

Exercise 1: Control Structures

Scenario 3: The bank wants to send reminders to customers whose loans are due within the next 30 days

Query


```
BEGIN
  FOR rec IN (
    SELECT c.Name,
           l.LoanID,
           l.DueDate
    FROM Customers c
    JOIN Loans l
    ON c.CustomerID = l.CustomerID
    WHERE l.DueDate BETWEEN SYSDATE
           AND SYSDATE + 30
  )
  LOOP
    DBMS_OUTPUT.PUT_LINE(
      'Reminder: Loan '
      || rec.LoanID
      || ' for '
      || rec.Name
      || ' is due on '
      || rec.DueDate
    );
  END LOOP;
END;
```

Execution

The PL/SQL block executed successfully and send reminders to customers whose loans are due within the next 30 days

Statistics 1 ×	
Name	Value
Updated Rows	-1
Execute time	0.012s
Start time	Fri Jun 19 15:25:03 IST 2026
Finish time	Fri Jun 19 15:25:03 IST 2026
Query	<pre>BEGIN FOR rec IN (SELECT c.Name, l.LoanID, l.DueDate FROM Customers c JOIN Loans l ON c.CustomerID = l.CustomerID WHERE l.DueDate BETWEEN SYSDATE AND SYSDATE + 30) LOOP DBMS_OUTPUT.PUT_LINE('Reminder: Loan ' rec.LoanID ' for ' rec.Name ' is due on ' rec.DueDate); END LOOP; END;</pre>

Output (After Execution)

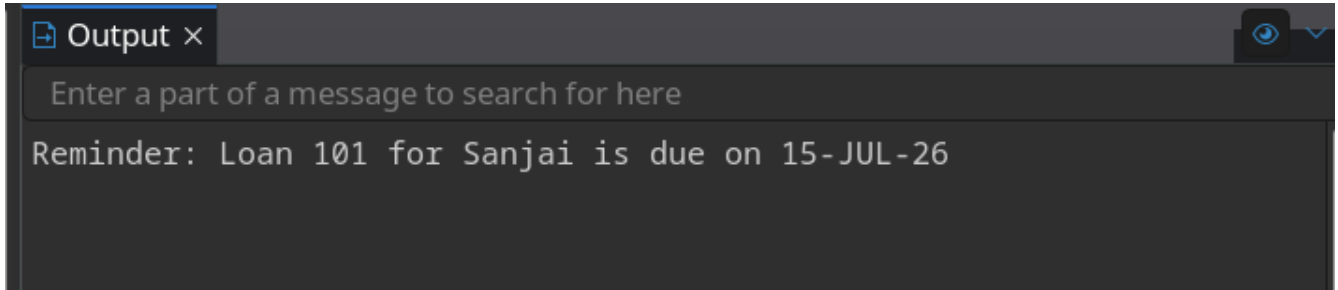

The screenshot shows a dark-themed IDE output window. The title bar at the top reads "Output x" with a close button on the right. Below the title bar is a search bar containing the text "Enter a part of a message to search for here". The main area of the window displays the text "Reminder: Loan 101 for Sanjai is due on 15-JUL-26" in a monospaced font.

```
Output x
Enter a part of a message to search for here
Reminder: Loan 101 for Sanjai is due on 15-JUL-26
```