


PING REQUEST BEFORE ARP

Ping Request						
	PAYLOAD	PROTOCOL	SOURCE IP	DESTINATION IP	SOURCE MAC	DESTINATION MAC
	RANDOM DATA	ICMP	192.168.1.2	192.168.1.3	5000.0022.2222	UNKNOWN

ARP REQUEST

ARP Request				
	PAYLOAD		SOURCE MAC	DESTINATION MAC
	SOURCE IP	192.168.1.2	5000.0022.2222	ffff.ffff.ffff (BROADCAST)
	SOURCE MAC	5000.0022.2222		
	DESTINATION IP	192.168.1.3		
	DESTINATION MAC	0000.0000.0000		


ARP REQUEST (PDU)

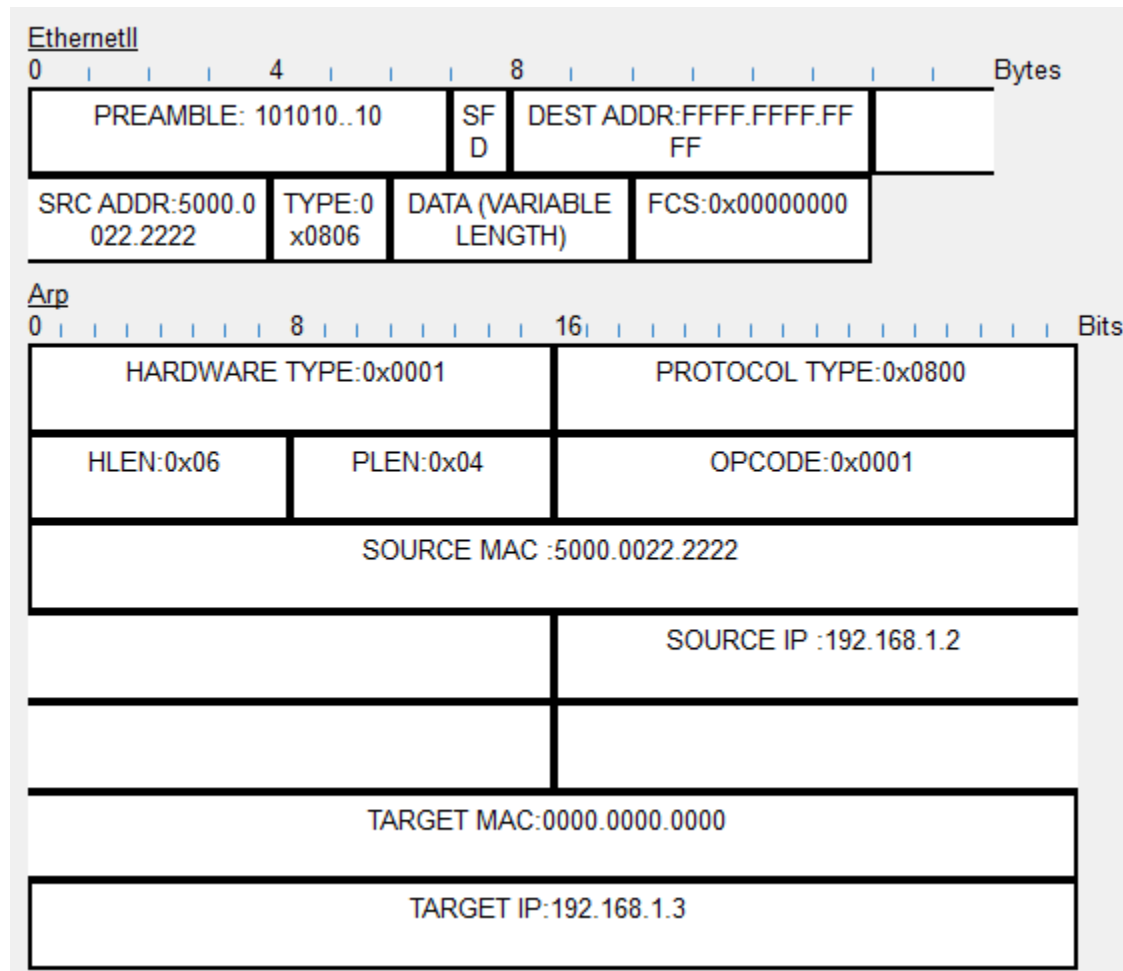

ARP REPLY

ARP Reply				
	PAYLOAD		SOURCE MAC	DESTINATION MAC
	SOURCE IP	192.168.1.3	5000.0033.3333	5000.0022.2222
	SOURCE MAC	5000.0033.3333		
	DESTINATION IP	192.168.1.2		
	DESTINATION MAC	5000.0022.2222		


ARP REPLY (PDU)

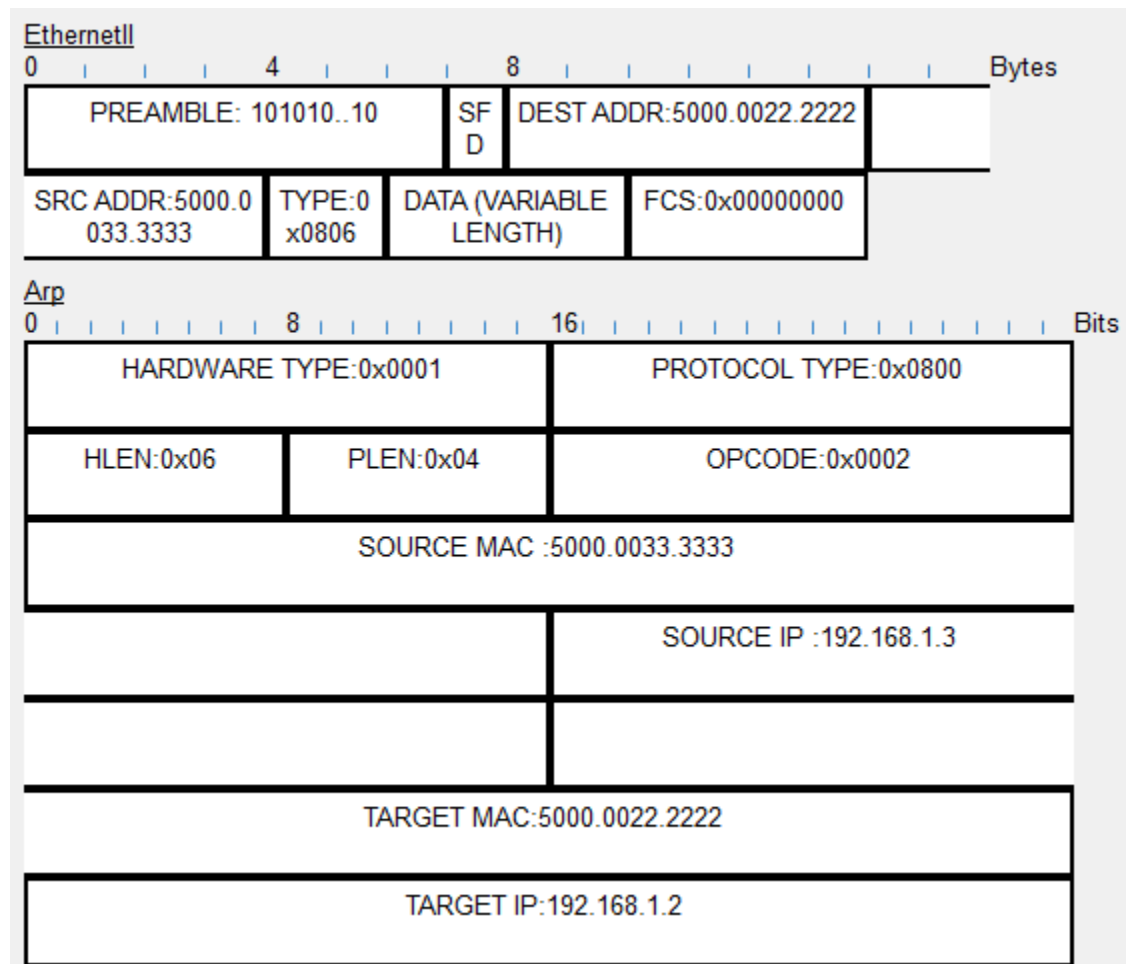

PING REQUEST AFTER ARP

Ping Request after ARP						
	PAYLOAD	PROTOCOL	SOURCE IP	DESTINATION IP	SOURCE MAC	DESTINATION MAC
	RANDOM DATA	ICMP	192.168.1.2	192.168.1.3	5000.0022.2222	5000.0033.3333

PING REQUEST AFTER ARP (PDU)

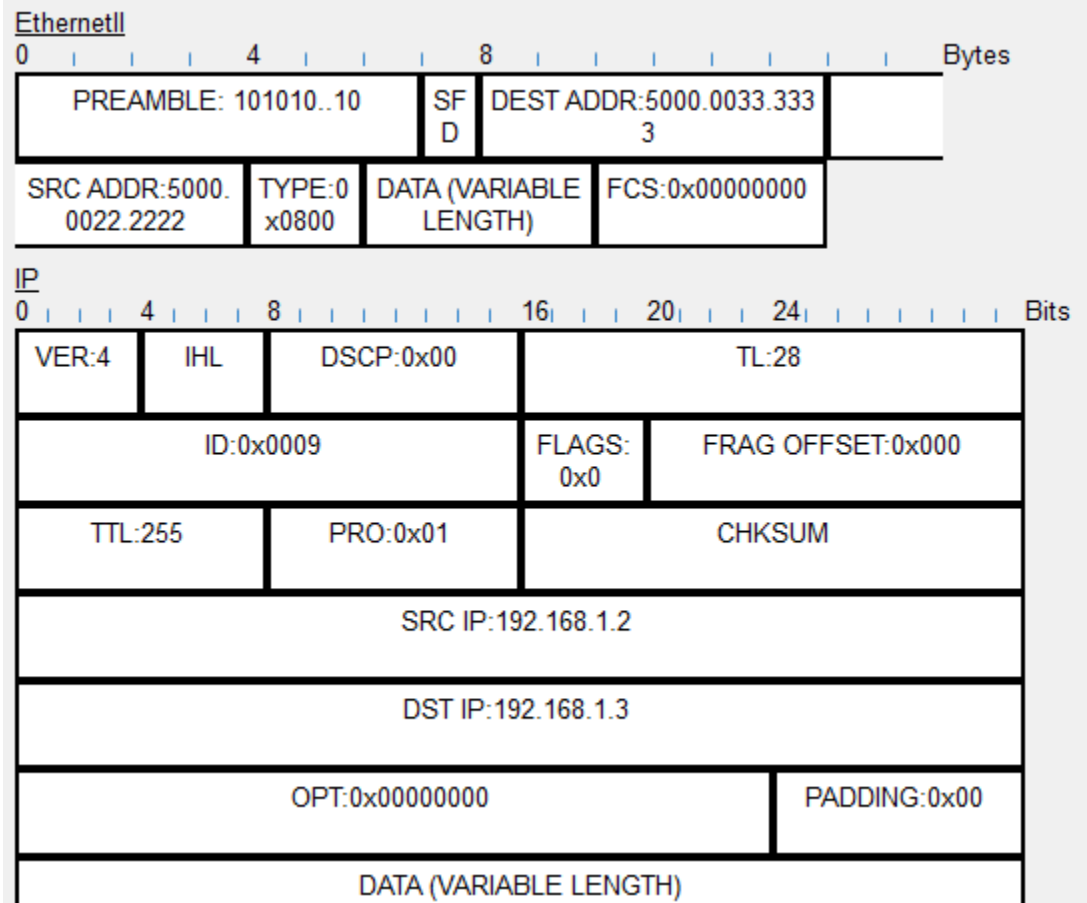

PING REPLY

Ping Reply						
	PAYLOAD	PROTOCOL	SOURCE IP	DESTINATION IP	SOURCE MAC	DESTINATION MAC
	RANDOM DATA	ICMP	192.168.1.3	192.168.1.2	5000.0033.3333	5000.0022.2222

PING REPLY (PDU)

