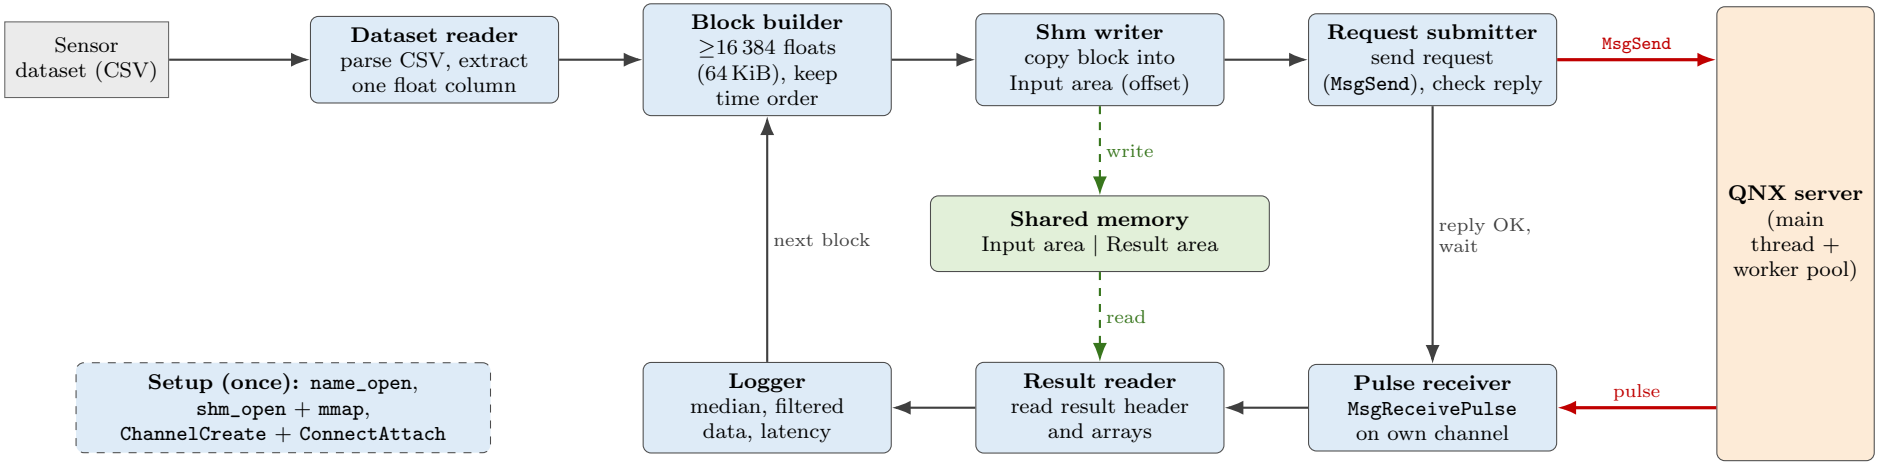


Rules: one block in flight; after a valid reply the client waits for the completion pulse, then reads the results from shared memory

Internal flow — QNX IPC (message / pulse) — Shared-memory access