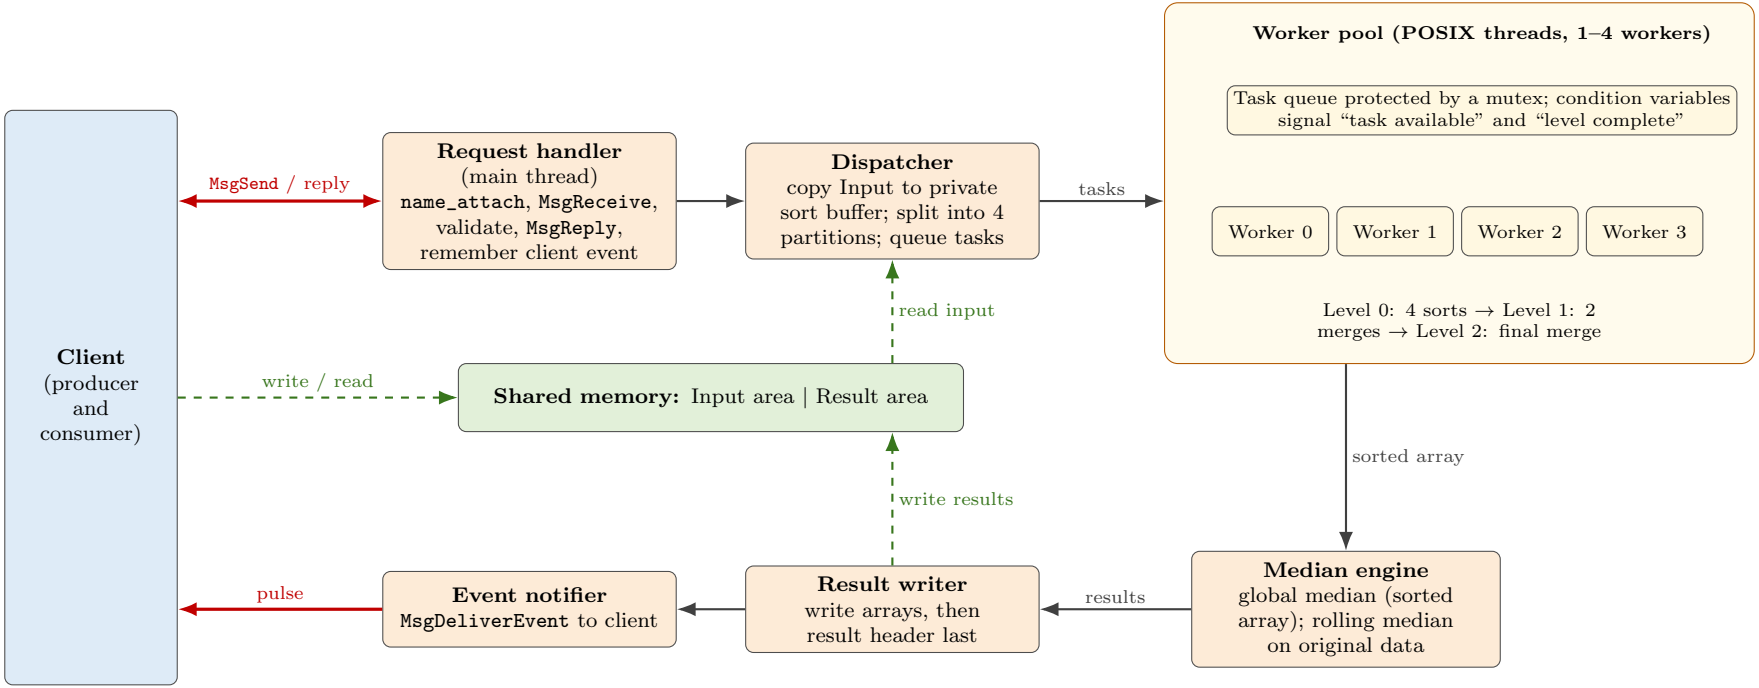


Memory: shared region (Input, Result) is accessed by offsets only; the sort buffer, partitions and task queue are private to the server process (heap). The median engine reads the original input, never the sorted copy.

Internal flow — QNX IPC (message / pulse) — Shared-memory access