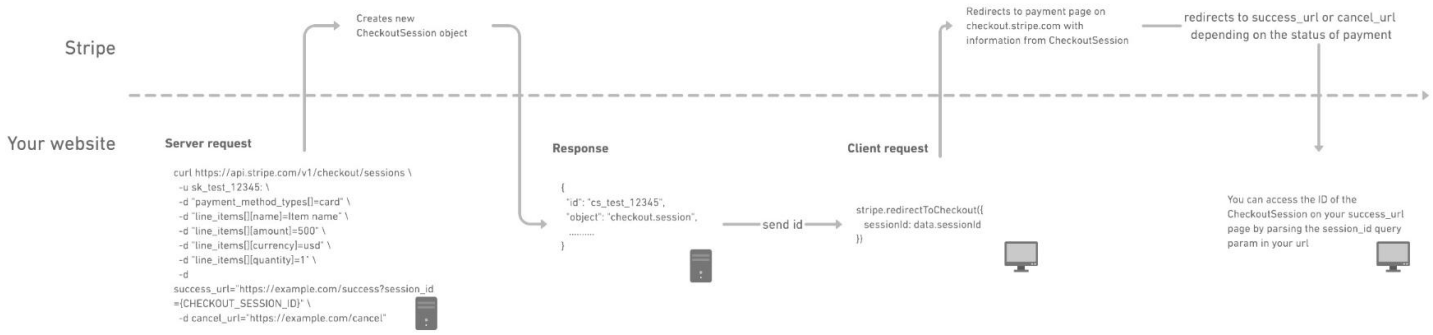
Stripe
Your website
Creates new CheckoutSession object
Redirects to payment page on checkout.stripe.com with information from CheckoutSession
redirects to success_url or cancel_url depending on the status of payment
Server request
curl https://api.stripe.com/v1/checkout/sessions \
-u sk_test_12345: \
-d "payment_method_types[]=card" \
-d "line_items[][name]=Item name" \
-d "line_items[][amount]=500" \
-d "line_items[][currency]=usd" \
-d "line_items[][quantity]=1" \
-d
success_url="https://example.com/success?session_id
={CHECKOUT_SESSION_ID}" \
-d cancel_url="https://example.com/cancel"
Response
{
"id": "cs_test_12345",
"object": "checkout.session",
.....
}
send id
Client request
stripe.redirectToCheckout({
sessionId: data.sessionId
})
You can access the ID of the CheckoutSession on your success_url page by parsing the session_id query param in your url