

# Cucumber Report

07-Aug-2023, 11:42:35 am

**Start : Aug 07, 11:42:08.251 am**

**End : Aug 07, 11:42:35.191 am**

**Duration : 26.940 s**

*Features*

*Scenarios*

*Steps*

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 0**

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 0**

**PASSED - 6**

**FAILED - 1**

**SKIPPED - 0**



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>acms</u>	26.940 s	1	0	1	0	7	6	1	0

<b>Tag</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@acms	1	0	1	0	1	0	1	0
@all	1	0	1	0	1	0	1	0
@Region	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>acms</u>	1	0	1	0	26.940 s

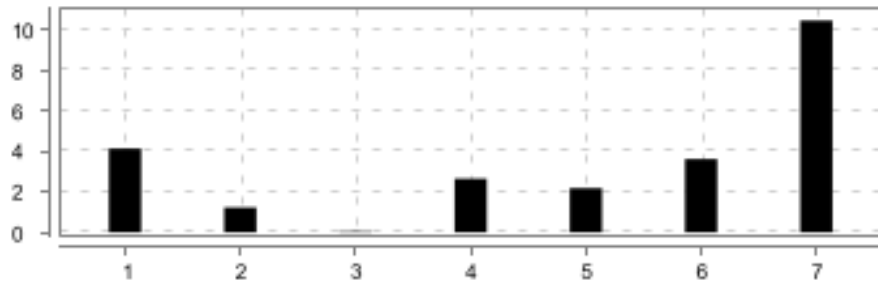



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>acms</u>	<u>Verify the user to able to create Region.</u>	7	6	1	0	26.937 s

**acms**

<b>FAILED</b>	<b>DURATION - 26.940 s</b>	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 7 Pass - 6 Fail - 1 Skip - 0	
/ 11:42:08.251 am // 11:42:35.191 am /					

**Verify the user to able to create Region.**

<div>FAILED</div> <div>DURATION - 26.937 s</div>			<div>Steps</div> <div>Total - 7</div> <div>Pass - 6</div> <div>Fail - 1</div> <div>Skip - 0</div>	
/ 11:42:08.254 am // 11:42:35.191 am /				
acms				
@acms @all @Region				

#	Step / Hook Details	Status	Duration
	BEFORE - steps.Loginsteps.setup() Driver Initialized Organization page object Initialized	PASSED	2.230 s
1	Given I enter URL on the browser	PASSED	4.133 s
2	Then I passed vaild user name and vaild password	PASSED	1.230 s
3	And Click on check box	PASSED	0.044 s
4	And Click On login button	PASSED	2.642 s
5	When User Clicks on Region	PASSED	2.178 s
6	And Add the details on it	PASSED	3.613 s
7	Then Click on create and User succesfully created  org.openqa.selenium.TimeoutException: Expected condition failed: waiting for presence of element located by: By.xpath: //*[@id="6hwhqajxks"]/div[1] (tried for 10 second(s) with 500 milliseconds interval) at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:95) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:272) at steps.Loginsteps.Click_on_create_and_User_succesfully_created(Loginsteps.java:169) at ?.Click on create and User succesfully created(file:///C:/Users/syedjeelan/Downloads/ACMS/ACMS%20project/src/test/java/features/acms.	FAILED	10.439 s

#	Step / Hook Details	Status	Duration
	<p>feature:17)</p> <p>Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector": Cant find element with xpath //*[@id=6hwhqajxks]/div[1]} (Session info: chrome=115.0.5790.170) For documentation on this error, please visit: https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'WS137', ip: '10.10.21.240', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 115.0.5790.170, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\SYEDJE~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:60843}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 52183eca21bdda73f699d167e3bdabca *** Element info: {Using=xpath, value=//*[@id=6hwhqajxks]/div[1]}</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323) at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428) at org.openqa.selenium.By\$ByXPath.findElement(By.java:353) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315) at org.openqa.selenium.support.ui.ExpectedConditions\$6.apply(ExpectedConditions.java:182) at org.openqa.selenium.support.ui.ExpectedConditions\$6.apply(ExpectedConditions.java:179) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249) at steps.Loginsteps.Click_on_create_and_User_succesfully_created(Loginsteps.java:169) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p>		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)  at io.cucumber.core.runner.TestStep.run(TestStep.java:57)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)  at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)  at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)  at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)  at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </p> <p>* Not displayable characters are replaced by '?'. </p>		



#	Step / Hook Details	Status	Duration
	AFTER - steps.Loginsteps.teardown(io.cucumber.java.Scenario)	PASSED	0.409 s
	screenshot name		
	