

| Feature | | | Scer | nario | | Step | | | |
|---------|--------------|---|------|-------|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| acms | 1 m 20.616 s | 1 | 0 | 1 | 0 | 7 | 6 | 1 | 0 |

| Tag | | Scer | nario | | Feature | | | | |
|---------|---|------|-------|---|---------|---|---|---|--|
| Name | T | P | F | S | Т | P | F | S | |
| @acms | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @all | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @Region | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |

FEATURES SUMMARY -- 4



| # | Feature Name | T | P | F | S | Duration |
|---|--------------|---|---|---|---|--------------|
| 1 | <u>acms</u> | 1 | 0 | 1 | 0 | 1 m 20.616 s |

SCENARIOS SUMMARY -- 5




| # | Feature Name | Scenario Name | T | P | F | S | Duration | |
|---|--------------|---|---|---|---|---|--------------|--|
| 1 | acms | Verify the user to able to create Region. | 7 | 6 | 1 | 0 | 1 m 20.613 s | |

DETAILED SECTION -- 6 --

acms

| FAILED | DURATION - 1 m 20.616 s | Scenarios | | Steps | |
|----------------------|-------------------------|-----------|---|-----------|---|
| | | Total - 1 | | Total - 7 | |
| / 11:46:55.995 am // | ' 11:48:16.611 am / | Pass - 0 | 1 | Pass - 6 | 7 |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 0 | |

Verify the user to able to create Region.

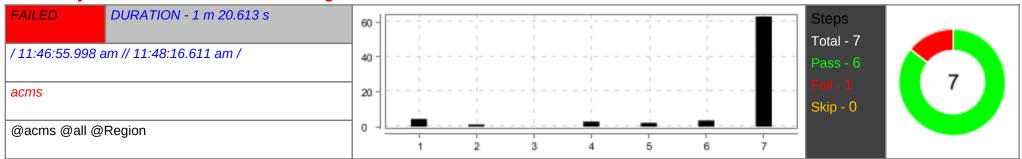

| # | Step / Hook Details | Status | Duration |
|---|--|--------|-------------|
| | BEFORE - steps.Loginsteps.setup() | PASSED | 2.647 s |
| | Driver Initialized | | |
| | Organization page object Initialized | | |
| 1 | Given I enter URL on the browser | PASSED | 4.377 s |
| 2 | Then I passed vaild user name and vaild password | PASSED | 1.227 s |
| 3 | And Click on check box | PASSED | 0.044 s |
| 4 | And Click On login button | PASSED | 2.934 s |
| 5 | When User Clicks on Region | PASSED | 2.184 s |
| 6 | And Add the details on it | PASSED | 3.577 s |
| 7 | Then Click on create and User succesfully created | FAILED | 1 m 3.185 s |
| | org.openqa.selenium.TimeoutException: Expected condition failed: waiting for presence of element located by: By.xpath: //*[@id="6hwhqajxks"]/div[1] (tried for 60 second(s) with 500 milliseconds interval) at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:95) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:272) at steps.Loginsteps.Click_on_create_and_User_succesfully_created(Loginsteps.java:169) at ?.Click on create and User succesfully created(file:///C:/Users/syedjeelan/Downloads/ACMS/ACMS%20project/src/test/java/features/acms. | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | feature:17) | | |
| | Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: | | |
| | {"method":"xpath","selector":"//*[@id="6hwhqajxks"]/div[1]"} (Session info: chrome=115.0.5790.170) For documentation on this error, please | | |
| | visit: https://www.seleniumhq.org/exceptions/no_such_element.html Build info: version: '3.141.59', revision: 'e82be7d358', time: | | |
| | '2018-11-14T08:17:03' System info: host: 'WS137', ip: '10.10.21.240', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: | | |
| | '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 115.0.5790.170, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: | | |
| | C:\Users\SYEDJE~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:61155}, javascriptEnabled: true, | | |
| | networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), | | |
| | setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss | | |
| | and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, | | |
| | webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: ea17d2e62cd456a0be383ce64b1a1c46 *** Element info: | | |
| | {Using=xpath, value=//*[@id="6hwhqajxks"]/div[1]} | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) | | |
| | at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) | | |
| | at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428) | | |
| | at org.openqa.selenium.By\$ByXPath.findElement(By.java:353) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions\$6.apply(ExpectedConditions.java:182) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions\$6.apply(ExpectedConditions.java:179) | | |
| | at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249) | | |
| | at steps.Loginsteps.Click_on_create_and_User_succesfully_created(Loginsteps.java:169) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.lnvoker.dolnvoke(Invoker.java:66) | | |
| | at io.cucumber.java.invoker.invoke(invoker.java.oo) at io.cucumber.java.lnvoker.invoke(lnvoker.java:24) | | |
| | at io.cucumber.java.nvoker.invoke(invoker.java.24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMetriou(AbstractGlueDefinition.java.47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.gava.JavaStepDefinition.execute(JavaStepDefinition.java.29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java.66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at 10.cacamber.core.ruminer.r. teknesteppenimitioniwateri.rumsteptr teknesteppenimitioniwateri.java.00) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:57) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) | | |
| | at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) | | |
| | at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) | | |
| | at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | * Not displayable characters are replaced by '?'. | | |

DETAILED SECTION -- 9 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - steps.Loginsteps.teardown(io.cucumber.java.Scenario) | PASSED | 0.421 s |
| | screenshot name | | |
| | | | |