Modern Buildable Projects with IBM i Project Explorer and Bob

Edmund Reinhardt, IBM

Product Architect - IBM i Application Development, AI solutions for IBM i edmund.reinhardt@ca.ibm.com

Sanjula Ganepola, IBM

Software Developer sanjula.ganepola@ibm.com





Agenda



- Challenges with Building on IBM i
- How does local development overcome this?
- How does Bob and IBM i Projects tie into local development?
- Ins and Outs of IBM i Project Explorer



Challenges with Building on IBM i

Building on IBM i is limiting...



- 1 SRC-PF
 - 10 char names
 - Fixed record length
 - Not accessible to open ecosystem, including Git and Make
 - Source of the same type stored in QxxxSRC to avoid name conflicts (member type does not disambiguate)
- 2 Libraries
 - Only 2 level hierarchy to organize, with only short 10 char names
- 3 Source control
 - None (sequence number dates)
 - Home grown
 - Proprietary IBM i systems
 - Cost
 - Smaller market = less investment
- 4 Build system
 - Individual CRTXXXMOD + CRTPGM
 - CL Scripts
 - A couple of vendors have dependency-based build

Let's look ahead to the future




New Developers Incoming!

```
📕 🚜 🖦 🖺 🎒 🧊 Clear Erase Attn Sysreq Help 🕟
    Object ID: GENREVAL
          // Description: GENRE table maintenance validation
          // NOTE: this must be compiled with RPGPPOPT = *LVL2
          // Author: Nick.Litten@projex.com (https://www.nicklitten.com)
         // Revision: V000 Jan 24 2021 Created
         dcl-s inMode char(10) inz('ADD');
         dcl-s inDataPtr pointer;
         dcl-s outStopProcess ind;
          // declare the array (containing screen fields) to be validated
         dcl-ds scrnArray qualified dim(999);
```

Need for Modernization is Urgent

New development tools/ecosystems (ie. Code for IBM i/Merlin)

Modern development practices (ie. Git)

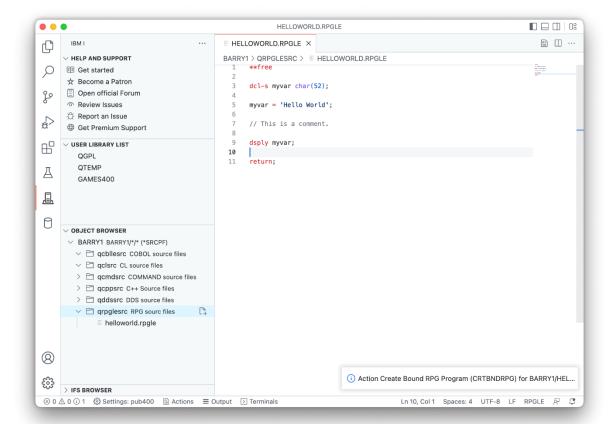



How does local development overcome this?

Let's use a different (but similar) file system



MYPROJECT

- QRPGLESRC
 - CUSTOMER.RPGLE
 - INVENTORY.RPGLE
 - STARTJOB.RPGLE
- QSQLSRC
 - CUSTOMERS.SQL
 - INVENTORY.SQL
- QCLLESRC
 - START.CLLE
- QCMDSRC
 - STARTJOB.CMD

No more character name restrictions

Now usable with Git and Make

/my-project

- /.git
- qrpglesrc
 - customer.rpgle
 - inventory.rpgle
 - startjob.rpgle
- qsqlsrc
 - customer.table
 - inventory.table
- qcllesrc
 - start.clle
- qcmdsrc
 - startjob.cmd

IFS/Local File System

QSYS.LIB Library

Let's go one step further!



/my-project

- /.git
- qrpglesrc
 - customer.rpgle
 - inventory.rpgle
 - startjob.rpgle
- qsqlsrc
 - customer.table
 - inventory.table
- qcllesrc
 - start.clle
- qcmdsrc
 - startjob.cmd

IFS/Local File System

Flexible directory structure

/my-project


- /.git
- customer-management
 - customer.rpgle
 - customer.table
- inventory-service
 - inventory.rpgle
 - inventory.table
- start-command
 - startjob.pgm.rpgle
 - start.clle
 - startjob.cmd

Logical Organization


Unlocking source control with Git



Distributed Development

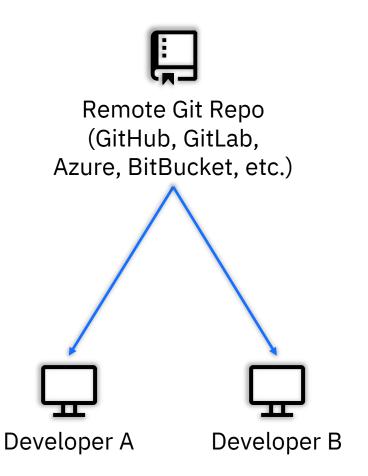

Version Control and Git Workflow

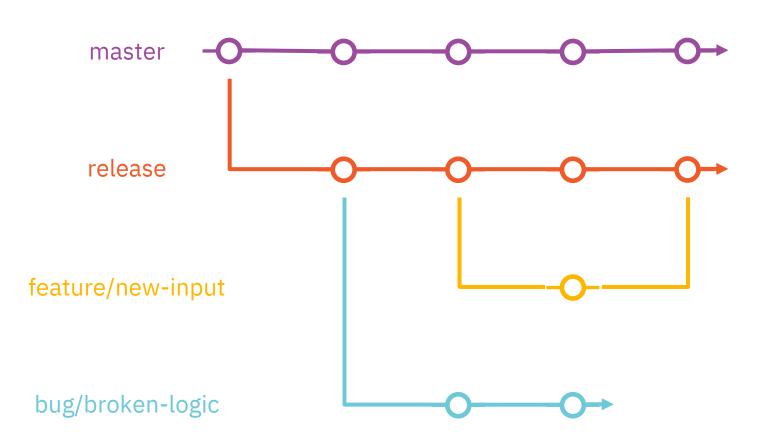

Did we solve our problems?



- 1 SRC-PF
 - 10 char names
 - Fixed record length
 - Not accessible to open ecosystem, including Git and Make
 - Source of the same type stored in QxxxSRC to avoid name conflicts (member type does not disambiguate)
- 2 Libraries
 - Only 2 level hierarchy to organize, with only short 10 char names
- 3 Source control
 - None (sequence number dates)
 - Home grown
 - Proprietary IBM i systems
 - Cost
 - Smaller market = less investment
- 4 Build system
 - Individual CRTXXXMOD + CRTPGM
 - CL Scripts
 - A couple of vendors have dependency-based build











How does Bob and IBM i Projects tie into local development?

What is Bob?



Free and open-source build system to build QSYS objects on IBM i

- Speed: Compile objects that need recompiling (new or changed source code)
- Reliability: If an item changes, then it and everything it depending on it will be rebuilt
- Industry standard: Object dependencies are specified using standard makefile syntax
- Flexibility: Override compile parameters, write custom recipes (If you can code it, you can build it!)
- Ease of use: Build with a single command or a single button in an IDE (IBM i Project Explorer in VS Code)



Projects that self-describe how to build themselves!?




```
my-project
  -□ .evfevent
    - 🖹 file.evfevent
    - 🖹 source.evfevent
                                                   {} iproj.json X
                                                    {} iproj.json > ...
  -logs
                                   Project
                                Information
    - i joblog.json
                                                              "version": "0.0.1",
    - 🖹 file.splf
                                                              "description": "SAMPLE PROJECT",
                                                                                                                                               Standardized
   └ 🖹 source.splf
                                                              "repository": "https://github.com/edmundreinhardt/bob-recursive-example.git".
                                                                                                                                             metadata format
                                                              "license": "Apache 2.0",
                                                                                                                                           with variables (&...)
  -□ includes
                                                              "objlib": "&CURLIB",
       constants.rpgleinc
                                                              "curlib": "&CURLIB",
                                                              "includePath":
  • ORPGLESRC
                                                                  "includes",
                                 Configure
       .ibmi.json
                                                                  "OPROTOSRC"
                                                     10
                                 library list
    - 🖹 Rules.mk
                                                              "preUsrlibl": [
                                                     12
   └B source.rpgle
                                                                  "&lib1"
                                                     13
                                                                                                                                                    Set
                                                     14
  □ ODDSSRC
                                                                                                                                              build/compile
                                                              "postUsrlibl": [
                                                     15
    -🖹 Rules.mk
                                                                                                                                                command
                                                                  "&lib2"
                                                     16
   └-🖺 file.pf
                                  Configure
                                                     17
                                                             "setIBMiEnvCmd": [],
                                build/compile
                                                     10
      .env
                                                              "compileCommand": "makei c -f {filename}"
                                                     19
                                environment
     .gitignore
                                                              "buildCommand": "makei build"
                                                     20
                                                     21
     .ibmi.json
                                                                              iproj.json in project root
     iproj.json
```

Rules.mk

Flexible subdirectories and build customization




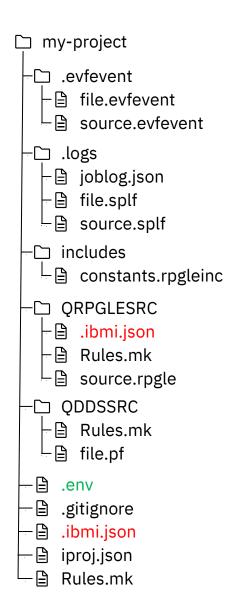

```
{} .ibmi.json ×
                                                                 EBCDIC encoding
                                                                    for compiler
       {} .ibmi.json > ...
                   "version": "0.0.1",
                   "build": {
                       "tgtCcsid": "273";
                       "objlib": "&lib3"
                                                                    Target object
                                                                 library for directory
         .ibmi.json in project root or
                subdirectories
.env
           X
.env
                                                                  Custom variable
       LIBL=QGPL QTEMP QDEVELOP QBLDSYS QBLDSYSR
                                                                 values so that each
       CURLIB=SANJULA
                                                                    developer can
                                                                   customize build
       lib1=MYLIB
       lib2=ABCLIB
       lib3=APILIB
             .env in project root
```

Control what objects to build and how to build them



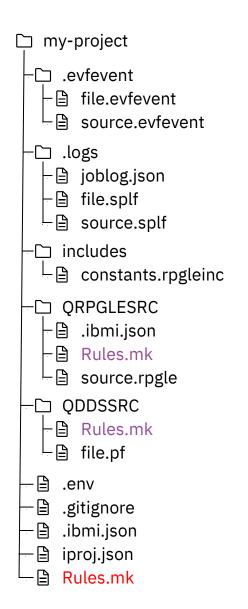

```
M Rules.mk ×

M Rules.mk

1 SUBDIRS = qrpglesrc qddssrc*

Rules.mk in project root
```

to be built

Makefile with list of

objects to be built and

from which source files

Declare subdirectories

Rules.mk in subdirectories

Build and Compile Process



Initialization and Migration

Command	Description
makei init	Create iproj.json
makei cvtsrcpf	Convert QSYS members to Unicode IFS stream files

Building

Command	Description
makei build	Build the entire project
makei b -t <object></object>	Build target object
makei b –d <directory></directory>	Build all objects in the specified directory (based on Rules.mk)

Compiling

	Command	Description
ı	makei compile -f <stream file=""></stream>	Compile target object of specified stream file
	makei compile –files file1: file2:	Compile target objects of all specified stream files



Ins and Outs of IBM i Project Explorer

Overview




The ultimate tool for local development on IBM i!

Set variables

Manage library list

Modify include paths

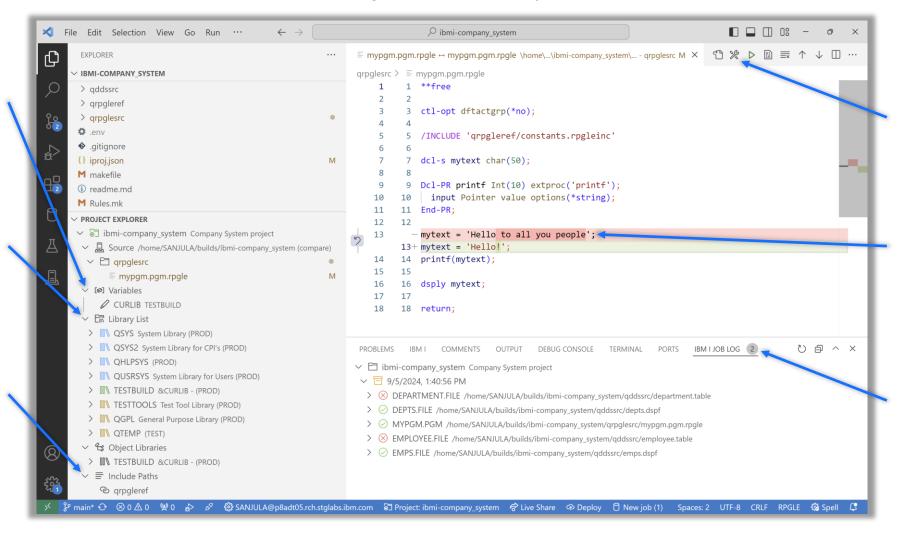

Build and Compile

Vs.
IFS source

View job logs


Installation



Download Visual Studio Code

Download VS Code extensions
IBM i Project Explorer,
Source Orbit and Code for IBM i


Run
yum install bob
on IBM i

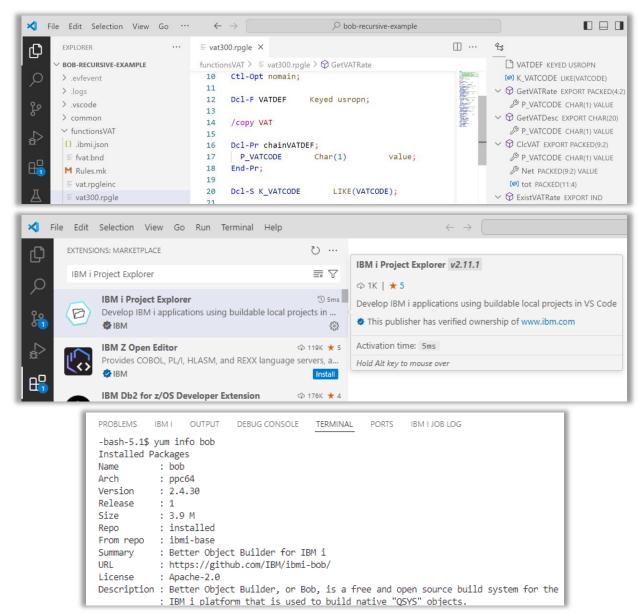


Create a New Project



- Create and open a folder for your project
- Create an iproj.json
- Set the project description

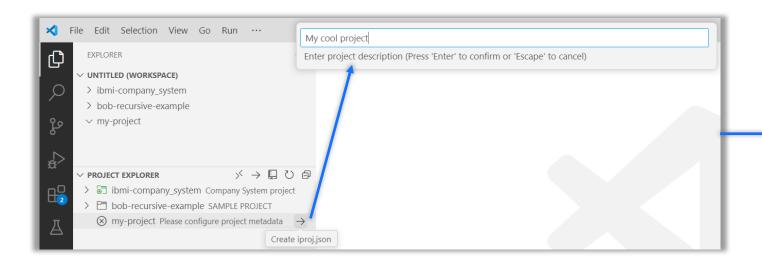


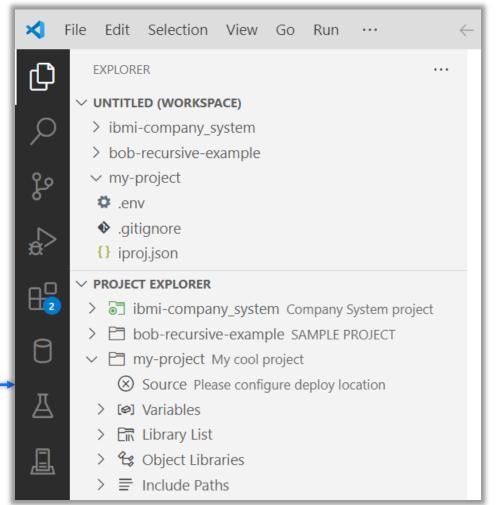


Connect to an IBM i



- Open the Connection Browser from Project Explorer
- Create new IBM i connection from the Server view

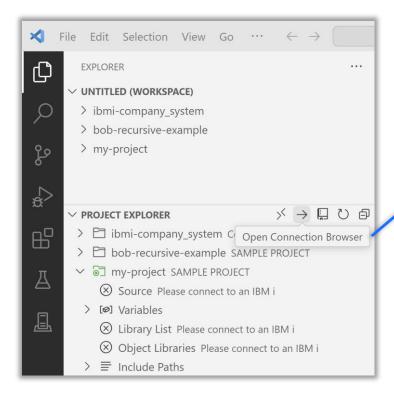

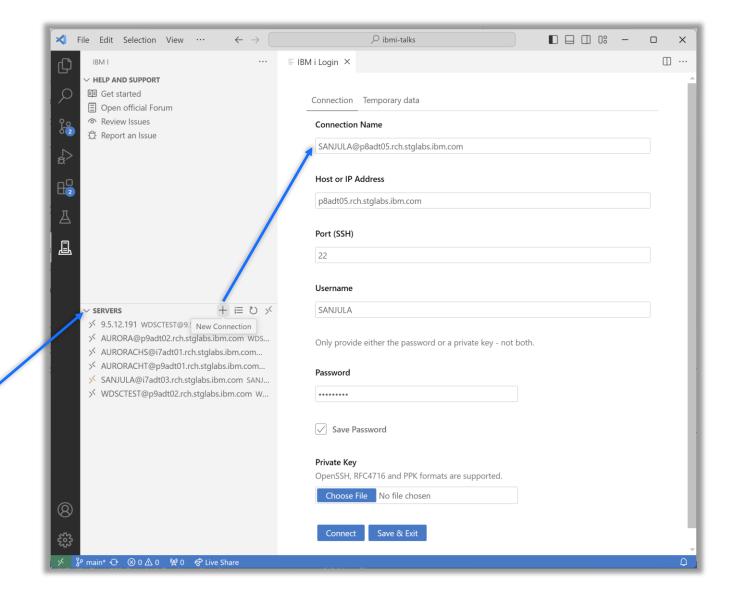

Migrate Source from QSYS



CVTSRCPF from BOB



QSYS members in source physical files

Properly encoded, terminated, and named source files in an IFS directory


Download to local project

Source Orbit



Rename extensions


Convert includes/copy directives to Unix style paths

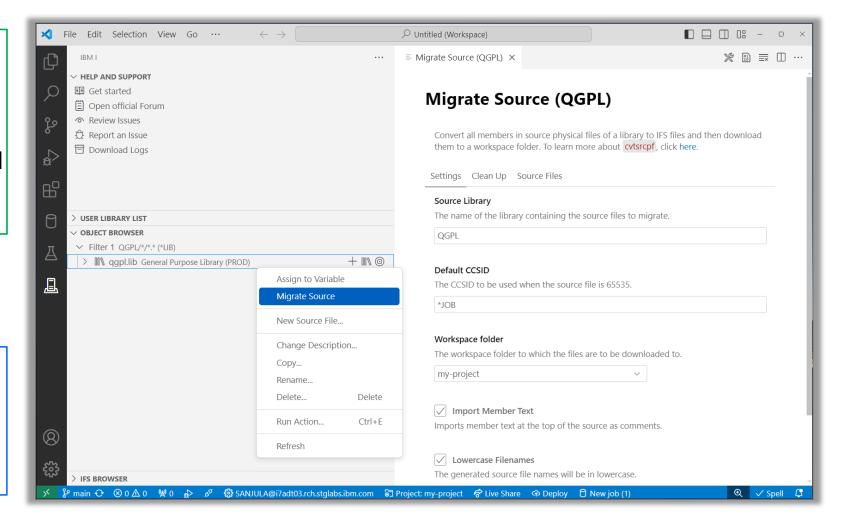


Deployment



- Set deploy location
 - Where source gets uploaded to
 - Typically set one
 - Each developer gets a unique location
 - Each repository gets a unique location
- Set deployment method
 - Compare (typically the safest)
 - Changes (typically the fastest)
 - Working Changes
 - Staged Changes
 - All
- Deploy project
 - Moves files to deploy location based on deployment method

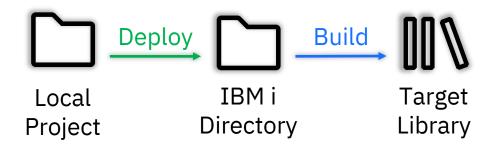


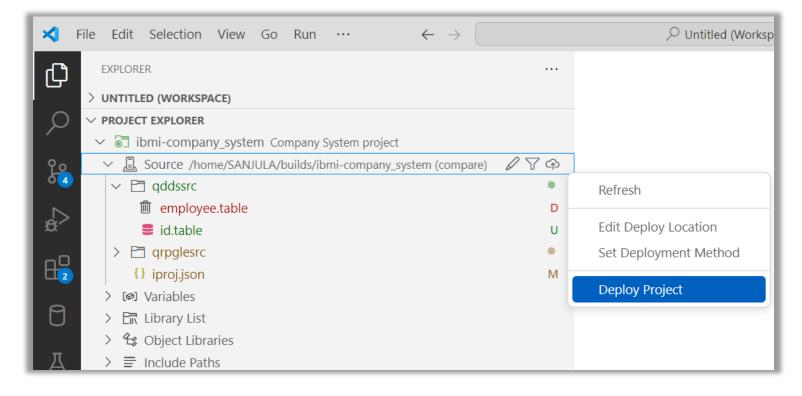

Visualize Local vs. Remote Source Files



- Visualize, compare, and deploy your local source files to the deploy location in the IFS
- Track file changes (added, modified, deleted, etc.)
- Compare local file content with remote IFS

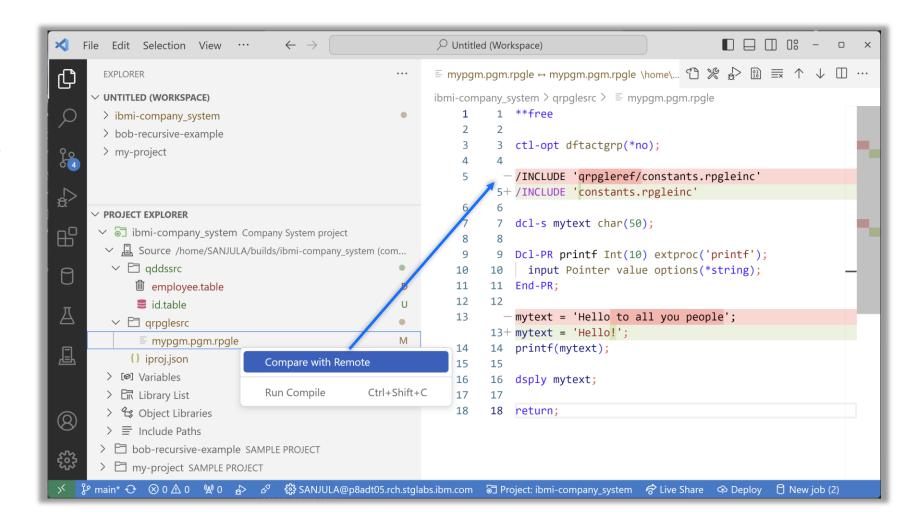


Work with Variables



- Reusable project definition that can be used by multiple developers or in automated builds
- View and set variables (for libraries, include paths, or build/compile commands)
- Browse for libraries and assign values to variables
- Configure hardcoded values as variables


Do not push .env file to Git!

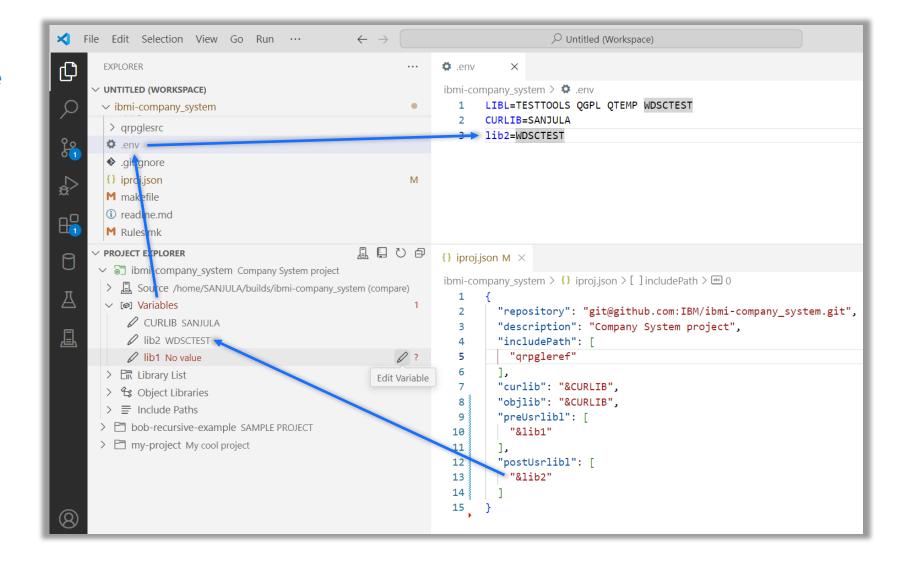

Manage the Library List

continuous innovation continuous integration


- Project's library list is a composition of your user profile's library list (from JOBD)
 + set of project specific libraries
- Add to beginning/end of library list (preUsrlibl and postUsrlibl) and set current library (curlib in iproj.json)
- Reorder library list
- Browse objects and members
- Manage libraries, objects, and members

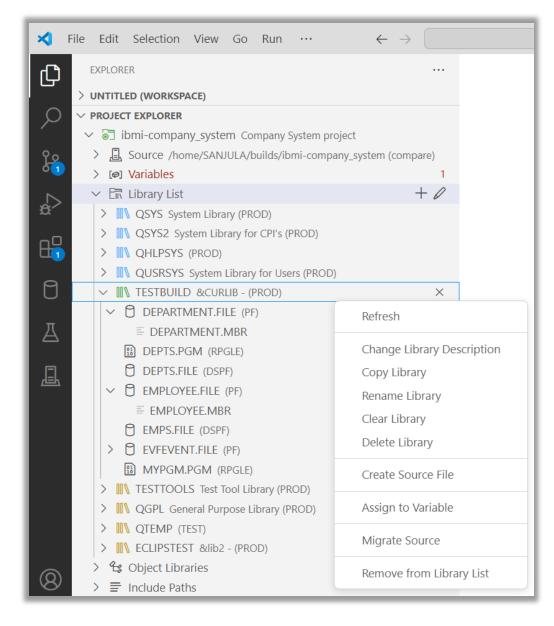

Browse Object Libraries

continuous innovation continuous integration


- The place for developers to easily see, debug, and manipulate the results of your build
- Another place to manage libraries in iproj.json (curlib, objlib, preUsrlibl, postUsrLibl)
- Manage libraries, objects, and members

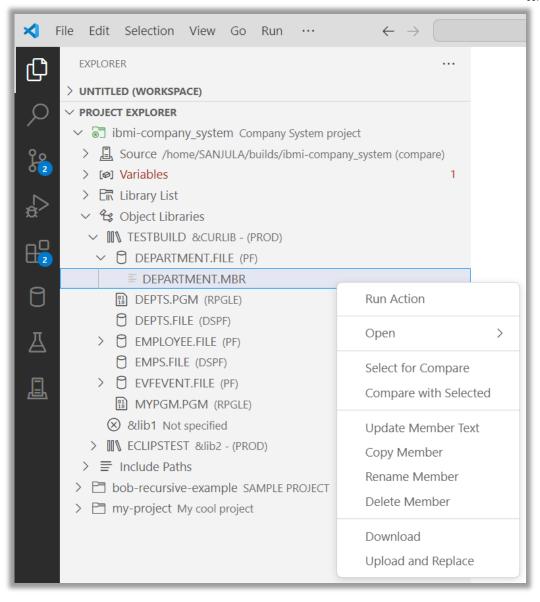

Manage Include Paths



- Self-contained projects should know where to find includes within the project
- Add, remove, and reorder include paths
- Visualize if includes resolve locally or to remote IFS

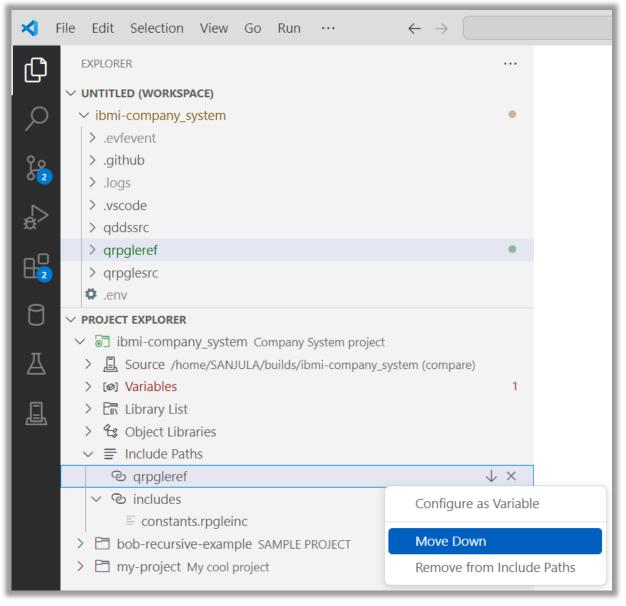

Build and Compile





- Deploy

 Run build or compile command

 (any build framework)

 Download logs and evfevent files
- Building
 - Set build command
 - Run Build (Ctrl+Shift+b or Cmd+Shift+b)
- Compiling
 - Set compile command
 - Run compile (Ctrl+Shift+c or Cmd+Shift+c)
 - On active editor
 - On file or directory in File Explorer
 - On file or directory in Source

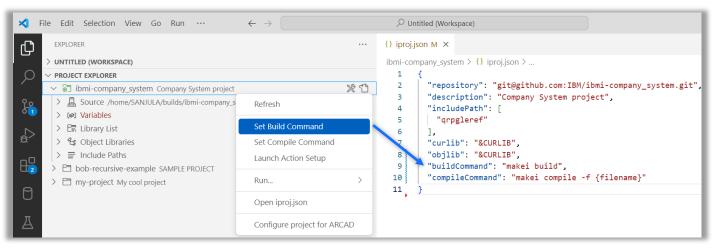


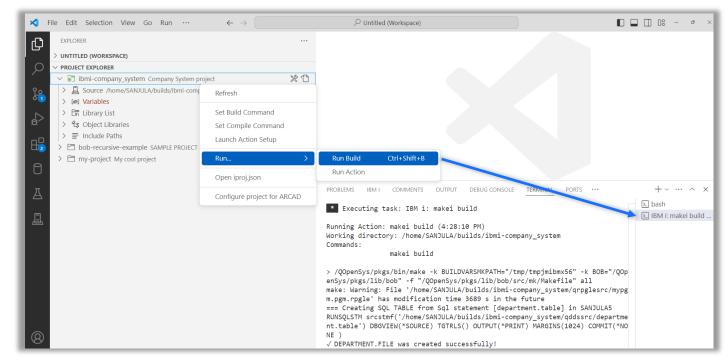

Run Actions




IBM i Project Explorer also supports running Code for IBM i's custom workspace actions

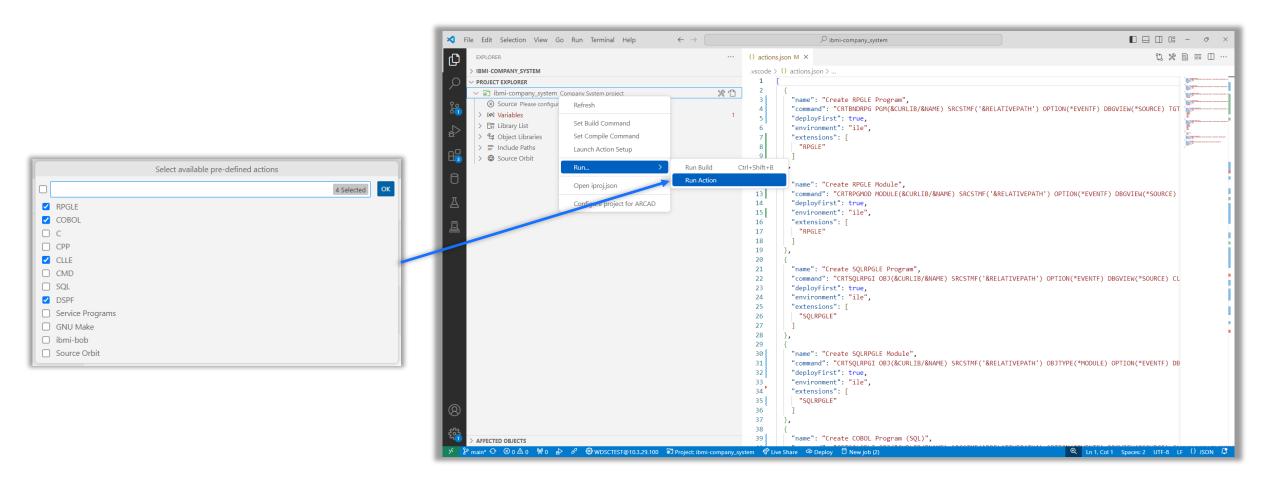

View Diagnostics




- Visualize build or compile diagnostics in the Problems view
- Evfevent file diagnostics are dumped in a .evfevent directory after a build or compile
- Diagnostics are also rendered inline in the source file

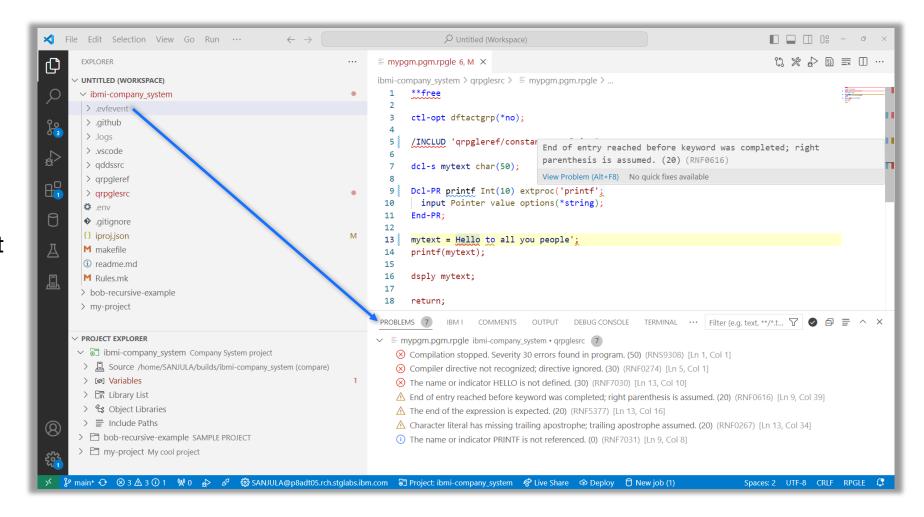

View Job Logs




- Visualize and manage anything that could be seen in an IBM i job log including second level help
- Job log and spool files are dumped in .logs directory after a build or compile
- Track up to 10 of the previous logs in memory
- Organized by the ILE objects being built
- Filter by failed objects or severity

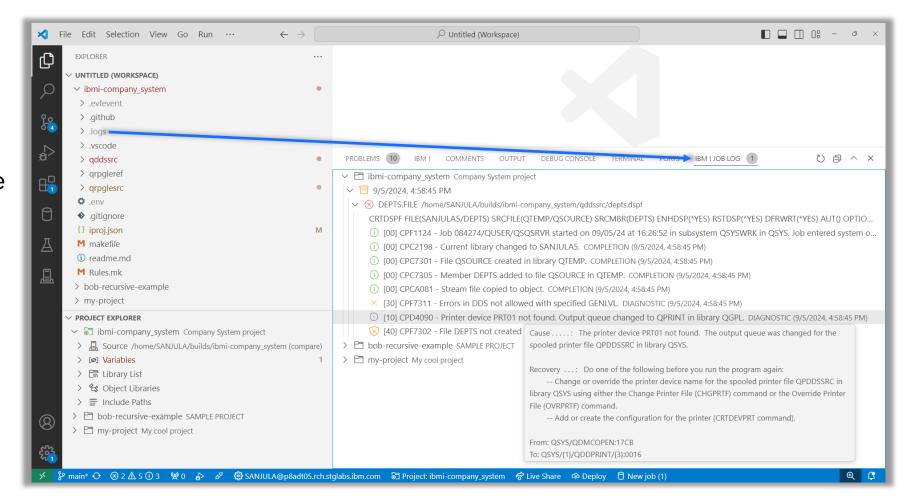


Integration






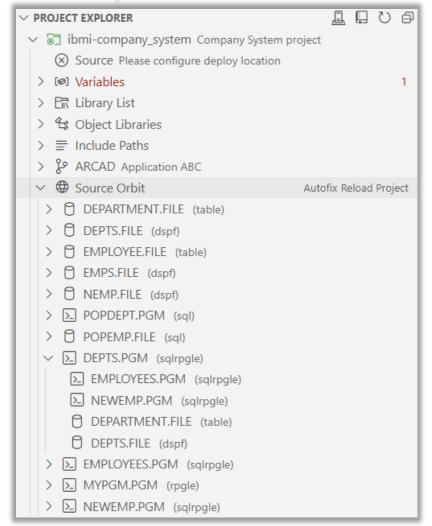



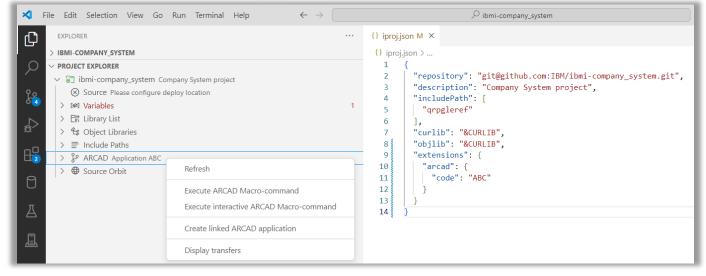

What can <u>you</u> integrate with IBM i Project Explorer's API?

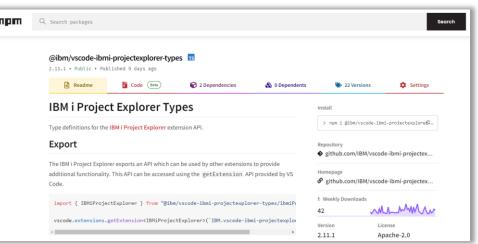



Any Questions?

Important Links



IBM i Project Explorer

VS Code Marketplace https://marketplace.visualstudio.com/items?itemName=IBM.vscode-ibmi-projectexplorer

Documentation https://ibm.github.io/vscode-ibmi-projectexplorer/#/

GitHub Repository https://github.com/IBM/vscode-ibmi-projectexplorer

API https://www.npmjs.com/package/@ibm/vscode-ibmi-projectexplorer-types

Bob

Documentation https://ibm.github.io/ibmi-bob/#/

GitHub Repository https://github.com/IBM/ibmi-bob

Code for IBM i

• VS Code Marketplace https://marketplace.visualstudio.com/items?itemName=HalcyonTechLtd.code-for-ibmi

Documentation https://codefori.github.io/docs/#/

GitHub Repository https://github.com/codefori/vscode-ibmi

• API https://www.npmjs.com/package/@halcyontech/vscode-ibmi-types

For More Information



Links You Need	Twitter	#Hashtags
IBM i Home Page: https://www.ibm.com/it-infrastructure/power/os/ibm-i (find link to Forrester Study and updated IBM i Strategy Whitepaper) IBM Strategy Whitepaper: https://www.ibm.com/it-infrastructure/us-en/resources/power/i-strategy-roadmap/ IBM Client Success: https://www.ibm.com/it-infrastructure/us-en/resources/power/ibm-i-customer-stories/ Support Life Cycle: https://www.ibm.com/support/lifecycle/ License Topics: https://www-01.ibm.com/support/docview.wss?uid=nas8N1022087 Fortra IBM i Marketplace Survey https://www.fortra.com/resources/guides/ibm-i-marketplace-survey-results	@IBMSystems @COMMONug @IBMChampions @IBMSystemsISVs @IBMiMag @ITJungleNews @SAPonIBMi @SiDforIBMi	#PowerSystems #IBMi #IBMAIX #POWER9 #LinuxonPower #OpenPOWER #HANAonPower #ITinfrastructure #OpenSource #HybridCloud #BigData

Modern Development using Intelligent Buildable **Projects with IBM i Project Explorer and BOB** - Sanjula Ganepola and **Edmund** Reinhardt

Please take the last minute of this session to complete the evaluation. A direct link to the evaluation can be found using the QR code below.





