


RPG Unit Testing Made Easy in VS Code

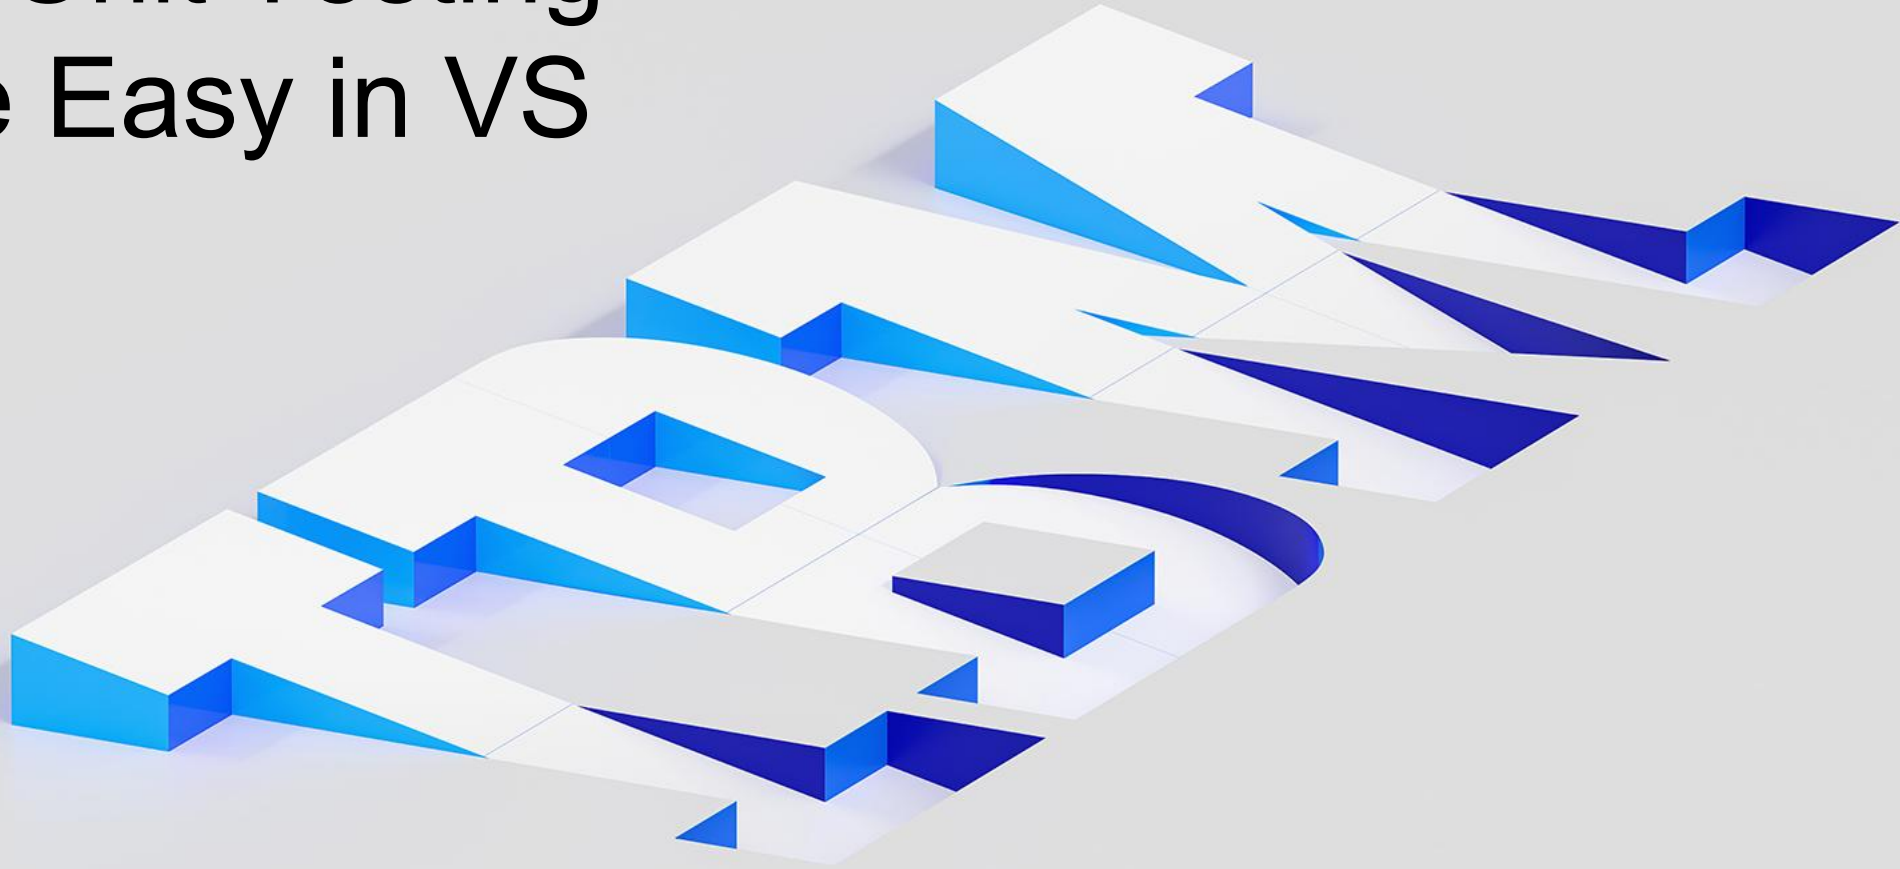


Agenda

- Why Build Tooling for Unit Testing?
- Basics of RPGUnit
- IBM i Testing Extension Demo
 - How to write tests and generate test stubs?
 - How to run tests with code coverage?
- IBM i Testing CLI Demo
 - How to run tests outside VS Code?
 - How to run tests in a CI/CD pipeline?
- What's Coming Next
 - Green Screen Testing

Why Build Tooling for Unit Testing?


Let's look at the Code for IBM i family of extensions

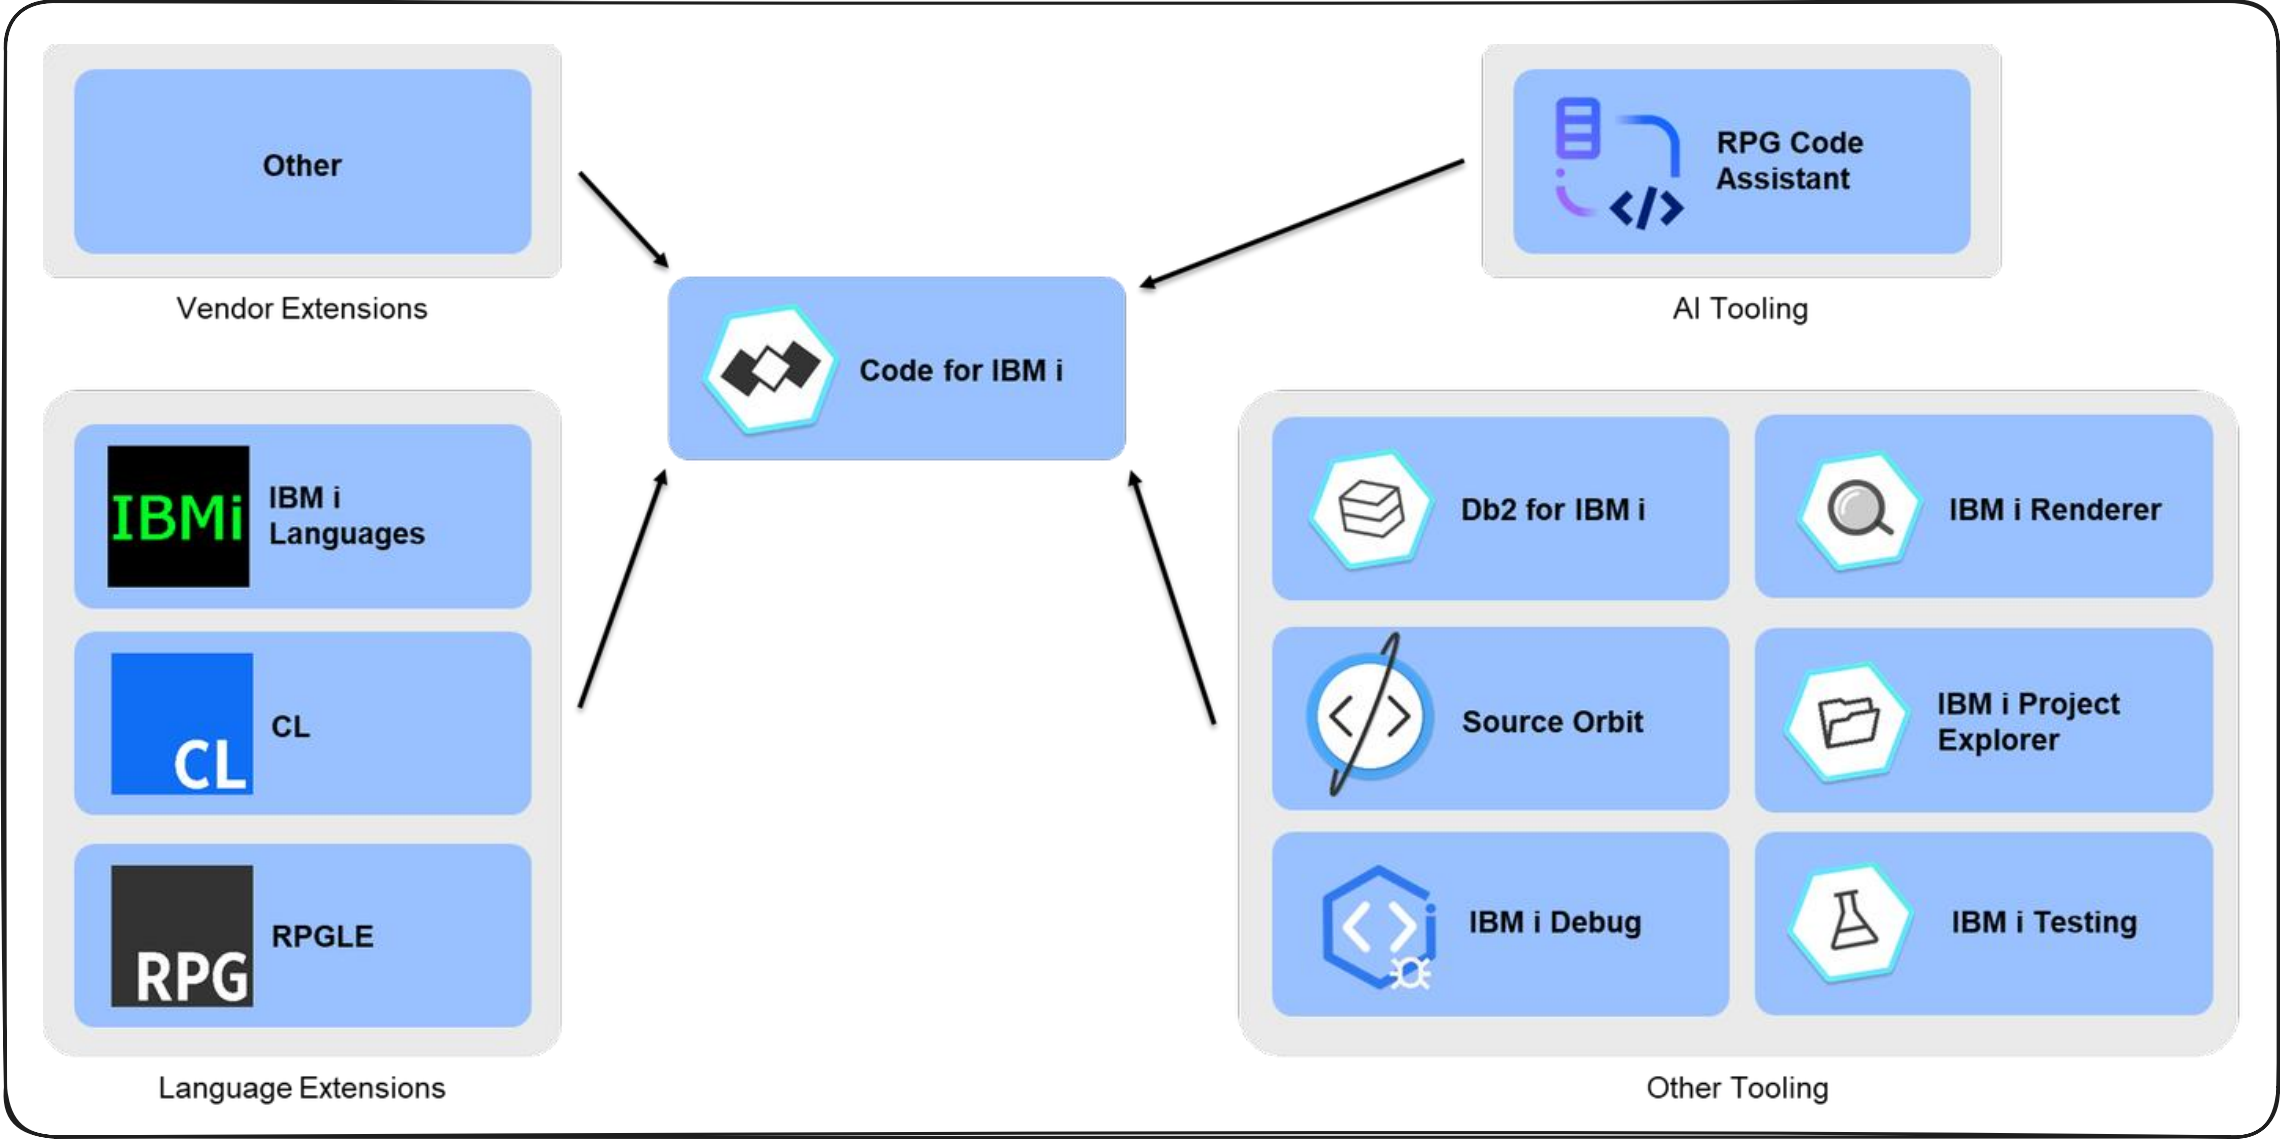

We did a survey...

Have you done unit testing with IBM i before?


19 responses

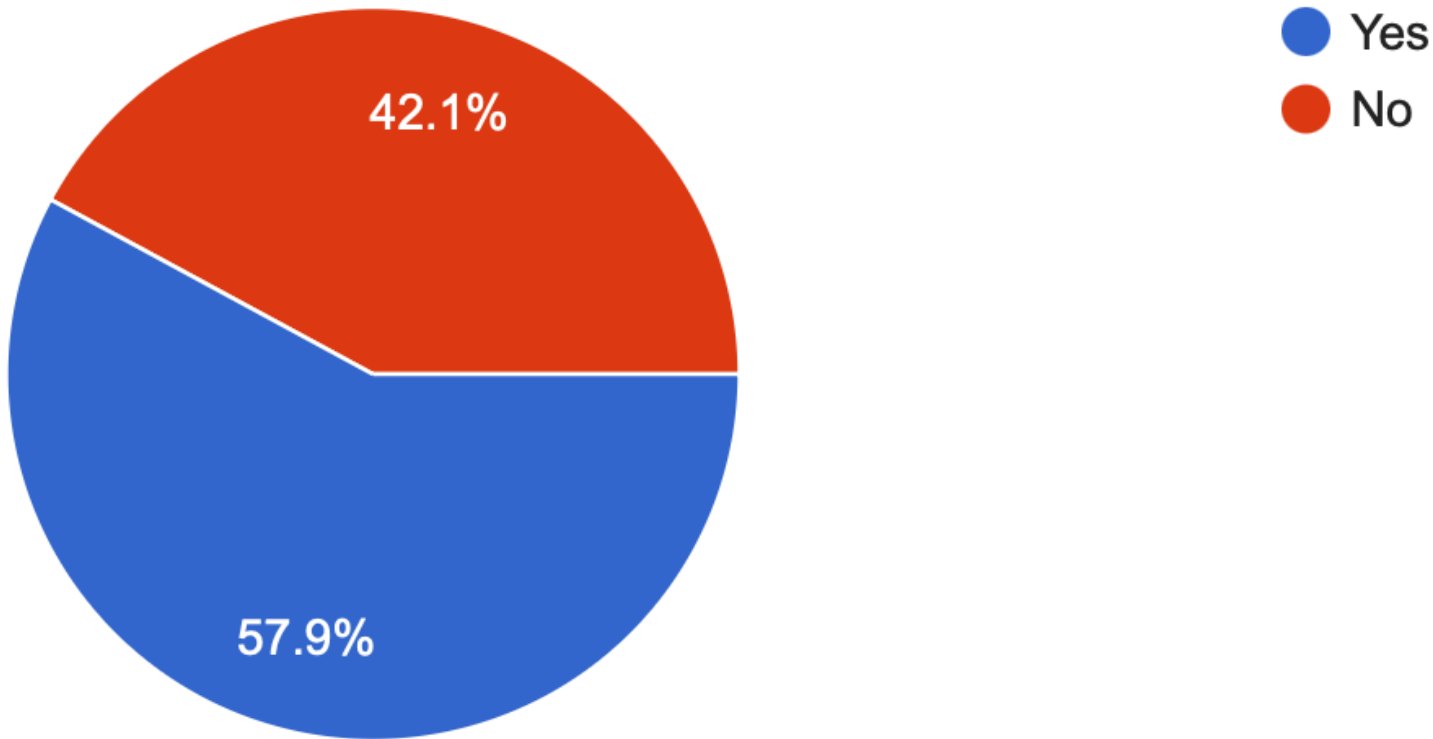

We did a survey...

What framework did you use for IBM i testing?


19 responses

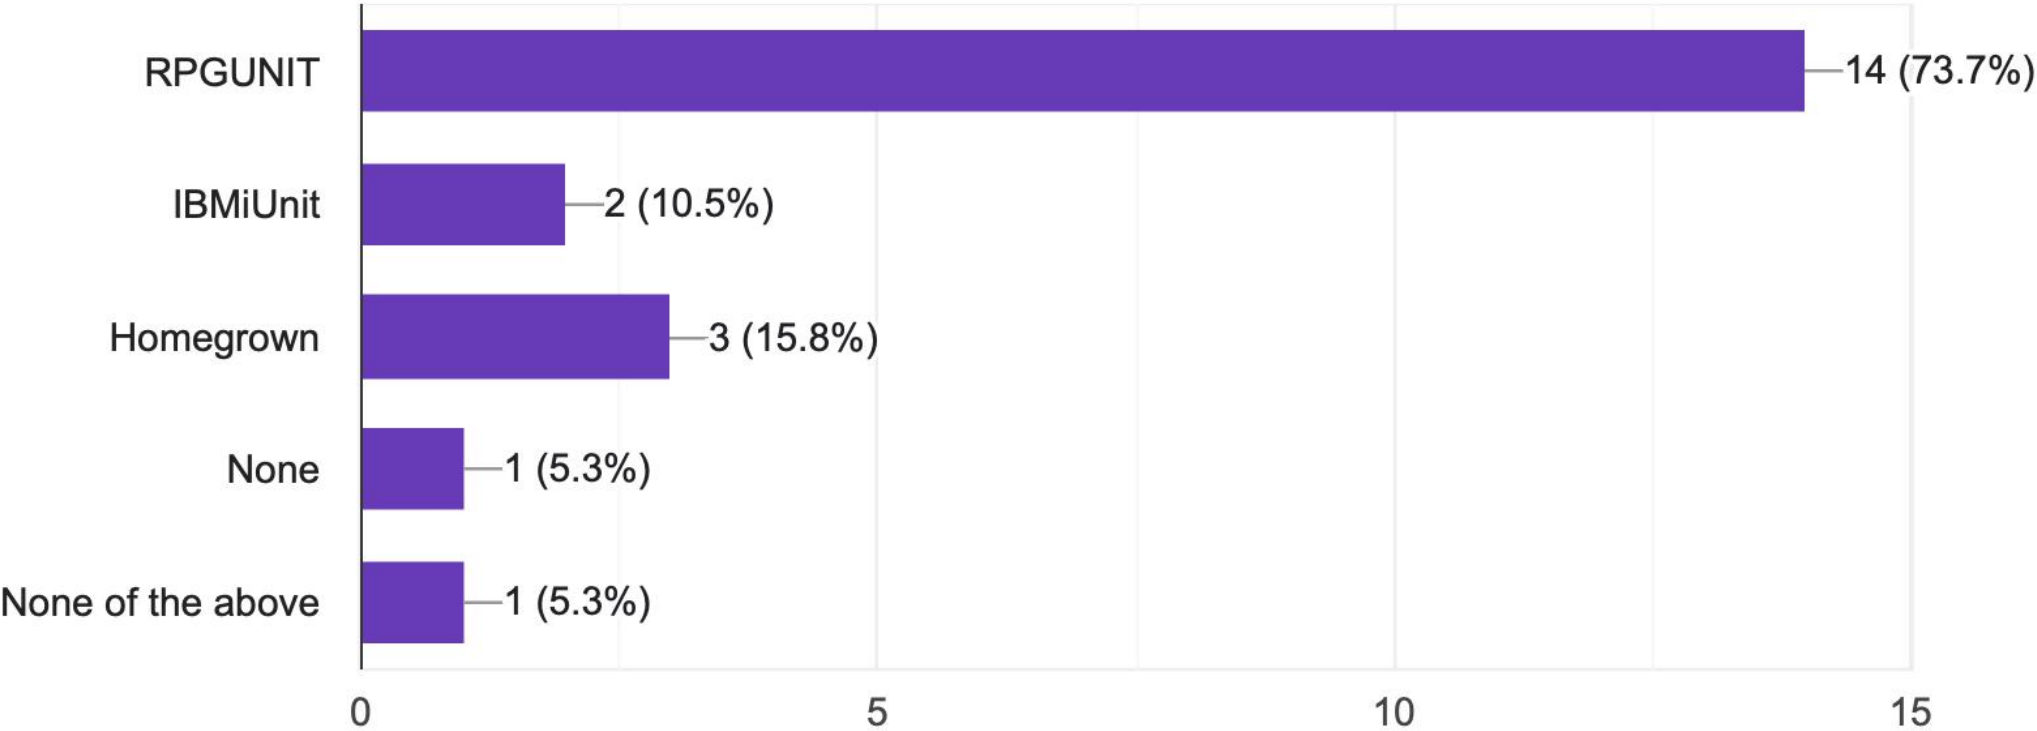

We did a survey...

Have you used IBM i Code Coverage? (CODECOV)

19 responses

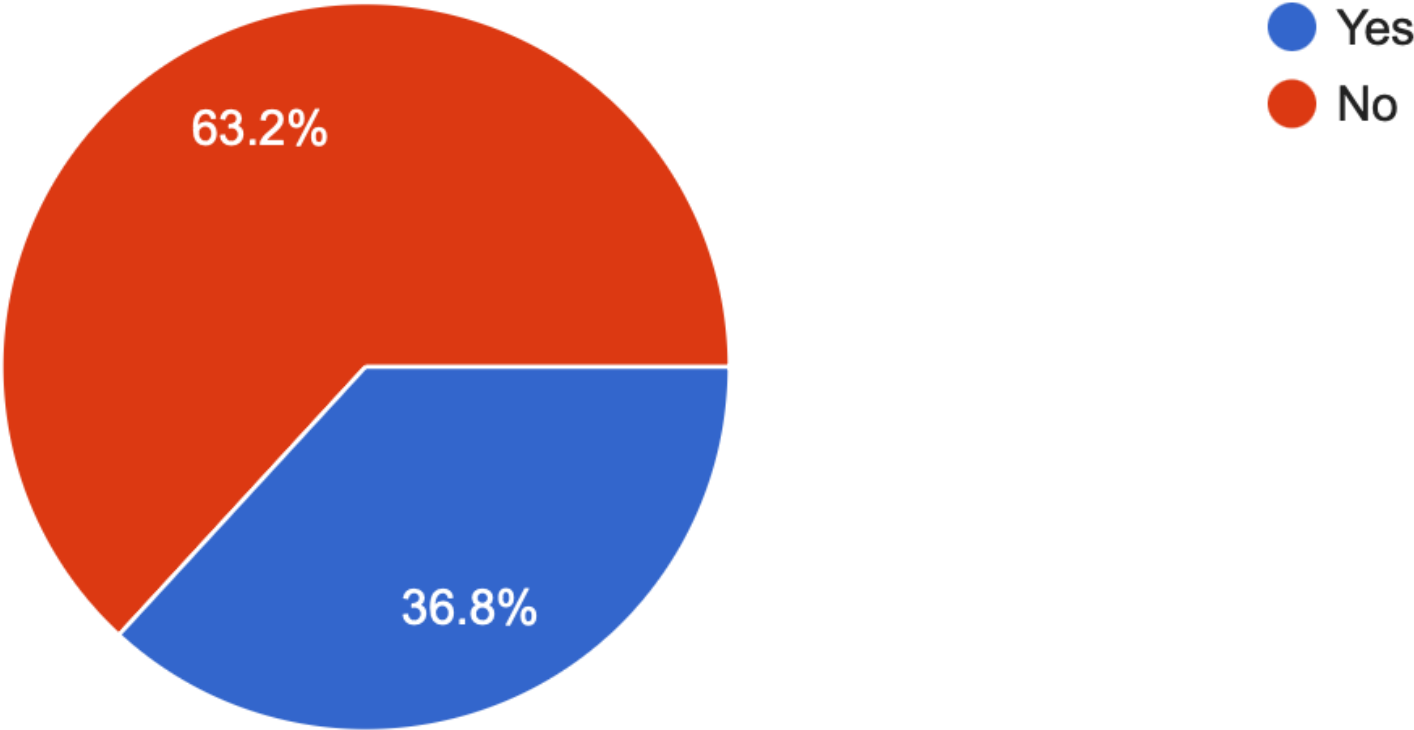

Basics of RPGUnit

Naming requirements

A test case ...

- is an **exported procedure**
- starts with the name **test**
 - test_getEmployeeDetail
 - test_getDeptDetail
 - testIsPalindrome
 - testFactorial

A test suite ...

- has no naming requirements

but the extension requires that ...

- local files are suffixed with **.test.rpgle**, **.test.sqlrpgle**, **.test.cbll**, or **.test.sqlcbll**


and recommends that ...


- source members are prefixed or suffixed with **T**, **_T**, **T_**, etc.

Assertions & utilities

💡 Add the copybook: [/include qinclude,TESTCASE](#)


Example Assertions:

```
//  Pass
assert( 1=1 : 'Impossible to fail' );


//  Fail
assert( 1=0 : 'Obviously wrong' );
```

Example Utilities:


```
monitor;
  a = 10;
  b = 0;
  c = a / b;

//  Fail: Only runs if exception was not caught
fail('Division by zero did not raise an error.');
```

```
on-error;
  msgInfo = getMonitoredMessage(*ON);
endmon;

//  Pass
aEqual( 'MCH1211' : msgInfo.Id );
```

Set up and tear down

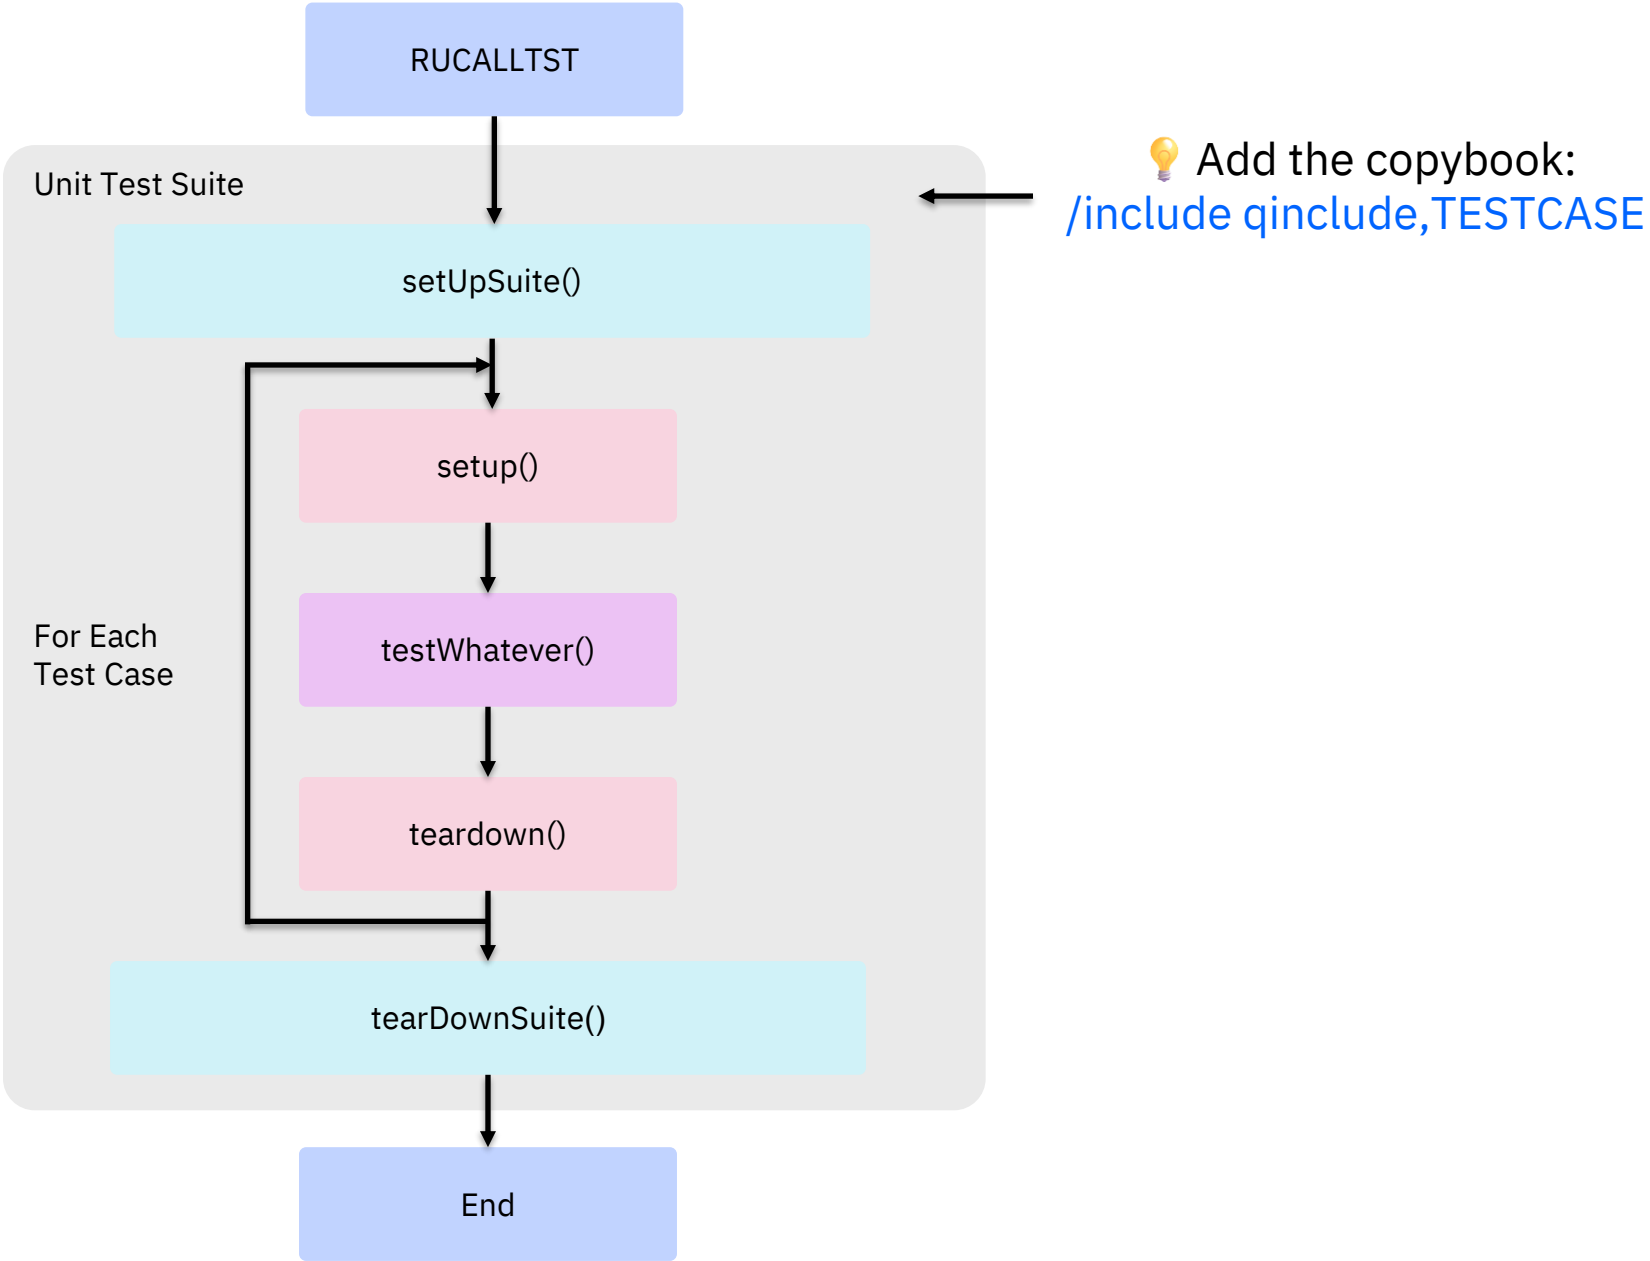

Compile and execution commands

Compile Command:


```
RPGUNIT/RUCRTRPG TSTPGM(MYUSER/TEMPDET) SRCSTMF('/home/MYUSER/builds/  
ibmi-company_system/qtestsrc/empdet.test.sqlrpgle') TGTCCSID(*JOB)  
DBGVIEW(*SOURCE) COPTION(*EVENTF) RPGPPOPT(*LVL2) INCDIR(''/home/  
MYUSER/builds/ibmi-company_system'')
```

Execution Command:

```
RPGUNIT/RUCALLTST TSTPGM(MYUSER/TEMPDET) ORDER(*REVERSE) DETAIL(*ALL)  
OUTPUT(*ALLWAYS) LIBL(*CURRENT) JOBD(*DFT) RCLRSC(*NO) XMLSTMF('/tmp/  
testing/vscode-ibmi-testing/RPGUNIT/TEMPDET_1751646914682.xml')
```

IBM i Testing Extension Demo

Generating test stubs

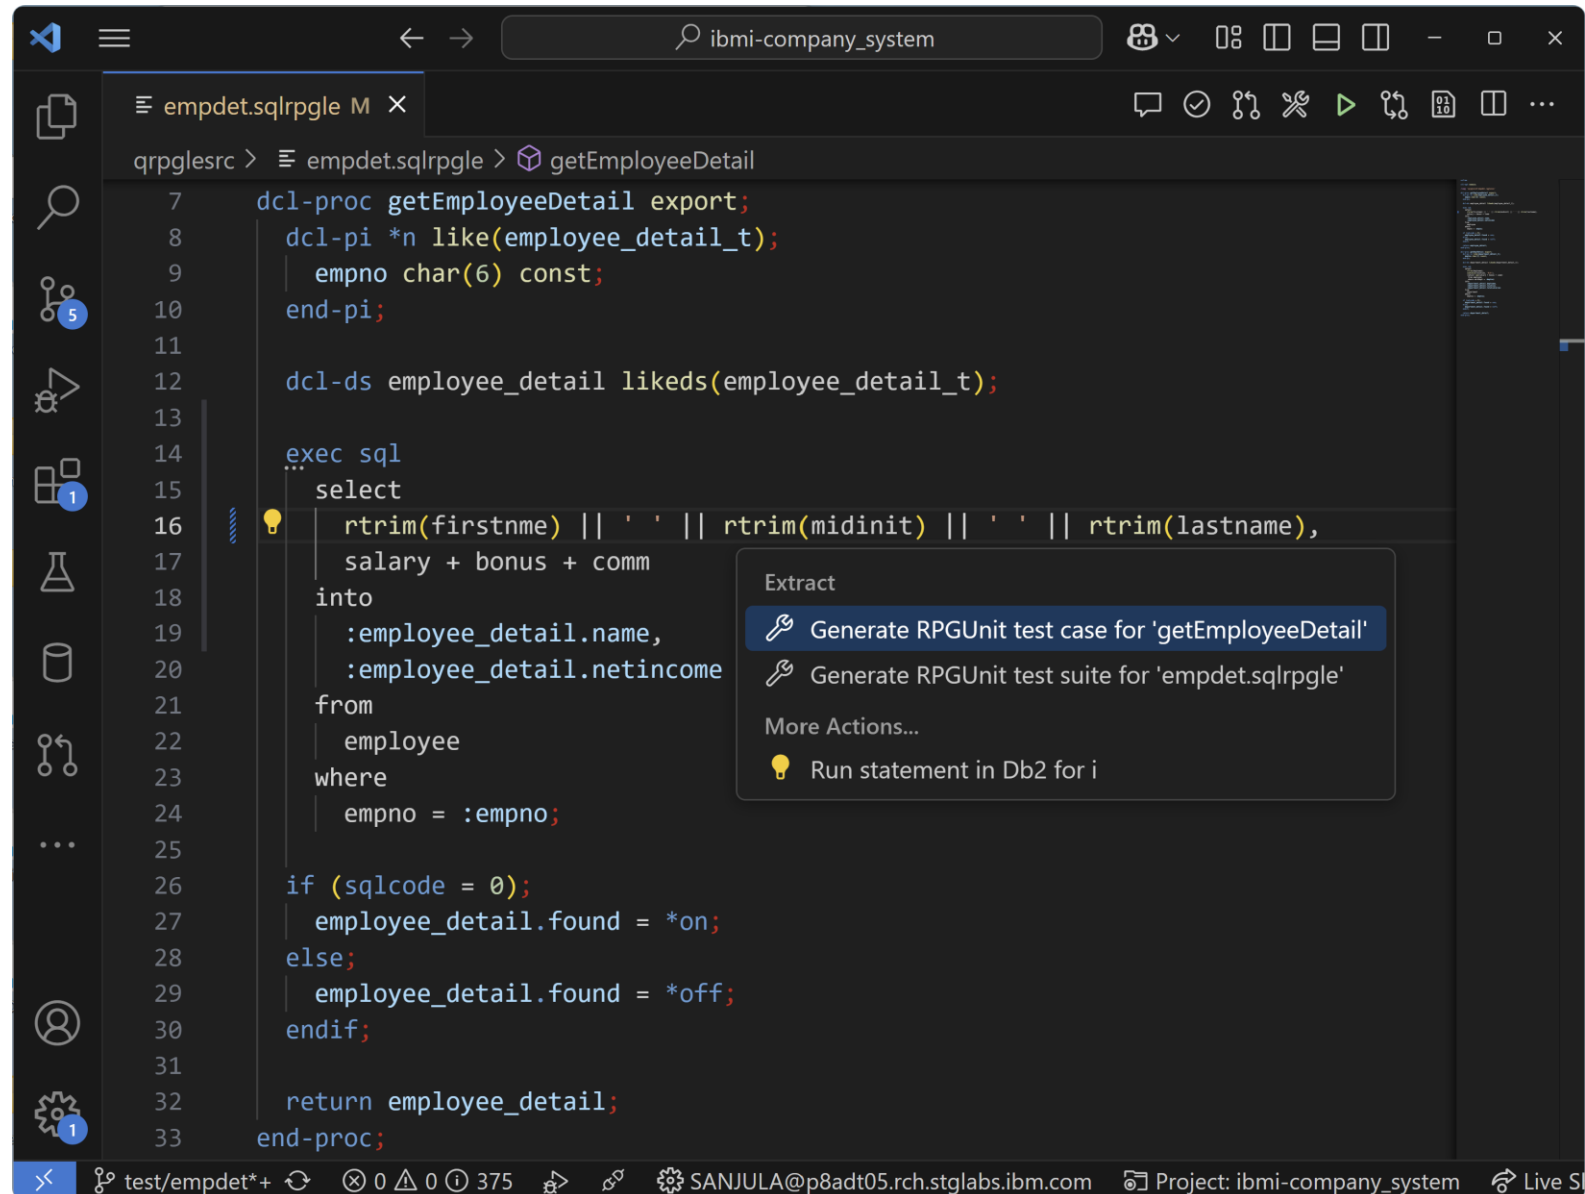


The screenshot shows the IBM Developer IDE with a file named `empdet.sqlrpgle` open. The code is in RPG format and defines a procedure `getEmployeeDetail`. A context menu is visible over the `select` statement, offering options to generate test stubs.

```
7  dcl-proc getEmployeeDetail export;
8  dcl-pi *n like(employee_detail_t);
9    empno char(6) const;
10 end-pi;
11
12 dcl-ds employee_detail likeds(employee_detail_t);
13
14 exec sql
15   select
16     rtrim(firstname) || ' ' || rtrim(midinit) || ' ' || rtrim(lastname),
17     salary + bonus + comm
18   into
19     :employee_detail.name,
20     :employee_detail.netincome
21   from
22     employee
23   where
24     empno = :empno;
25
26 if (sqlcode = 0);
27   employee_detail.found = *on;
28 else;
29   employee_detail.found = *off;
30 endif;
31
32 return employee_detail;
33 end-proc;
```

Context Menu Options:

- Extract
 - Generate RPGUnit test case for 'getEmployeeDetail'
 - Generate RPGUnit test suite for 'empdet.sqlrpgle'
- More Actions...
 - Run statement in Db2 for i

Generating test stubs

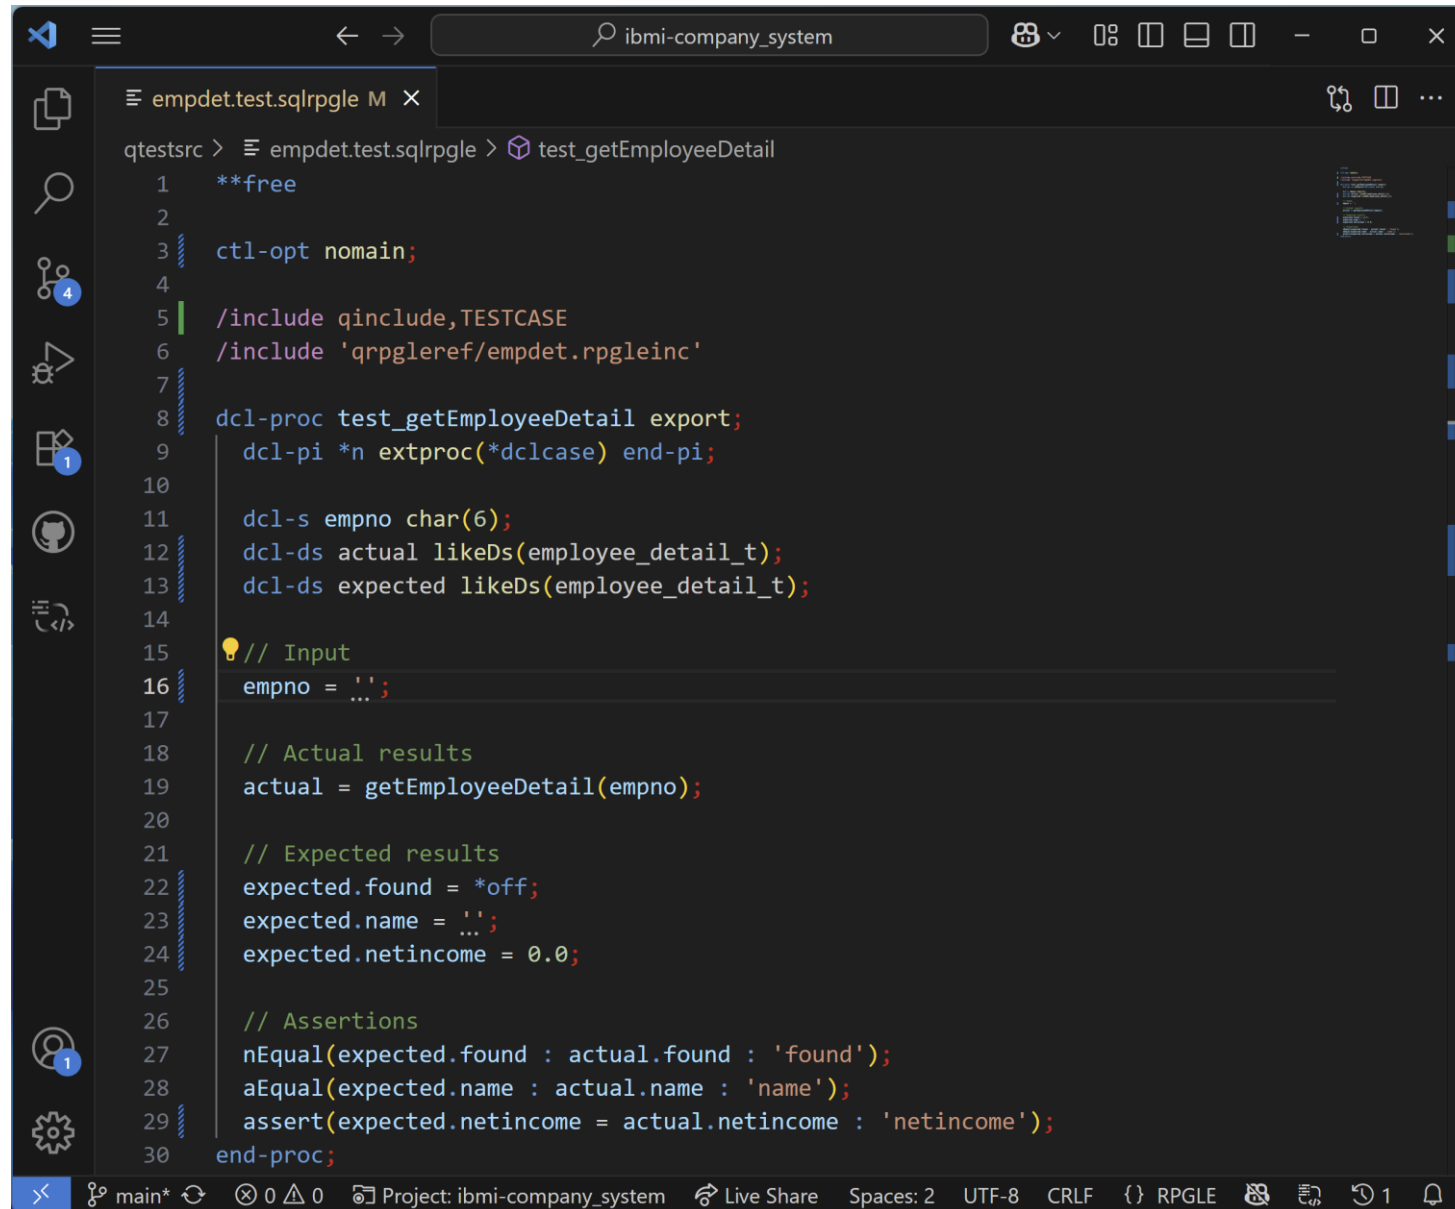


```
ibmi-company_system

empdet.test.sqlrpgle M X
qtestsrc > empdet.test.sqlrpgle > test_getEmployeeDetail

1  **free
2
3  ctl-opt nomain;
4
5  /include qinclude,TESTCASE
6  /include 'qrpgleref/empdet.rpgleinc'
7
8  dcl-proc test_getEmployeeDetail export;
9      dcl-pi *n extproc(*dclcase) end-pi;
10
11     dcl-s empno char(6);
12     dcl-ds actual likeDs(employee_detail_t);
13     dcl-ds expected likeDs(employee_detail_t);
14
15     // Input
16     empno = '..';
17
18     // Actual results
19     actual = getEmployeeDetail(empno);
20
21     // Expected results
22     expected.found = *off;
23     expected.name = '..';
24     expected.netincome = 0.0;
25
26     // Assertions
27     nEqual(expected.found : actual.found : 'found');
28     aEqual(expected.name : actual.name : 'name');
29     assert(expected.netincome = actual.netincome : 'netincome');
30 end-proc;
```


Writing tests

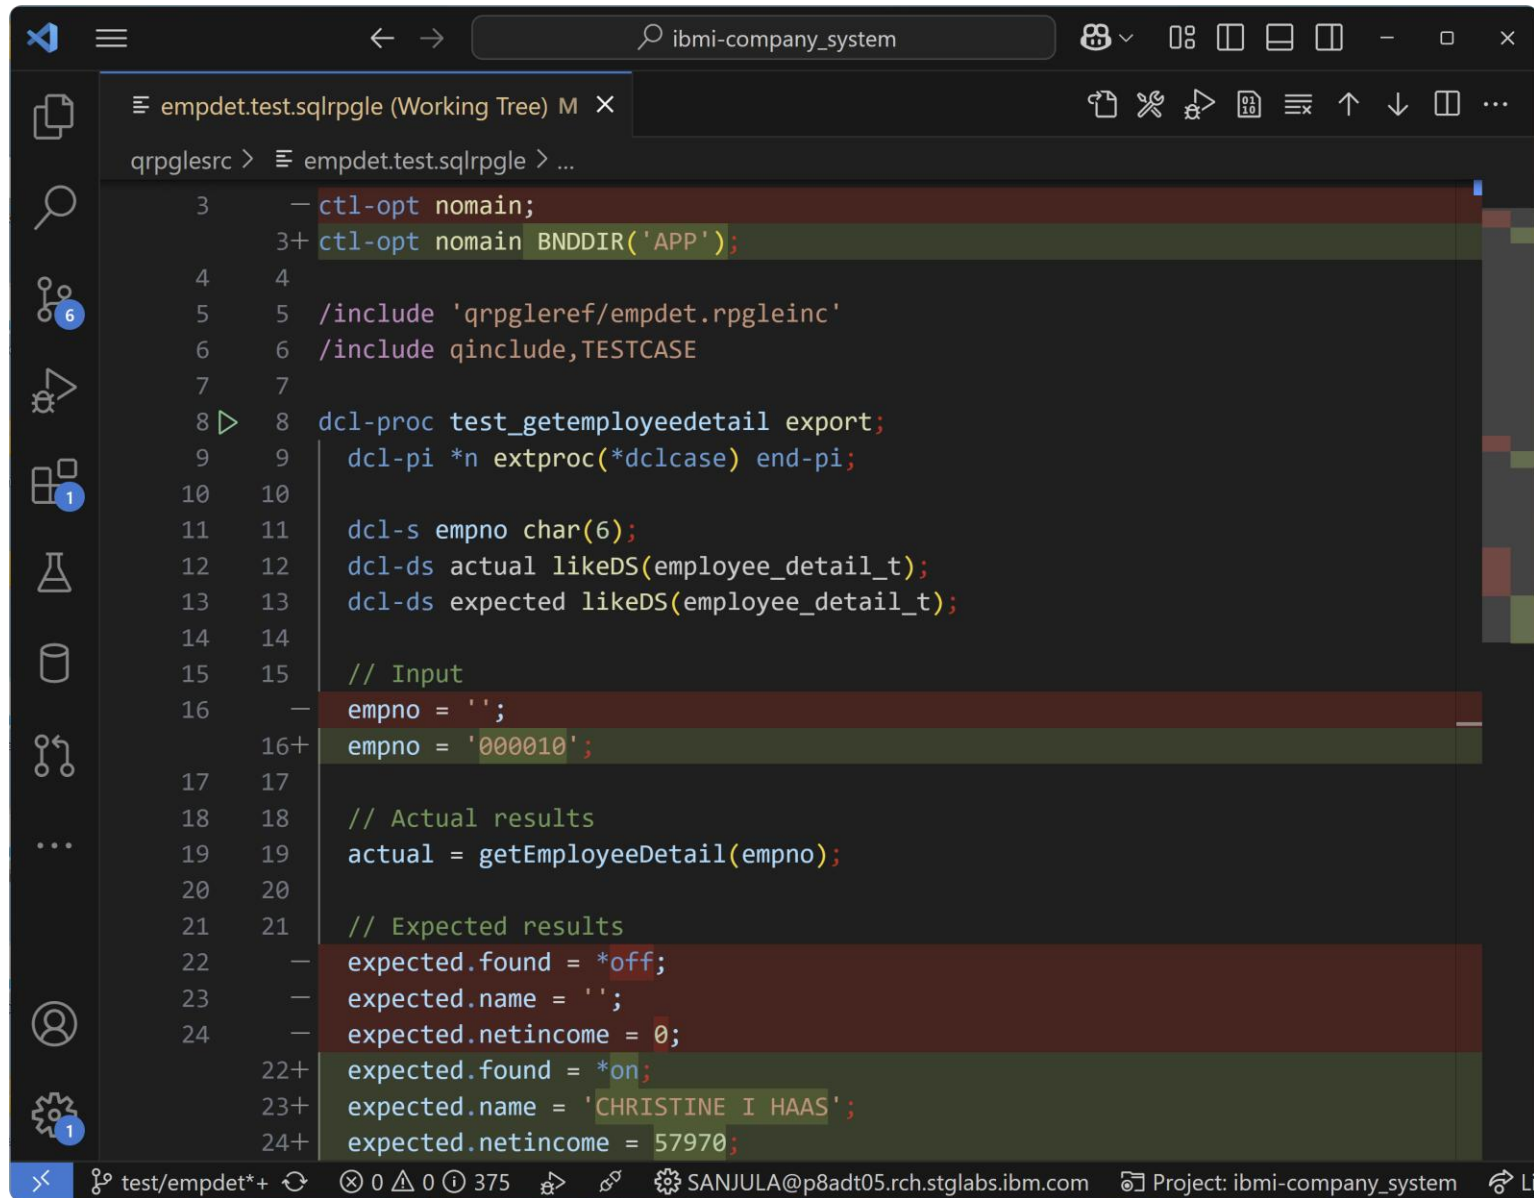

```
empdet.test.sqlrpgle (Working Tree) M X
qrpglesrc > empdet.test.sqlrpgle > ...

3      - ctl-opt nomain;
3+     ctl-opt nomain BNDDIR('APP');
4      4
5      5 /include 'qrpgleref/empdet.rpgleinc'
6      6 /include qinclude,TESTCASE
7      7
8      8 dcl-proc test_getemployeedetail export;
9      9     dcl-pi *n extproc(*dclcase) end-pi;
10     10
11     11     dcl-s empno char(6);
12     12     dcl-ds actual likeDS(employee_detail_t);
13     13     dcl-ds expected likeDS(employee_detail_t);
14     14
15     15     // Input
16     - empno = '';
16+    empno = '000010';
17     17
18     18     // Actual results
19     19     actual = getEmployeeDetail(empno);
20     20
21     21     // Expected results
22     - expected.found = *off;
23     - expected.name = '';
24     - expected.netincome = 0;
22+    expected.found = *on;
23+    expected.name = 'CHRISTINE I HAAS';
24+    expected.netincome = 57970;
```


Generating more test stubs (preview mode)

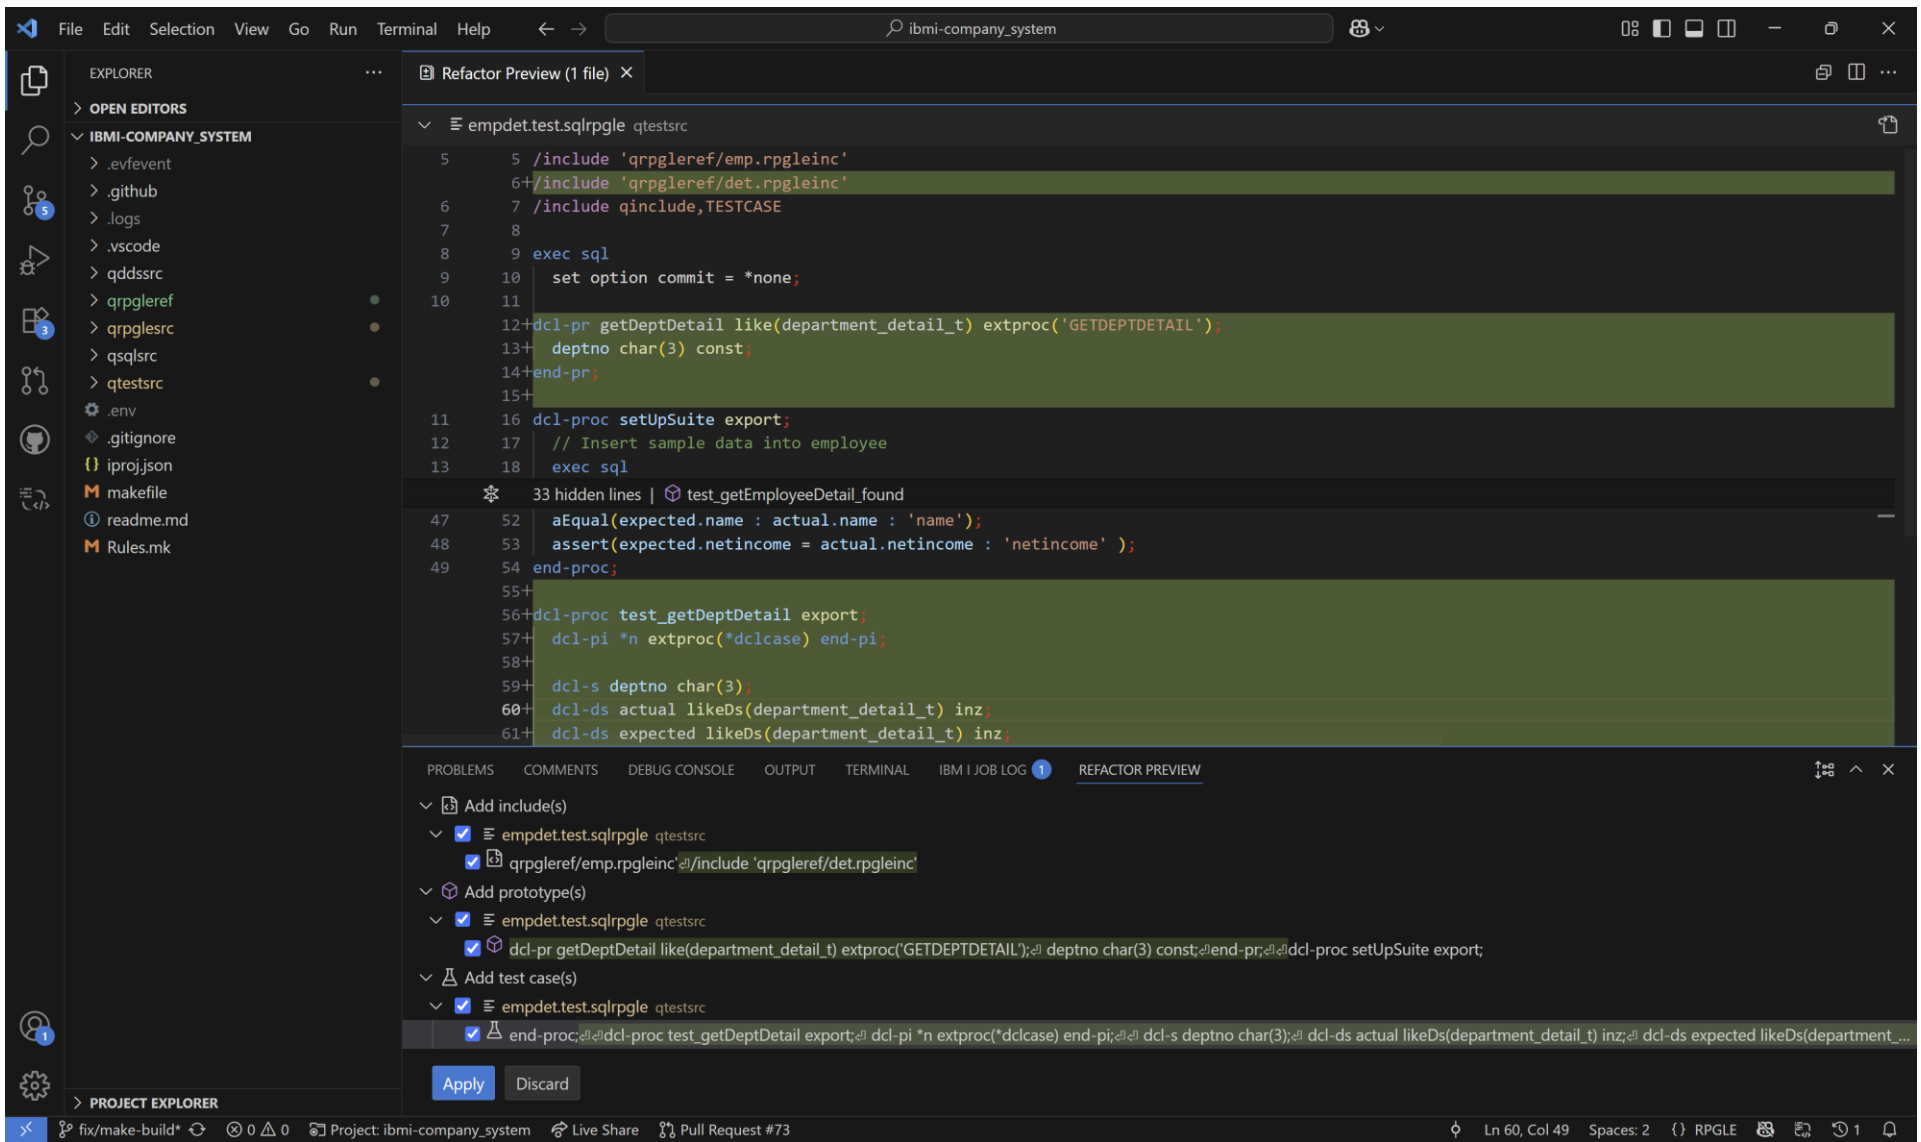

Running unit tests

TEST EXPLORER

Filter (e.g. text, !exclude, @tag)

1/1 9.3s

ibmi-company_system 68ms

qrpglesrc 68ms

empdet.test.sqlrpgle 68ms

test_getemployeedetail 68ms

RPGUNIT

empdet.test.sqlrpgle M X

qrpglesrc > empdet.test.sqlrpgle > test_getemployeedetail

8 dcl-proc test_getemployeedetail export;

9 dcl-pi *n extproc(*dclcase) end-pi;

10

11 dcl-s empno char(6);

12 dcl-ds actual likeDS(employee_detail_t);

13 dcl-ds expected likeDS(employee_detail_t);

14

15 // Input

16 empno = '000010';

PROBLEMS 375 COMMENTS DB2 FOR I DEBUG CONSOLE OUTPUT TERMINAL TEST RESULTS

WORKSPACE

ibmi-company_system (1) [Deployment Successful]

> empdet.test.sqlrpgle (1) [Compilation Successful]

✓ test_getemployeedetail 0.068s

EXECUTION

Deployments: 1 successful | 0 failed (1)

Compilations: 1 successful | 0 failed | 0 skipped (1)

RESULTS

Test Files: 1 passed | 0 failed | 0 errored (1)

Test Cases: 1 passed | 0 failed | 0 errored (1)

Assertions: 3

Duration: 0.068s

PASS

IBM i Testing

✓ test_getemployeede...

test/empdet*+ 0 0 375 SANJULA@p8adt05.rch.stglabs.ibm.com Project: ibmi-company_system Live Share Deploy New job (1) Pul

Viewing failures and errors

TEST EXPLORER

Filter (e.g. text, !exclude, @tag)

6/16

17.3s

examples 35ms

- cbl.test.cbllle
 - TEST_TRUE
 - TEST_FALSE
 - TEST_FAIL0
 - TEST_FAIL1
- rpgsqlstmf.test.sqlrpgle 26ms
 - testWhatever_1 25ms
 - testWhatever_2 1.0ms
- rpgstmf.test.rpgle 3.0ms
 - testWhatever_1 3.0ms
 - testWhatever_2 0.0ms
- sub 6.0ms
- RPGUNIT

rpgstmf.test.rpgle

```
222 // =====
223 // RPGUnit test case.
224 // =====
225 dcl-proc testWhatever_1 export;
226   dcl-pi *n extproc(*dclcase) end-pi;
227
228   print('Executing:      * testWhatever_1()');
229
230   // Run
231   assert(sds.pgmName = 'TEMPLATE': 'Name of the test suite should be 'TEMPLATE''');
232
233   // Place your assertions here.
234
235 end-proc;
```

PROBLEMS

DB2 FOR I

DEBUG CONSOLE

OUTPUT

TERMINAL

PORTS

IBM I JOB LOG

TEST RESULTS

WORKSPACE

examples (4) [Deployment Successful]

> rpgstmf.test.rpgle (2) [Compilation Skipped]

X testWhatever_1 0.003s

Failure (line 231): Name of the test suite should be 'TEMPLATE'

✓ testWhatever_2 0s

> rpgsqlstmf.test.sqlrpgle (2) [Compilation Skipped]

✓ testWhatever_1 0.025s

✓ testWhatever_2 0.001s

> cbl.test.cbllle (4) [Compilation Failed]

CPFA0A9: Object not found. Object is EN_US.UTF-8.

: CRTCBMOD MODULE(*PGMID) SRCSTMF('/home/SANJULA/builds/examples/cbl.test.cbllle') OPTION(*EVENTF) DBGVIEW(*SOURCE) TGTRLS(*CURRENT) INCDIR('/home/SANJULA/builds/examples') DEFINE(*NONE) TGTCCSID(37)

CPFA0A9: Object not found. Object is EN_US.UTF-8.

CPFA0A9: Object not found. Object is EN_US.UTF-8.

CPFA0A9: Object not found. Object is EN_US.UTF-8.

CPD4090: Printer device PRT01 not found. Output queue changed to QPRINT i

n library QGPL.

CPFA0A9: Object not found. Object is EN_US.UTF-8.

IBM i Testing

TEST_TRUE cbl.test.cbllle < examples

TEST_FALSE cbl.test.cbllle < examples

TEST_FAIL0 cbl.test.cbllle < examples

TEST_FAIL1 cbl.test.cbllle < examples

TEST_TRUE cbl.test.cbllle < sub < examples

TEST_FALSE cbl.test.cbllle < sub < examples

TEST_FAIL0 cbl.test.cbllle < sub < examples

TEST_FAIL1 cbl.test.cbllle < sub < examples

testWhatever_1 Name of the test suite should b...

testWhatever_1 Name of the test suite should b...

testWhatever_2 rpgstmf.test.rpgle < examples

testWhatever_1 rpgsqlstmf.test.sqlrpgle < examp...

testWhatever_2 rpgsqlstmf.test.sqlrpgle < examp...

testWhatever_2 rpgstmf.test.rpgle < sub < examp...

main*

0 0

SANJULA@p8adt05.rch.stglabs.ibm.com

Live Share

Deploy

New job (1)

Ln 239, Col 45

Spaces: 2


UTF-8

CRLF

{ } RPGLE

1

Configuring tests

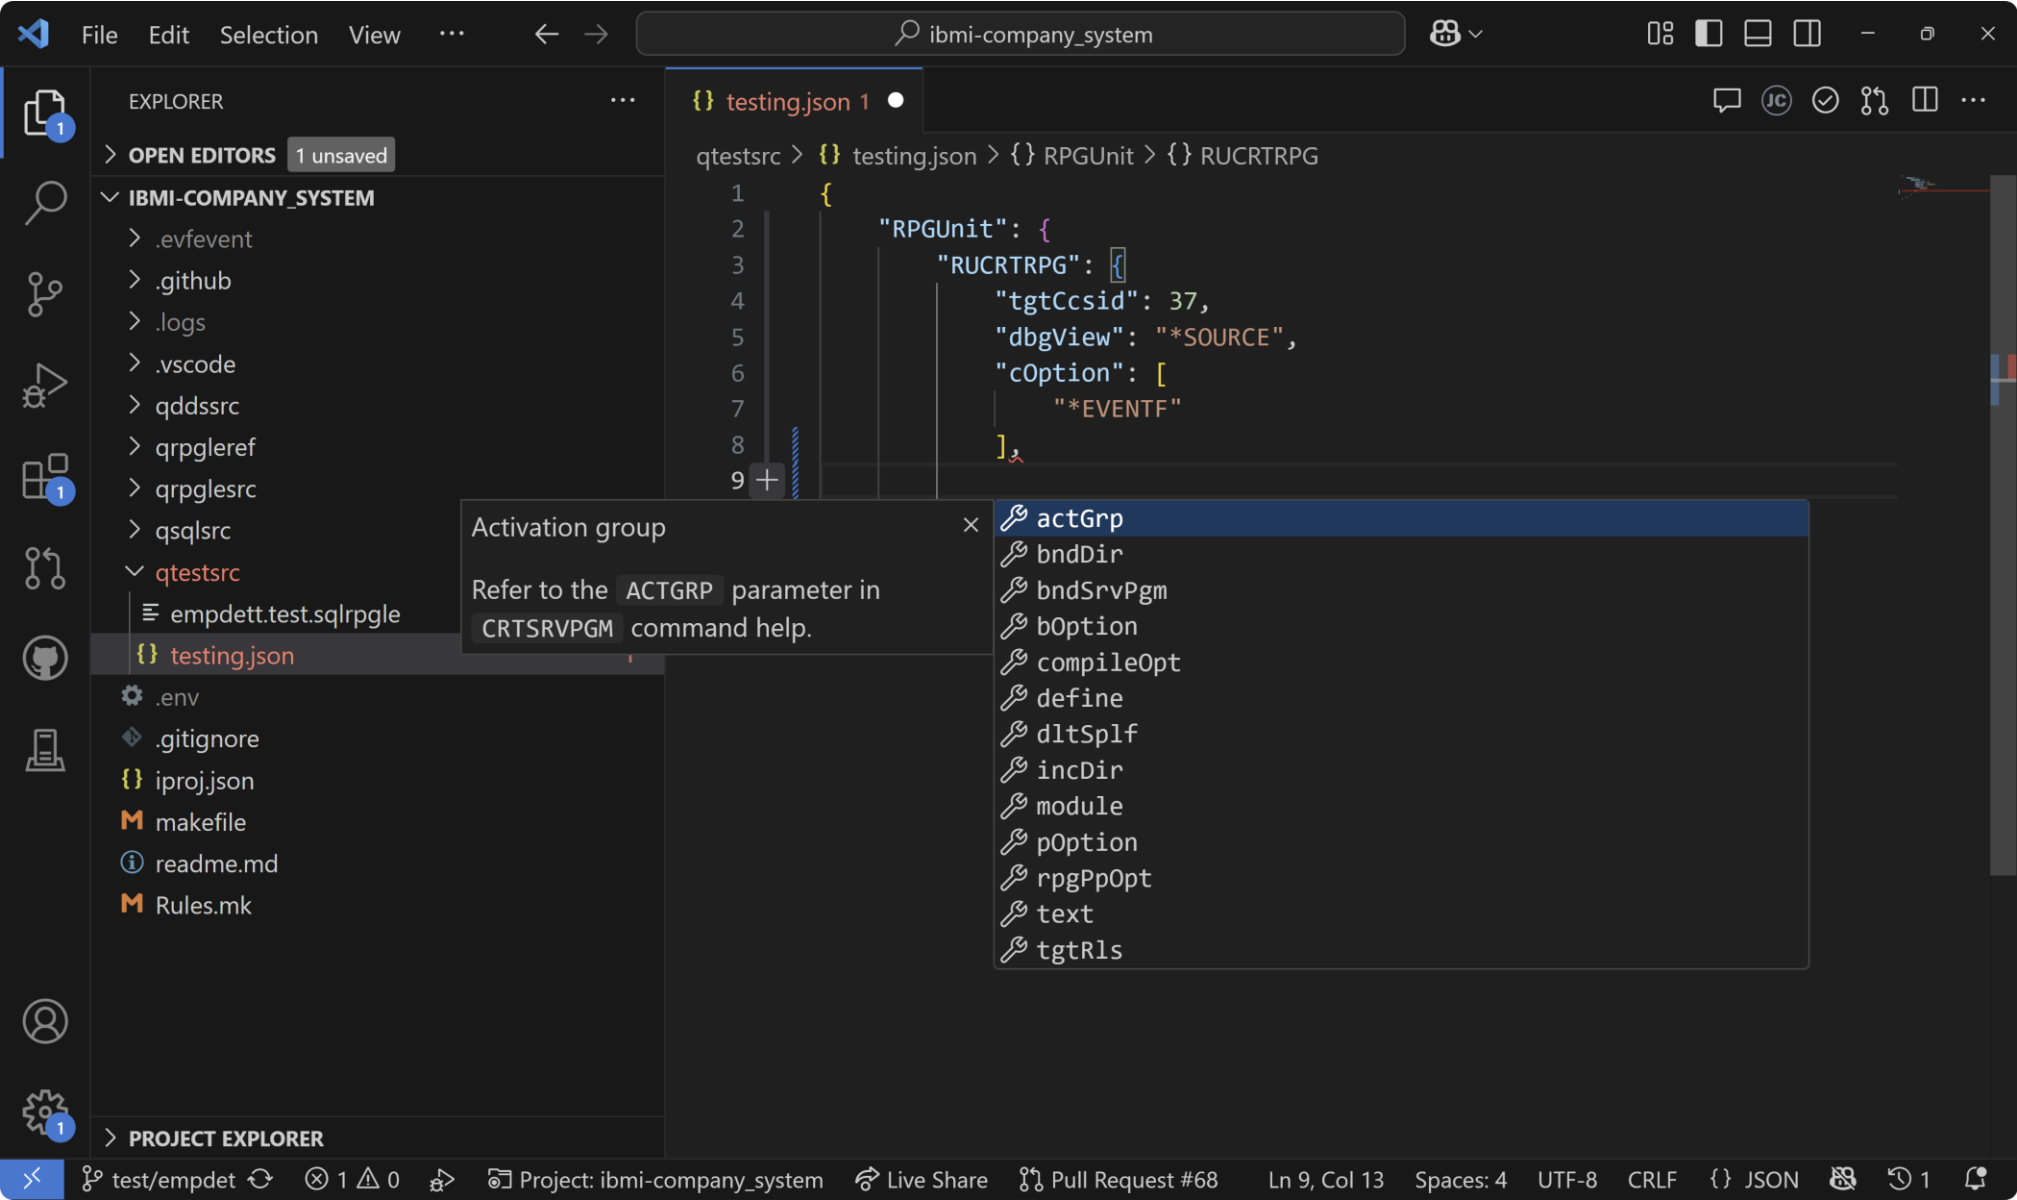

Generating code coverage

The screenshot displays the Visual Studio Code interface with the following components:

- TESTING Panel:**
 - TEST EXPLORER:** Shows a tree of tests. The test `rpgstmf.test.rpgle` is selected, showing a status of 3/8 and a duration of 16.8s. A tooltip for `Run Test with Coverage` is visible over the `testWhatever_2` item.
 - TEST COVERAGE:** Displays coverage percentages for the selected test:

Test	Coverage
rpgunit-stmf	67.36%
rpgsqlstmf.test.sqlrpgle	74.32%
rpgstmf.test.rpgle	60.00%
- Editor:** Shows the source code for `rpgstmf.test.rpgle`. The code includes a `setUpSuite` procedure with various SQL-related logic and command-line calls. Line numbers 120 through 190 are visible.
- Bottom Status Bar:** Shows the file path `vscode-ibmi-testing main*`, a search bar, and other standard VS Code status information.

IBM i Testing CLI Demo

Running tests from a local terminal or in PASE on IBM i

```
-bash-5.1$ itest --help
Usage: itest [options]
```

The **IBM i Testing CLI** (**itest - v1.1.0**) can be used to run unit tests and generate code coverage results in PASE for RPG and COBOL programs on IBM i. Under the covers, this extension leverages the RPGUnit testing framework.

✦ Documentation: <https://codefori.github.io/docs/developing/testing/overview>

Options:

--v, --version	Display the version number
--ld, --localDirectory [path]	Local directory containing tests (preset: ".")
--id, --ifsDirectory [path]	IFS directory containing containing tests (preset: ".")
--l, --library <library>	Library containing tests.
--sf, --source-files <sourceFiles...>	Source files to search for tests.
--ll, --library-list <libraries...>	Libraries to add to the library list.
--cl, --current-library <library>	The current library to use for the test run.
--cc, --code-coverage [ccLv1]	Run with code coverage (choices: "*LINE", "*PROC", preset: "*LINE")
--ct, --coverage-thresholds <thresholds...>	Set the code coverage thresholds (yellow and green). (default: ["60", "90"])
--sr, --summary-report [path]	Save summary report (preset: "./.itest/summary-report.md")
--tr, --test-result [path]	Save test result logs (preset: "./.itest/test-result.log")
--to, --test-output [path]	Save test output logs (preset: "./.itest/test-output.log")
--co, --command-output [path]	Save command output logs (preset: "./.itest/command-output.log")
--h, --help	Display help for command

Examples:

```
itest --ld . --id /home/USER/builds/ibmi-company_system --ll RPGUNIT QDEVTOOLS --cl MYLIB
itest --id /home/USER/builds/ibmi-company_system --ll RPGUNIT QDEVTOOLS --cl MYLIB
itest --l MYLIB --ll RPGUNIT QDEVTOOLS --cl MYLIB
```

Running tests and code coverage in a pipeline

Summary

Jobs

ibmi

Run details

Usage

Workflow file

ibmi

succeeded 2 minutes ago in 41s

Search logs

Build and Test

221 =====

222 Executing step 9: cmd

223 =====

224

225 /home/***/builds/ics_test/example \$ itest --id . --ll VSB3C8B4D3 RPGUNIT QDEVT00LS --c1 VSB3C8B4D3 --cc --sr --tr --to --co

226 - Setting up environment

227 - Loading tests

228 IFS example (1)

229 > empdet.test.sqlrpgle → TEMPDET.SRVPGM (2) [Compilation Successful]

230 ✓ test_getEmployeeDetail_found 0.01s

231 ✓ test_getEmployeeDetail_notFound 0.004s

232

233

234 EXECUTION

235 Deployments: 0 successful | 0 failed (0)

236 Compilations: 1 successful | 0 failed | 0 skipped (1)

237

238 RESULTS

239 Test Files: 1 passed | 0 failed | 0 errored (1)

240 Test Cases: 2 passed | 0 failed | 0 errored (2)

241 Assertions: 4

242 Duration: 0.014s

243

244 PASS

245

246

Viewing test and code coverage results

Add employee test cases #2

Open

SanjulaGanepola wants to merge 2 commits into main from test/example

Conversation 1

Commits 2

Checks 1

Files changed 0

+0 -0

SanjulaGanepola commented 1 hour ago

No description provided.

SanjulaGanepola added 2 commits 1 hour ago

restore tests

SanjulaGanepola temporarily deployed to COMMON1 1 hour ago

with GitHub Actions

Inactive

github-actions bot commented 1 hour ago

Test and Code Coverage Report

test passing coverage 76%

Test Result

Total Tests	Passed	Failed	Errored	Assertions	Duration
1	1	0	0	4	0.013s

Code Coverage

File	Coverage	Uncovered Lines	Covered Lines	Executable Lines
empdet.sqlrpgle	53%	9	10	19
empdet.test.sqlrpgle	93%	2	25	27

Reviewers

No reviews

Assignees

No one—assign yourself

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

None yet

Notifications

Customize

Unsubscribe

You're receiving notifications because you modified the open/close state.

1 participant

Lock conversation

25

© Copyright IBM Corporation 2024

What's Coming Next

Green Screen Testing

```
{ } department.test.json U ×
demos > { } department.test.json > [ ] steps
1 {
2   "name": "Department test",
3   "show": true,
4   "delay": 1000,
5   "terminal": {
6     "location": 2,
7     "encoding": "37",
8     "terminal": "default",
9     "deviceName": "Test",
10    "connectionString": "+uninhibited localhost",
11    "currentDirectory": ""
12  },
13  "steps": [
14    {
15      "name": "Sign in",
16      "type": "input",
17      "inputs": [
18        "$USER\t",
19        "$PASSWORD\r",
20        "\r"
21      ]
22    },
23    {
24      "name": "Setup library list",
25      "type": "input",
26      "inputs": [
27        "ADDLIBLE SANJULA\r"
28      ]
29    },
30    {
31      "name": "Call DEPTS program",
32      "type": "input",
33      "inputs": [
34        "CALL PGM(DEPTS)\r"
35      ]
36    }
37  ]
38 }
```



{ } department.test.json U IBM i 5250: View department test ×

Departments

F3=Exit
5=View 8=New Employee

Opt	ID	Name
<input type="checkbox"/>	A00	SPIFFY COMPUTER SERVICE DIV.
-	B01	PLANNING

I

5250008/007

Important Links

IBM i Testing

VS Code Marketplace

<https://marketplace.visualstudio.com/items?itemName=IBM.vscode-ibmi-testing>

Documentation

<https://codefori.github.io/docs/developing/testing/overview/>

GitHub Repository

<https://github.com/IBM/vscode-ibmi-testing>

RPGUNIT

Documentation

<https://irpgunit.sourceforge.io/help/>

GitHub Repository

<https://github.com/tools-400/irpgunit>

Sample Projects

Company System Demo

https://github.com/IBM/ibmi-company_system

RPGUTILS

<https://github.com/IBM/vscode-ibmi-testing/tree/main/examples/rpg-utils>

VS Code

Documentation

<https://code.visualstudio.com/docs/editor/testing>

Sanjula Ganepola - RPG Unit Testing Made Easy In VS Code

Please take the last minute of this session to complete the evaluation. A direct link to the evaluation can be found using the QR code to the right.



COMMON

IBM i