



Main Canvas with pipeline parameter:-

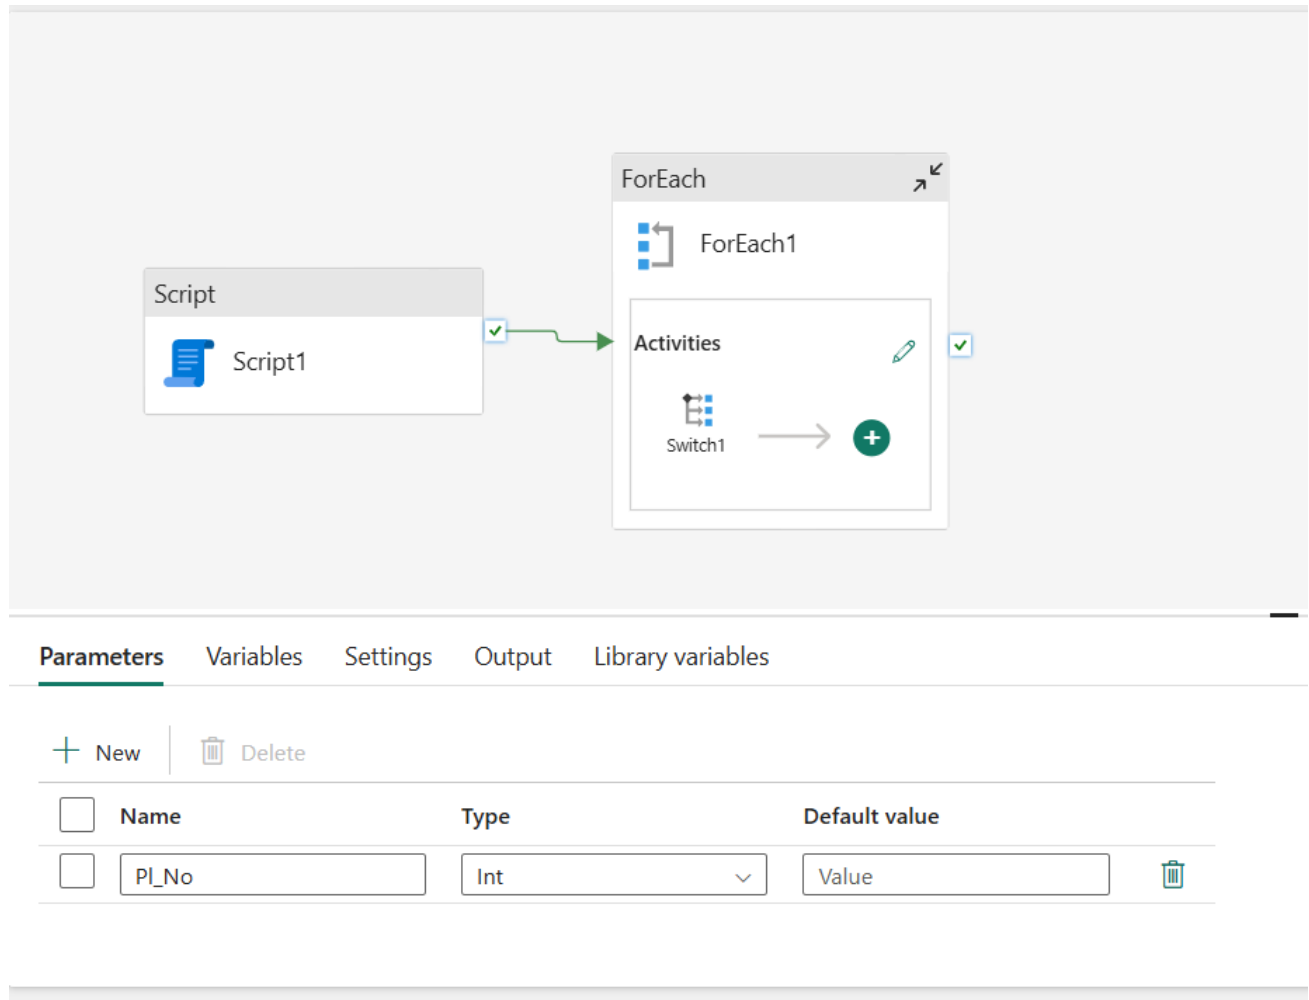


Script activity with Full outer join query :-

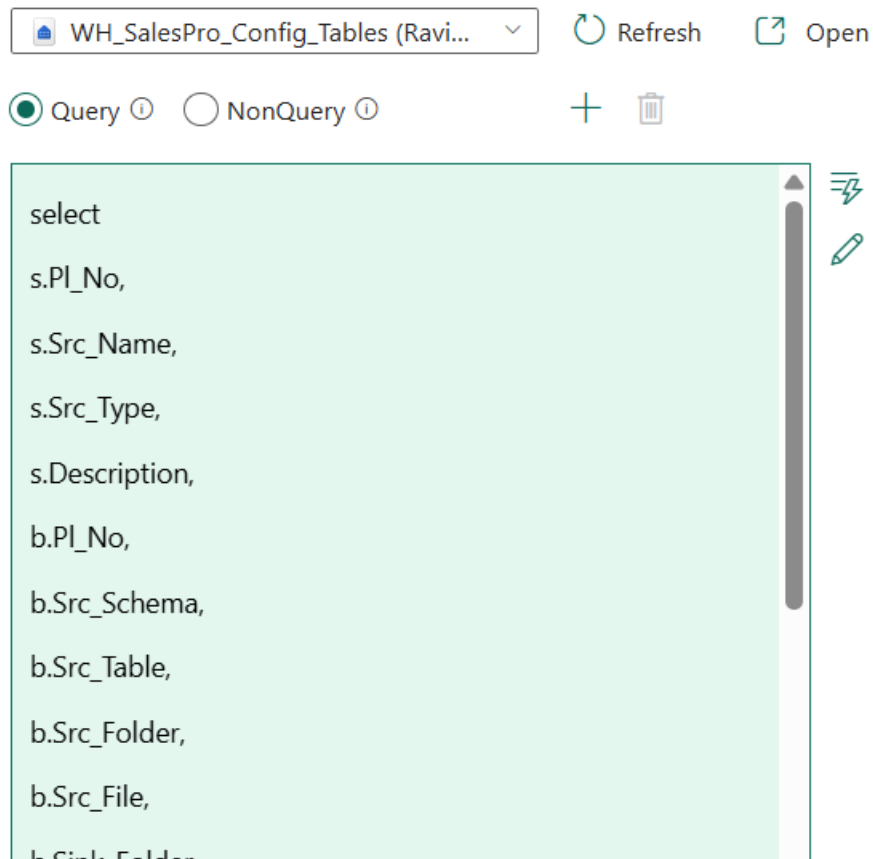

```
selec
s.PI_No,
s.Src_Name,
s.Src_Type,
s.Description,
b.PI_No,
b.Src_Schema,
b.Src_Table,
b.Src_Folder,
```

```
b.Src_File,  
b.Sink_Folder,  
b.Sink_file,  
b.FileType,  
b.Load_type  
FROM Src_Details s  
FULL OUTER JOIN Bronzeconfig b  
ON s.Pl_No = b.Pl_No  
WHERE s.Is_Active = 1  
AND b.Is_Active = 1  
AND  
  
b.Pl_No = S-abcdef1234-S0E-abcdef1234-E
```


ForEach Activity with script activity result set:-

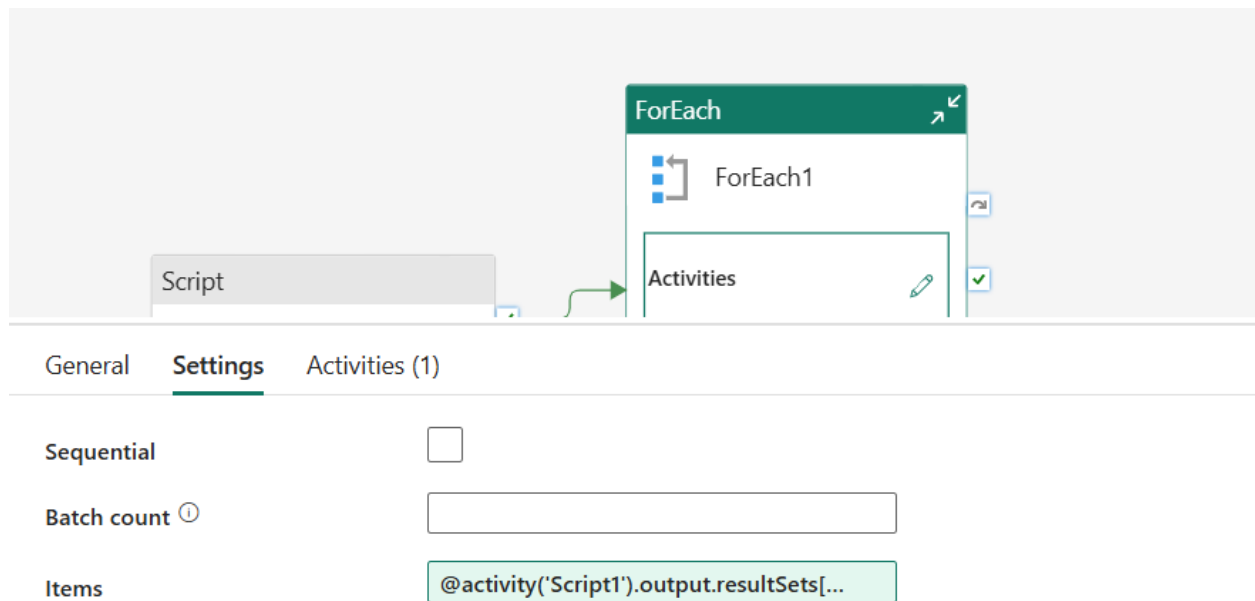

The screenshot displays the Microsoft Power Automate interface. At the top, a workflow canvas shows a 'Script' activity connected to a 'ForEach' loop. The 'ForEach' loop is expanded, showing a sub-activity named 'ForEach1' and an 'Activities' section. Below the canvas, the 'Settings' tab is selected, showing the following configuration:

- Sequential:** ☐
- Batch count** ⓘ:
- Items:**

➤ Switch Activity :-

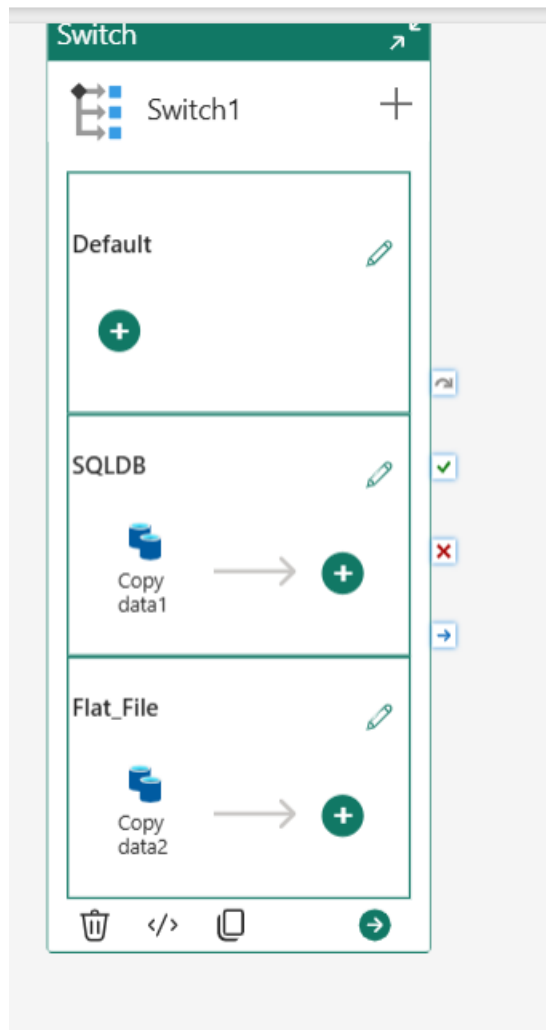

General Activities (2)

Expression

@item().Src_Name

+ Add case

Case

Activity

Default

No activities

SQLDB

Copy data1

1 Activity

Flat_File

Copy data2

1 Activity

Main canvas > ForEach1 > Switch1 - SQLDB

Copy data

Copy data1

General **Source** Destination Mapping Settings

Connection *

OnPre_SQLDB_SalesPro_Ravin_18...  Refresh  Edit

Connection type

SQL Server  Test connection

Database

SALES  Refresh

Use query

☒ Table ☐ Query ☐ Stored procedure


Table *

@item().Src_Schema . @item().Src_Table  Preview data

☒ Enter manually

> Advanced

Final Result:-

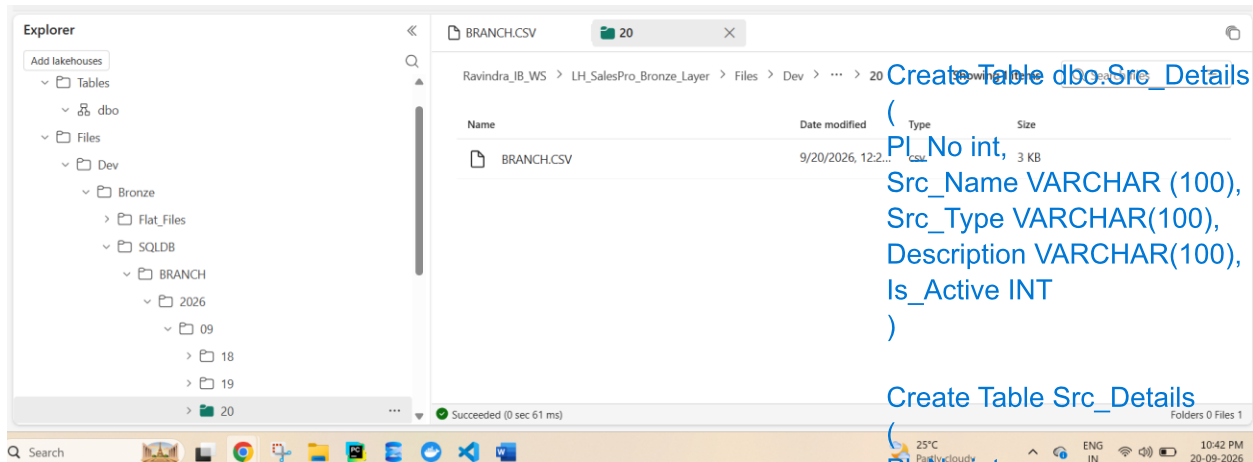

Create Table dbo.Src_Details

```
(
PI_No int,
Src_Name VARCHAR (100),
Src_Type VARCHAR(100),
Description VARCHAR(100),
Is_Active INT
)
```

Create Table Src_Details

```
(
PI_No int,
Src_Name VARCHAR (100),
Src_Type VARCHAR(100),
Description VARCHAR(100),
Is_Active INT
)
```

```
INSERT INTO Src_Details VALUES
(1,'SQLDB','On Premise','Sales Data',1),
(2,'Flat_File','LakeHouse','Files',1)
```

```
select * from Src_Details;
```

```
--DELETE from Src_Details where PI_No =
3;
```

Create Table Bronzeconfig

```
(
PI_No int,
Map_id int,
Src_Schema VARCHAR (40),
Src_Table VARCHAR(200),
Src_Folder VARCHAR (40),
Src_File VARCHAR (100),
Sink_Folder VARCHAR (200),
Sink_file VARCHAR (400),
FileType VARCHAR(20),
Load_type VARCHAR (10),
Is_Active INT
);
```

```
select * from Bronzeconfig where Is_Active = 1;
--drop table Bronzeconfig;
TRUNCATE Table Bronzeconfig
--DELETE Bronzeconfig where PI_No = 2;
```

insert into Bronzeconfig VALUES

```
(1,101,'dbo','BRANCH',Null,Null,'DEV/Bronze/SQLDB','BRANCH','.CSV','Full',1),
(1,102,'dbo','INVENTORY_LEVELS',Null,Null,'DEV/Bronze/SQLDB','INVENTORY_LEVELS','.CSV','Full',1)
(1,103,'dbo','ORDER_DETAILS',Null,Null,'DEV/Bronze/SQLDB','ORDER_DETAILS','.CSV','Inc-Load',1),
(1,104,'dbo','ORDER_HEADER',Null,Null,'DEV/Bronze/SQLDB','ORDER_HEADER','.CSV','Inc-Load',1),
(1,105,'dbo','PRODUCT',Null,Null,'DEV/Bronze/SQLDB','PRODUCT','.CSV','Full',1),
(1,106,'dbo','RETURNED_ITEM',Null,Null,'DEV/Bronze/SQLDB','RETURNED_ITEM','.CSV','Full',1)
```

insert into Bronzeconfig VALUES

```
(2,107,Null,Null,'FlatFile','COUNTRY.txt','DEV/Bronze/FlatFile','COUNTRY','.txt','Full',1),
(2,108,Null,Null,'FlatFile','ORDER_METHOD.csv','DEV/Bronze/FlatFile','ORDER_METHOD','.CSV','Full',1)
(2,109,Null,Null,'FlatFile','PRODUCT_NAME_LOOKUP.csv','DEV/Bronze/FlatFile','PRODUCT_NAME_LOOKUP','.csv','Full',1),
(2,110,Null,Null,'FlatFile','RETURN_REASON.csv','DEV/Bronze/FlatFile','RETURN_REASON','.csv','Full',1),
(2,111,Null,Null,'FlatFile','Retailer.csv','DEV/Bronze/FlatFile','Retailer','.csv','Full',1),
(2,112,Null,Null,'FlatFile','WAREHOUSE.TXT','DEV/Bronze/FlatFile','WAREHOUSE','.TXT','Full',1)
```