

GSSSP : Generator of Synthetic Scans of Spectroscopic Plates for Object Detection

Santiago Andres Ponte Ahón¹[0009–0002–8540–6546], Juan Martín Seery¹[0009–0005–3009–8330], Facundo Quiroga^{1,2}[0000–0003–4495–4327], Franco Ronchetti^{1,2}[0000–0003–3173–1327], Yael Aidelman^{3,4}[0000–0001–5279–0241], Waldo Hasperué¹[0000–0002–9950–1563], Roberto Gamen^{3,4}[0000–0002–5227–9627], and Lydia Cidale^{3,4}[0000–0003–2160–7146]

¹ Instituto de Investigación en Informática LIDI, Universidad Nacional de La Plata,
La Plata, Argentina
{sponte,jmseery,fquiroga,fronchetti,whasperue}@lidi.info.unlp.edu.ar
<https://weblidi.info.unlp.edu.ar/>

² Comisión de Investigaciones Científicas de la Provincia de Buenos Aires (CICPBA),
Buenos Aires, Argentina
<https://www.cic.gba.gob.ar/>

³ Facultad de Ciencias Astronómicas y Geofísicas, Universidad Nacional de La Plata,
La Plata, Argentina
{aidelman,rgamen,lydia}@fcaglp.unlp.edu.ar
<https://www.fcaglp.unlp.edu.ar/>

⁴ Instituto de Astrofísica de La Plata, La Plata, Argentina
<https://ialp.fcaglp.unlp.edu.ar/>

Abstract. The area of spectroscopic analysis is old in the Astronomic Domain. Legacy observational methods recorded stellar spectra on photographic plates. These plates have high historical and scientific value. And are essentials to obtain scientific data from the past of certain astronomical objects. Due its characteristics are vulnerable lose of information. Reason for many institutions have launched digitization projects to preserve this heritage.

Despite the efforts of digitization, the process is still in progress and many plates remain undigitalized. The act of digitizing a plate is time-consuming, taking approximately 15 to 30 minutes per plate. Even after digitization, many tasks essentials for scientific analysis must be performed manually. Between these tasks, the detection and segmentation of observations on the plates is a relevant step. This process is slow and prone to errors, making it a bottleneck in the workflow. Many other processes essentials for scientific analysis of spectroscopic plates are still performed manually, which further emphasizes the need for automation in this domain.

Are plates to be digitalized what can be relevants but not have enough data to train modern computer vision models for observation detection. With this challenge in mind, we present GSSSP (Generator of Synthetic Scans of Spectroscopic Plates), a tool for generating labeled scans of physical spectroscopic observations. The generated images preserve a realistic appearance and allow the inclusion of artificial defects such as

dust stains, moisture marks, reflections, among others. Each generated image is accompanied by labels containing the coordinates and shape of every observation. Datasets ready for use in training detection models for observations detections in scans of real historical spectroscopic plates. For validate the tool we trained a detection model and compared its performance when using only real data, only generated data, and a combination of both. The results show that GSSSP enables the model to learn the general visual patterns of this type of plate, providing a strong generalization basis for subsequent fine-tuning. The resulting model achieves a high performance, with a general mAP of 0.9611 and 0.9900 at IoU=0.75.

Keywords: Generated data, Object detection, Spectroscopic plates

1 Spectroscopic Data

Spectroscopy constitutes a fundamental tool for the physical study of astronomical objects. Through the analysis of electromagnetic radiation received, absorbed, or reflected by an object, it is possible to infer several of its physical properties. For example, spectroscopy can reveal the chemical composition, temperature, and radial velocity of astronomical sources. This technique enables the study of celestial bodies beyond their position or apparent brightness in the sky [5].

In the 20th century, the acquisition of spectroscopic data using photographic techniques was widespread. This method consisted of recording spectra through photography, with the distinctive feature that the images were stored on glass plates rather than on photographic paper. The plates captured in this time have high historical and scientific value, as they contain information about the past of certain astronomical objects, some very desired above all for objects of sky of the southern hemisphere, which were less observed than those of the northern hemisphere in these years. Today, many of these plates are preserved in their original institutions [7]. Figure 1 shows a spectroscopic glass plate containing two observations on its surface.

However, storing information in physical plates can present challenges under suboptimal storage conditions. Several incidents affecting this type of heritage have occurred. In 2016, due to a burst pipe, the Harvard College Observatory suffered a flood that affected more than 61,000 plates in its archive, including part of the Harvard plate collection currently digitized by the DASCH project [21]. A similar situation occurred at the Facultad de Ciencias Astronómicas y Geofísicas of the Universidad Nacional de La Plata, where mold was discovered on the furniture used to store the plates [13]. The risk of mold, dust, scratches, or other types of damage is significant and, if not properly addressed, can lead to the permanent degradation of the information stored on each plate.

In addition to physical deterioration, plates may present defects associated with the data acquisition process, such as curvature in the spectral trace, imaging artifacts, or the absence of certain calibration elements. Figure 2 shows examples of plates exhibiting observations with different types of defects.

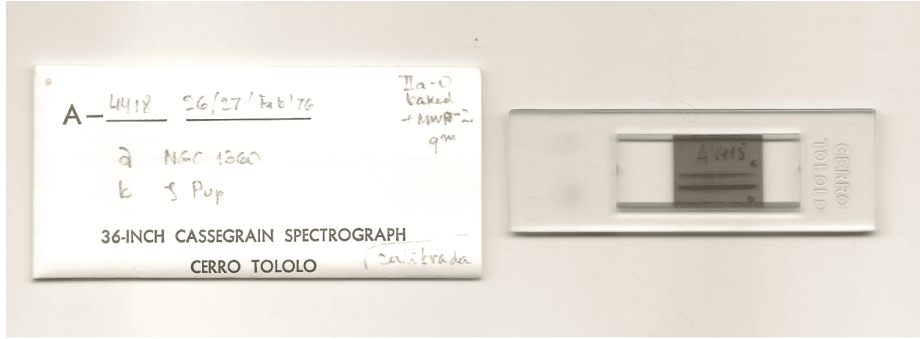


Fig. 1: Right, spectroscopic plate A4418 of astronomical source **Zeta Puppis** captured at Observatorio Interamericano de Cerro Tololo (Chile) as part of the **ReTrOH** [11] project. The plate contains two spectroscopic observations. Left, wrapping, includes additional information about each observation.

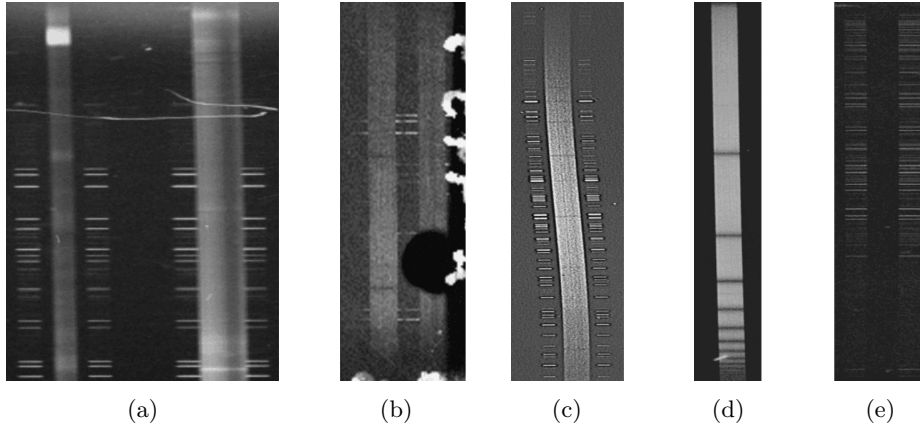


Fig. 2: Samples of possible defects on the plates. Defects associated with prolonged storage: (a) Scratches. (b) Dirt and/or moisture stains. Defects associated with the capture process: (c) Curved engraving. (d) Missing comparison lamps. (e) Comparison lamps without their respective spectrum.

To preserve this heritage, institutions such as the International Astronomical Union (IAU) have issued resolutions⁵ highlighting the importance of preserving spectroscopic plates for future generations of astronomers. The IAU recommends digitization as a conservation strategy. This process enables the creation of multiple copies and redundant archives, helping to preserve the most relevant information in the long term.

⁵ IAU Resolution B3 (August 2000): Safeguarding the Information in Photographic Observations

To address these preservation challenges, many institutions have launched digitization projects for their photographic plate collections. Table 1 lists some of the most relevant collections containing large numbers of spectroscopic plates, together with their digitization status and calibration progress.

Table 1: Some relevant projects or institutions with collections of spectroscopic plates. (a) It is known that HCO has a collection of spectroscopic plates, but the exact number is unknown.

Collection	#plates.	Digitized	Calibrated	Date range	References
HCO	? ^(a)	?%	0%	1880–1992	[21]
APPLAUSE	19.240	100%	0%	1893–1999	[3]
ReTrHO	>15.000	4%	0%	1920–1980	[13]
WFPDB	?	100%	?%	1858–2005	[19,20]
OHP Archive	63.500	100%	?%	1944–1997	[15]
Foster Archive	>4.800	100%	?%	1928–1991	[2]
DFBS	1.874	100%	100%	1965–1980	[10]

Plates need to be digitized and calibrated in order to be useful for scientific work. Digitization consists of scanning the plate and storing its information in a digital format. Although the process presents several challenges, different approaches exist to accomplish this, either using adapted scanners [9,12] or specialized hardware [15,18,17]. On average, scanning a plate takes approximately 15–30 minutes. Calibration involves extracting relevant features from the plate and usually consists of several steps with varying levels of complexity. In previous work, we presented PlateUNLP, a software tool designed to assist in the calibration process. This tool can speed up calibration using machine learning, signal processing, and metadata-based approaches [1]. In this work, we improve one stage of the calibration process, which consists of detecting observations in plate scans.

2 Detection problem

An observation consists of the spectrum of an astronomical object together with two symmetrical comparison lamps located above and below it. A single plate can contain many observations; however, to extract scientific data, each observation must be isolated in a separate file. Figure 3 shows an example of how the regions corresponding to each observation should be defined. Each observation is defined as a bounding box enclosing the spectrum and its corresponding comparison lamps.

In previous work, we presented a YOLO-based detector [16] that automates observation detection in spectroscopic plates. The model was trained exclusively on real scan images applying data augmentation. The model achieved good per-

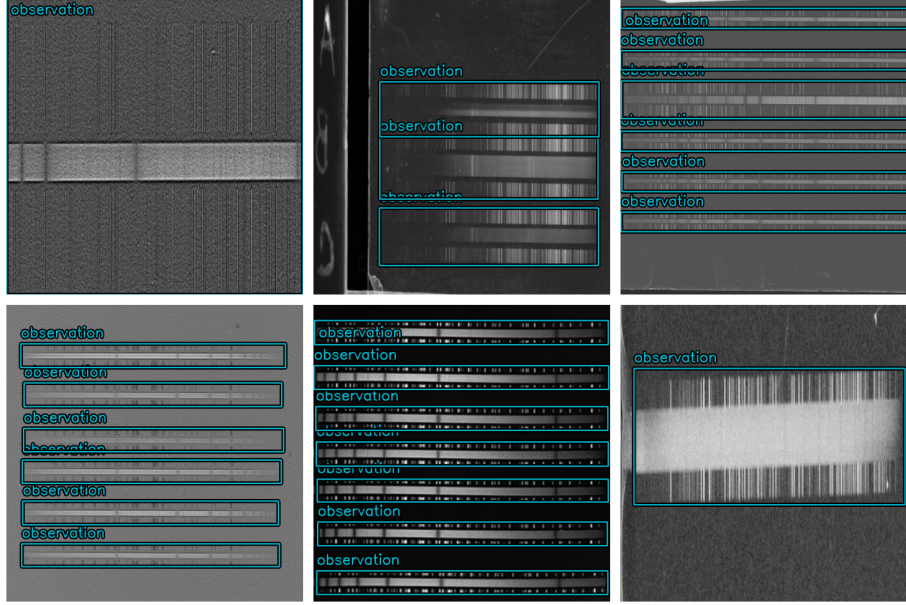


Fig. 3: Examples of how must be isolated each observation of a spectroscopic plate. The images shows different spectroscopic plates with different numbers of observations. Each bounding box encloses the spectrum and its corresponding comparison lamps. When the observation is to big the bounding box can be cut off by the plate edge, as in the rightmost top image.

formance for this detection task but showed limited precision when predicting the exact boundaries of observations.

The predicted bounding boxes often do not align well with the actual boundaries of the observations. This issue is particularly problematic for subsequent calibration steps, as it can lead to the inclusion of unwanted background or the exclusion of relevant parts of the spectrum. For example, if the predicted bounding box cuts off a portion of the comparison lamp, it can cause errors in wavelength calibration, which relies on accurately capturing the lamp’s spectral lines.

This behavior can be observed in the IoU-based evaluation metrics: while $mAP_{IoU=0.50} = 0.94$, the performance decreases very to $mAP_{IoU=0.75}$. This indicates that the model can locate the relative positions of the observations but struggles to accurately predict their exact positions and dimensions.

This behavior can be attributed to the small number of scans available for training. As a result, the model lacks sufficient variability in the positions and dimensions of the observations. Data augmentation alleviates this issue; however, because the initial dataset is very small, the generated variations remain limited.

Consequently, the model tends to memorize features from the restricted training data rather than generalizing.

In this work, we present a tool to address the problem of limited training data. It enables training with small datasets while maintaining high detection performance for observations with precise positions and dimensions.

3 GSSSP

GSSSP⁶ is a software tool designed to generate synthetic spectroscopic plate scan data. The generated images preserve a realistic appearance and allow the inclusion of artificial defects such as dust stains, moisture marks, reflections, among others. Each generated image is accompanied by labels containing the coordinates and shape of every observation.

The proposed generator constructs synthetic plate scans using a procedural model defined by parameterized numerical operations. This approach allows full control over the generated features and enables the creation of large synthetic datasets even when real data is scarce.

The tool can be installed as a package. The library provides several functions for generating synthetic data directly from code. Users may either call these functions manually or use the implemented generator object, which is compatible with TensorFlow pipelines. The generator internally relies on the same functions, making both approaches equivalent. Figure 4 shows examples of generated plate scans.

The generator provides a high degree of parameterization, allowing control over plate geometry, observation layout, spectral characteristics, and the inclusion of artificial defects.

- Height and width of the canvas.
- Background color.
- Inclination of observations within the plate.
- Thickness of each observation component.
- Distance between spectral components.
- Distance between observations.
- Horizontal and vertical deviation of each observation.
- Number of observations per plate.
- Number, intensity, and size of emission lines in each observation component.
- Number, intensity, and size of absorption lines in each observation component.
- Gaussian noise level.
- Horizontal band noise level.
- Number and size of dust stains.
- Blur level.
- Probability of adding a plate edge to the image.
- Number, intensity, and length of horizontal light defects.

⁶ GSSSP repository

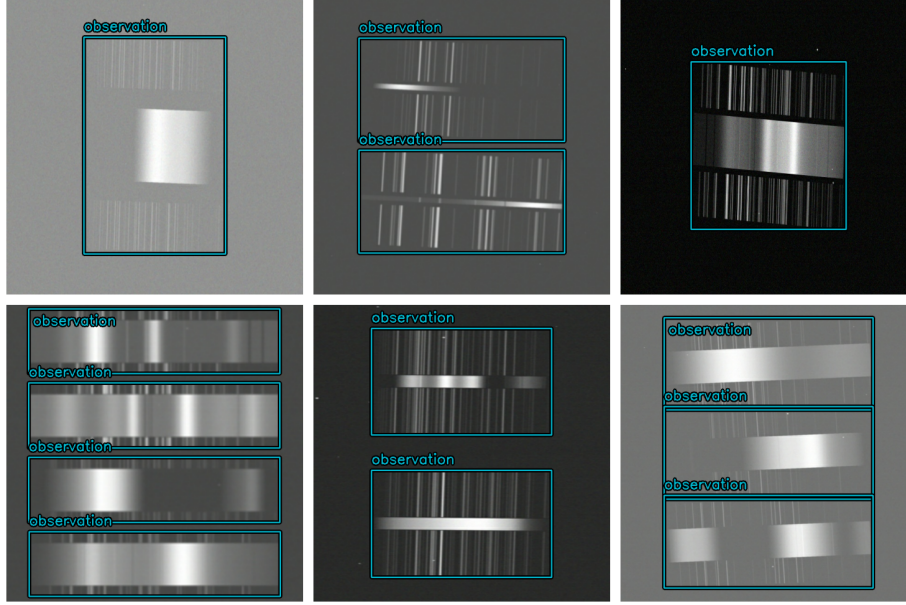


Fig. 4: Generated plate scans with labels of observations of each plate.

All parameters are defined as ranges, ensuring that the generated observations exhibit the desired variability. The produced observations preserve the expected anatomical structure of spectroscopic plates. For example, the comparison lamps located on both sides of each science spectrum are always generated symmetrically. The generated images also can reproduce extreme cases what are present in real plates but rare cases, such as plates with many observations, plates with observations that are very close to each other, or plates with one observation what occupies almost all of the plate. This variability allows the model to learn the general visual patterns of this type of plate, providing a strong generalization basis for subsequent fine-tuning.

The generated labels follow the `rel_xywh` format, according to the YOLO annotation scheme [14]. This means that the coordinates of each observation are expressed as normalized values between 0 and 1.

`<class_id> <x_center> <y_center> <width> <height>`

$jclass_id_i$ represents the detection class. Since only one class (observations) is considered, its value is always 0. jx_center_i and iy_center_i correspond to the normalized coordinates of the bounding box center, while $jwidth_i$ and $jheight_i$ represent its normalized dimensions. All values except $jclass_id_i$ are expressed in the range $[0, 1]$. Figure 4 shows examples of these annotations.

3.1 Available Data

For this study, we use a dataset composed of 361 spectroscopic plates from the archive of the Facultad de Ciencias Astronómicas y Geofísicas of the Universidad Nacional de La Plata. These plates were scanned and annotated for observation detection. The dataset is publicly available⁷. Since the dataset is relatively small, an additional 96,000 synthetic images were generated using GSSSP to complement it.

Each dataset was divided into training and test sets using an 80/20 split:

- Real images (361): 289 for training and 72 for testing.
- Generated images (96,000): 76,800 for training and 19,200 for testing.

4 Detection model

For model construction, the YOLO architecture was used [14]. The model was implemented in TensorFlow using the `keras-cv` library [6]. A lightweight version of YOLO, *yolo_v8-n*, was selected for the experiments.

An initial model was trained using only real data in order to establish a baseline performance. This model was then evaluated on both real and generated datasets. If similar performance is obtained on both datasets, this indicates that the generated images exhibit patterns of comparable complexity to the real data.

Additionally, a model was trained using only generated data and evaluated on both real and generated datasets. After, this model was fine-tuned using real data to obtain a final model, which was evaluated on the real dataset.

To evaluate the model performance, Mean Average Precision (mAP) was used. This is a standard evaluation metric for object detection, computed from the precision–recall curve using a defined Intersection over Union (IoU) threshold [4,8].

IoU measures the overlap between the predicted bounding box and the ground truth bounding box. Its value ranges from 0 (no overlap) to 1 (perfect overlap).

The notation $mAP[IoU = X]$ indicates that the mAP is calculated considering predictions with $IoU \geq 0.X$ as true positives, while predictions with $IoU < 0.X$ are considered incorrect detections. The value of X ranges between 0 and 1. Table 2 shows the metrics obtained in each training experiment.

5 Conclusions

The re images capture part of the complexity of results in Table 2 show that the GSSSP tool can generate well-labeled synthetic scans of spectroscopic plates. The generatedl images, and their randomness allows models to be prepared for plates containing many observations with different spectral positions and shapes.

A relevant behavior is that a small dataset of real scans does not provide sufficient spatial variability in the positions and shapes of observations. This

⁷ Observation Detection in Spectroscopic Plates Dataset

Table 2: Results with real, generated and mix data train.

data train	data test	mAP	mAP[IoU:0,5]	mAP[IoU:0,75]
<i>gen-train</i>	<i>gen-test</i>	0.9835	0.9901	0.9901
<i>real-train</i>	<i>gen-test</i>	0.1268	0.4457	0.0429
<i>real-train</i>	<i>real-test</i>	0.9381	0.9999	0.9683
<i>gen-train</i>	<i>real-test</i>	0.7544	0.9760	0.8724
<i>gen+real-train</i>	<i>real-test</i>	0.9611	1.0000	0.9900

limitation prevents the model from accurately fitting bounding boxes, which negatively affects performance at higher IoU thresholds. The model trained only real data achieves a good performance but have poor performance to generalize over generated data, which indicates that the model is overfitting to the limited training data and fails to capture the underlying patterns of the observations. For other side, the model trained only on generated data achieves good performance on the generated test set and maintain a decent performance on the real test set. This indicates that the generated data provides a strong generalization basis, allowing the model to learn the general visual patterns of this type of plate. However, since the generated data does not capture all the complexity of real plates, the model’s performance on real data is limited.

Finally, fine-tuning the model pretrained on generated data with real training data allows the combination of the spatial variability provided by the generator with the complex patterns present in real images. This approach achieves the best overall performance, enabling more accurate and precise detection of observations in real spectroscopic plates. Figure 5 shows example predictions obtained using the fine-tuned model.

References

1. Ahón, S.A.P., Seery, J.M., Pereyra, L., Iannuzzi, M., Quiroga, F., Ronchetti, F., Aidelman, Y., Hasperué, W., Gamen, R., Cidale, L.: Plateunlp v2: Automating spectral extraction, calibration, and metadata from digitized glass plate. In: 2025 LI Latin American Computer Conference (CLEI). pp. 1–7 (2025). <https://doi.org/10.1109/CLEI67442.2025.11420714>
2. Arcos, C., Vanzi, L., Vogt, N., Garcia, S., Ortiz, V., Acuña, E.: Hidden spectra treasures in the foster archive: A pilot study of the be stars α eri, α col, ω car and η cen. *Galaxies* **10**(6), 106 (2022)
3. Enke, H., Tuvikene, T., Groote, D., Edelmann, H., Heber, U.: Archives of photographic plates for astronomical use (applause)-digitisation of astronomical plates and their integration into the international virtual observatory. *Astronomy & Astrophysics* **687**, A165 (2024)
4. Everingham, M., Van Gool, L., Williams, C.K., Winn, J., Zisserman, A.: The pascal visual object classes (voc) challenge. *International journal of computer vision* **88**(2), 303–338 (2010)
5. Gray, D.F.: The observation and analysis of stellar photospheres. Cambridge university press (2021)

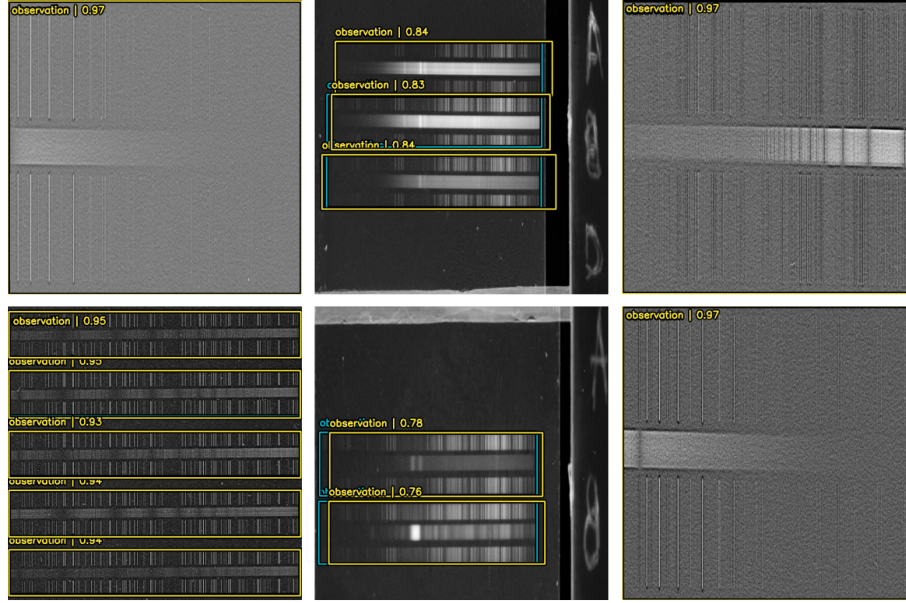


Fig. 5: Predictions obtained with the model trained on generated data and fine-tuned using a limited set of real images. Blue bounding boxes correspond to the ground truth, while red bounding boxes represent the model's predictions. The model achieves good performance in both detecting the presence of observations and accurately fitting their boundaries.

6. Keras Team: Kerascv. <https://github.com/keras-team/keras-cv> (2023), gitHub repository
7. Kunzmann, B.: Real and virtual heritage—historical astronomical plate archives in sonneberg, bamberg and hamburg observatories, the evolution of astrophysics and their influence on human knowledge and culture. *Monuments and Sites* **18**, 304–309 (2009)
8. Lin, T.Y., Maire, M., Belongie, S., Hays, J., Perona, P., Ramanan, D., Dollár, P., Zitnick, C.L.: Microsoft coco: Common objects in context. In: *European conference on computer vision*. pp. 740–755. Springer (2014)
9. Meilán, N.S.: Recuperación del patrimonio observacional histórico: Elaboración de un método óptimo de digitalización y extracción de datos. Tesis de licenciatura, Universidad Nacional de La Plata, La Plata, Argentina (2018), <https://sedici.unlp.edu.ar/handle/10915/74678>
10. Mickaelian, A., Nesci, R., Rossi, C., Weedman, D., Cirimele, G., Sargsyan, L., Erastova, L., Gigoyan, K., Mikayelyan, G., Massaro, E., et al.: The digitized first byurakan survey—dfbs. *Astronomy & Astrophysics* **464**(3), 1177–1180 (2007)
11. Niemelä, V.S.: Placa espectrográfica identificada como a4418 de la fuente astronómica zeta puppis (1976)
12. Pakuliak, L., Kazantseva, L., Virun, N., Andruk, V.: Photographic archives of ukrainian observatories: Digitizing a heritage. *Proceed-*

- ings of the International Astronomical Union **7**(S285), 389–391 (2011). <https://doi.org/10.1017/S1743921312001160>
13. Peralta, R., López, M., Iannuzzi, M., Aidelman, Y.J., Gamen, R., Cidale, L.: Puesta en valor museológica y astronómica de placas espectrográficas. *Epistemología e Historia de la Astronomía*. Volumen 2 **2**, 323–342 (2025)
 14. Redmon, J., Divvala, S., Girshick, R., Farhadi, A.: You only look once: Unified, real-time object detection. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. pp. 779–788 (2016)
 15. Robert, V., Desmars, J., Lainey, V., Arlot, J.E., Perlberg, A.C., Horville, D., Aboudarham, J., Etienne, C., Guérard, J., Ilovaisky, S., et al.: The naroo digitization center-overview and scientific program. *Astronomy & Astrophysics* **652**, A3 (2021)
 16. Ronchetti, F., Quiroga, F.M., Pereyra, N., Miranda, J., Ponte Ahón, S.A., Aidelman, Y.J., Gamen, R.C., Lanzarini, L.C.: Software inteligente para la digitalización de placas espectroscópicas. In: *XXVIII Congreso Argentino de Ciencias de la Computación (CACIC)*(La Rioja, 3 al 6 de octubre de 2022) (2023)
 17. Shang, Z.J., Yu, Y., Wang, L.L., Yang, M.T., Yang, J., Shen, S.Y., Liu, M., Xu, Q.F., Cui, C.Z., Fan, D.W., Tang, Z.H., Zhao, J.H.: Digitization of astronomical photographic plate of china and astrometric measurement of single-exposure plates (2024), <https://arxiv.org/abs/2403.09094>
 18. Simcoe, R.J., Grindlay, J.E., Los, E.J., Doane, A., Laycock, S.G., Mink, D.J., Champine, G., Sliski, A.: An ultrahigh-speed digitizer for the Harvard College Observatory astronomical plates. In: Tescher, A.G. (ed.) *Applications of Digital Image Processing XXIX*. vol. 6312, p. 631217. International Society for Optics and Photonics, SPIE (2006). <https://doi.org/10.1117/12.681365>, <https://doi.org/10.1117/12.681365>
 19. Tsvetkov, M.: The wide-field plate database: Development and access via internet. *Serdica Journal of Computing* **6**(1), 1–18 (2012)
 20. Tsvetkov, M., Stavrev, K., Tsvetkova, K., Mutafov, A., Semkov, E., Kalagarsky, D.: Wide-field plate database WFPDB. VO resource provided by the GAVO Data Center (2015), <http://dc.g-vo.org/wfpdb/q/cone/info>
 21. Williams, P.K.G.: Dasch: Bringing 100+ years of photographic data into the 21st century and beyond (2025), <https://arxiv.org/abs/2501.12977>