# **StarRiver Server Manual**

Pei Qing <qingpei@sansitech.com> Software Group, R&D Dept. Shanghai Sansi Technology Co., Ltd.

v0.1-alpha

August 6, 2014

## **Contents**

1	System Requirements	3
	1.1 Hardware	3
	1.2 Software	3
2	Installation	4
	2.1 Database Installation	4
	2.2 Install StarRiver Communication Application	16
3	Uninstallation	18
4	Start/Stop Server	19
5	Server Logging	21

### 1 System Requirements

StarRiver Server and its database dependencies run on the following hardware/software.

#### 1.1 Hardware

- Minimum requirements
  - Dual-core CPU. E.g. Intel Celeron, Pentium.
  - 4GB RAM
  - Fast Ethernet (100Mbps)
- · Recommended setup
  - Quad-core CPU. Intel Core i5 or higher.
  - 8GB RAM
  - Gigabit Ethernet

NOTE: Wired network is highly recommended. A wireless connection may lead to high latency.

#### 1.2 Software

- Minimum
  - Windows Server 2003
  - MySQL Server 5.5 (MariaDB 5.5)
- Recommended
  - Windows Server 2008 / Windows 7 or newer
  - MySQL Server 5.6+ (MariaDB 10.0+)

NOTE: As a Windows service, StarRiver Server can be remotely started/ stopped by our client application. This feature is not supported by Windows XP.

#### 2 Installation

StarRiver Server has two modules: database system and StarRiver communication application.


#### 2.1 Database Installation

StarRiver works with MySQL or its compatible replacements such as MariaDB. The following guide is based on MySQL Server 5.6 as an example.


First, download the installer from the MySQL website. The MySQL Installer packaged for Windows platform is recommended. MySQL Installer 5.6.19 is adopted here.

Here are the installation steps.


1. The installer shows a welcome page initially. Select "Install MySQL Prod-

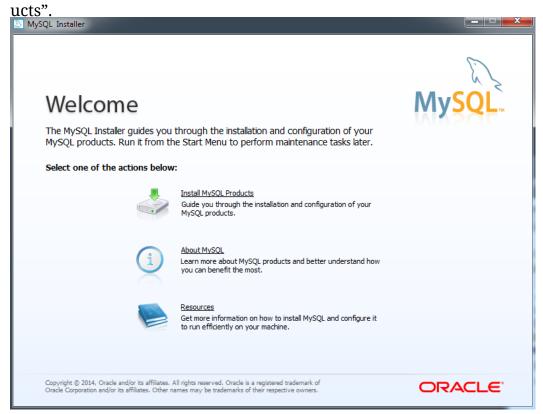


2. Now the installer checks for updates. If there is no Internet connection, tick "Skip the check for updates" and continue.

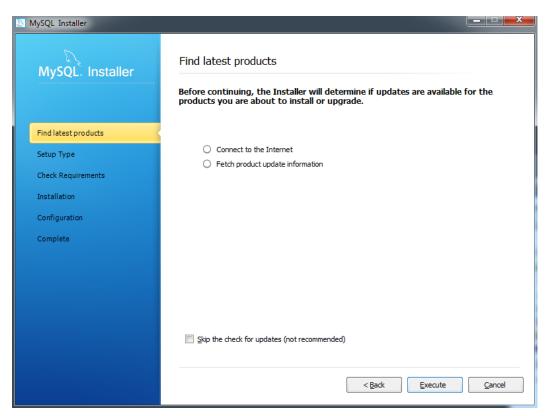


3. Select "Server only" as the setup type and specify the data path. Here we use C:\MySQL Data as an example.

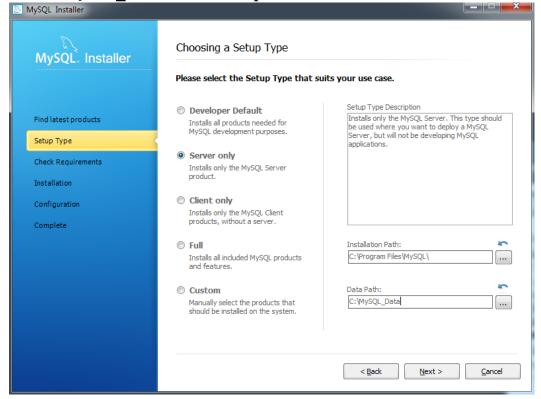


4. The installer will check for addition requirements to be installed. Let it finish.

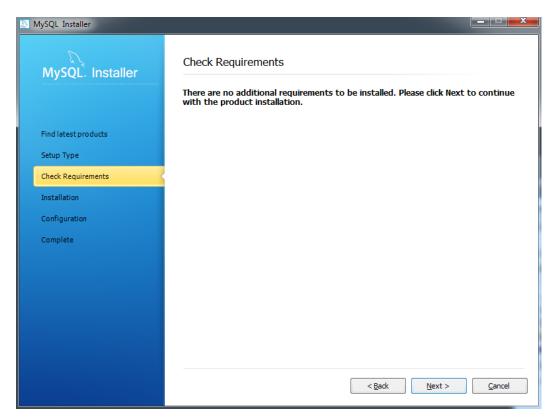


5. Click "Execute" to install MySQL Server.

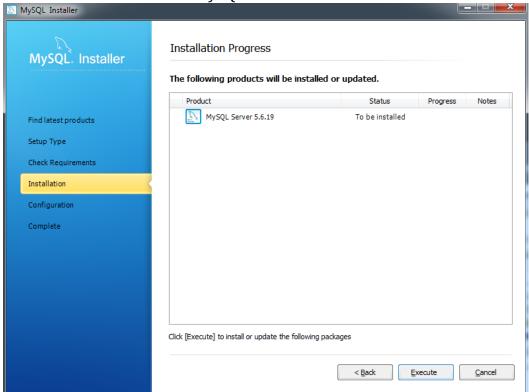

6. Installation finishes. Click "Next" to start configuration.

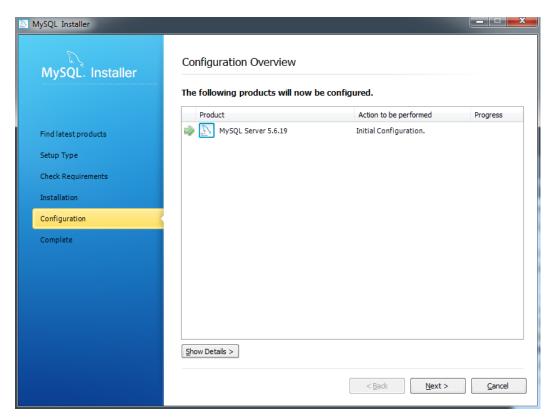


7. Select "Server Machine" as the config type and continue.

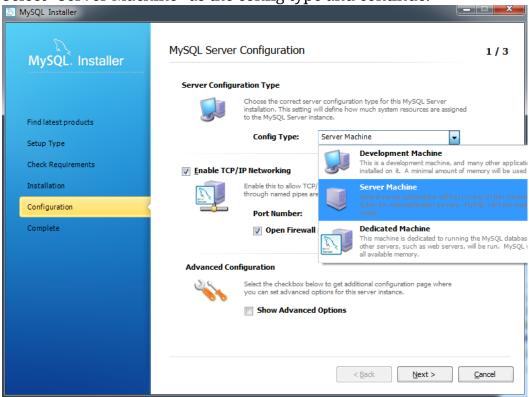


8. Now we create uses. Enter a password for the root user. **Please remember the password set here.** Click "Add User" to create a dedicated user for StarRiver. Use sansi as the username and starriver as the pass-


word. If you customize the username or password, make sure you remember what is set here as the information will be used later.

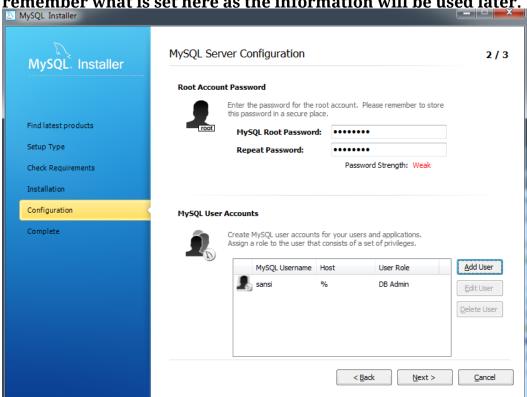


9. MySQL Server starts as a Windows service. Just accept the default configuration and continue.

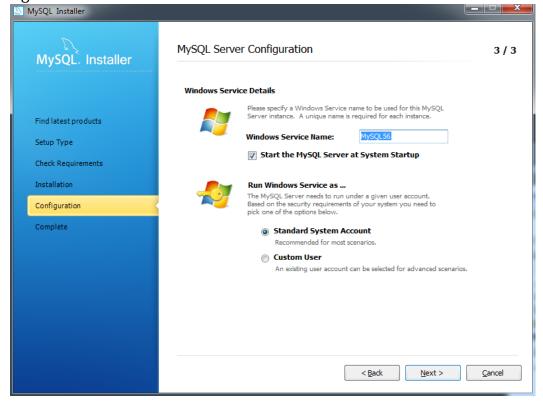

10. Continue after the configuration procedure finishes.

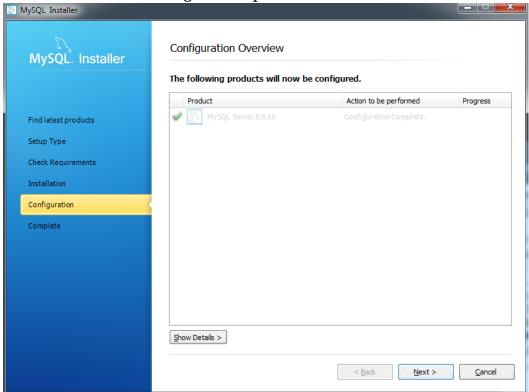

11. <u>Installation</u> complete.

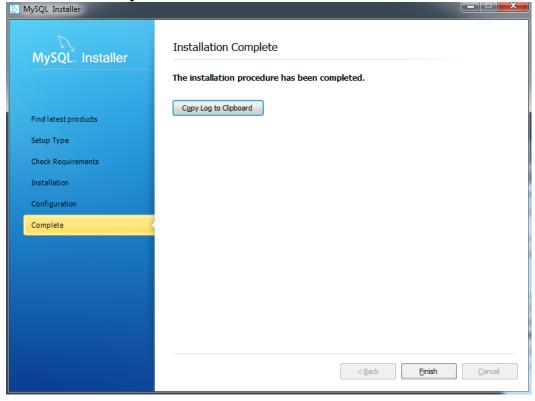


Then install MySQL Workbench, a GUI management tool. MySQL Work-


bench 6.1.7 is adopted in this example. Accept all defaults during installation.

Finally, create the database structure StarRiver uses.


1. Open MySQL Workbench. Click the "+" button next to "MySQL Connection" to create a new MySQL connection.

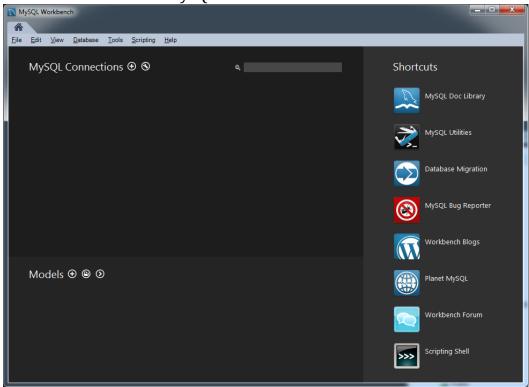


2. Enter "StarRiver" for connection name, "sansi" for username. Click "Store in Vault" and enter "starriver" for password. (If you use a custom database user in step 8 during MySQL installation, use that instead.)

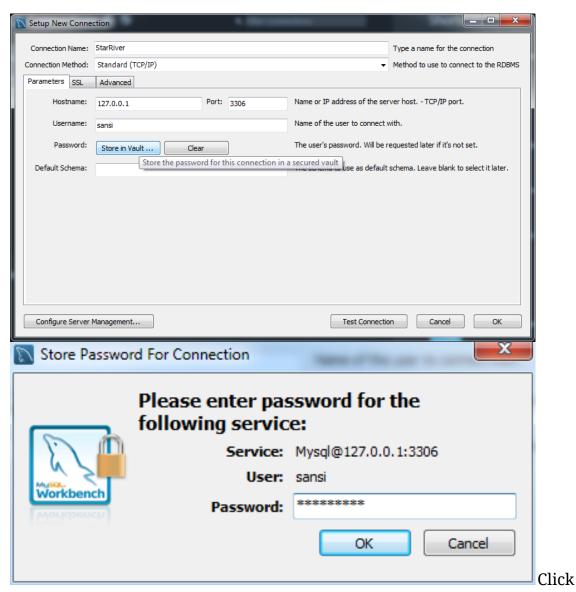


"Test Connection". If there is an error, check username and password entered.

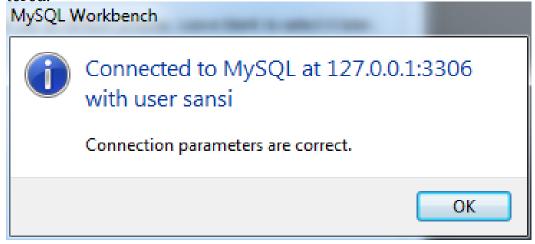


3. Click the newly created connection to connect to the database.

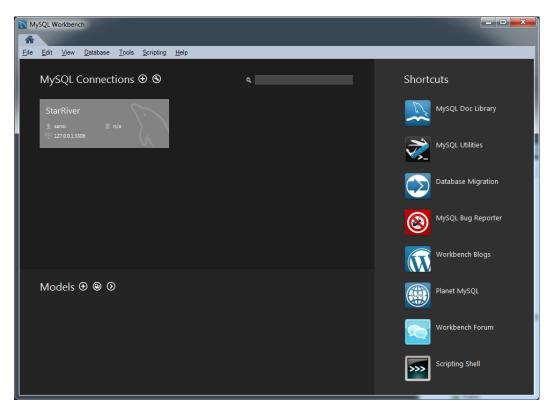


4. Select "File->Open SQL Script".

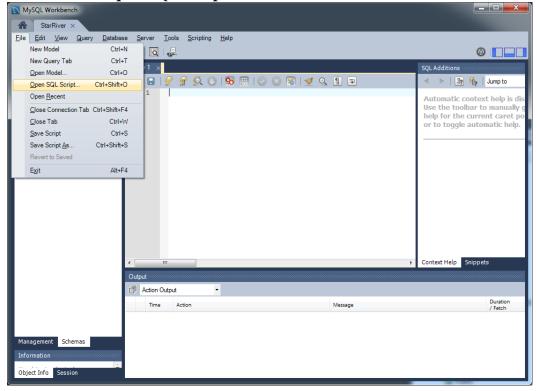


5. Open init\_schema.sql. Click the execute button highlighted with a red box below.

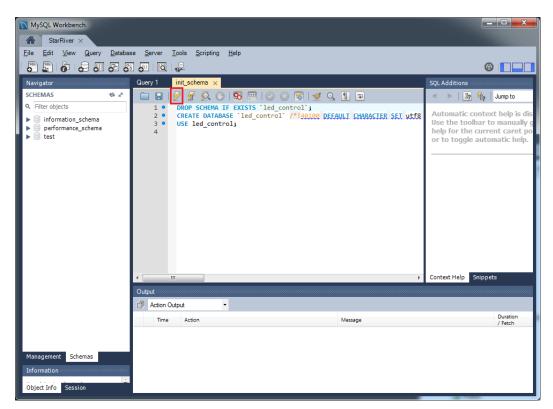


6. The script finishes execution with no errors.

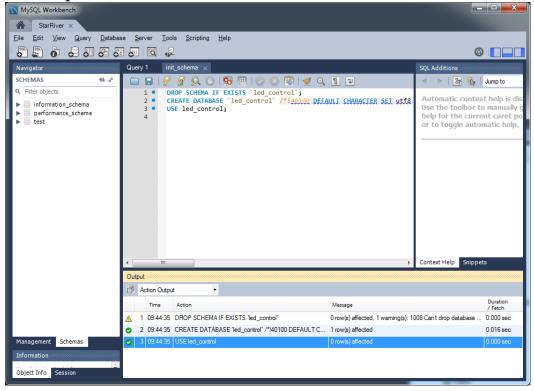


7. Execute init\_db.sql the same way.

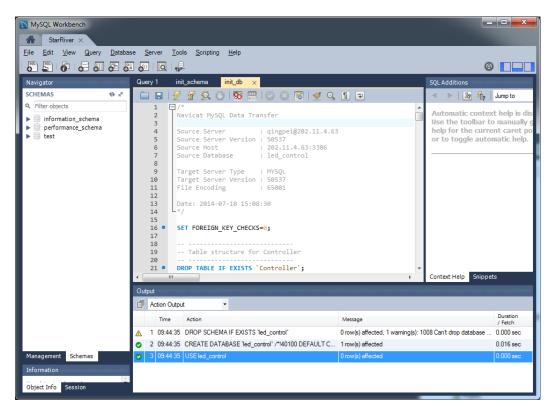


8. Check "Output" panel for errors.

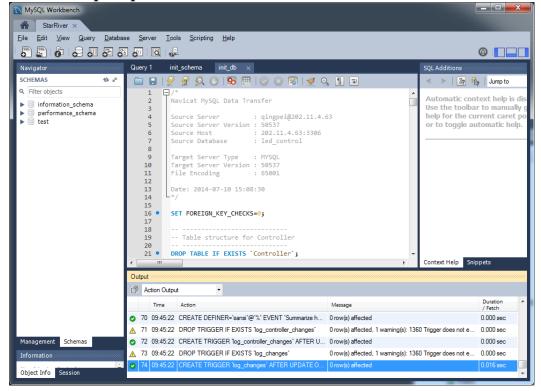

9. Execute init users.sql the same way.

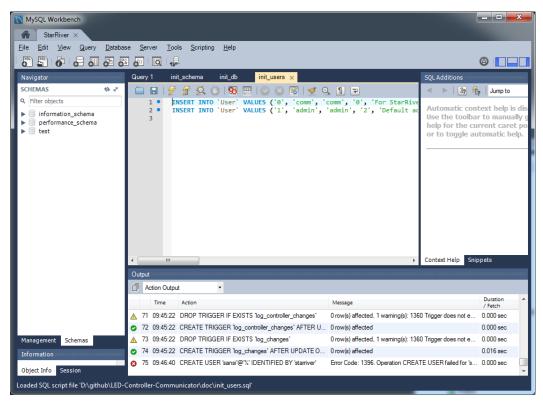

10. Click the refresh button in "Schemas" panel. Verify the a database named led control has been setup.

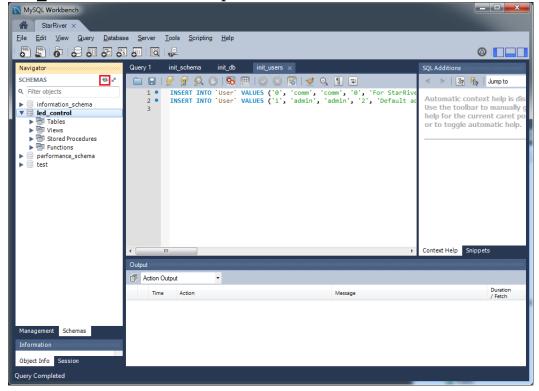

Some extra configuration is necessary for the database server by editing my.ini in MySQL data path (which is C:\MySQL\_Data in this example.)

```
my.ini - Notepad
 File Edit Format View Help
# The following options will be read by the MySQL Server. Make sure that
# you have installed the server correctly (see above) so it reads this
# file.
# server_type=3
[mysqld]
event-scheduler=on
lower_case_table_names=2
   The next three options are mutually exclusive to SERVER_PORT below.
# The next three options are mutuall
# skip-networking
# enable-named-pipe
# The Pipe the MySQL Server will use
# socket=mysql
# The TCP/IP Port the MySQL Server will listen on port=3306
# Path to installation directory. All paths are usually resolved relative to this.
# basedir="C:/Program Files/MySQL/MySQL Server 5.6/"
# Path to the database root
datadir="C:/MySQL_Data/data\"
   The default character set that will be used when a new schema or table is created and no character set is defined
character-set-server=utf8
collation-server=utf8_general_ci
init-connect='SET collation_connection=utf8_unicode_ci'
init-connect='SET NAMES utf8'
 <u>skip-character-set-client-handshake</u>
# The default storage engine that will be used when create new tables when default-storage-engine=INNODB
# Set the SQL mode to strict
sql-mode="STRICT_TRANS_TABLES,NO_AUTO_CREATE_USER,NO_ENGINE_SUBSTITUTION"
   Enable Windows Authentication
```

Add the following lines under [mysqld] section.

```
event-scheduler=on
lower_case_table_names=2

collation-server=utf8_general_ci
init-connect='SET collation_connection=utf8_unicode_ci'
init-connect='SET NAMES utf8'
skip-character-set-client-handshake
```

The new configuration will take effect after rebooting the system or restarting MySQL service.

### 2.2 Install StarRiver Communication Application

Run setup. exe and it just works.



If you use custom user to connect to the database, you need to edit config.ini in StarRiver installation path.

```
config.ini - Notepad
<u>File Edit Format View Help</u>
[database]
    host
                             = 127.0.0.1
    user
                             = sansi
                             = starriver
= led_control
    pass
    schema
    query_buffer_size = 4090
task_fetch_interval = 100
                             = 4096
    server_uid
[control]
    refresh_interval
                             = 30
[meta]
    project_name
                             = LED Control
```

Change the values to allow StarRiver to connect to the database successfully.


### 3 Uninstallation

Uninstall StarRiver Server with "Add/Remove Programs" in Control Panel. This would be "Programs and Features" in Windows 7 or newer systems.

If no other application uses the MySQL database installed, you are free to uninstall "MySQL Server" as well.

### 4 Start/Stop Server

StarRiver runs in background as a service. You could manually start or stop the service via shortcuts in Start Menu.

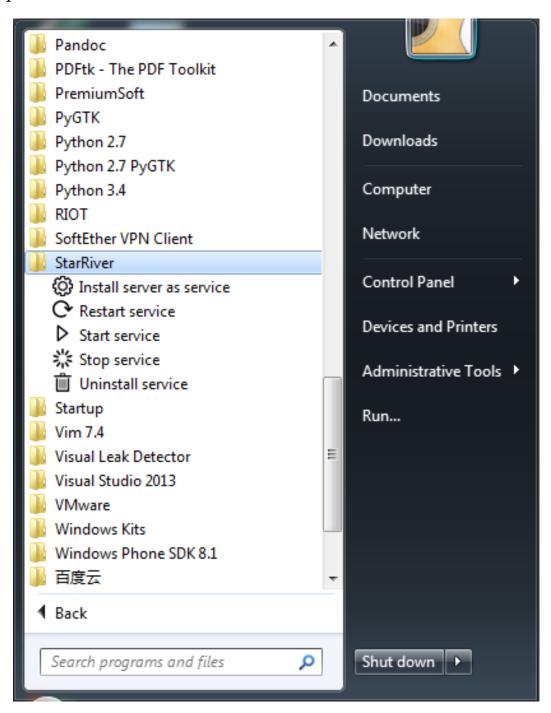

Five shortcuts created during installation are:

• Install server as service: Install StarRiver Server as a Windows service.

This has been done during installation.

- Restart service: Manually restart StarRiver service.
- Start service: Manually start StarRiver service.
- Stop service: Manually stop StarRiver service.
- Uninstall service: Remove the StarRiver Windows service. StarRiver communication application will not be removed. But it will no longer starts with the system.

# 5 Server Logging

StarRiver Server keeps its logs when it is running. The logs are stored in the installation path. Log files are names by the following format.

LED\_Control\_Communicator\_date\_time.counter.log