



Dialog per l'inserimento di Person

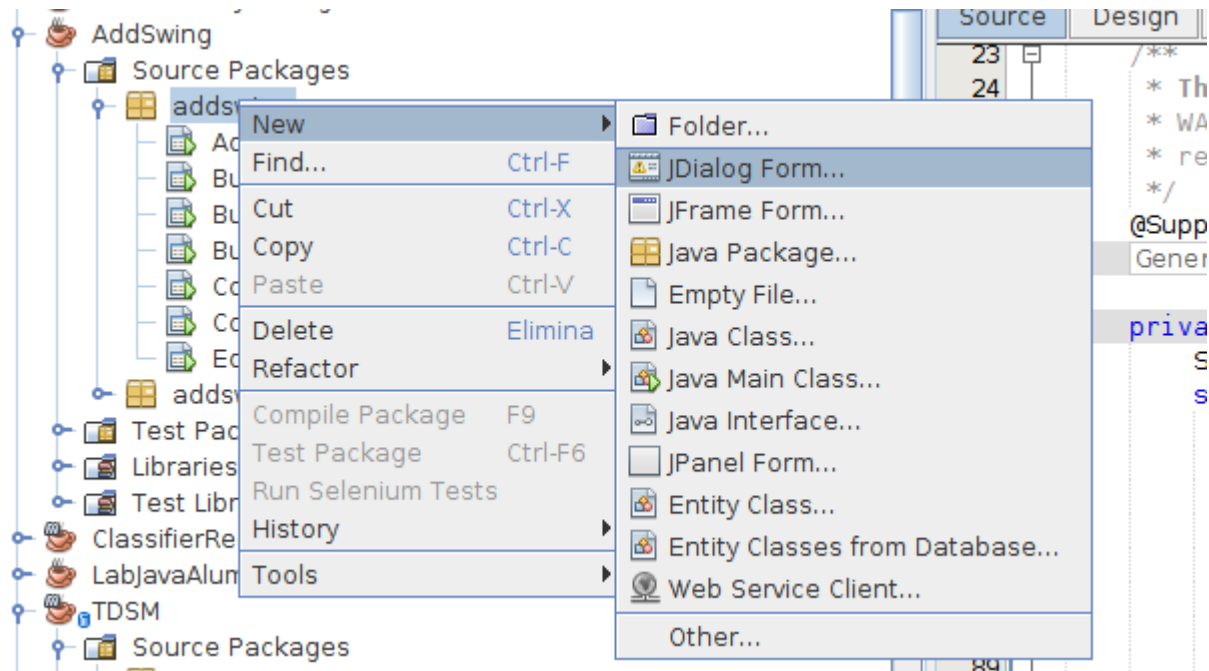


Dialog per l'inserimento di Person

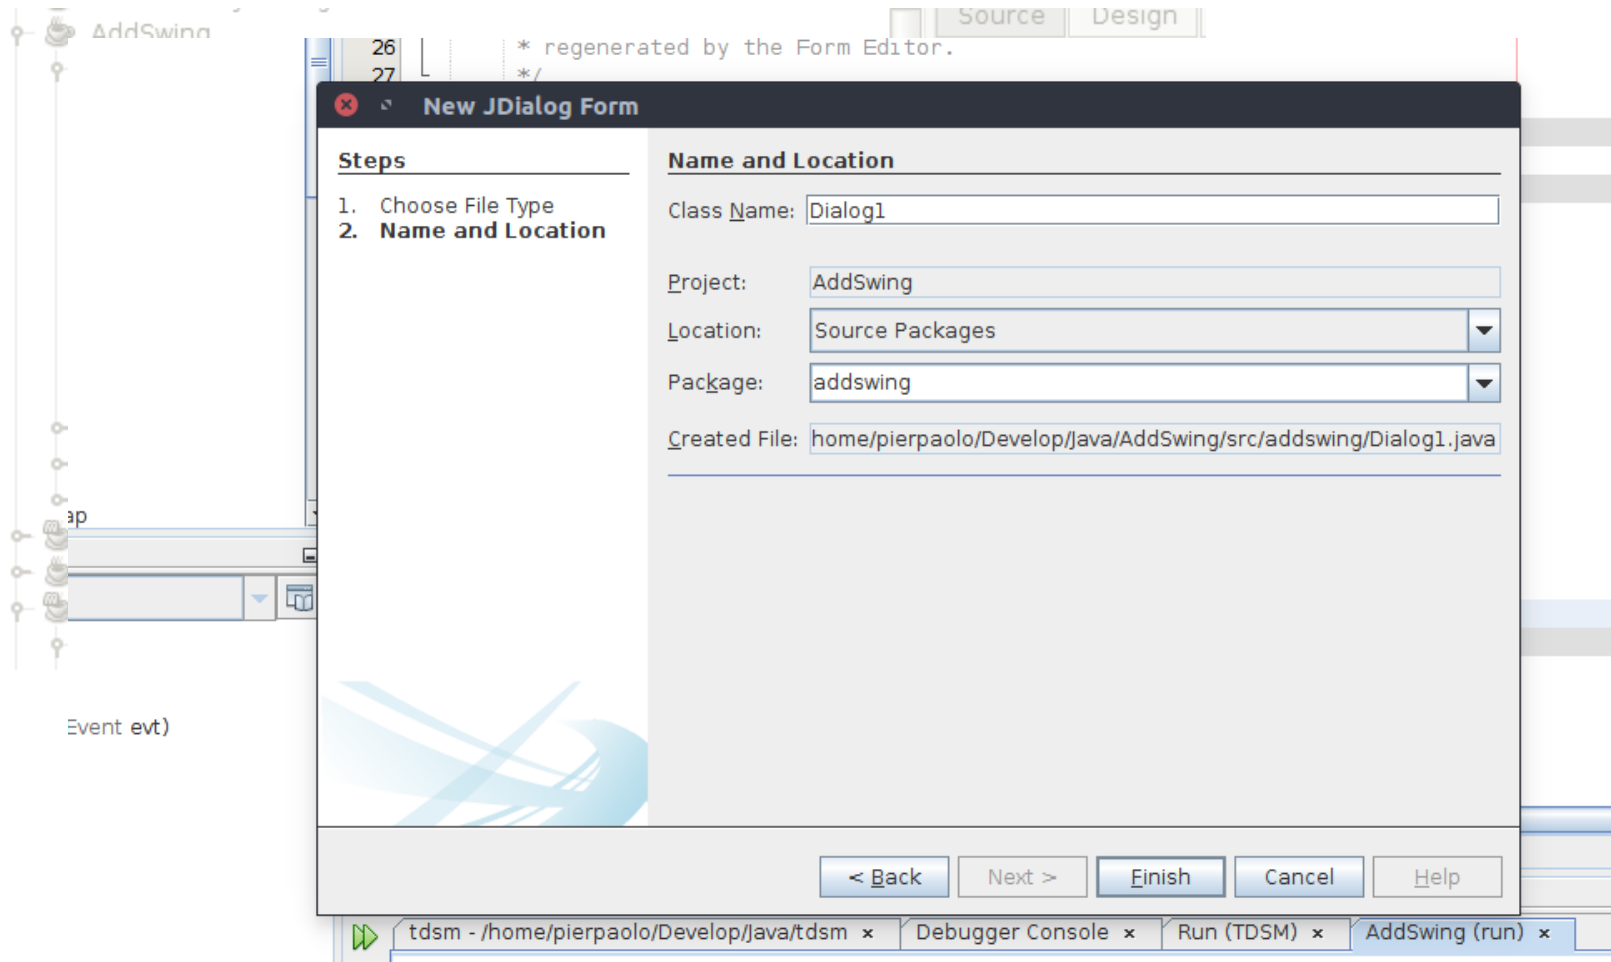

La classe Person

```
L  */  
public class Person {  
  
    private String name;  
  
    private String surname;  
  
    private String birthplace;  
  
    public Person(String name, String surname, String birthplace) {  
        this.name = name;  
        this.surname = surname;  
        this.birthplace = birthplace;  
    }  
  
    public String getName() {  
        return name;  
    }  
  
    public void setName(String name) {  
        this.name = name;  
    }  
  
    public String getSurname() {  
        return surname;  
    }  
  
    public void setSurname(String surname) {
```

Dialog per Person

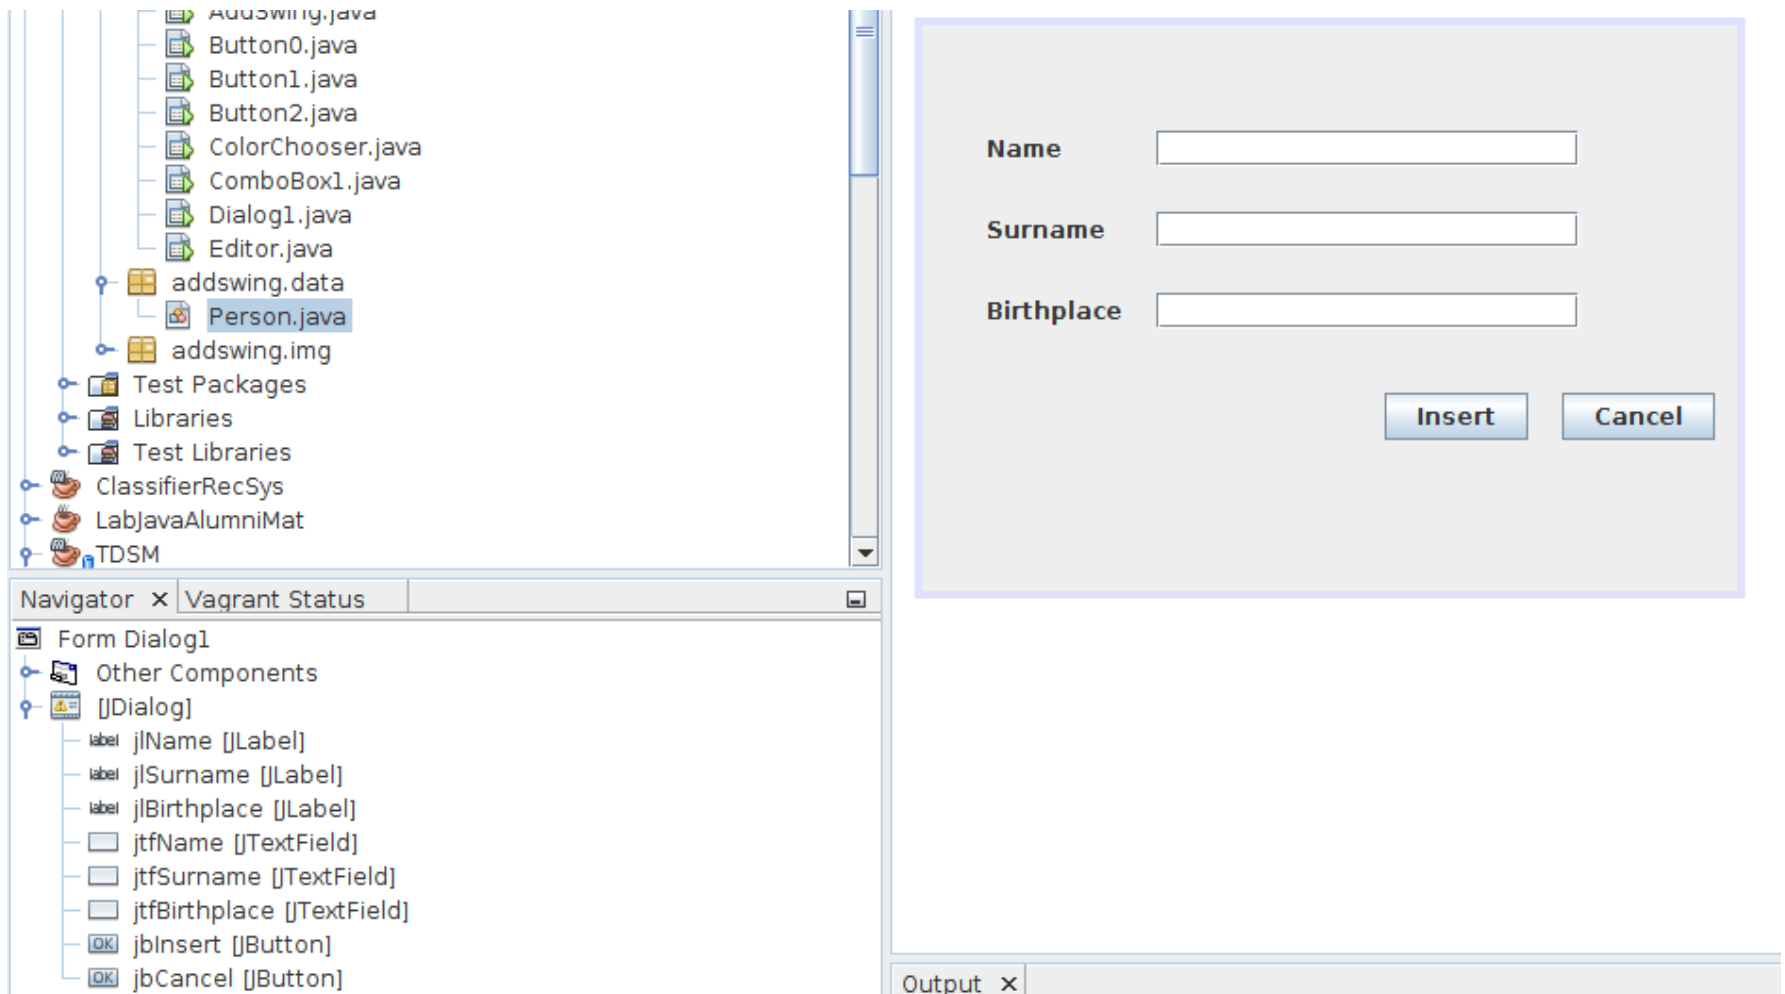

Dialog per Person

```
private Person person = null;

public Person getPerson() {
    return person;
}
```



```
/**
 * This method is called from within the constructor to initialize the form.
 * WARNING: Do NOT modify this code. The content of this method is always
 * regenerated by the Form Editor.
 */
@SuppressWarnings("unchecked")
```

Generated Code

```
private void jbInsertActionPerformed(java.awt.event.ActionEvent evt) {
    person = new Person(jtfName.getText(), jtfSurname.getText(), jtfBirthplace.getText());
    this.dispose();
}


private void jbCancelActionPerformed(java.awt.event.ActionEvent evt) {
    person=null;
    this.dispose();
}
```

Uso della Dialog

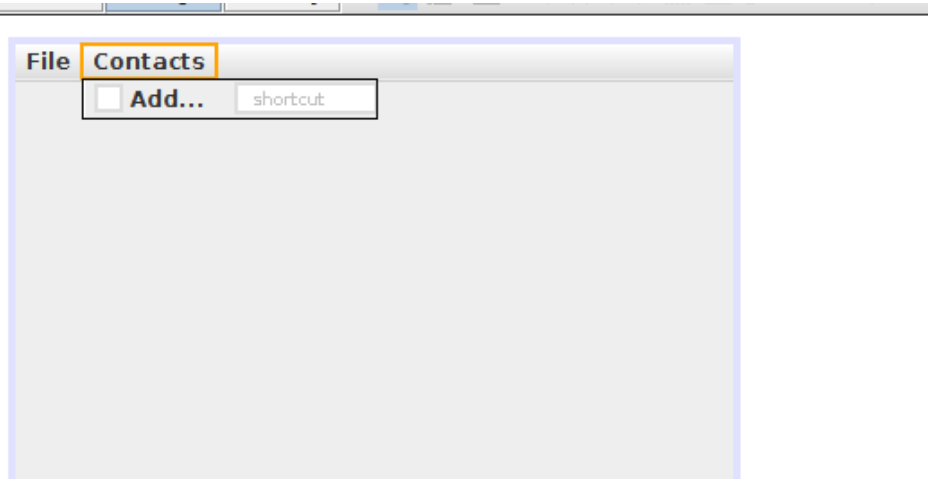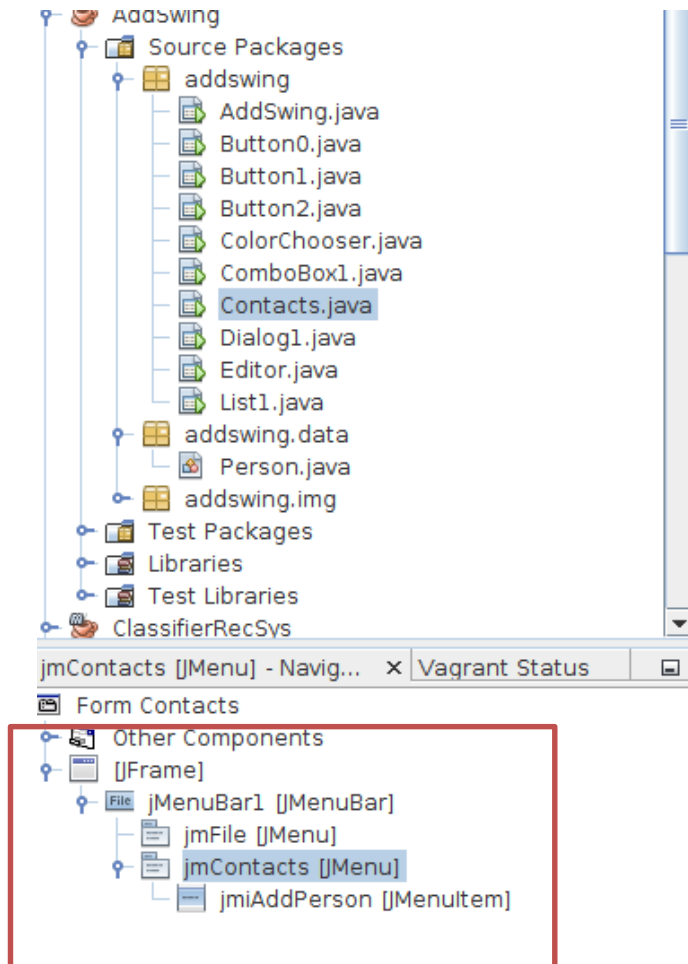

Aggiungiamo un evento
actionPerformed a jmiPerson

Uso della Dialog

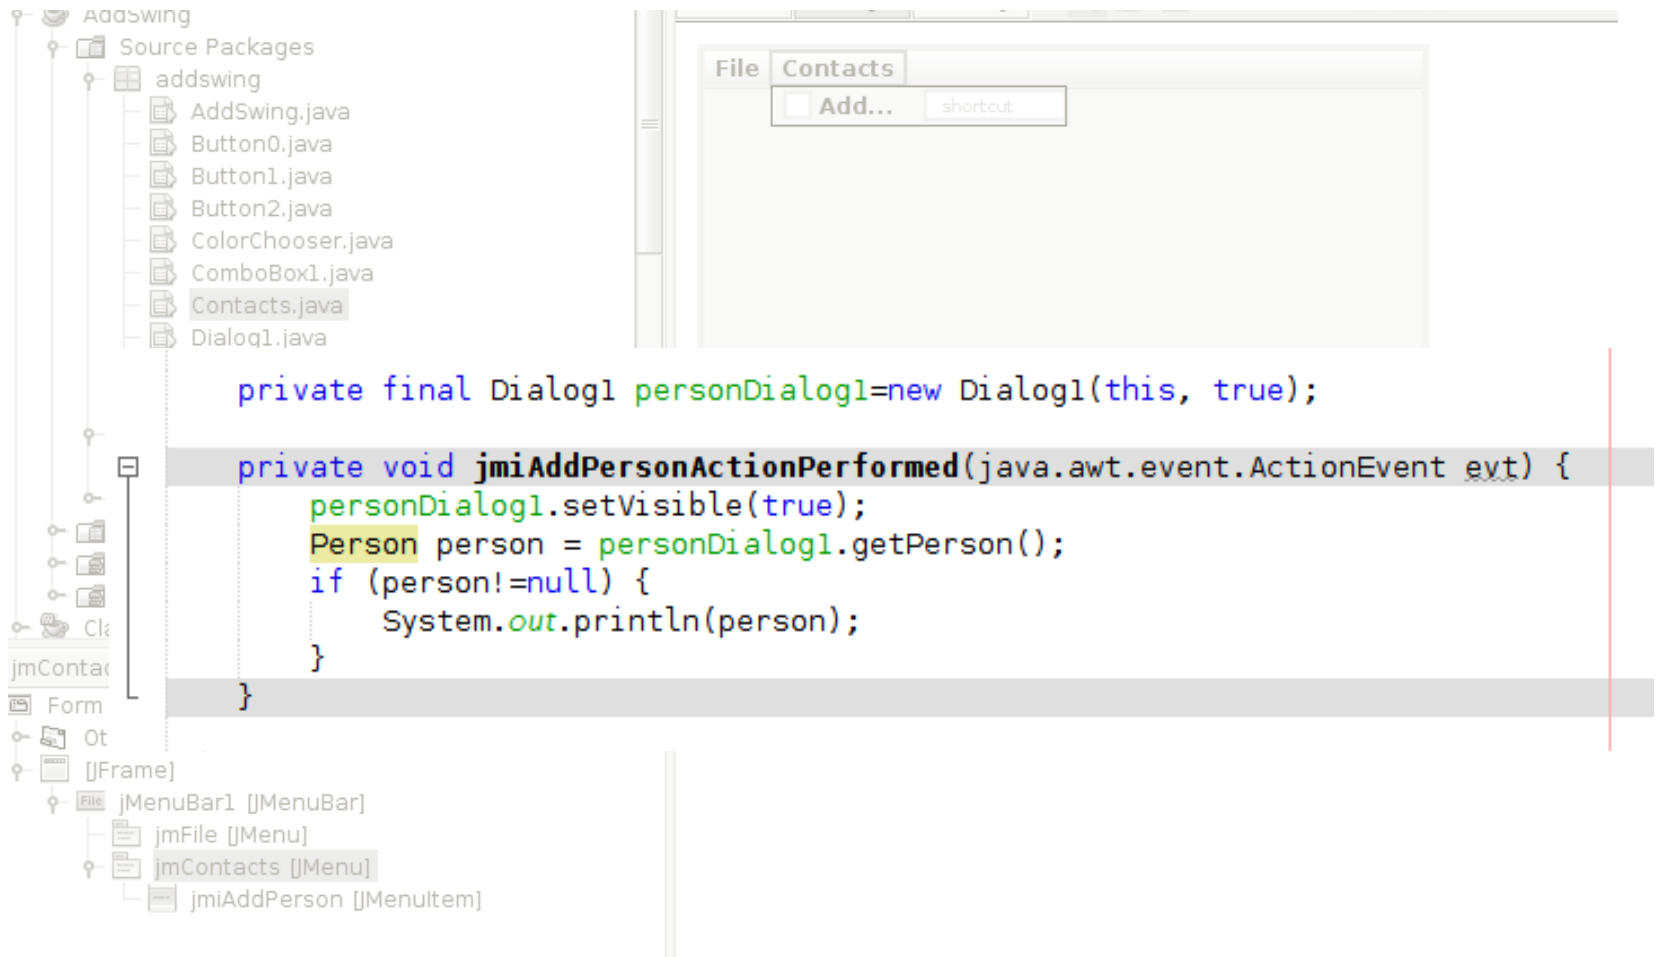

The screenshot displays an IDE environment with a project named 'AddSwing'. The 'Source Packages' view on the left shows a package 'addswing' containing several Java files: 'AddSwing.java', 'Button0.java', 'Button1.java', 'Button2.java', 'ColorChooser.java', 'ComboBox1.java', 'Contacts.java', and 'Dialog1.java'. The 'Contacts.java' file is selected, and its code is visible in the main editor. The code defines a 'personDialog1' instance and a method 'jmiAddPersonActionPerformed' that triggers the dialog and prints the selected person.

On the right, a preview of the 'Contacts' dialog box is shown. It has a title bar with 'File' and 'Contacts' tabs. Inside, there is a text input field, an 'Add...' button, and a 'shortcut' button.

```
private final Dialog1 personDialog1=new Dialog1(this, true);

private void jmiAddPersonActionPerformed(java.awt.event.ActionEvent evt) {
    personDialog1.setVisible(true);
    Person person = personDialog1.getPerson();
    if (person!=null) {
        System.out.println(person);
    }
}
```

The IDE's 'Outline' view on the left shows the project structure, including a 'Form' section with 'jmContact' and 'Ot', and a 'JFrame' section with 'jMenuBar1 [JMenuBar]' containing 'jmFile [JMenu]' and 'jmContacts [JMenu]', which in turn contains 'jmiAddPerson [JMenuItem]'.