

Protechsoft day2 grooming notes

1. What is CSS?

CSS stands for **Cascading Style Sheets**.

It is used to design and style web pages.

HTML provides the structure, while CSS provides the appearance.

Q1. What is CSS?

Ans: CSS stands for Cascading Style Sheets and is used to style web pages.

Q2. Why do we use CSS?

Ans: To improve the appearance and design of webpages.

2. Ways to Apply CSS

There are 3 ways to write CSS:

1. Inline CSS

```
<h1 style="color: red;text-align: center; "> welcome to css grooming</h1>
```

2. Internal CSS

```
<style>
    h3{
        color: green;
    }
</style>
```

3. External CSS

```
<link rel="stylesheet" href="style.css">
```

```
h4{
    color:blue;
}
```

Advantages of External CSS

- Code reusability
- Easy maintenance
- Better readability
- One CSS file can style multiple pages

Q1. How many ways can we apply CSS?

Ans: 3 (Inline, Internal, External)

Q2. Which CSS method is most preferred?

Ans: External CSS.

3. Difference Between ID and Class Selector

ID Selector	Class Selector
Represented by #	Represented by .
Must be unique	Can be used multiple times
One element should have one unique ID	Multiple elements can share the same class

Q1. Which symbol is used for ID selector?

Ans: #

Q2. Which symbol is used for Class selector?

Ans: .

4. Hover Pseudo Class

Hover is applied when the mouse pointer is placed over an element.

Example

```
<button id="login"> login </button>

#login{
    background-color: green;
}

#login:hover{
    background-color: red;
    color: cyan;
}
```

5. Focus Pseudo Class

Focus is applied when an input field becomes active.

Example

```
<input type="text" id="inp1">

#inp1{
    outline: none;
}

#inp1:focus{


    background-color: brown;
    border: 2px solid blue;
}
```

6. Box Model

Every HTML element is considered a rectangular box.

The Box Model consists of:

1. Content
2. Padding
3. Border
4. Margin

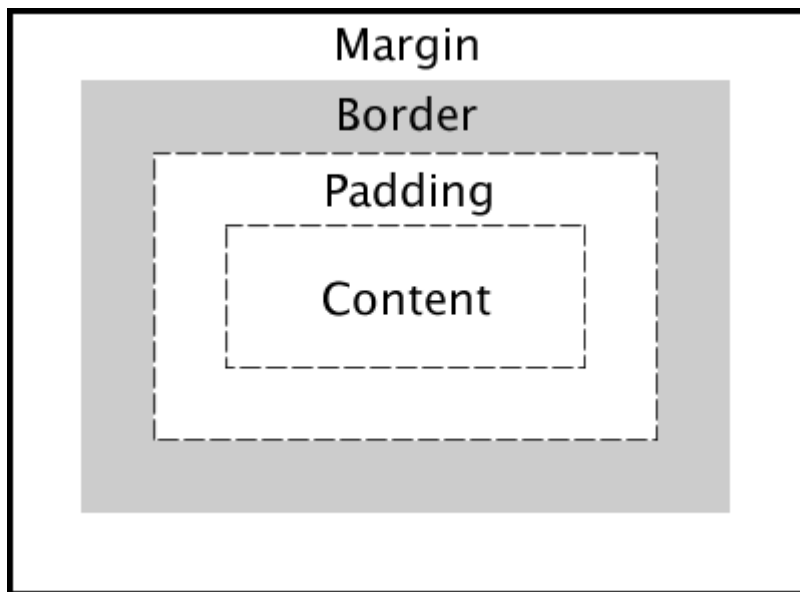

Example

```
<div id="card">

    <h1 >i am card1</h1>
</div>

#card {
    width: 350px;
    height: 250px;
    border: 2px solid black;
    padding: 10px;
    margin: 50px;
}
```

7. Div Tag

<div> stands for Division.

It is a block-level container used to group elements together.

Example

```
<div>
  <h1>Hello</h1>
  <p>Welcome</p>
</div>
```

8. Create one Profile Card

```
<div id="profileCard">
  
  <h2>santanu </h2>
  <p>java,webtech trainer</p>
</div>
```

```
#profileCard{
    background-color: red;
    width: 350px;
    height: 250px;
    padding: 20px;
    border: 3px solid blue;
    border-radius: 20px;
    text-align: center;
    box-shadow: 3px 4px 5px black;
    margin: 20px;
}
```

```
/* making image round */
img{
    height: 150px;
    width: 150px;
    border-radius: 50%;
}
```

9. Transition

Transition is used to create smooth changes between property values.

Transition Properties

Property	Purpose
transition-property	Property to animate
transition-duration	Time taken
transition-timing-function	Speed curve
transition-delay	Delay before animation

Common Timing Functions

- ease
- ease-in
- ease-out
- ease-in-out
- linear

Example

```
<div id="circle">  
  
</div>
```

```
#circle{  
  height: 200px;  
  width: 200px;  
  background-color: purple;  
  transition: all 1s ease-in 1s;  
}  
  
#circle:hover{  
  
  background-color: red;  
}
```

10. Text Properties

Used to style text.

Example

```
<h1 id="grooming"> welcome to webtech grooming</h1>

#grooming{
  text-align: center ;
  text-transform: capitalize;
  letter-spacing: 5px;
  text-shadow: -10px -4px 6px blue;
}
```

Important Text Properties

Property	Purpose
text-align	Align text
text-transform	Change case
letter-spacing	Space between letters
text-shadow	Shadow effect

Values of text-transform

- uppercase
- lowercase
- capitalize

11. Font Properties

Used to change the appearance of fonts.

Example

```
<p id="para1">this is day2 topic</p>
```

```
#para1{  
    font-size: 30px;  
    font-style: italic;  
    font-weight: bold;  
    font-family: Verdana, Geneva, Tahoma, sans-serif;  
}
```

Important Font Properties

Property	Purpose
font-size	Size of text
font-style	Normal/Italic
font-weight	Thickness of text
font-family	Font type