CREATE A NEW SHELL SCRIPT
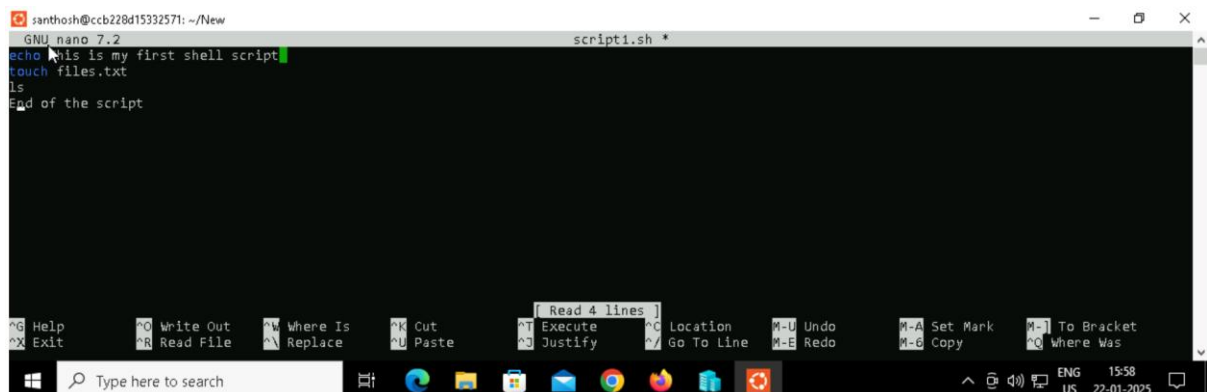
STEP 1: Create a new Nano shell script using the command "nano"

```
santhosh@ccb228d15332571:~/New$ nano script1.sh
```

STEP 2: Giving execute permission to the scripts1.sh file.

```
santhosh@ccb228d15332571:~/New$ chmod +x script1.sh
```

Step 3: Providing the contents to the file.

```
santhosh@ccb228d15332571: ~/New                                                              —  □  ×
  GNU nano 7.2                              script1.sh *
echo This is my first shell script
touch files.txt
ls
End of the script




                                        [ Read 4 lines ]
^G Help        ^O Write Out   ^W Where Is   ^K Cut        ^T Execute    ^C Location    M-U Undo    M-A Set Mark   M-] To Bracket
^X Exit        ^R Read File   ^\ Replace    ^U Paste      ^J Justify    ^/ Go To Line  M-E Redo    M-6 Copy       ^Q Where Was
```

Step 4: Output

```
santhosh@ccb228d15332571:~/New$ ./script1.sh
This is my first shell script
file.txt  files.txt  script1.sh  scripts.sh
```