Type $\it Markdown$ and LaTeX: $\it \alpha^2$

Importing Libraries

```
In [1]: import numpy as np
   import pandas as pd
   import seaborn as sns
   import matplotlib.pyplot as plt
```

Importing Datasets

In [2]: df=pd.read_csv(r"C:\Users\user\Downloads\drive-download-20230804T043023Z-001\ra
df

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост
0	2162	EAST MADHYA PRADESH	1901	48.5	38.1	15.7	10.7	6.2	61.0	367.5	589.2	189.9	5.9
1	2163	EAST MADHYA PRADESH	1902	14.9	8.9	0.0	3.6	2.7	28.0	411.9	227.0	236.6	17.0
2	2164	EAST MADHYA PRADESH	1903	5.6	2.9	0.3	0.9	37.5	67.5	261.4	366.7	257.4	177.9
3	2165	EAST MADHYA PRADESH	1904	2.0	15.3	48.2	0.0	8.6	109.9	443.2	316.6	135.6	44.8
4	2166	EAST MADHYA PRADESH	1905	15.9	8.0	14.3	12.3	10.2	34.4	292.4	243.3	250.9	2.9
110	2272	EAST MADHYA PRADESH	2011	0.6	1.9	0.3	7.1	4.7	332.5	323.6	326.9	276.5	1.1
111	2273	EAST MADHYA PRADESH	2012	39.4	0.7	0.6	1.1	1.2	67.8	398.9	351.7	172.6	12.7
112	2274	EAST MADHYA PRADESH	2013	2.0	43.4	14.1	9.5	0.3	311.9	456.2	480.8	78.0	124.2
113	2275	EAST MADHYA PRADESH	2014	32.1	49.7	17.8	5.1	2.5	91.8	283.4	231.8	139.6	56.4
114	2276	EAST MADHYA PRADESH	2015	37.3	11.0	73.4	25.8	6.3	139.2	262.2	272.1	71.6	38.2
115 rows × 20 columns													
1101													•

Data Cleaning and Data Preprocessing

```
In [5]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
```

#	Column	Non-Null Count	Dtype				
0	index	115 non-null	int64				
1	SUBDIVISION	115 non-null	object				
2	YEAR	115 non-null	int64				
3	JAN	115 non-null	float64				
4	FEB	115 non-null	float64				
5	MAR	115 non-null	float64				
6	APR	115 non-null	float64				
7	MAY	115 non-null	float64				
8	JUN	115 non-null	float64				
9	JUL	115 non-null	float64				
10	AUG	115 non-null	float64				
11	SEP	115 non-null	float64				
12	OCT	115 non-null	float64				
13	NOV	115 non-null	float64				
14	DEC	115 non-null	float64				
15	ANNUAL	115 non-null	float64				
16	Jan-Feb	115 non-null	float64				
17	Mar-May	115 non-null	float64				
18	Jun-Sep	115 non-null	float64				
19	Oct-Dec	115 non-null	float64				
<pre>dtypes: float64(17), int64(2), object(1)</pre>							
memory usage: 18.9+ KB							

memory usage: 18.9+ KB


Line chart

```
In [6]: df.plot.line(subplots=True)
Out[6]: array([<AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
             <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
             <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
             <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
             <AxesSubplot:>, <AxesSubplot:>], dtype=object)
                                             MAR
                              MAY
                              JUN
                                             AUG
                                             SEP
                                             OCT
        106
                                           ANNUAL
                                           lan-Feb
                                           Mar-May
                                         100
```

Line chart

```
In [7]: df.plot.line()
```


Out[7]: <AxesSubplot:>

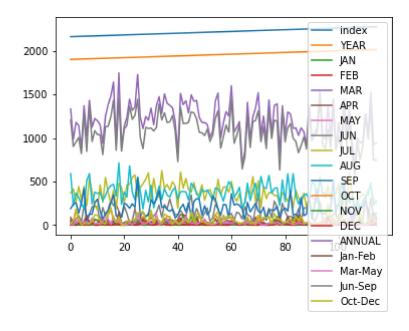

Bar chart

```
In [8]: df.plot.bar()
```


Out[8]: <AxesSubplot:>

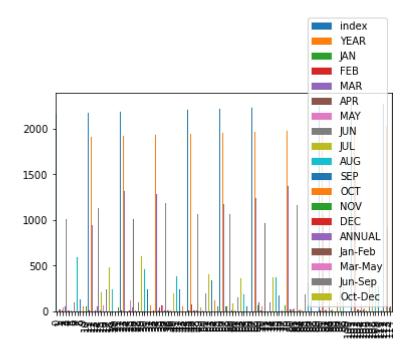

Histogram

```
In [9]: df.plot.hist()
```


Out[9]: <AxesSubplot:ylabel='Frequency'>

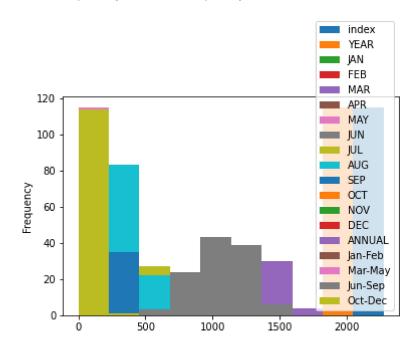

Area chart

```
In [10]: df.plot.area()
```


Out[10]: <AxesSubplot:>

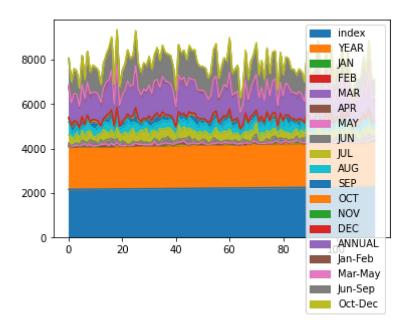

Box chart


```
In [11]: df.plot.box()
```


Out[11]: <AxesSubplot:>

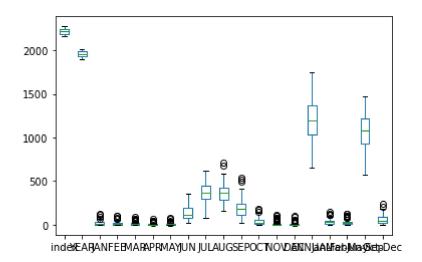

Pie chart

```
In [12]: df.plot.pie(y='ANNUAL' )
Out[12]: <AxesSubplot:ylabel='ANNUAL'>
```

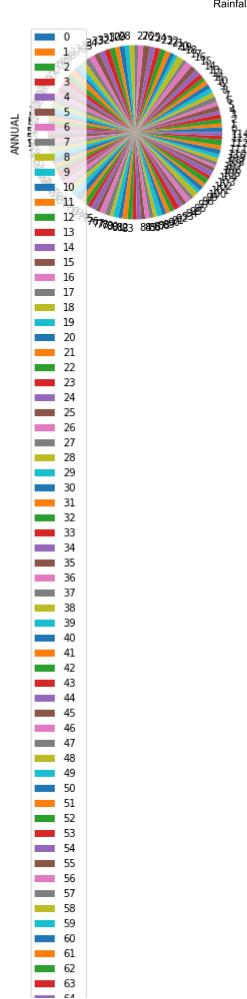




Scatter chart

```
In [13]: df.plot.scatter(x='SUBDIVISION' ,y='ANNUAL')
```


Out[13]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>

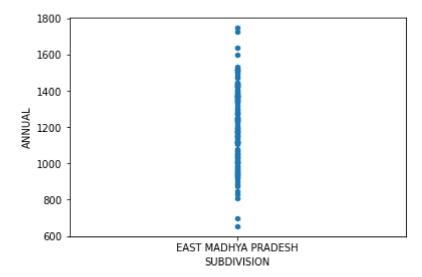

Seaborn

In [14]: sns.pairplot(df)

Out[14]: <seaborn.axisgrid.PairGrid at 0x2116d6159a0>

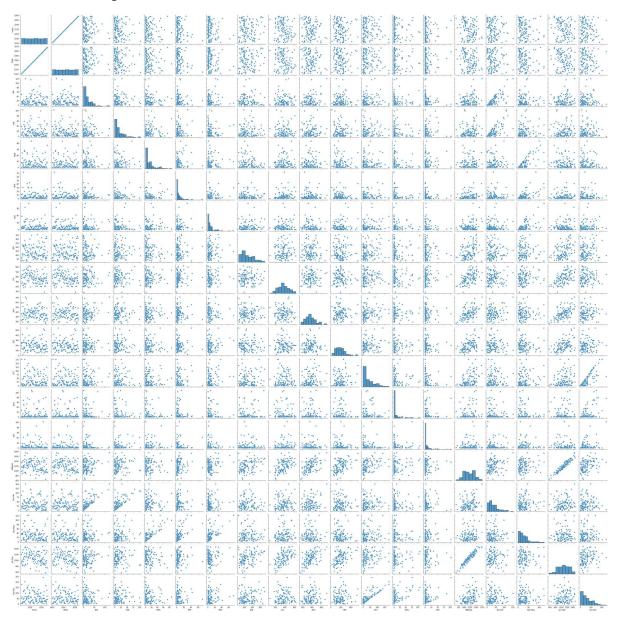


In [15]: sns.distplot(df['ANNUAL'])

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: Fut ureWarning: `distplot` is a deprecated function and will be removed in a futu re version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for hi stograms).


warnings.warn(msg, FutureWarning)

Out[15]: <AxesSubplot:xlabel='ANNUAL', ylabel='Density'>

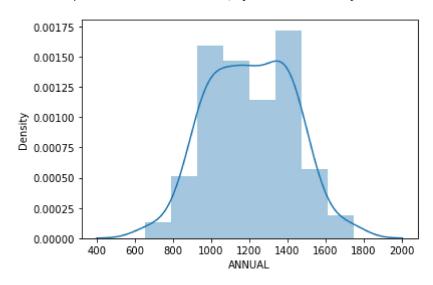

In [16]: sns.heatmap(df.corr())

Out[16]: <AxesSubplot:>

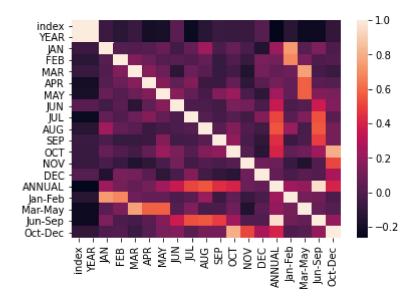

In []: