Type *Markdown* and LaTeX: α^2

Importing Libraries

In [1]:
```
import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
```

Importing Datasets

In [2]:
```
df=pd.read_csv(r"C:\Users\user\Downloads\drive-download-20230804T043023Z-001\rainfall_naga mani mizo tripura.csv"
df
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL	Jan-Feb	Mar-May	Ju S
0	322	NAGA MANI MIZO TRIPURA	1901	11.7	18.1	29.4	206.2	124.0	443.3	331.4	466.0	304.1	166.7	67.4	0.0	2168.4	29.8	359.6	1544
1	323	NAGA MANI MIZO TRIPURA	1902	4.8	0.5	36.3	297.8	215.5	480.1	392.4	312.8	318.7	102.4	8.9	4.7	2175.0	5.2	549.7	1504
2	324	NAGA MANI MIZO TRIPURA	1903	6.5	40.5	139.8	45.5	159.9	458.6	300.2	470.6	366.1	166.4	76.7	0.1	2230.7	47.0	345.1	1595
3	325	NAGA MANI MIZO TRIPURA	1904	2.3	46.9	47.5	290.3	230.5	455.3	423.5	423.6	375.8	128.9	90.0	5.0	2519.8	49.3	568.3	1678
4	326	NAGA MANI MIZO TRIPURA	1905	9.1	35.3	306.5	161.7	193.6	339.7	450.1	429.9	320.1	246.4	8.0	27.1	2527.6	44.5	661.8	1539
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	
110	432	NAGA MANI MIZO TRIPURA	2011	12.6	3.6	51.4	81.1	334.9	374.2	313.3	367.6	258.3	92.6	2.4	0.2	1892.1	16.1	467.4	1313
111	433	NAGA MANI MIZO TRIPURA	2012	24.5	10.2	20.3	243.5	163.5	396.2	280.1	342.7	248.7	160.9	32.0	0.4	1922.9	34.7	427.3	1267
112	434	NAGA MANI MIZO TRIPURA	2013	0.2	5.7	19.7	60.3	348.9	206.6	255.9	291.3	241.4	125.6	0.3	1.2	1557.2	5.9	428.9	995
113	435	NAGA MANI MIZO TRIPURA	2014	1.2	21.0	25.4	49.6	192.5	268.3	295.7	372.3	300.9	69.6	3.3	0.1	1599.9	22.2	267.5	1237
114	436	NAGA MANI MIZO TRIPURA	2015	14.4	14.2	21.6	253.5	198.3	283.9	413.6	334.2	255.9	118.7	3.9	10.0	1922.4	28.7	473.4	1287

115 rows × 20 columns

Data Cleaning and Data Preprocessing

In [3]:
```
df=df.dropna()
```

In [4]:
```
df.columns
```

Out[4]:
```
Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',
       'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',
       'Mar-May', 'Jun-Sep', 'Oct-Dec'],
      dtype='object')
```

In [5]:
```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
 #   Column       Non-Null Count  Dtype  
---  ------       --------------  -----  
 0   index        115 non-null    int64  
 1   SUBDIVISION  115 non-null    object 
 2   YEAR         115 non-null    int64  
 3   JAN          115 non-null    float64
 4   FEB          115 non-null    float64
 5   MAR          115 non-null    float64
 6   APR          115 non-null    float64
 7   MAY          115 non-null    float64
 8   JUN          115 non-null    float64
 9   JUL          115 non-null    float64
 10  AUG          115 non-null    float64
 11  SEP          115 non-null    float64
 12  OCT          115 non-null    float64
 13  NOV          115 non-null    float64
 14  DEC          115 non-null    float64
 15  ANNUAL       115 non-null    float64
 16  Jan-Feb      115 non-null    float64
 17  Mar-May      115 non-null    float64
 18  Jun-Sep      115 non-null    float64
 19  Oct-Dec      115 non-null    float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.9+ KB
```

Line chart

In [6]:
```
df.plot.line(subplots=True)
```

Out[6]:
```
array([<AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>,
       <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>, <AxesSubplot:>],
      dtype=object)
```

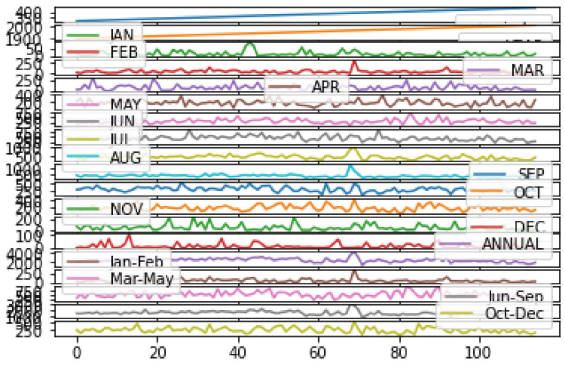

Line chart

In [7]:
```
df.plot.line()
```

Out[7]: <AxesSubplot:>

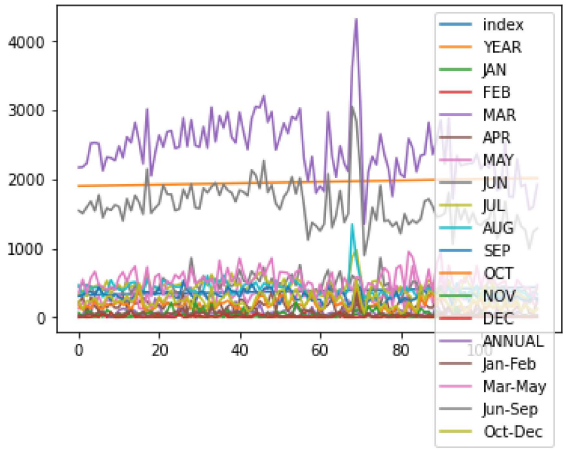

Bar chart

In [8]:
```
df.plot.bar()
```

Out[8]: <AxesSubplot:>

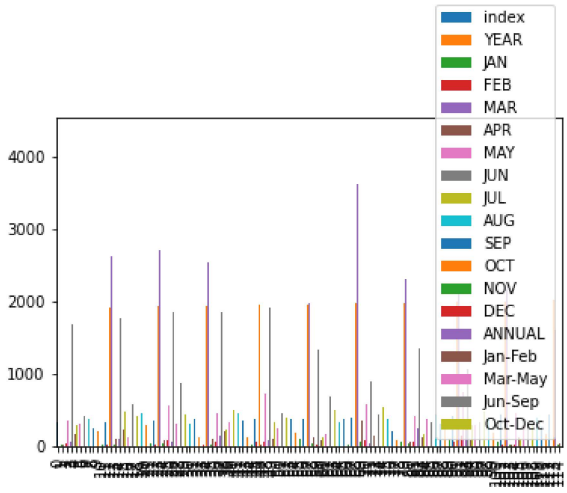

Histogram

In [9]:
```
df.plot.hist()
```

Out[9]: <AxesSubplot:ylabel='Frequency'>

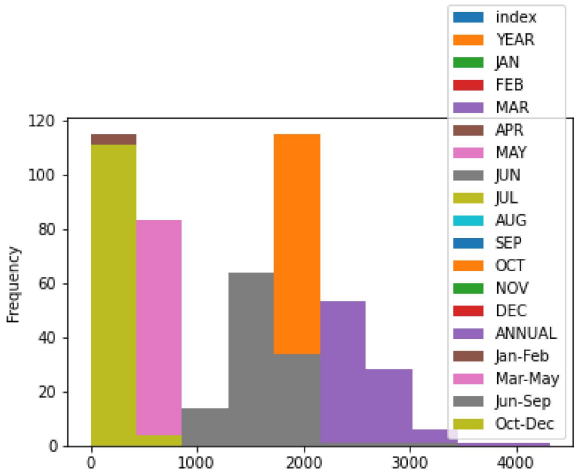

Area chart

In [10]:
```
df.plot.area()
```

Out[10]: <AxesSubplot:>

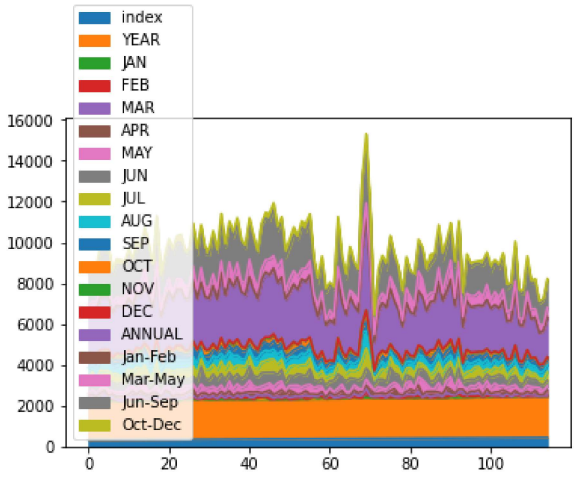

Box chart

In [11]:
```
df.plot.box()
```

Out[11]: <AxesSubplot:>

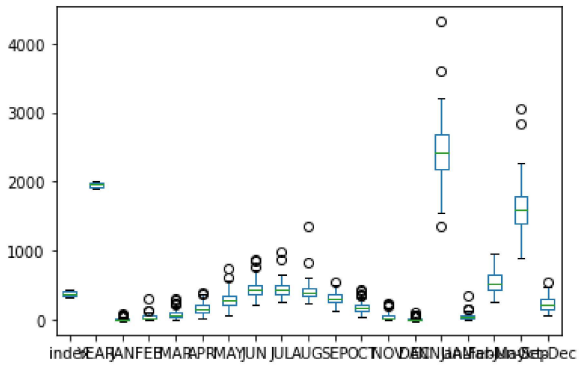

Pie chart

In [12]:
```
df.plot.pie(y='ANNUAL' )
```

Out[12]:
```
<AxesSubplot:ylabel='ANNUAL'>
```

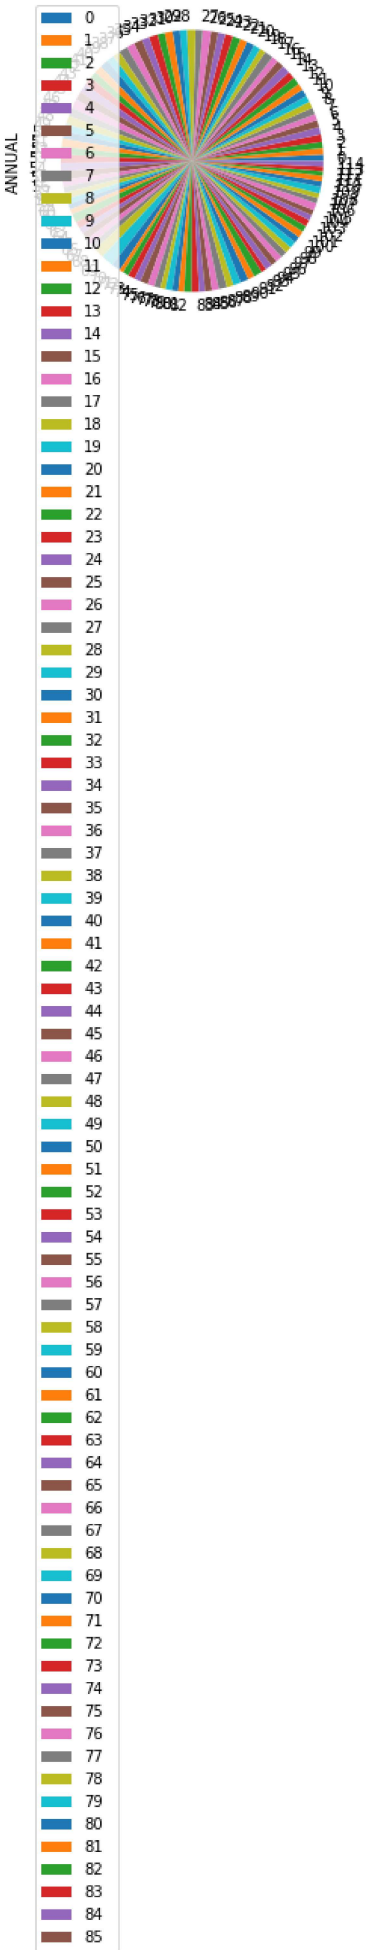
ANNUAL
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85



Scatter chart

In [13]:
```
df.plot.scatter(x='SUBDIVISION' ,y='ANNUAL')
```

Out[13]:
```
<AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>
```

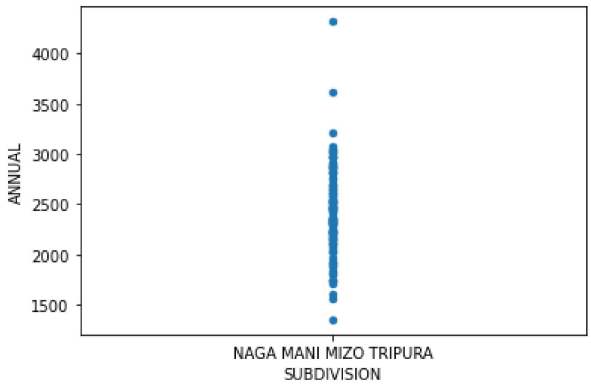

Seaborn

In [14]:
```
sns.pairplot(df)
```

Out[14]:
```
<seaborn.axisgrid.PairGrid at 0x1c25a663a60>
```

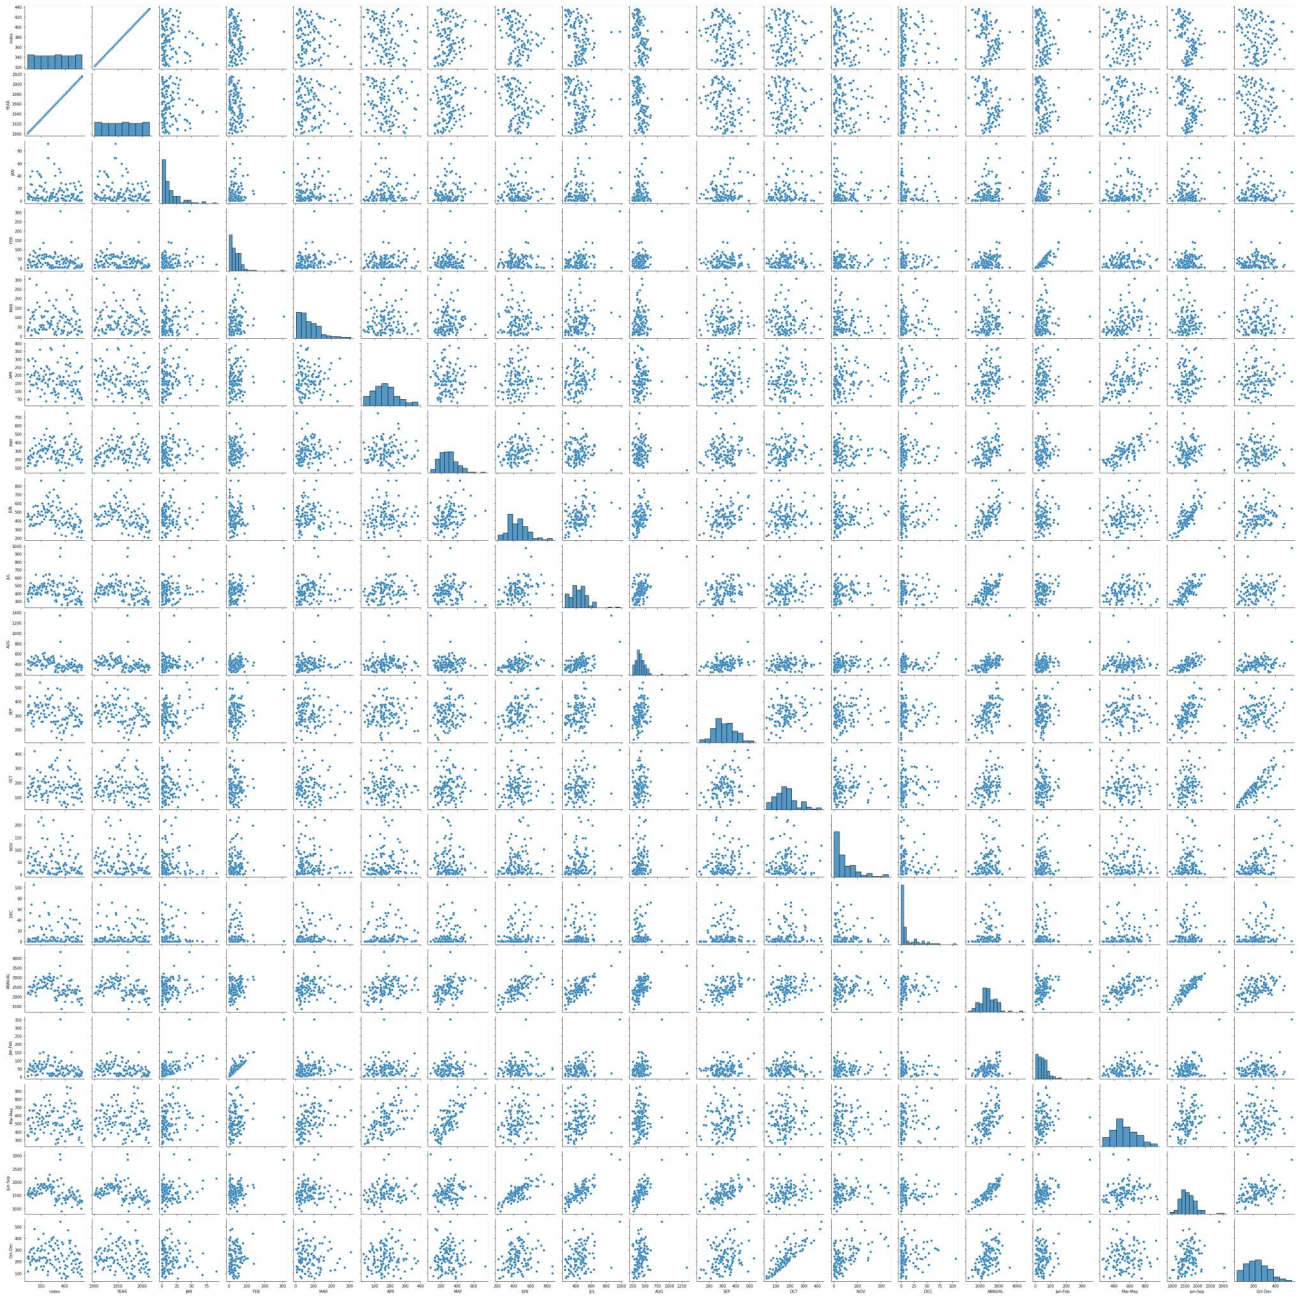

In [15]:
```
sns.distplot(df['ANNUAL'])
```

```
C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprec
ated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure
-level function with similar flexibility) or `histplot` (an axes-level function for histograms).
  warnings.warn(msg, FutureWarning)
```

Out[15]: <AxesSubplot:xlabel='ANNUAL', ylabel='Density'>

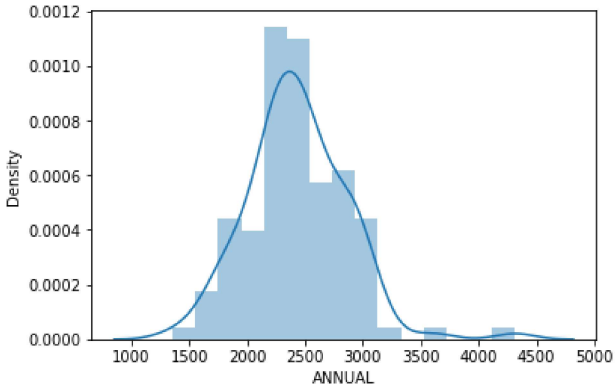

In [16]:
```
sns.heatmap(df.corr())
```

Out[16]: <AxesSubplot:>

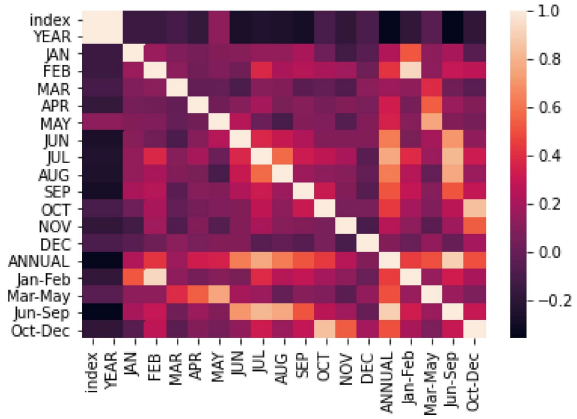

In [ ]: