

Type *Markdown* and LaTeX: α^2

Importing Libraries

```
In [1]: import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
```

Importing Datasets ¶

```
In [2]: df=pd.read_csv(r"C:\Users\user\Downloads\drive-download-20230804T043023Z-001\rainfall_himachal pradesh.csv")
df
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	ANNUAL	Jan-Feb	Mar-May
0	1932	EAST RAJASTHAN	1901	21.6	8.9	2.9	0.7	5.0	15.0	164.8	175.6	7.5	9.8	0.0	0.8	412.5	30.5	8.5
1	1933	EAST RAJASTHAN	1902	4.1	0.7	0.0	1.8	9.9	34.6	247.6	116.7	145.6	14.4	0.0	2.8	578.3	4.8	11.7
2	1934	EAST RAJASTHAN	1903	1.9	0.7	1.3	0.1	12.9	15.6	238.2	229.1	168.5	17.8	0.0	0.0	686.1	2.7	14.2
3	1935	EAST RAJASTHAN	1904	4.3	5.5	21.7	0.2	27.5	49.9	289.7	223.5	50.2	1.5	5.8	14.7	694.5	9.8	49.4
4	1936	EAST RAJASTHAN	1905	4.1	8.8	3.2	1.6	2.0	14.4	130.5	30.9	83.8	0.0	0.0	0.6	279.8	12.8	6.8
...
110	2042	EAST RAJASTHAN	2011	0.0	11.2	0.2	0.5	5.1	140.9	193.6	284.1	166.4	0.0	0.0	0.0	802.1	11.2	5.9
111	2043	EAST RAJASTHAN	2012	1.9	0.0	0.0	3.6	9.5	11.2	170.5	365.0	131.3	0.5	0.0	0.1	693.6	1.9	13.1
112	2044	EAST RAJASTHAN	2013	1.4	21.7	0.4	3.2	1.0	90.6	319.0	278.5	88.0	30.6	1.3	0.3	836.1	23.1	4.6
113	2045	EAST RAJASTHAN	2014	28.4	10.0	6.4	7.3	8.4	23.5	197.1	261.0	136.9	3.2	0.0	1.1	683.3	38.4	22.1
114	2046	EAST RAJASTHAN	2015	12.1	0.1	55.9	15.9	3.5	96.4	297.6	142.8	20.1	5.0	0.5	0.8	650.7	12.1	75.3

115 rows × 20 columns

Data Cleaning and Data Preprocessing

```
In [3]: df=df.dropna()
```

```
In [4]: df.columns
```

```
Out[4]: Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',
              'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',
              'Mar-May', 'Jun-Sep', 'Oct-Dec'],
              dtype='object')
```

In [5]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
Int64Index: 115 entries, 0 to 114
Data columns (total 20 columns):
 #   Column          Non-Null Count  Dtype  
---  --
 0   index           115 non-null    int64  
 1   SUBDIVISION     115 non-null    object  
 2   YEAR            115 non-null    int64  
 3   JAN             115 non-null    float64 
 4   FEB             115 non-null    float64 
 5   MAR             115 non-null    float64 
 6   APR             115 non-null    float64 
 7   MAY             115 non-null    float64 
 8   JUN             115 non-null    float64 
 9   JUL             115 non-null    float64 
10  AUG             115 non-null    float64 
11  SEP             115 non-null    float64 
12  OCT             115 non-null    float64 
13  NOV             115 non-null    float64 
14  DEC             115 non-null    float64 
15  ANNUAL          115 non-null    float64 
16  Jan-Feb         115 non-null    float64 
17  Mar-May         115 non-null    float64 
18  Jun-Sep         115 non-null    float64 
19  Oct-Dec         115 non-null    float64 
dtypes: float64(17), int64(2), object(1)
memory usage: 18.9+ KB
```

Line chart

In [6]: `df.plot.line(subplots=True)`


Out[6]: array([<AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>, <AxesSubplot:~>], dtype=object)



Line chart

In [7]: `df.plot.line()`


Out[7]: <AxesSubplot:>

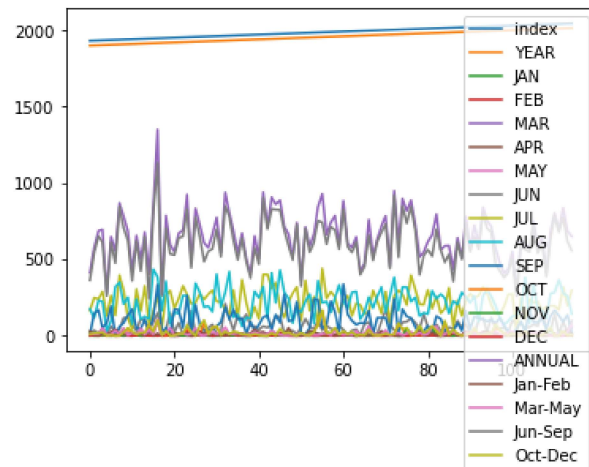

Bar chart

In [8]: `df.plot.bar()`


Out[8]: <AxesSubplot:>

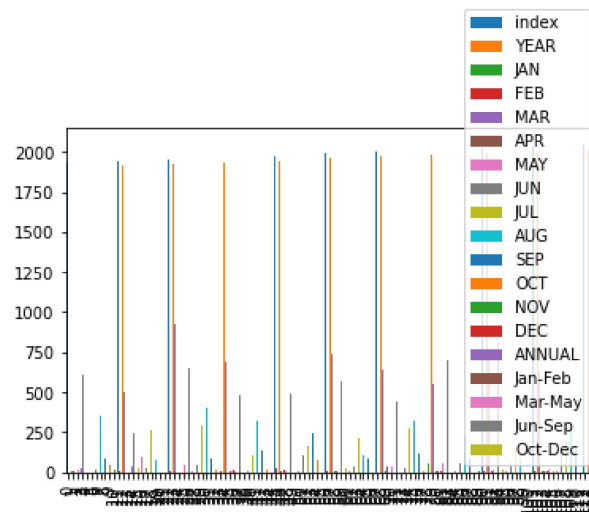

Histogram

```
In [9]: df.plot.hist()
```


```
Out[9]: <AxesSubplot:ylabel='Frequency'>
```

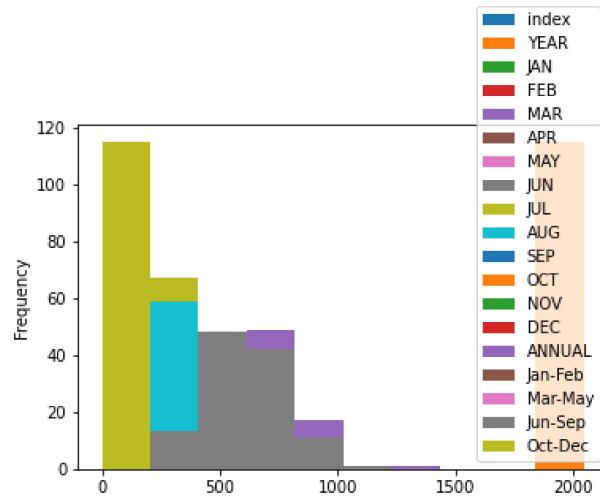

Area chart

```
In [10]: df.plot.area()
```


```
Out[10]: <AxesSubplot:>
```

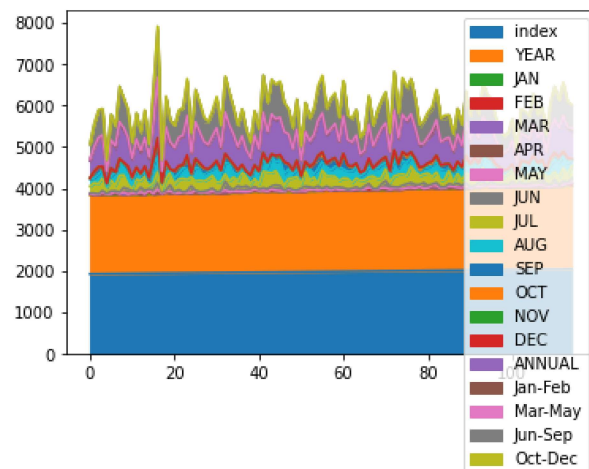

Box chart

```
In [11]: df.plot.box()
```


Out[11]: <AxesSubplot:>

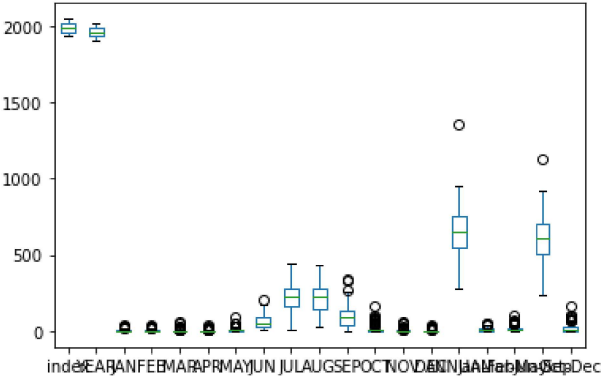


Pie chart

```
In [12]: df.plot.pie(y='ANNUAL' )
```


```
Out[12]: <AxesSubplot:ylabel='ANNUAL'>
```

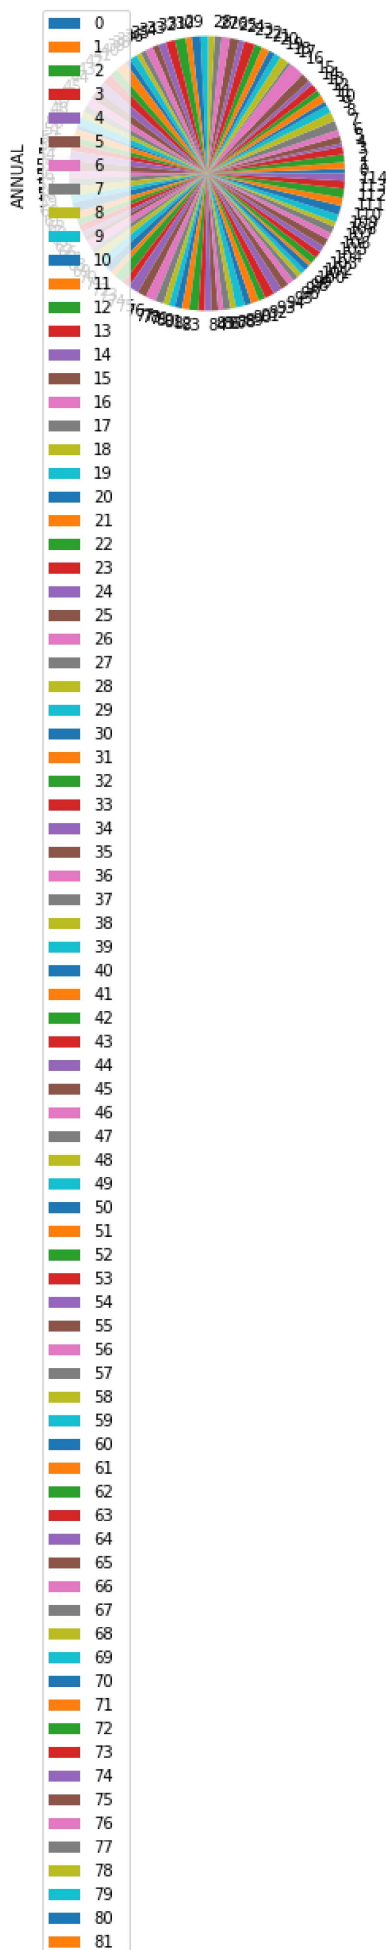

Scatter chart


```
In [13]: df.plot.scatter(x='SUBDIVISION' ,y='ANNUAL')
Out[13]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='ANNUAL'>
```

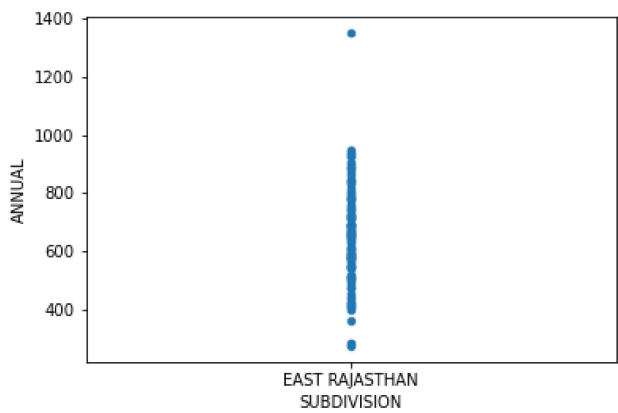

Seaborn

```
In [14]: sns.pairplot(df)
```

```
Out[14]: <seaborn.axisgrid.PairGrid at 0x1f990312220>
```

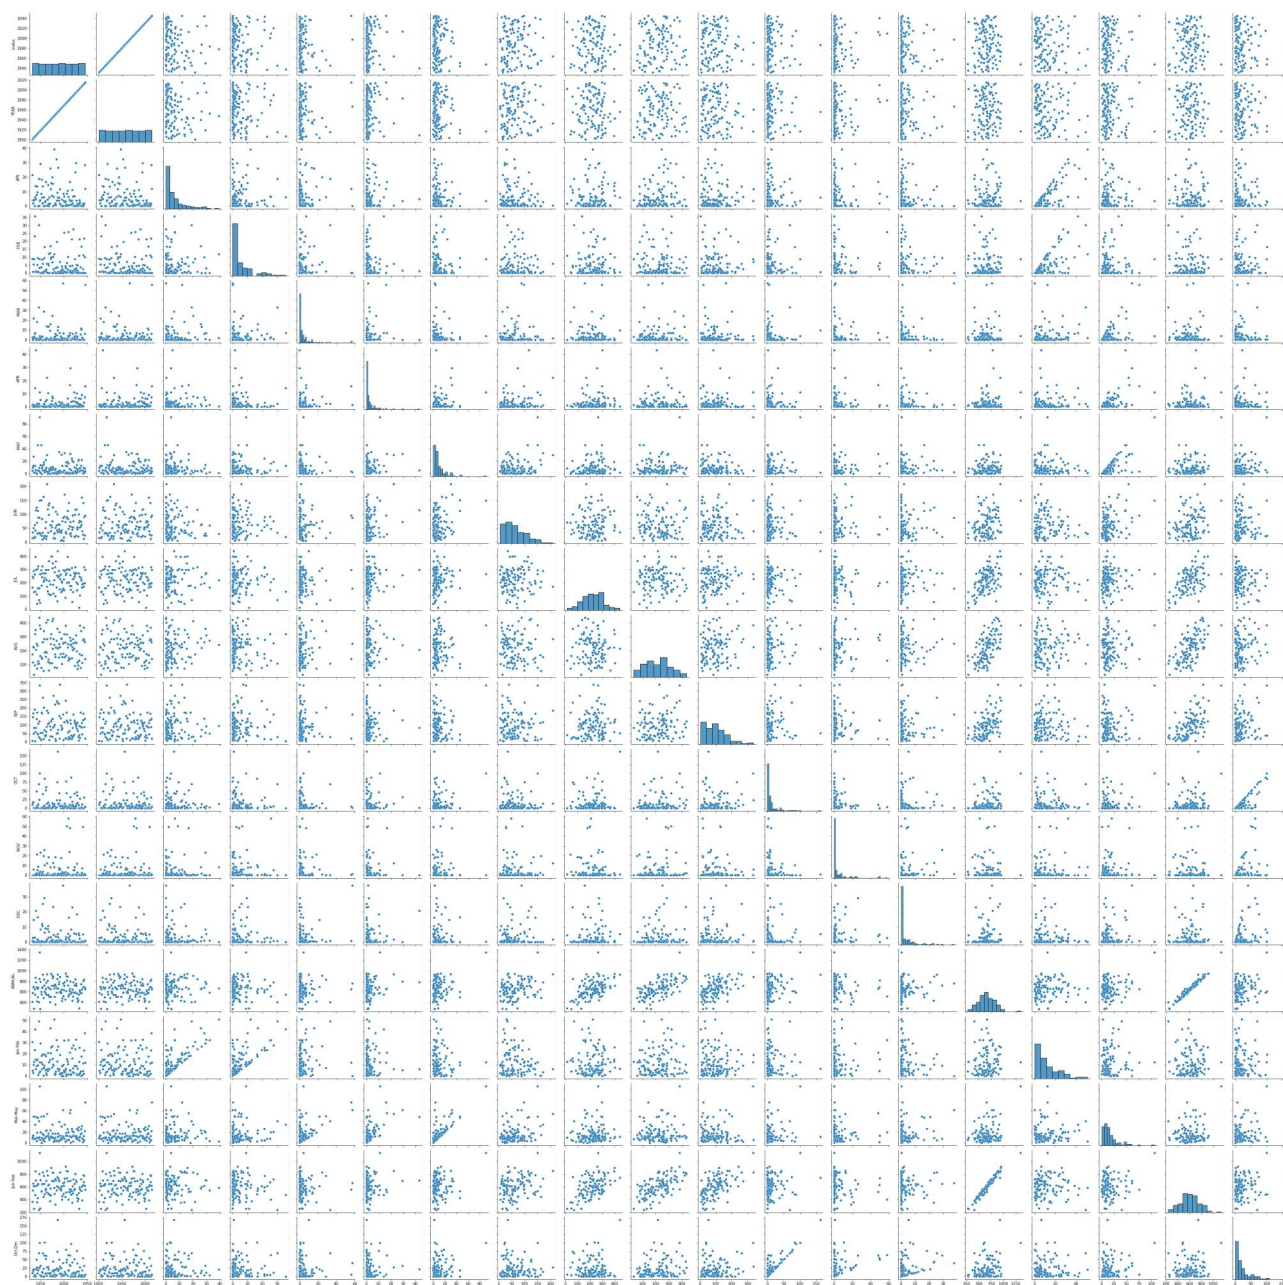


```
In [15]: sns.distplot(df['ANNUAL'])
```

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).


warnings.warn(msg, FutureWarning)

```
Out[15]: <AxesSubplot:xlabel='ANNUAL', ylabel='Density'>
```

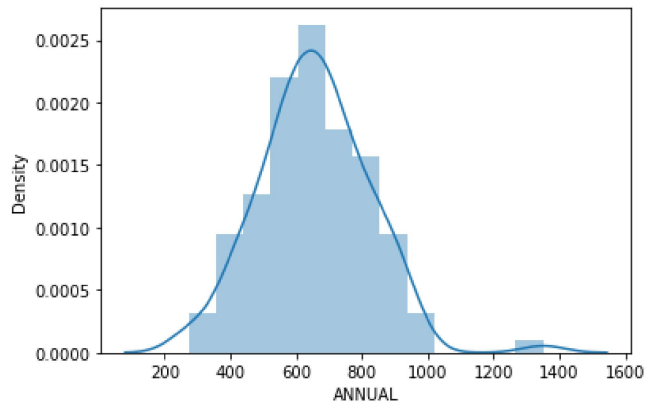

```
In [16]: sns.heatmap(df.corr())
```

```
Out[16]: <AxesSubplot:>
```

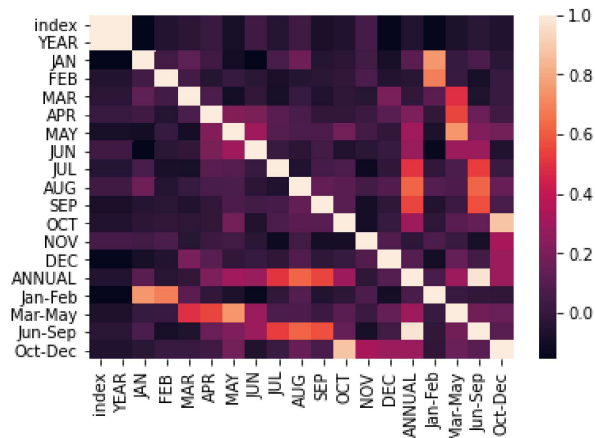

```
In [ ]:
```