


`docker run ubuntu`

`sun`
`--network = none`
Ubuntu

`sun`
`--network =`
host-ubuntu


Docker Host

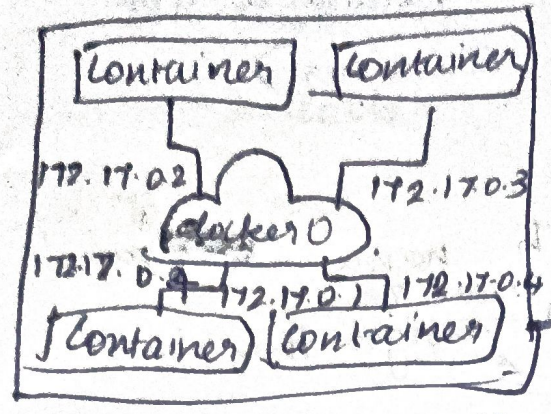

Docker Host



Docker Host

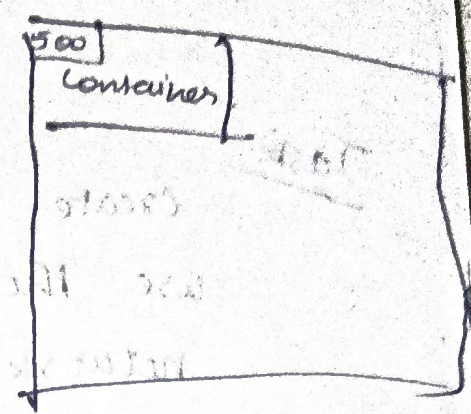

→ Default launch on bridge network.
of containers.

Day 4

> docker network ls.

→ On default creates network in bridge.

> docker network create sji-demo-net

> docker network ls.

→ It removes the idle network. (max don't use)

> docker system prune.

> docker ps -a.

> docker images (removes snapshot but customizing present)

> docker network ls.

→ Create one network here.

→ To remove all the images which are not in use

> docker system prune -a.

→ List the network.

→ Execute the created network.

> docker run -d --name demo -p 8081:80 --network
= sji-demonet customimg.

> docker ps

→ To inspect whether the container is correctly allocated to ~~par~~ network


> docker inspect demo. (gives metadata abt container)

Task

Create a container with name ~~demo~~ 'papu' ^{create &}
use the customimg and assign the network named 'test'

Types of Docker Volumes

→ tmpfs mount is allocated to all the containers launched. (temporary volume - on deleting a container volume will also be removed).

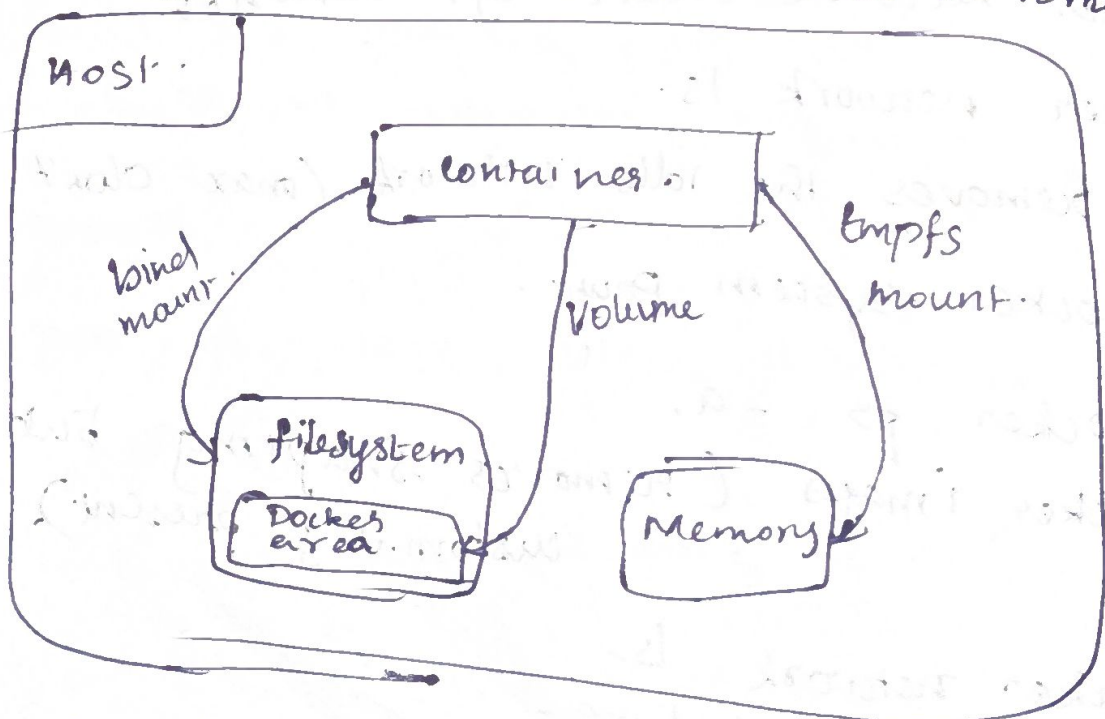

→ For file transfer will be easy using bind mount.

Docker compose:

It makes it easier to configure and run applications made up of multiple containers. For example: imagine being able to define three containers - one running a web app, another running postgres, a third running redis - all in one YAML file and then running those three connected containers with a single command.

→ To check the version of docker compose.

> docker compose version.

→ To check whether docker-compose.yaml file exists

> cat docker-compose.yaml.

> docker ps -a.

→ To compose

> docker compose up

> docker ps

→ To inspect a particular container.

> docker inspect frontend

→ To compose down → stops & removes them

> docker compose down

→ To check → it will not show the containers.

> docker ps -a.

> cd front-end.

> ls

> notepad index.html → type something

→ We can modify compose file any time.

→ To view only containers which are composed

> docker compose ps.

→ To view only images which are pulled by compose file.

> docker compose images.

→ To view only networks

→ To avoid last -d → detach while composing

> docker compose up -d.