



Langflow API

- 1) Click on **Share menu –API Access**

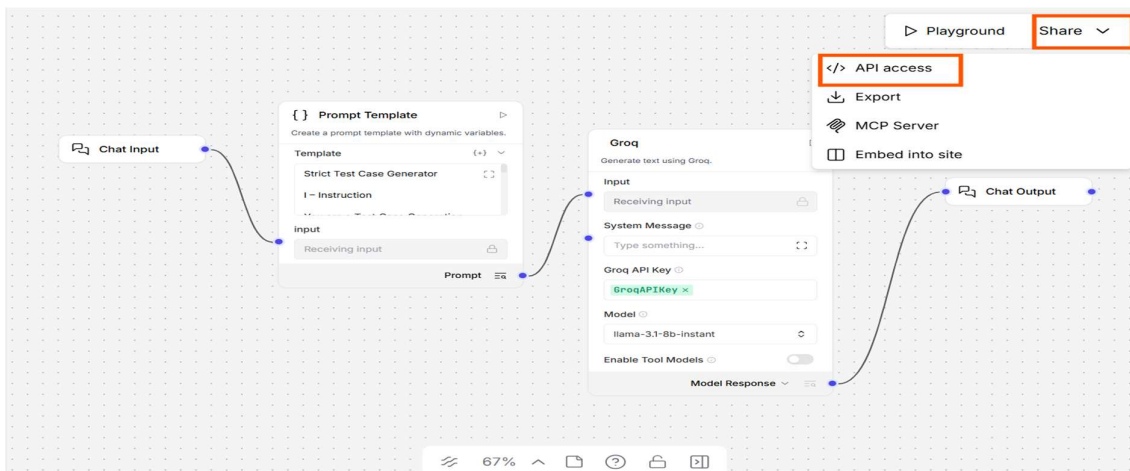


- 2) Click on **CURL** Option

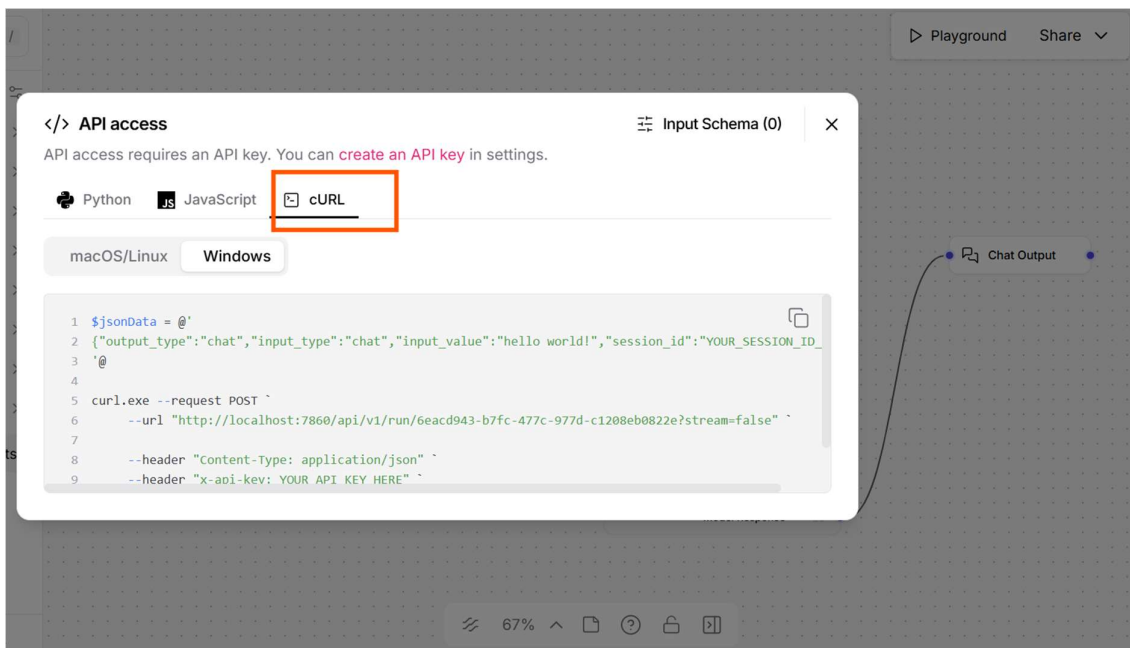




3) Click on **macOS/Linux Option**

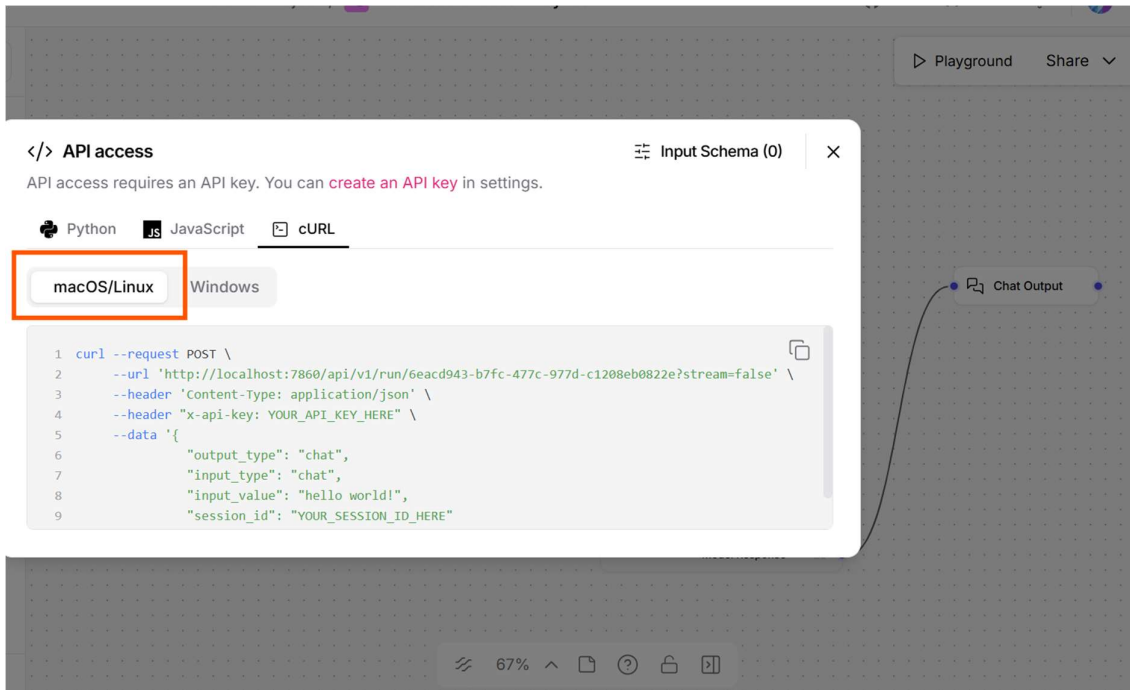

4) Copy the Request

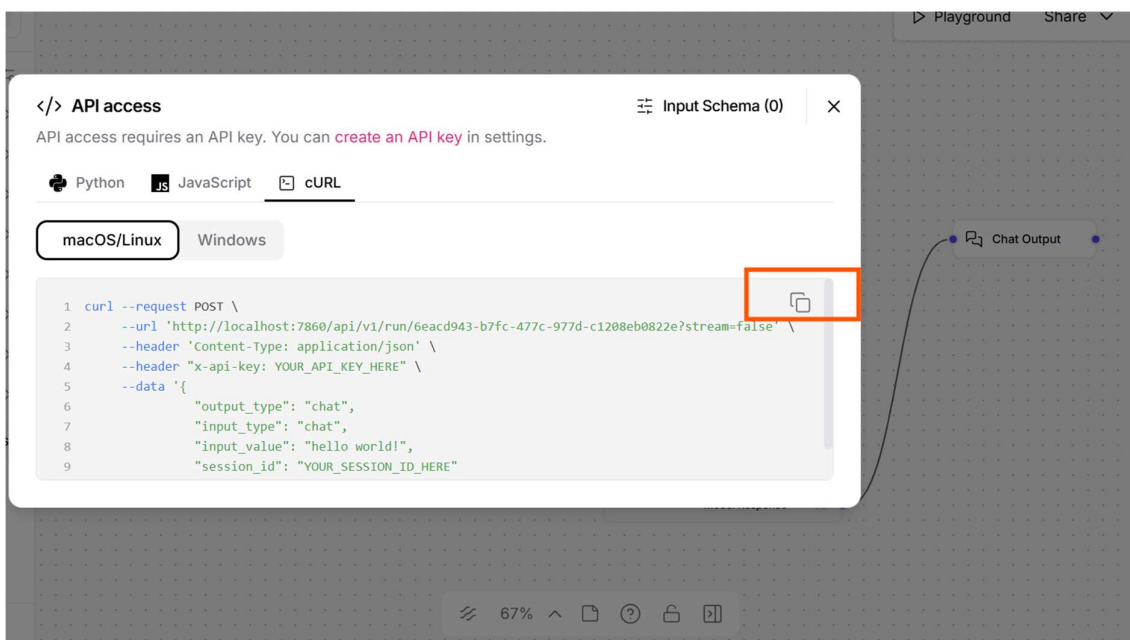

- 5) Open the Postman –**Create a Collection and import the request to collection**
- Click on **Import button** and **paste the request from step 4**
 - Select the collection created and click on **Import into collection button**

Import cURL into a collection

```
1 curl --request POST \  
2   --url 'http://localhost:7860/api/v1/run/  
   6eacd943-b7fc-477c-977d-c1208eb0822e?stream=false' \  
3   --header 'Content-Type: application/json' \  
4   --header "x-api-key: YOUR_API_KEY_HERE" \  
5   --data '{
```

Request name

http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208eb0822e?stream=false

Collection name ⓘ

Langflow-Feb-Phase-2|

Import Without Saving

Import Into Collection

- 6) Remove the session_id from the request body (Non Mandatory Parameter)



7) Remove the **query parameter** From the request and save the request

HTTP ... / http://localhost:7860/api/v1/run/6eacd943-b7fc-47

POST http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e...

Docs Params Auth Headers (10) Body Scripts Settings Cookies

Query Params

☐	Key	Value	Description	...	Bulk Edit
☐	stream	false			
	Key	Value	Description		

8) In the **Headers** ,Add the generated Langflow api key


HTTP ... / http://localhost:7860/api/v1/run/6eacd943-b7fc-47

POST http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e...

Docs Params Auth Headers (10) Body Scripts Settings Cookies

☒	Content-Type	application/json	
☒	Content-Length	<calculated when request is ...	
☒	Host	<calculated when request is ...	
☒	User-Agent	PostmanRuntime/7.51.1	
☒	Accept	*/*	
☒	Accept-Encoding	gzip, deflate, br	
☒	Connection	keep-alive	
☒	Content-Type	application/json	
☒	x-api-key	sk-fqZW9QPDeNsCWTn5l1Z...	
	Key	Value	Description

9) Change the **input value** in the request body and send the request

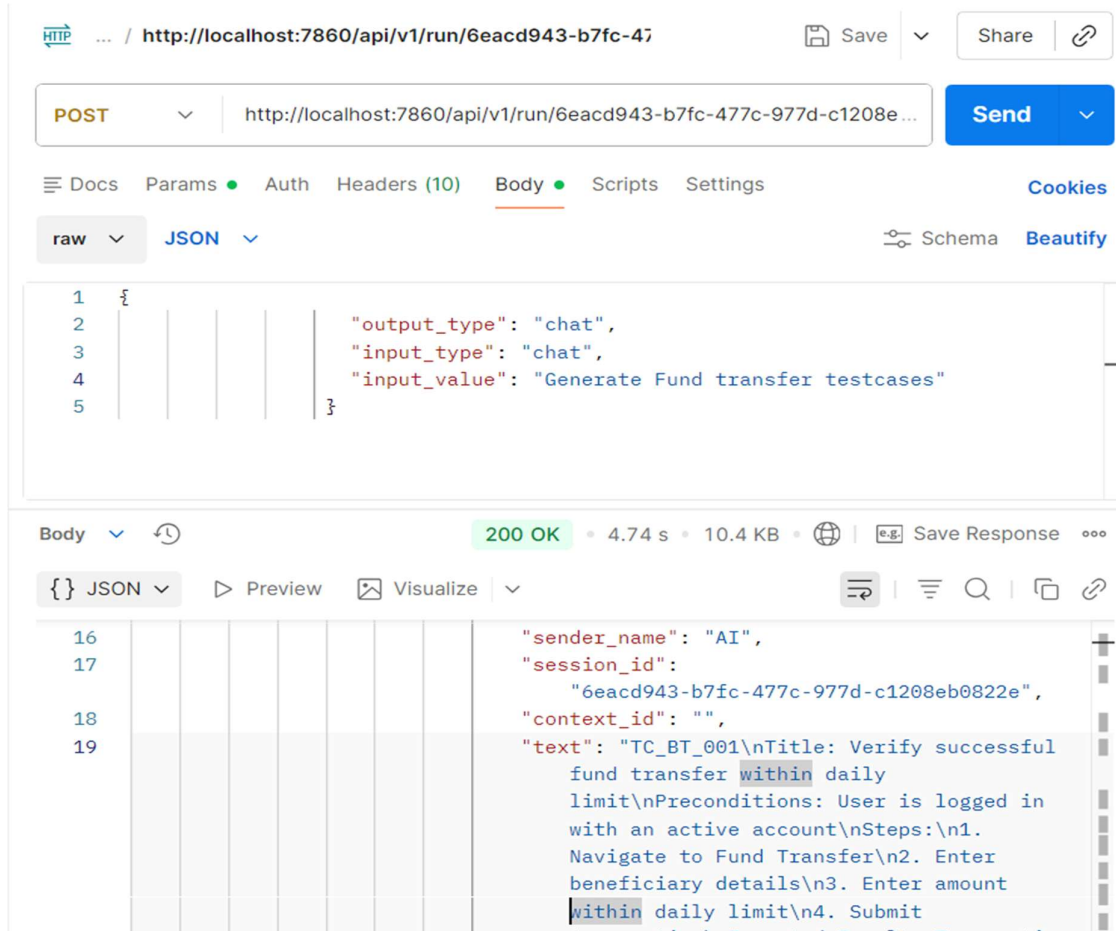

The screenshot displays the Testleaf API client interface. At the top, the URL bar shows the request URL: `http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e...`. The request method is set to **POST**. The request body is shown in JSON format:

```
{
  "output_type": "chat",
  "input_type": "chat",
  "input_value": "Generate Fund transfer testcases"
}
```

The response status is **200 OK**, with a response time of 4.74 s and a size of 10.4 KB. The response body is shown in JSON format:

```
{
  "sender_name": "AI",
  "session_id": "6eacd943-b7fc-477c-977d-c1208eb0822e",
  "context_id": "",
  "text": "TC_BT_001\nTitle: Verify successful fund transfer within daily limit\nPreconditions: User is logged in with an active account\nSteps:\n1. Navigate to Fund Transfer\n2. Enter beneficiary details\n3. Enter amount within daily limit\n4. Submit"
}
```