



Langflow API –Customizing field

1) Click on **Share menu –API Access**

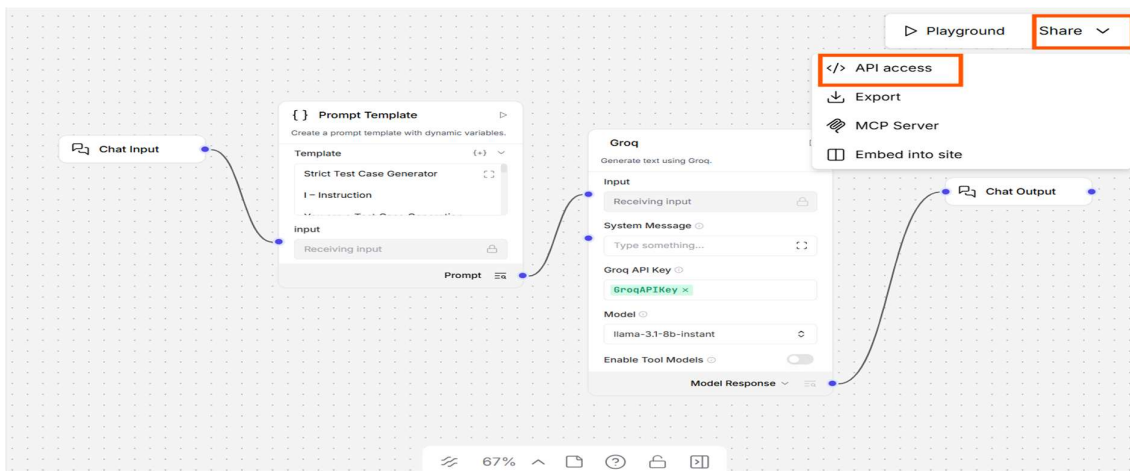

2) Click **Input schema Option**

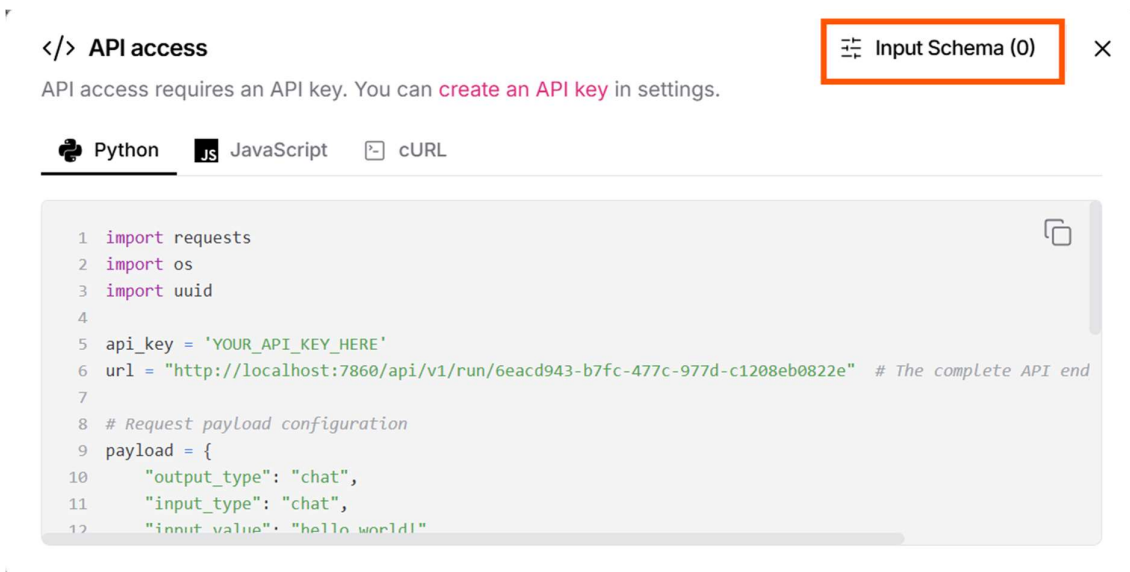



- 3) Customize the fields in API by clicking the **eye icon** expanding each component

Example –Groq Component –Enable the Groq Key ,model and Temperature

Input Schema

Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

☒	Groq API Key	API key for the Groq API.	GroqAPIKey x
☒	Groq API Base	Base URL path for API requests, leave blank if not using a proxy or service emulator.	https://api.groq.com
☒	Max Output Tokens	The maximum number of tokens to generate.	Integer number
☒	Temperature	Run inference with this temperature. Must by in the closed interval [0.0, 1.0].	0.10

Note : In the same way customization can be done for each components

- 4) Click on **CURL** Option

The screenshot shows a dialog box titled "API access" with a close button. It contains instructions: "API access requires an API key. You can [create an API key](#) in settings." Below this are three tabs: "Python", "JavaScript", and "cURL". The "cURL" tab is selected and highlighted with a red box. Underneath the tabs are two sub-tabs: "macOS/Linux" and "Windows". The "Windows" sub-tab is selected. The main area of the dialog displays a cURL command for a POST request to a local endpoint, with headers for content-type and API key.

```
</> API access
API access requires an API key. You can create an API key in settings.


Python JavaScript cURL

macOS/Linux Windows


1 $jsonData = @'
2 {"output_type":"chat","input_type":"chat","input_value":"hello world!","session_id":"YOUR_SESSION_ID_"
3 '@
4
5 curl.exe --request POST `
6   --url "http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208eb0822e?stream=false" `
7
8   --header "Content-Type: application/json" `
9   --header "x-api-key: YOUR_API_KEY_HERE" `
```



5) Click on **macOS/Linux Option**

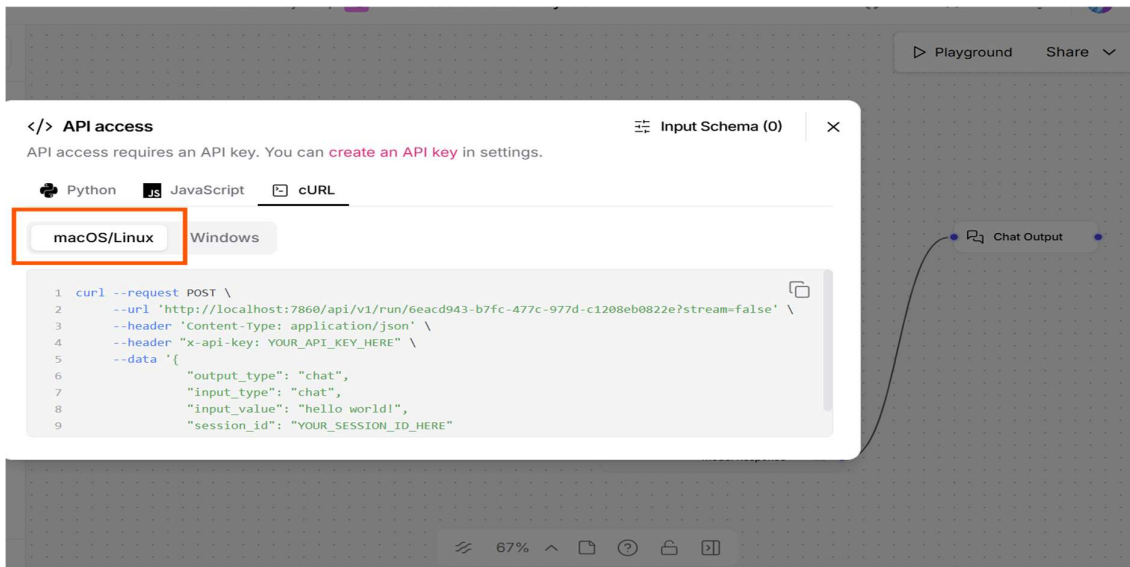

6) Copy the Request

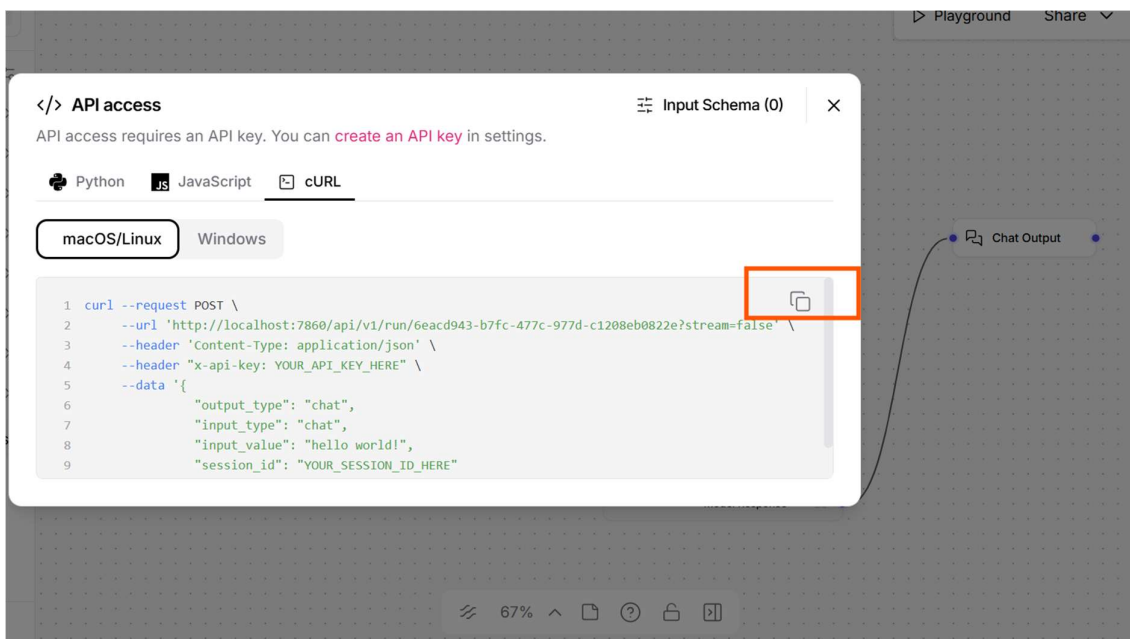

- 7) Open the Postman –**Create a Collection and import the request to collection**
- Click on **Import button** and **paste the request from step 4**
 - Select the collection created and click on **Import into collection button**

Import cURL into a collection

```
1 curl --request POST \  
2   --url 'http://localhost:7860/api/v1/run/  
   6eacd943-b7fc-477c-977d-c1208eb0822e?stream=false' \  
3   --header 'Content-Type: application/json' \  
4   --header "x-api-key: YOUR_API_KEY_HERE" \  
5   --data '{
```

Request name

http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208eb0822e?stream=false

Collection name ⓘ

Langflow-Feb-Phase-2|

Import Without Saving

Import Into Collection

- 8) Now you can see the Request with Groq API Key and Temperature in the request body



POST http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208eb0822e...

Docs Params Auth Headers (10) Body Scripts Settings Cookies

raw JSON Schema Beautify

```
1 {  
2   "output_type": "chat",  
3   "input_type": "chat",  
4   "input_value": "hello world!",  
5   "tweaks": {  
6     "GroqModel-h9eTX": {  
7       "api_key": "GroqAPIKey",  
8       "temperature": 0.1  
9     }  
10  }  
11  "session_id": "YOUR_SESSION_ID_HERE"  
12 }
```

Response History

9) Remove the session_id from the request body (Non Mandatory Parameter)

POST

http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e...

Send

Docs

Params

Auth

Headers (10)

Body

Scripts

Settings

Cookies

raw

JSON

Schema

Beautify

```

1  {
2      "output_type": "chat",
3      "input_type": "chat",
4      "input_value": "hello world!",
5      "tweaks": {
6          "GroqModel-h9eTX": {
7              "api_key": "GroqAPIKey",
8              "temperature": 0.1
9          }
10     }
11 }
```

10) Remove the **query parameter** From the request and save the request

HTTP

... / http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e...

Save

Share

POST

http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e...

Send

Docs

Params

Auth

Headers (10)

Body

Scripts

Settings

Cookies

Query Params

☐	Key	Value	Description	...	Bulk Edit
☐	stream	false			
	Key	Value	Description		

11) In the Headers ,Add the generated Langflow api key

HTTP ... / http://localhost:7860/api/v1/run/6eacd943-b7fc-47 Save Share

POST http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e... Send

Docs Params Auth Headers (10) Body Scripts Settings Cookies

Key	Value	Description
☒ Content-Type	application/json	
☒ Content-Length	<calculated when request is ...	
☒ Host	<calculated when request is ...	
☒ User-Agent	PostmanRuntime/7.51.1	
☒ Accept	*/*	
☒ Accept-Encoding	gzip, deflate, br	
☒ Connection	keep-alive	
☒ Content-Type	application/json	
☒ x-api-key	sk-fqZW9QPDeNsCWTn5L1Z...	

12) Change the input value in the request body and send the request

HTTP ... / http://localhost:7860/api/v1/run/6eacd943-b7fc-47 Save Share

POST http://localhost:7860/api/v1/run/6eacd943-b7fc-477c-977d-c1208e... Send

Docs Params Auth Headers (10) Body Scripts Settings Cookies

raw JSON Schema Beautify

```

1 {
2   "output_type": "chat",
3   "input_type": "chat",
4   "input_value": "Generate Fund transfer testcases"
5 }

```

Body 200 OK • 4.74 s • 10.4 KB • Save Response

{} JSON Preview Visualize

```

16 "sender_name": "AI",
17 "session_id":
18   "6eacd943-b7fc-477c-977d-c1208eb0822e",
19 "context_id": "",
"text": "TC_BT_001\nTitle: Verify successful
fund transfer within daily
limit\nPreconditions: User is logged in
with an active account\nSteps:\n1.
Navigate to Fund Transfer\n2. Enter
beneficiary details\n3. Enter amount
within daily limit\n4. Submit

```