




Santiago Godoy Poce
José Correro Barquín

BOT



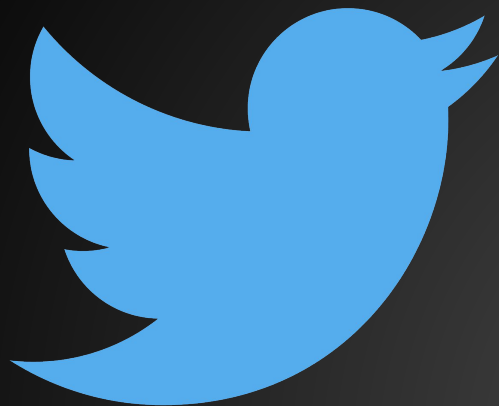



@NBAMule



Available Feeds:

NBA ▾

2017-2018 Regular ▾

[Cumulative Player Stats](#)

[Full Game Schedule](#)

[Daily Game Schedule](#)

[Daily Player Stats](#)

[Game BoxScore](#)

[Game Play-by-Play](#)

[Scoreboard](#)

[Player Game Logs](#)

[Team Game Logs](#)

[Roster Players](#)

[Game Starting Lineup](#)

[Active Players](#)

[Overall Team Standings](#)

[Conference Team Standings](#)

PULL URL Syntax

Response

Code Samples

Issue a HTTPS GET request to:

```
https://api.mysportsfeeds.com/v1.2/pull/nba/{season-name}/cumulative_player_stats.{format}
```

with optional parameters:

```
team={list-of-teams} (filter teams)
player={list-of-players} (filter players)
position={list-of-positions} (filter player positions)
country={list-of-countries} (filter player countries of birth)
playerstats={list-of-player-stats} (filter player stats)
sort={sort-specifier} (sort the feed's content)
offset={offset-specifier} (filter results starting at the given offset)
limit={limit-specifier} (limit the maximum # of results)
force={force-if-not-modified} (force content)
```

where:


Parameter	Description
{season-name}	a value obtained by concatenating




Flow



Flow

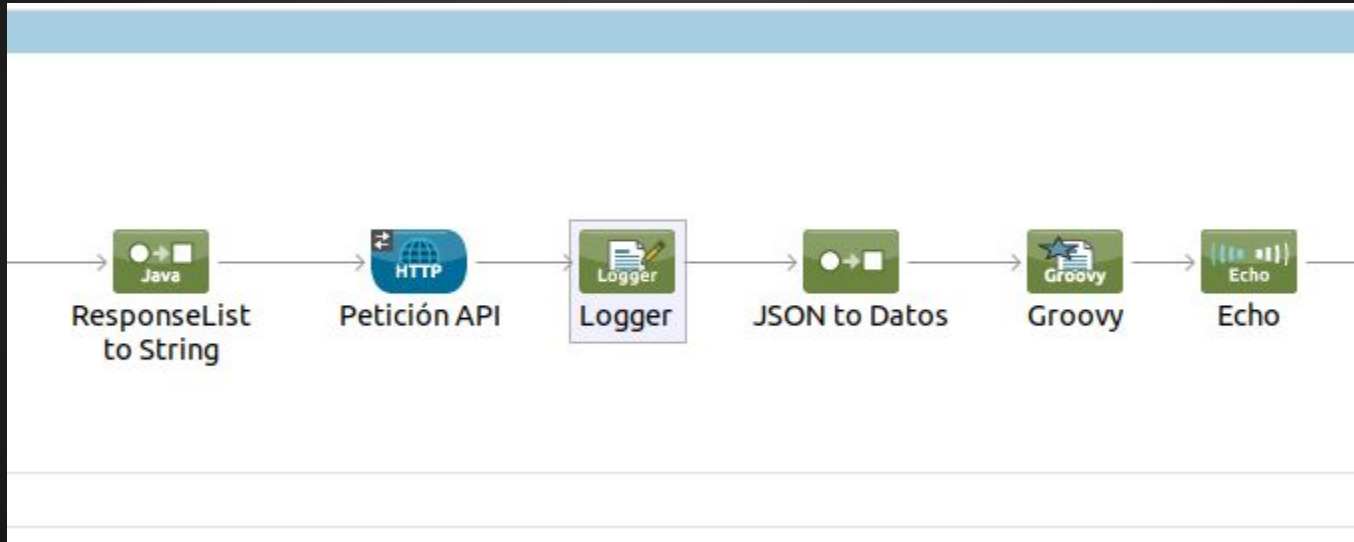

Flow

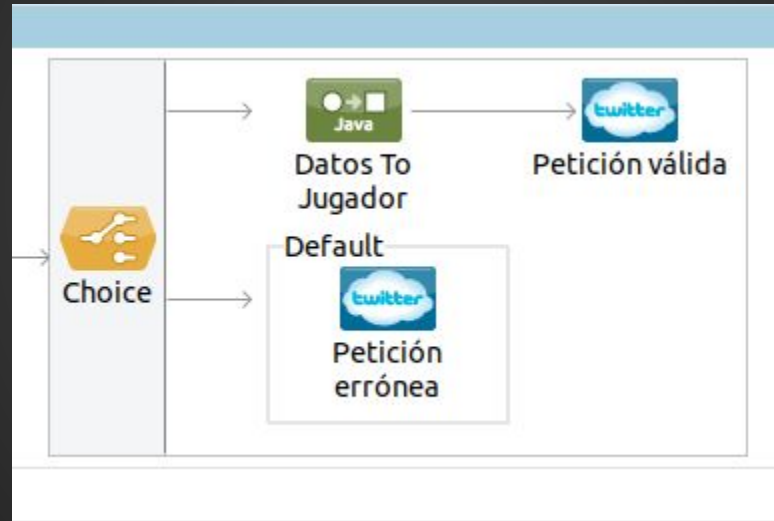



Basic Settings

Connector Configuration: Twitter__Configuration

Operation: Get mentions timeline

Pagination

Page: 1

Count: 1

Since Id: -1

The 'Basic Settings' section shows the 'Connector Configuration' set to 'Twitter__Configuration' and the 'Operation' set to 'Get mentions timeline'. The 'Pagination' section shows 'Page' set to 1, 'Count' set to 1, and 'Since Id' set to -1. A red arrow points from the 'Recibir menciones' step in the flowchart above to the 'Basic Settings' section.



Display Name: Byte Array to ResponseList

Transformer Settings

Return Class: twitter4j.ResponseList

This block shows the configuration for the 'Byte Array to ResponseList' transformer. The 'Display Name' field is set to 'Byte Array to ResponseList'. Under the 'Transformer Settings' section, the 'Return Class' is set to 'twitter4j.ResponseList'. A red arrow points from the circled transformer in the flowchart above to this configuration panel.







Generic

Id Expression:

Value Expression:

☐ Throw On Unaccepted

Store Prefix:

Object Store:    




Settings

Operation: ☒ Set Variable ☐ Remove Variable

Name:

Value:

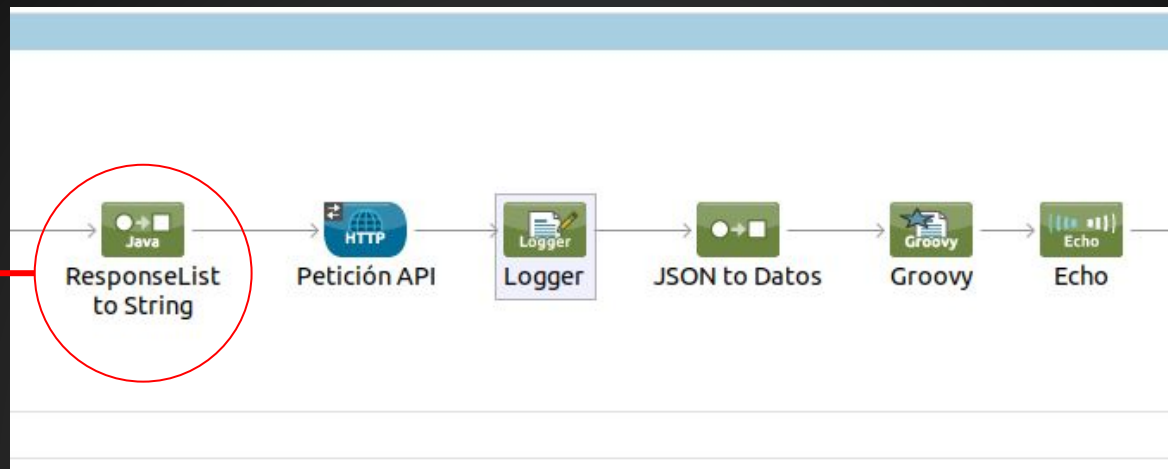

Return Class:



☐ Ignore Bad Input


Encoding:
▼

Mime Type Attributes

MIME Type:
▼


Transformer Settings

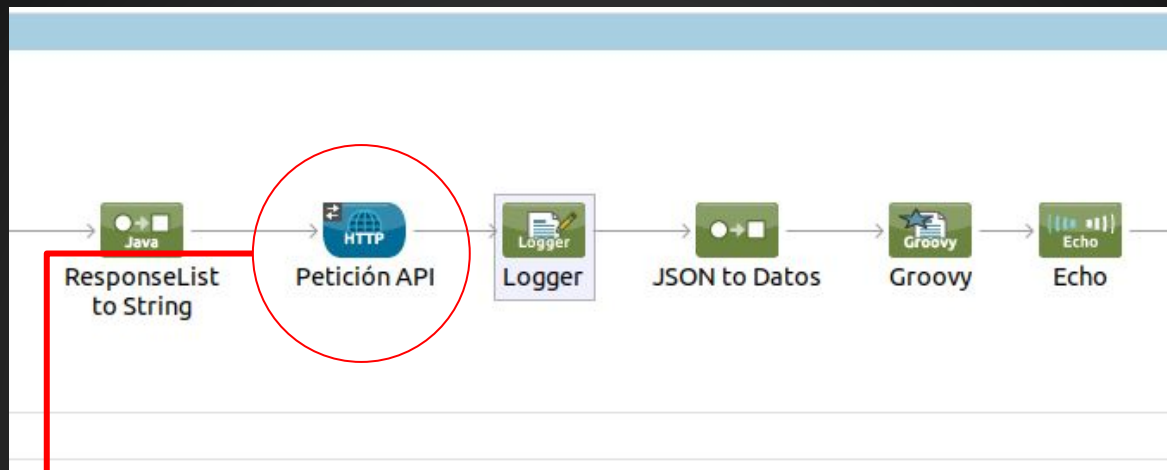

Transformer Class:  




Path:

Method:

Parameters 

query-param	Name: <input type="text" value="player"/>	Value: <input type="text" value="#[payload]"/>	
query-param	Name: <input type="text" value="playerstats"/>	Value: <input type="text" value="Reb/g,pts/g,ast/g,"/>	

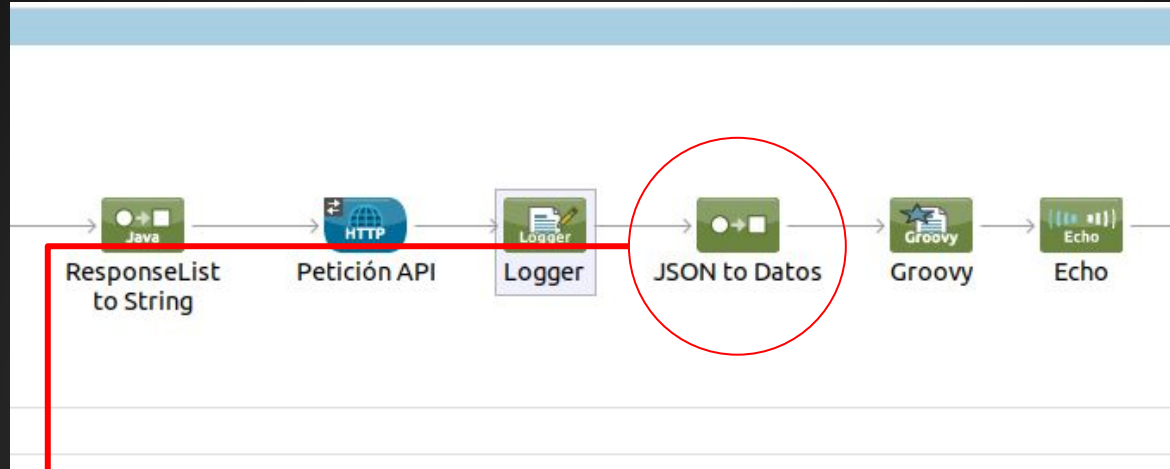


Display Name:

General

Return Class:


☐ Known Return Type

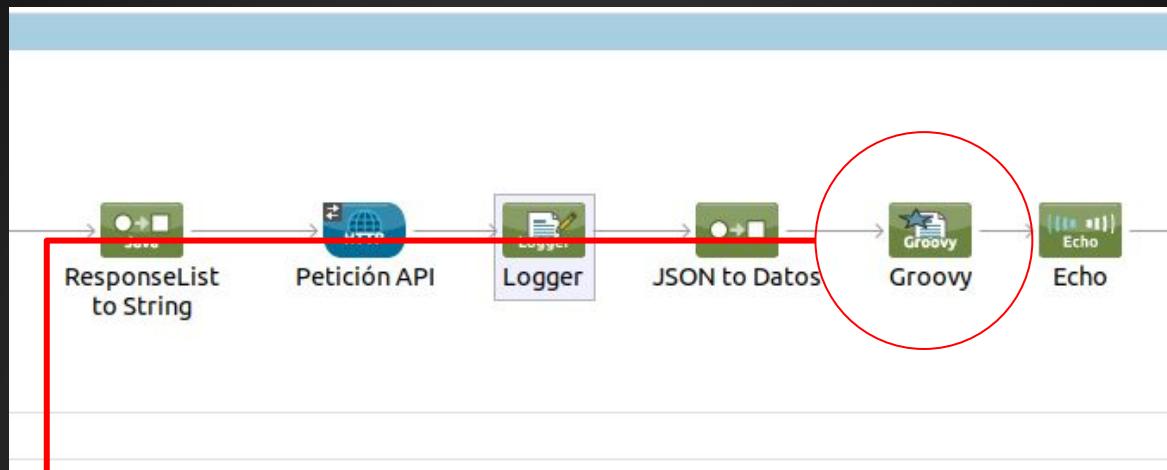

Script

Script Text:

```
if(payload.getCumulativeplayerstats().getPlayerstatsentry())  
    return payload;  
else  
    return null;
```

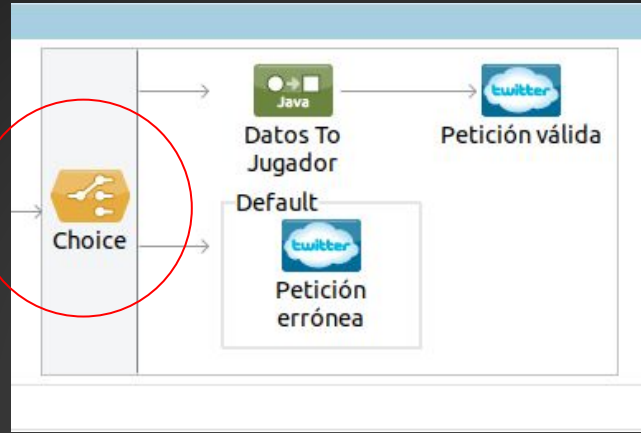




Display Name:

Business Events

Enabling this option will activate event tracking feature for this element and its children.

☐ Enable default events tracking


When	Route Message to
<code>#[!(payload == null)]</code>	 Datos To Jugador
Default	 Petición errónea

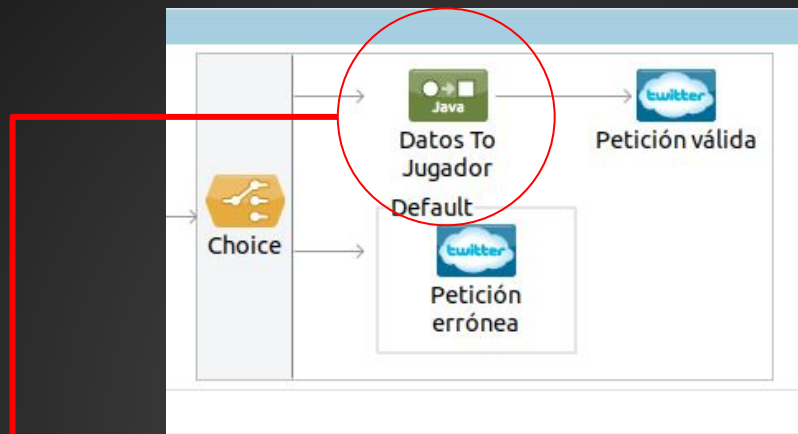



Display Name:

General

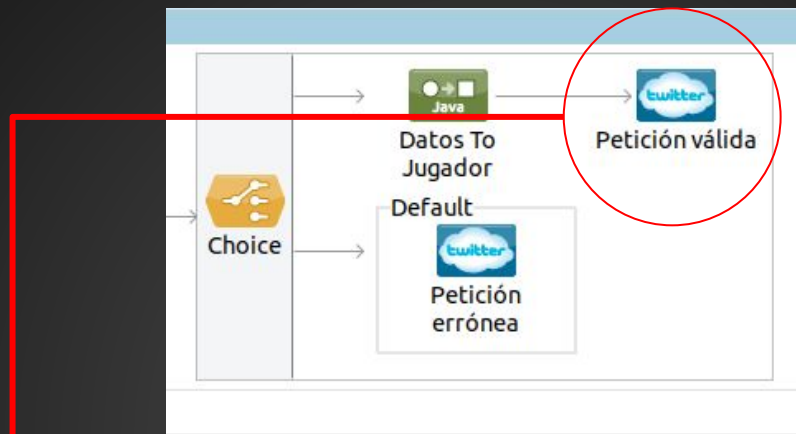Return Class:



Basic Settings


Connector Configuration:  

Operation:



General

Status:

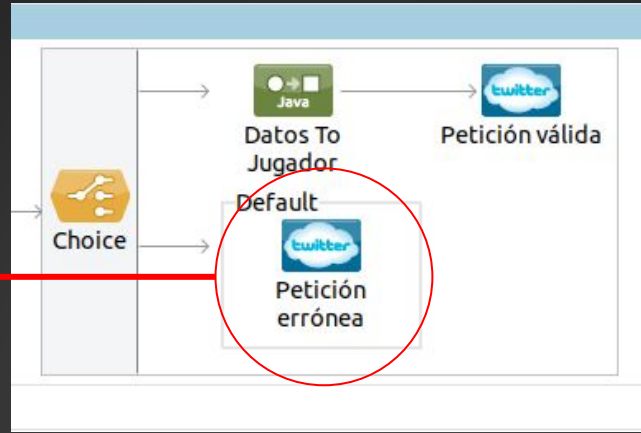In Reply To:



Basic Settings

Connector Configuration:  

Operation:

General

Status:


In Reply To:



Problemas




Autenticación en la API

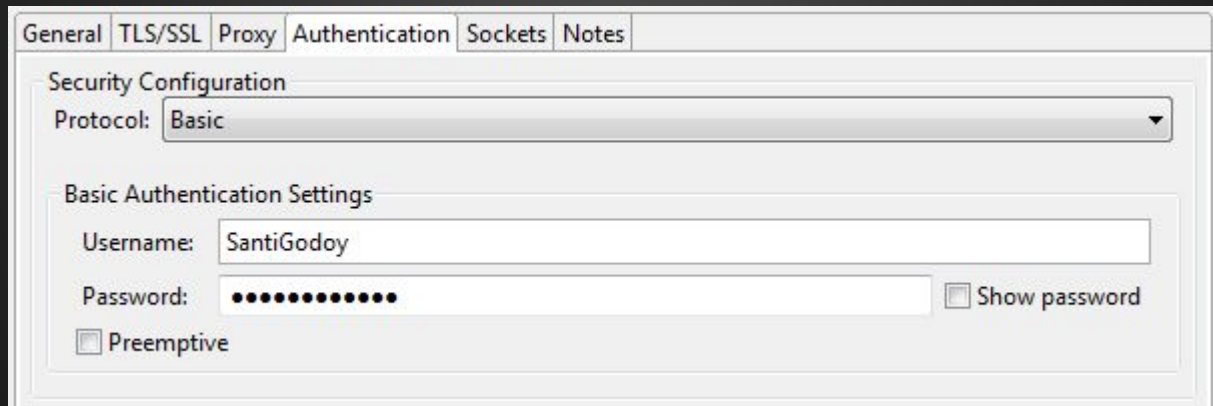

The image shows a screenshot of a software configuration window with the 'Authentication' tab selected. The window has several tabs: 'General', 'TLS/SSL', 'Proxy', 'Authentication', 'Sockets', and 'Notes'. The 'Authentication' tab is active, displaying 'Security Configuration' options. The 'Protocol' is set to 'Basic'. Under 'Basic Authentication Settings', the 'Username' is 'SantiGodoy' and the 'Password' is masked with dots. There are checkboxes for 'Show password' and 'Preemptive'.

General	TLS/SSL	Proxy	Authentication	Sockets	Notes
Security Configuration					
Protocol: Basic					
Basic Authentication Settings					
Username: SantiGodoy					
Password: <input type="checkbox"/> Show password					
<input type="checkbox"/> Preemptive					

Estructura compleja

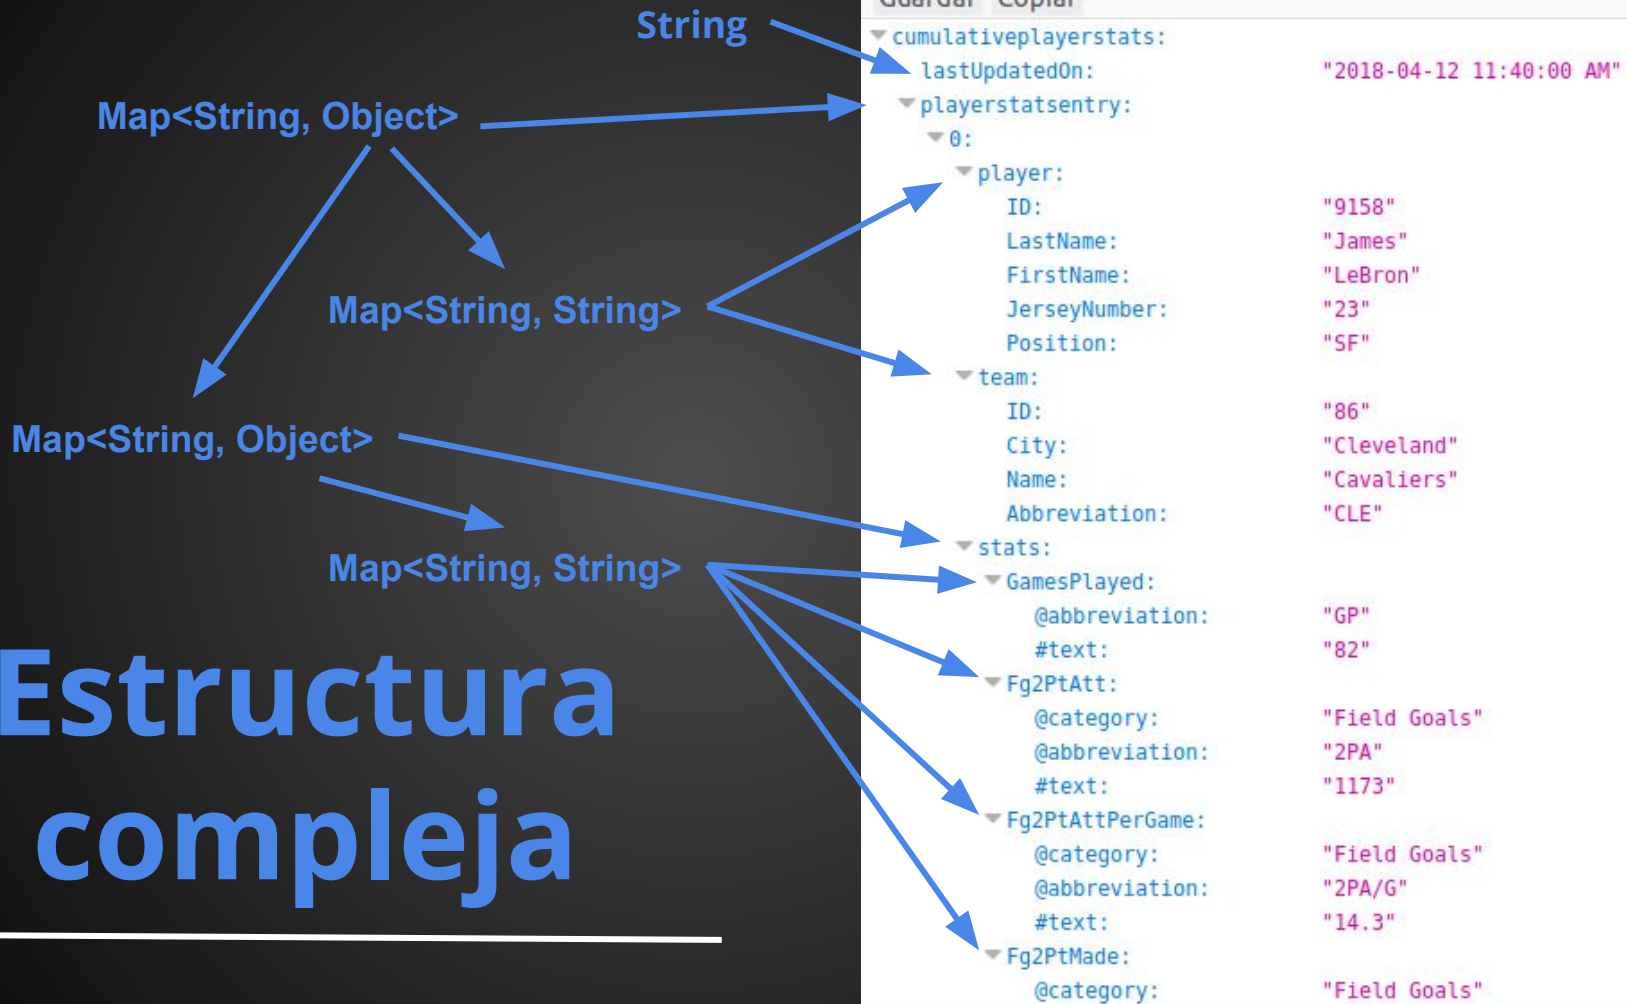

Datos actuales privados

Need a Discount?

In addition to our industry-best prices for commercial business

Educational or Developers

If you're working on a cool app concept, performing research, or belong to an educational organization

100% FREE!

([Contact us](#) for your full discount)

Contactamos con el encargado de la API para acceso gratuito a datos en tiempo real

+ Aplicaciones

- Url fácilmente modificable para consultas relacionadas (equipos, partidos, etc.)
- Calcular probabilidades de victoria o derrota a partir de las estadísticas de partidos