

Activitat 7.1 - Instal·lació i configuració rsyslog

Nom	1r Llinatge	2n Llinatge
Santiago	García	Santiago
Assignatura	Curs	Grau
SI	SMX	2
1a Data d'entrega	08/02/2023	
2a Data d'entrega	DD/MM/AAAA	



Instal·lació i configuració rsyslog

L'objectiu de la pràctica és poder instal·lar un HIDS senzill per monitoritzar els accessos als servidors de la nostra xarxa. Per això farem servir el rsyslog, que ens permet una monitorització molt senzilla però eficaç i moltes voltes no necessitem més.

Instruccions


1. Instal·lar rsyslog a un servidor d'ubuntu o debian (que anomenaré srv1)
2. Instal·lar rsyslog a un servidor d'ubuntu o debian (que anomenaré srv2)
3. Configurar el fitxer /etc/rsyslog.conf del srv1 per a què monitoriitzi el log de l'ssh del srv2

Format d'entrega


- Nom del fitxer: SI-ACT-7.1.LlinatgeNom
- Extensió vàilda: Google Docs
- Caire: Obligatòria
- Entrega: Individual

Respostes

1- Comprobación de que ambos equipos se pueden “ver”.

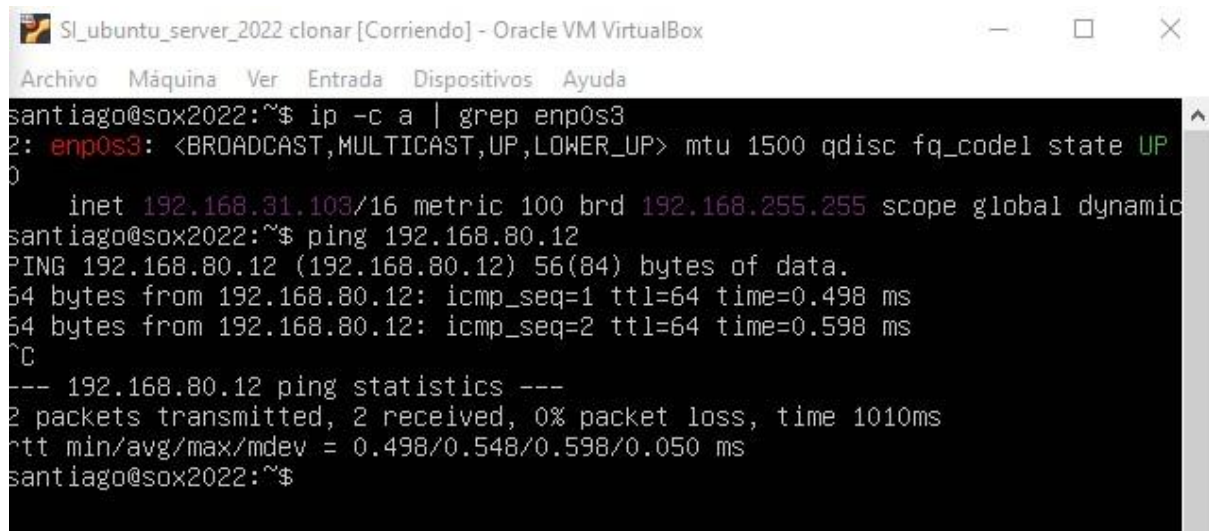


```
SI_ubuntu_server_2022 clonar [Corriendo] - Oracle VM VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda
santiago@sox2022:~$ ip -c a | grep enp0s3
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP
    inet 192.168.31.103/16 metric 100 brd 192.168.255.255 scope global dynamic
santiago@sox2022:~$ ping 192.168.80.12
PING 192.168.80.12 (192.168.80.12) 56(84) bytes of data.
64 bytes from 192.168.80.12: icmp_seq=1 ttl=64 time=0.498 ms
64 bytes from 192.168.80.12: icmp_seq=2 ttl=64 time=0.598 ms
^C
--- 192.168.80.12 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1010ms
rtt min/avg/max/mdev = 0.498/0.548/0.598/0.050 ms
santiago@sox2022:~$
```

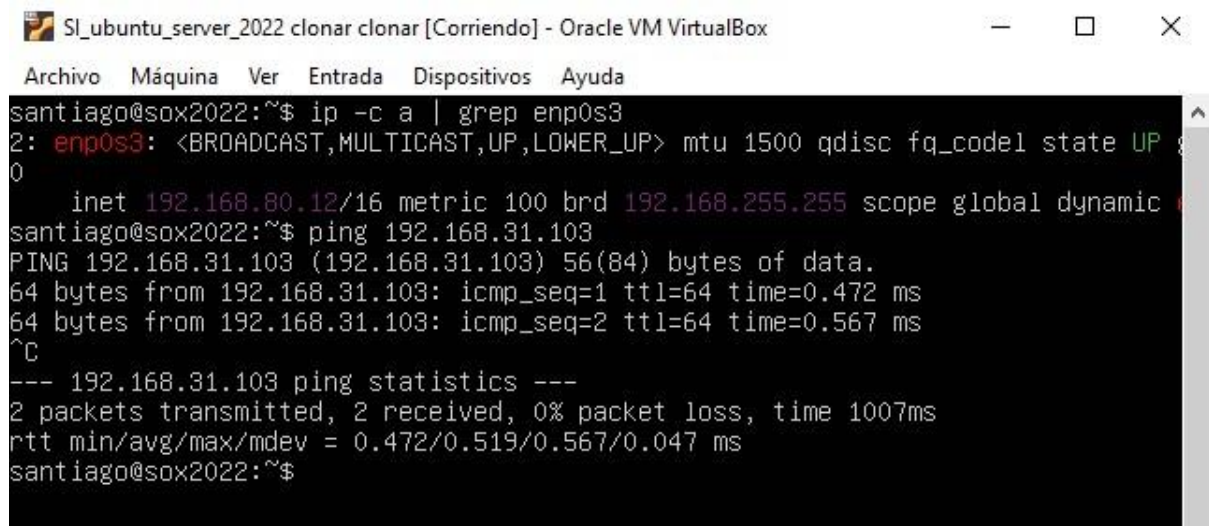

```
SI_ubuntu_server_2022 clonar clonar [Corriendo] - Oracle VM VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda
santiago@sox2022:~$ ip -c a | grep enp0s3
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP
    inet 192.168.80.12/16 metric 100 brd 192.168.255.255 scope global dynamic
santiago@sox2022:~$ ping 192.168.31.103
PING 192.168.31.103 (192.168.31.103) 56(84) bytes of data.
64 bytes from 192.168.31.103: icmp_seq=1 ttl=64 time=0.472 ms
64 bytes from 192.168.31.103: icmp_seq=2 ttl=64 time=0.567 ms
^C
--- 192.168.31.103 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1007ms
rtt min/avg/max/mdev = 0.472/0.519/0.567/0.047 ms
santiago@sox2022:~$
```

2- Configuración del servidor:

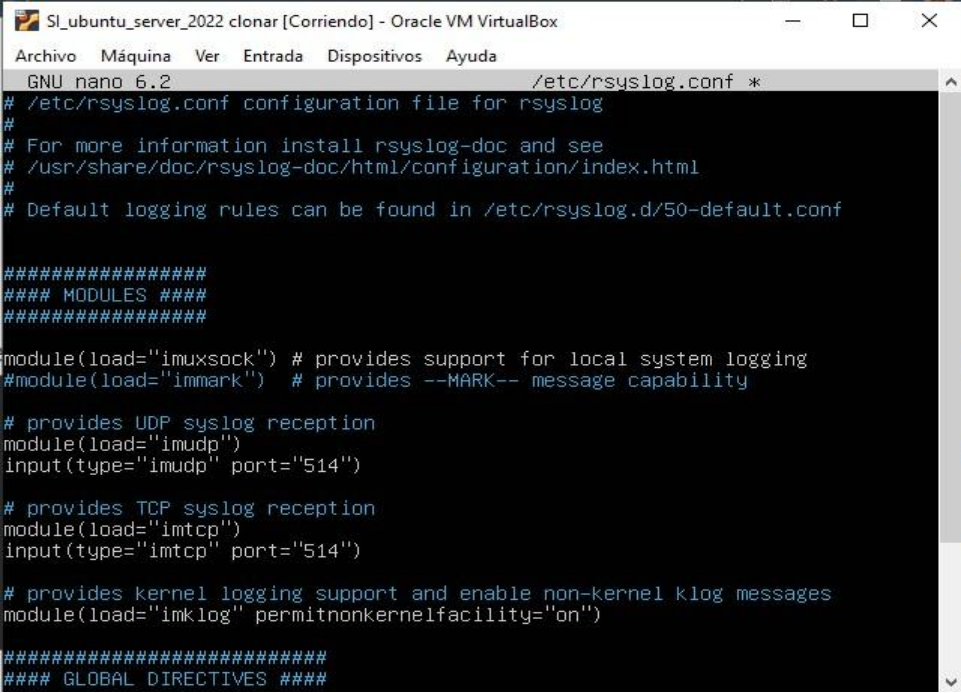

```
Sl_ubuntu_server_2022 clonar [Corriendo] - Oracle VM VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda
GNU nano 6.2 /etc/rsyslog.conf *
# /etc/rsyslog.conf configuration file for rsyslog
#
# For more information install rsyslog-doc and see
# /usr/share/doc/rsyslog-doc/html/configuration/index.html
#
# Default logging rules can be found in /etc/rsyslog.d/50-default.conf

#####
#### MODULES ####
#####

module(load="imuxsock") # provides support for local system logging
#module(load="imark") # provides --MARK-- message capability


# provides UDP syslog reception
module(load="imudp")
input(type="imudp" port="514")

# provides TCP syslog reception
module(load="imtcp")
input(type="imtcp" port="514")

# provides kernel logging support and enable non-kernel klog messages
module(load="imklog" permitnonkernelfacility="on")

#####
#### GLOBAL DIRECTIVES ####
```

Descomentamos las líneas que definen los puertos de conexión (514 udp-tcp)

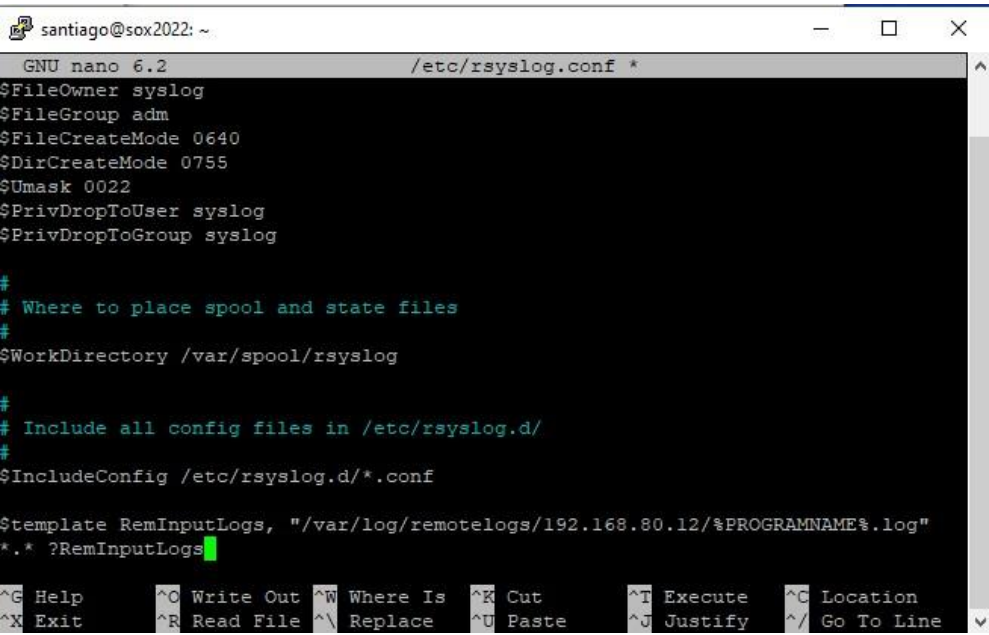

```
santiago@sox2022: ~
GNU nano 6.2 /etc/rsyslog.conf *
$FileOwner syslog
$FileGroup adm
$FileCreateMode 0640
$DirCreateMode 0755
$Umask 0022
$PrivDropToUser syslog
$PrivDropToGroup syslog

#
# Where to place spool and state files
#
$WorkDirectory /var/spool/rsyslog

#
# Include all config files in /etc/rsyslog.d/
#
$IncludeConfig /etc/rsyslog.d/*.conf

$template RemInputLogs, "/var/log/remotelogs/192.168.80.12/%PROGRAMNAME%.log"
*.? ?RemInputLogs

^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```

Añadimos al final del archivo de configuración, la IP del servidor del que vamos a obtener los .log

Reiniciamos el servicio: **sudo systemctl restart rsyslog**

3 - Verificamos que el servicio funciona correctamente.

```
santiago@sox2022: ~  
● rsyslog.service - System Logging Service  
   Loaded: loaded (/lib/systemd/system/rsyslog.service; enabled; vendor prese  
   Active: active (running) since Wed 2023-02-08 18:34:52 UTC; 6s ago  
TriggeredBy: ● syslog.socket  
   Docs: man:rsyslogd(8)  
         man:rsyslog.conf(5)  
         https://www.rsyslog.com/doc/  
 Main PID: 2752 (rsyslogd)  
    Tasks: 10 (limit: 2238)  
  Memory: 1.5M  
     CPU: 11ms  
   CGroup: /system.slice/rsyslog.service  
           └─2752 /usr/sbin/rsyslogd -n -iNONE  
  
feb 08 18:34:52 sox2022 systemd[1]: Stopping System Logging Service...  
feb 08 18:34:52 sox2022 systemd[1]: rsyslog.service: Deactivated successfully.  
feb 08 18:34:52 sox2022 systemd[1]: Stopped System Logging Service.  
feb 08 18:34:52 sox2022 systemd[1]: Starting System Logging Service...  
feb 08 18:34:52 sox2022 systemd[1]: Started System Logging Service.  
feb 08 18:34:52 sox2022 rsyslogd[2752]: imuxsock: Acquired UNIX socket '/run/sy  
feb 08 18:34:52 sox2022 rsyslogd[2752]: rsyslogd's groupid changed to 113  
feb 08 18:34:52 sox2022 rsyslogd[2752]: rsyslogd's userid changed to 107  
feb 08 18:34:52 sox2022 rsyslogd[2752]: [origin software="rsyslogd" swVersion=">  
lines 1-23
```

4 - Configuración del servidor objetivo

```
santiago@sox2022: /etc  
GNU nano 6.2 /etc/rsyslog.conf *  
$PrivDropToGroup syslog  
  
#  
# Where to place spool and state files  
#  
$WorkDirectory /var/spool/rsyslog  
  
#  
# Include all config files in /etc/rsyslog.d/  
#  
$IncludeConfig /etc/rsyslog.d/*.conf  
  
$PreserveFQDN on  
*. * @192.168.31.103:514  
$ActionQueueFileName queue  
$ActionQueueMaxDiskSpace 1g  
$ActionQueueSaveOnShutdown on  
$ActionQueueType LinkedList  
$ActionResumeRetryCount -1  
  
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location  
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify   ^_ Go To Line
```

Añadimos estas líneas en el final del archivo de configuración de 'rsyslog.conf' introduciendo la IP del servidor que ha de recibir la copia de los logs y el puerto que se definió previamente.

5- Visualizamos los .log recuperados del servidor objetivo.

```
santiago@sox2022: /var/log/remotelogs/192.168.80.12
santiago@sox2022:/var/log/remotelogs/192.168.80.12$ ls -l
total 32
-rw-r----- 1 syslog adm 2764 feb  8 18:24 '%PROGRAMNAME%.log'
-rw-r----- 1 syslog adm 1103 feb  8 18:40 rsyslogd.log
-rw-r----- 1 syslog adm  308 feb  8 18:41 sshd.log
-rw-r----- 1 syslog adm  802 feb  8 18:40 sudo.log
-rw-r----- 1 syslog adm 4976 feb  8 18:41 systemd.log
-rw-r----- 1 syslog adm  239 feb  8 18:41 systemd-logind.log
-rw-r----- 1 syslog adm  128 feb  8 18:40 systemd-resolved.log
santiago@sox2022:/var/log/remotelogs/192.168.80.12$ cat sshd.log
Feb  8 18:41:19 sox2022 sshd[2463]: pam_unix(sshd:session): session closed for user santiago
Feb  8 18:41:41 sox2022 sshd[2651]: Accepted password for santiago from 192.168.31.90 port 1125 ssh2
Feb  8 18:41:41 sox2022 sshd[2651]: pam_unix(sshd:session): session opened for user santiago(uid=1000) by (uid=0)
santiago@sox2022:/var/log/remotelogs/192.168.80.12$
```

Podemos acceder a todos los logs, en una carpeta especifica, con el nombre de la IP al que pertenecen. Para visualizar su contenido solo tenemos que realizar un 'cat' .

[08-02-23]

Fonts emprades
