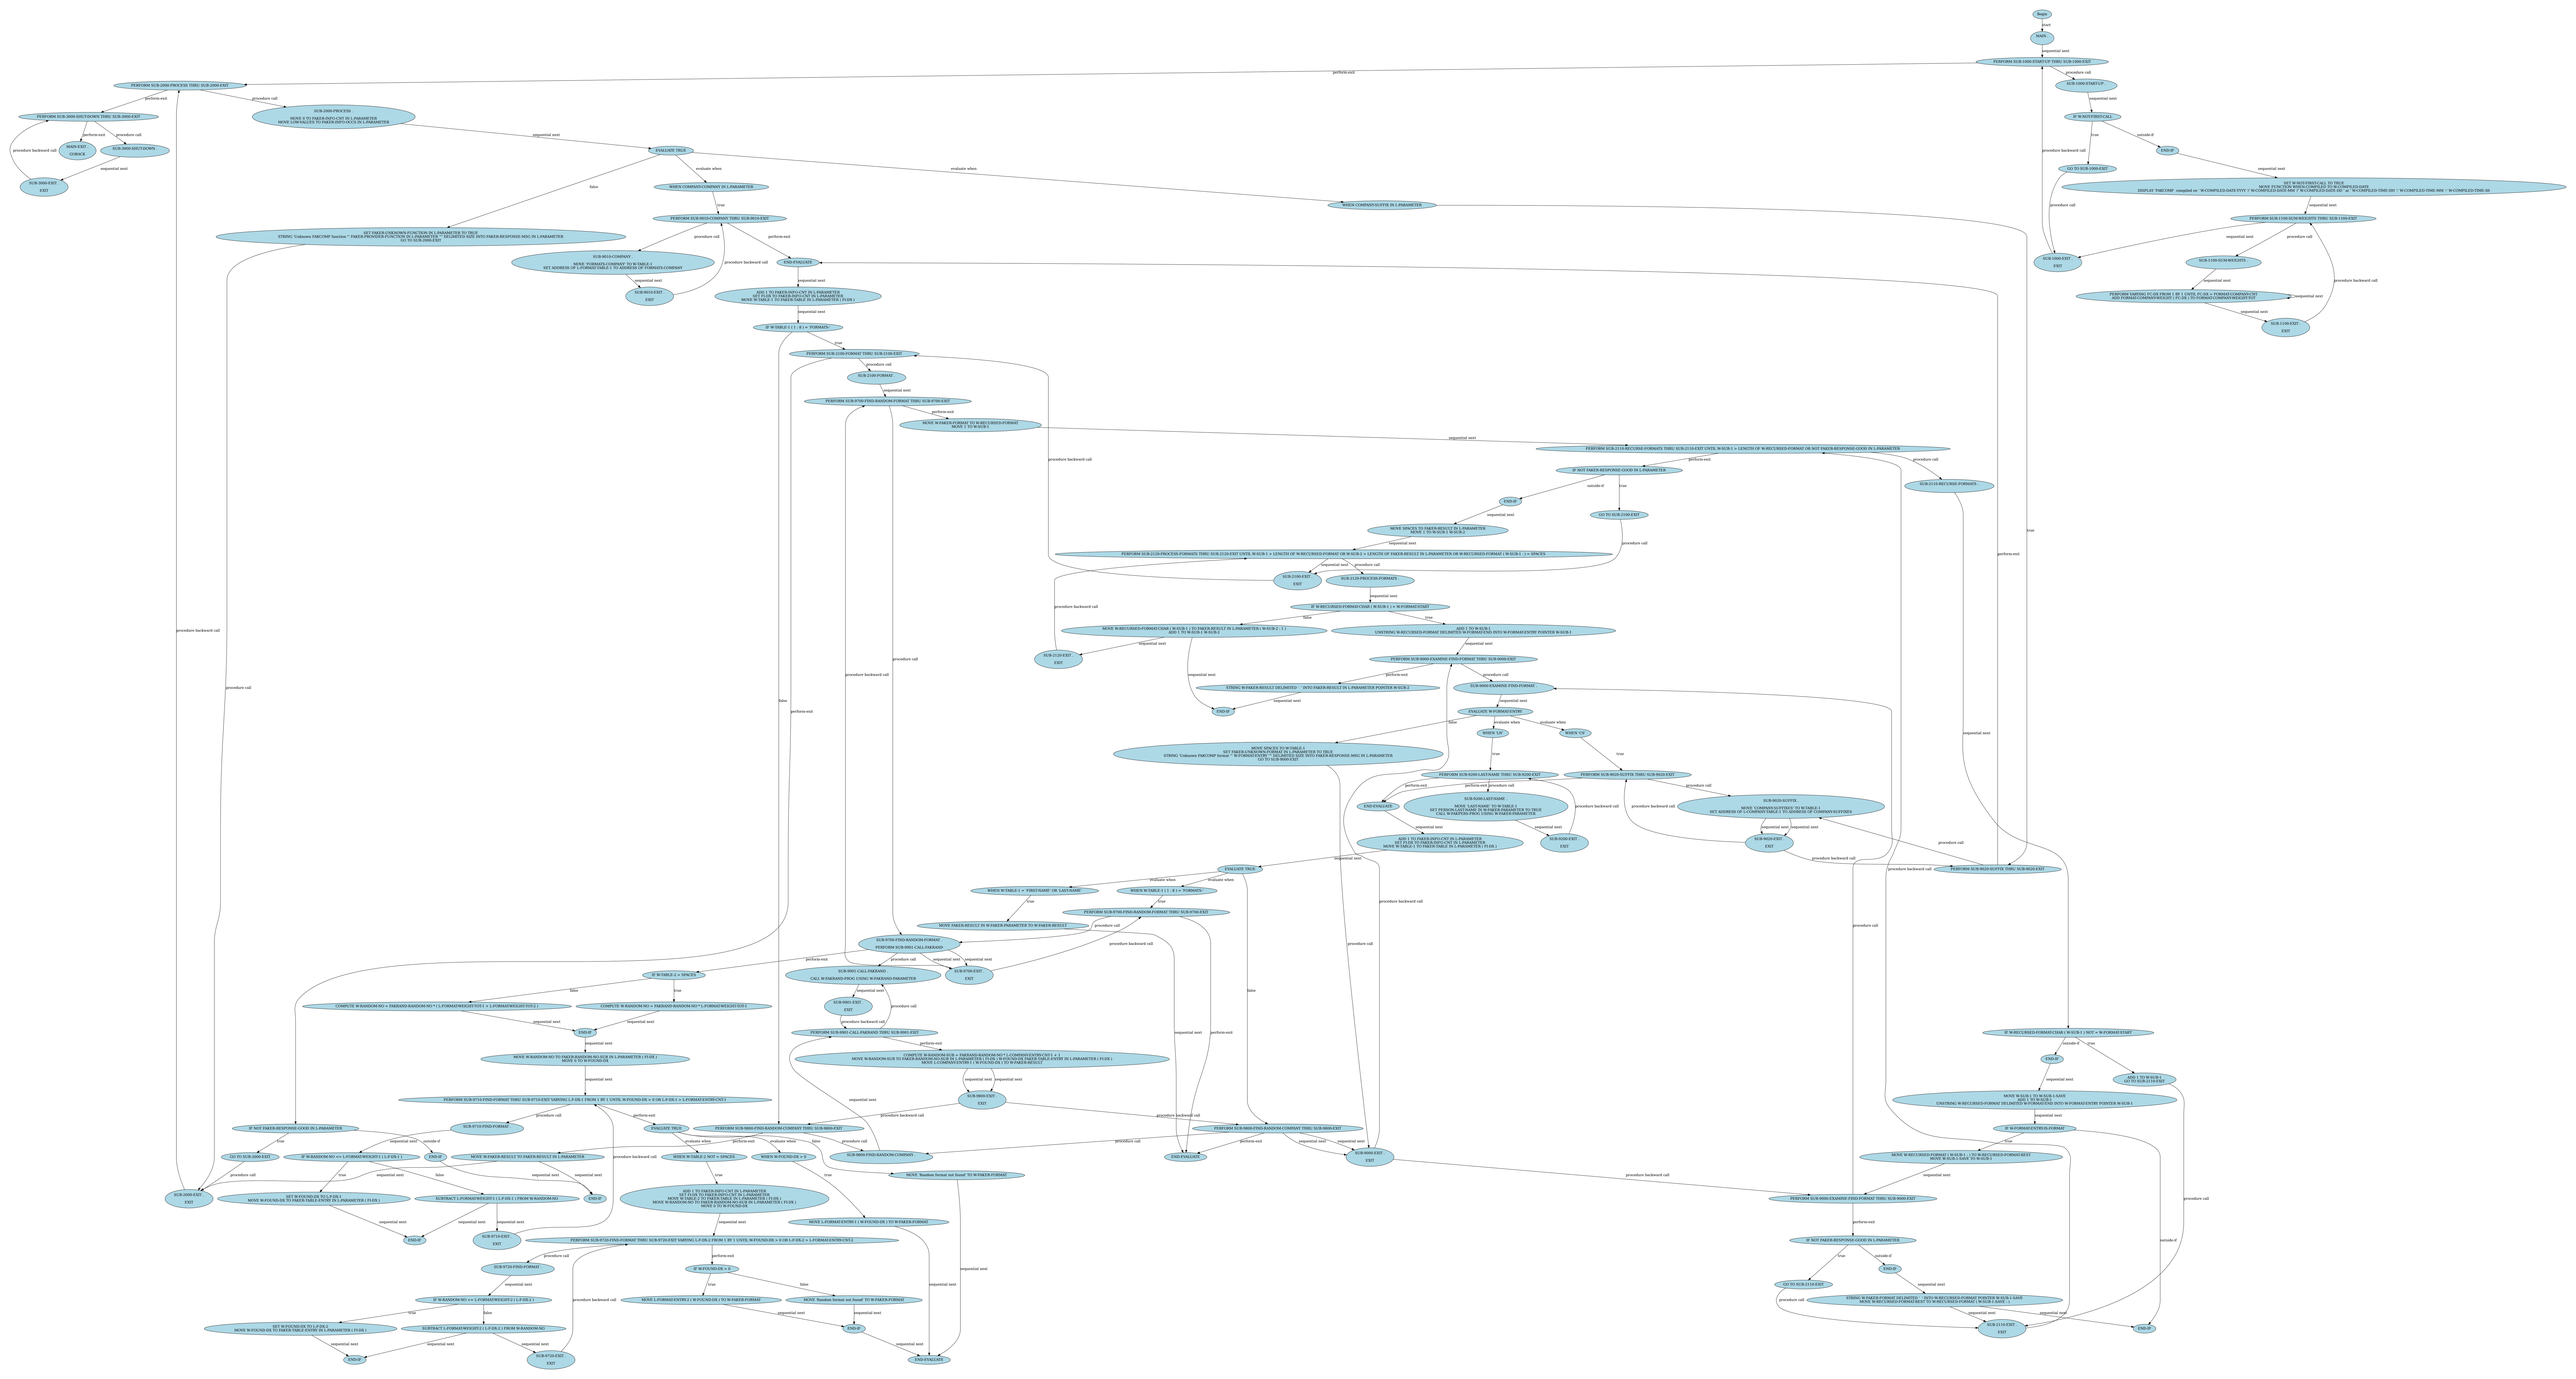
Begin
START
sequential next
PERFORM SUB-1000-STARTUP THRU SUB-1000-EXIT
procedure call
SUB-1000-STARTUP
sequential next
IF W-NOT-FIRST-CALL
true
outside-if
END-IF
GO TO SUB-1000-EXIT
SET W-NOT-FIRST-CALL TO TRUE
MOVE FUNCTION WHEN-COMPILED TO W-COMPILED-DATE
DISPLAY 'FAKCOMP' compiled on ' W-COMPILED-DATE-YYYY '/' W-COMPILED-DATE-MM '/' W-COMPILED-DATE-DD ' at ' W-COMPILED-TIME-HH ':' W-COMPILED-TIME-MN ':' W-COMPILED-TIME-SS
PERFORM SUB-1100-SUM-WORDS THRU SUB-1100-EXIT
SUB-1100-SUM-WORDS
PERFORM VARYING IVC FROM 1 BY 1 UNTIL IVC GT L-FORMAT-COMMANDS-IN
ADD FORMAT-COMMAND-WORD(IVC) TO W-FORMAT-COMMAND-WORDS-SUM
SUB-1100-EXIT
EXIT
SUB-1000-EXIT
EXIT
PERFORM SUB-2000-PROCESS THRU SUB-2000-EXIT
perform-exit
procedure call
PERFORM SUB-3000-SHUTDOWN THRU SUB-3000-EXIT
MAIN-EXIT
GOBACK
SUB-3000-SHUTDOWN
SUB-3000-EXIT
EXIT
SUB-2000-PROCESS
MOVE 4 TO FAKER-INFO-CNT IN L-PARAMETER
MOVE LOWCASE TO FAKER-INFO-OCCS IN L-PARAMETER
EVALUATE TRUE
WHEN COMMAND-COMPANY IN L-PARAMETER
true
PERFORM SUB-9010-COMPANY THRU SUB-9010-EXIT
procedure call
SUB-9010-COMPANY
MOVE 'FORMATS-COMPANY' TO W-TABLE-I
SET ADDRESS OF L-FORMAT-TABLE-2 TO ADDRESS OF FORMATS-COMPANY
SUB-9010-EXIT
EXIT
procedure backward call
perform-exit
END-EVALUATE
sequential next
ADD 1 TO FAKER-INFO-CNT IN L-PARAMETER
SET P-LOC TO FAKER-INFO-CNT IN L-PARAMETER
MOVE W-TABLE-I TO FAKER-TABLE IN L-PARAMETER (P-LOC)
MOVE W-FORMAT-NUM TO FAKER-FORMAT IN L-PARAMETER (P-LOC)
IF W-TABLE-I (1 : 8) = 'FORMATS'
true
PERFORM SUB-2100-FORMAT THRU SUB-2100-EXIT
SUB-2100-FORMAT
PERFORM SUB-9700-FIND-RANDOM-FORMAT THRU SUB-9700-EXIT
MOVE W-FAKER-FORMAT TO W-RECURSED-FORMAT
MOVE 1 TO W-SUB-9
PERFORM SUB-2110-RECURSE-FORMATS THRU SUB-2110-EXIT UNTIL W-SUB-9 > LENGTH OF W-RECURSED-FORMAT OR NOT FAKER-RESPONSE-GOOD IN L-PARAMETER
IF NOT FAKER-RESPONSE-GOOD IN L-PARAMETER
outside-of
END-IF
GO TO SUB-2100-EXIT
MOVE SPACES TO FAKER-RESULT IN L-PARAMETER
MOVE 1 TO W-SUB-1 W-SUB-2
PERFORM SUB-2120-PROCESS-FORMATS THRU SUB-2120-EXIT UNTIL W-SUB-1 > LENGTH OF W-RECURSED-FORMAT OR W-SUB-2 > LENGTH OF FAKER-RESULT IN L-PARAMETER OR W-RECURSED-FORMAT (W-SUB-1 :) = SPACES
SUB-2120-PROCESS-FORMATS
SUB-2100-EXIT
EXIT
IF W-RECURSED-FORMAT-CHAR (W-SUB-1 :) = W-FORMAT-START
true
MOVE W-RECURSED-FORMAT-CHAR (W-SUB-1) TO FAKER-RESULT IN L-PARAMETER (W-SUB-2 : 1)
ADD 1 TO W-SUB-1 W-SUB-2
false
UNSTRING W-RECURSED-FORMAT DELIMITED W-FORMAT-END INTO W-FORMAT-ENTRY POINTER W-SUB-1
SUB-2120-EXIT
EXIT
PERFORM SUB-9000-EXAMINE-FIND-FORMAT THRU SUB-9000-EXIT
STRING W-FAKER-RESULT DELIMITED ' ' INTO FAKER-RESULT IN L-PARAMETER POINTER W-SUB-2
SUB-9000-EXAMINE-FIND-FORMAT
END-IF
FINALIZE W-FORMAT-ENTRY
evaluate when
WHEN 'CS'
WHEN 'CU'
true
MOVE SPACES TO W-TABLE-I
SET FAKER-UNKNOWN-FORMAT IN L-PARAMETER TO TRUE
STRING 'Unknown FAKCOMP format " W-FORMAT-ENTRY " in FAKER-RESPONSE-MSG IN L-PARAMETER
GO TO SUB-9000-EXIT
PERFORM SUB-9200-LASTNAME THRU SUB-9200-EXIT
PERFORM SUB-9020-SUFFIX THRU SUB-9020-EXIT
END-EVALUATE
SUB-9200-LASTNAME
MOVE 'LASTNAME' TO W-TABLE-I
SET PERSON-LASTNAME IN W-FAKER-PARAMETER TO TRUE
CALL W-FAKPERS-PROC USING W-FAKER-PARAMETER
SUB-9200-EXIT
EXIT
SUB-9020-SUFFIX
MOVE 'COMMON-SUFFIXES' TO W-TABLE-I
SET ADDRESS OF L-COMMON-TABLE-1 TO ADDRESS OF COMMON-SUFFIXES
SUB-9020-EXIT
EXIT
ADD 1 TO FAKER-INFO-CNT IN L-PARAMETER
SET P-LOC TO FAKER-INFO-CNT IN L-PARAMETER
MOVE W-TABLE-I TO FAKER-TABLE IN L-PARAMETER (P-LOC)
MOVE W-FORMAT-ENTRY TO FAKER-FORMAT IN L-PARAMETER (P-LOC)
PERFORM SUB-9620-SUFFIX THRU SUB-9620-EXIT
EVALUATE TRUE
WHEN W-TABLE-I = 'FIRSTNAME' OR 'LASTNAME'
WHEN W-TABLE-I (1 : 8) = 'FORMATS'
true
PERFORM SUB-9700-FIND-RANDOM-FORMAT THRU SUB-9700-EXIT
MOVE FAKER-RESULT IN W-FAKER-PARAMETER TO W-FAKER-RESULT
SUB-9700-FIND-RANDOM-FORMAT
PERFORM SUB-9001-CALL-FAKRAND
SUB-9700-EXIT
EXIT
SUB-9001-CALL-FAKRAND
CALL W-FAKRAND-PROG USING W-FAKRAND-PARAMETER
SUB-9001-EXIT
EXIT
IF W-TABLE-2 = SPACES
COMPUTE W-RANDOM-NO = FAKRAND-RANDOM-NO * (L-FORMATWEIGHT-SUM-1 + L-FORMATWEIGHT-SUM-2)
COMPUTE W-RANDOM-NO = FAKRAND-RANDOM-NO * L-FORMAT-WEIGHT-SUM-1
END-IF
MOVE W-RANDOM-NO TO FAKER-RANDOM-NO-SUB IN L-PARAMETER (FI-IDX)
MOVE 0 TO W-FOUND-DX
PERFORM SUB-9001-CALL-FAKRAND THRU SUB-9001-EXIT
COMPUTE W-RANDOM-SUB = FAKRAND-RANDOM-NO * L-COMMON-ENTRY-CNT-1 + 1
MOVE W-RANDOM-SUB TO FAKER-RANDOM-NO-SUB IN L-PARAMETER (FI-IDX)
MOVE L-COMMON-ENTRY (W-RANDOM-SUB) TO W-FAKER-RESULT
SUB-9000-EXIT
EXIT
PERFORM SUB-9710-FIND-FORMAT THRU SUB-9710-EXIT VARYING L-F-IDX 1 FROM 1 BY 1 UNTIL W-FOUND-DX > 0 OR L-F-IDX > L-FORMAT-ENTRY-CNT-1
SUB-9710-FIND-FORMAT
IF NOT FAKER-RESPONSE-GOOD IN L-PARAMETER
true
GO TO SUB-2000-EXIT
false
IF W-RANDOM-NO <= L-FORMAT-WEIGHT (L-F-IDX 1)
END-IF
MOVE W-FAKER-RESULT TO FAKER-RESULT IN L-PARAMETER
SUB-2000-EXIT
EXIT
SUBTRACT L-FORMAT-WEIGHT (L-F-IDX 2) FROM W-RANDOM-NO
SET W-FOUND-DX TO L-F-IDX 1
MOVE W-FOUND-DX TO FAKER-TABLE-ENTRY-IX IN L-PARAMETER (FI-IDX)
MOVE 0 TO W-FOUND-DX
SUB-9710-EXIT
EXIT
PERFORM SUB-9720-FIND-FORMAT THRU SUB-9720-EXIT VARYING L-F-IDX 2 FROM 1 BY 1 UNTIL W-FOUND-DX > 0 OR L-F-IDX 2 > L-FORMAT-ENTRY-CNT-2
SUB-9720-FIND-FORMAT
IF W-RANDOM-NO <= L-FORMAT-WEIGHT (L-F-IDX 2)
SET W-FOUND-DX TO L-F-IDX 2
MOVE W-FOUND-DX TO FAKER-TABLE-ENTRY-IX IN L-PARAMETER (FI-IDX)
SUBTRACT L-FORMAT-WEIGHT (L-F-IDX 2) FROM W-RANDOM-NO
SUB-9720-EXIT
EXIT
IF W-FOUND-DX = 0
MOVE L-FORMAT-ENTRY (2) TO W-FOUND-DX (70) W-FAKER-FORMAT
MOVE 'Random format not found' TO W-FAKER-FORMAT
MOVE L-FORMAT-ENTRY (1) W-FOUND-DX (70) W-FAKER-FORMAT
SUB-9000-FIND-RANDOM-COMPANY
PERFORM SUB-9000-FIND-RANDOM-COMPANY THRU SUB-9000-EXIT
PERFORM SUB-9000-FIND-RANDOM-COMPANY THRU SUB-9000-EXIT
WHEN W-SUB-2 NOT = SPACES
WHEN W-FOUND-DX = 0
MOVE 'Random format not found' TO W-FAKER-FORMAT
END-EVALUATE
SUB-9000-EXIT
EXIT
PERFORM SUB-9000-EXAMINE-FIND-FORMAT THRU SUB-9000-EXIT
IF NOT FAKER-RESPONSE-GOOD IN L-PARAMETER
GO TO SUB-2110-EXIT
STRING W-FAKER-FORMAT DELIMITED ' ' INTO W-RECURSED-FORMAT POINTER W-SUB-1 SAVE
MOVE W-RECURSED-FORMAT-REST TO W-RECURSED-FORMAT (W-SUB-1 :)
SUB-2110-EXIT
EXIT
IF W-RECURSED-FORMAT-CHAR (W-SUB-1) NOT = W-FORMAT-START
GO TO SUB-2110-EXIT
MOVE W-SUB-1 TO W-SUB-9
UNSTRING W-RECURSED-FORMAT DELIMITED W-FORMAT-END INTO W-FORMAT-ENTRY POINTER W-SUB-1
IF W-FORMAT-ENTRY IS-FORMAT
MOVE W-RECURSED-FORMAT (W-SUB-9 :) TO W-RECURSED-FORMAT-REST
MOVE W-SUB-1 SAVE TO W-SUB-1
END-IF
END-IF
END-EVALUATE
END-EVALUATE
END-EVALUATE