

Space X Falcon 9 First Stage Landing Prediction

Assignment: Machine Learning Prediction

Estimated time needed: **60** minutes

Space X advertises Falcon 9 rocket launches on its website with a cost of 62 million dollars; other providers cost upward of 165 million dollars each, much of the savings is because Space X can reuse the first stage. Therefore if we can determine if the first stage will land, we can determine the cost of a launch. This information can be used if an alternate company wants to bid against space X for a rocket launch. In this lab, you will create a machine learning pipeline to predict if the first stage will land given the data from the preceding labs.



Several examples of an unsuccessful landing are shown here:

Most unsuccessful landings are planned. Space X; performs a controlled landing in the oceans.

Objectives

Perform exploratory Data Analysis and determine Training Labels

- create a column for the class
- Standardize the data
- Split into training data and test data

-Find best Hyperparameter for SVM, Classification Trees and Logistic Regression

- Find the method performs best using test data

Import Libraries and Define Auxiliary Functions

```
In [1]: import pip
await pip.install(['numpy'])
await pip.install(['pandas'])
await pip.install(['seaborn'])
```

We will import the following libraries for the lab

```
In [2]: # Pandas is a software library written for the Python programming language for data
import pandas as pd
# NumPy is a library for the Python programming language, adding support for large,
import numpy as np
# Matplotlib is a plotting library for python and pyplot gives us a MatLab like plot
import matplotlib.pyplot as plt
#Seaborn is a Python data visualization library based on matplotlib. It provides a h
import seaborn as sns
# Preprocessing allows us to standardize our data
from sklearn import preprocessing
# Allows us to split our data into training and testing data
from sklearn.model_selection import train_test_split
# Allows us to test parameters of classification algorithms and find the best one
from sklearn.model_selection import GridSearchCV
# Logistic Regression classification algorithm
from sklearn.linear_model import LogisticRegression
# Support Vector Machine classification algorithm
from sklearn.svm import SVC
# Decision Tree classification algorithm
from sklearn.tree import DecisionTreeClassifier
# K Nearest Neighbors classification algorithm
from sklearn.neighbors import KNeighborsClassifier
```

This function is to plot the confusion matrix.

```
In [3]: def plot_confusion_matrix(y, y_predict):
    "this function plots the confusion matrix"
    from sklearn.metrics import confusion_matrix

    cm = confusion_matrix(y, y_predict)
    ax = plt.subplot()
    sns.heatmap(cm, annot=True, ax = ax); #annot=True to annotate cells
    ax.set_xlabel('Predicted labels')
    ax.set_ylabel('True labels')
    ax.set_title('Confusion Matrix');
```

```
ax.xaxis.set_ticklabels(['did not land', 'land']); ax.yaxis.set_ticklabels(['did  
plt.show()
```

Load the dataframe

Load the data

```
In [31]: from js import fetch
import io

URL1 = "https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS032
resp1 = await fetch(URL1)
text1 = io.BytesIO((await resp1.arrayBuffer()).to_py())
data = pd.read_csv(text1)
```

```
In [32]: data.head()
```

```
Out[32]:
```

	FlightNumber	Date	BoosterVersion	PayloadMass	Orbit	LaunchSite	Outcome	Flights
0	1	2010-06-04	Falcon 9	6104.959412	LEO	CCAFS SLC 40	None None	1
1	2	2012-05-22	Falcon 9	525.000000	LEO	CCAFS SLC 40	None None	1
2	3	2013-03-01	Falcon 9	677.000000	ISS	CCAFS SLC 40	None None	1
3	4	2013-09-29	Falcon 9	500.000000	PO	VAFB SLC 4E	False Ocean	1
4	5	2013-12-03	Falcon 9	3170.000000	GTO	CCAFS SLC 40	None None	1

```
In [33]: URL2 = 'https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS032
resp2 = await fetch(URL2)
text2 = io.BytesIO((await resp2.arrayBuffer()).to_py())
X = pd.read_csv(text2)
```

```
In [34]: X.head(100)
```

```
Out[34]:
```

	FlightNumber	PayloadMass	Flights	Block	ReusedCount	Orbit_ES-L1	Orbit_GEO	Orbit_G
0	1.0	6104.959412	1.0	1.0	0.0	0.0	0.0	
1	2.0	525.000000	1.0	1.0	0.0	0.0	0.0	
2	3.0	677.000000	1.0	1.0	0.0	0.0	0.0	

	FlightNumber	PayloadMass	Flights	Block	ReusedCount	Orbit_ES-L1	Orbit_GEO	Orbit_G
3	4.0	500.000000	1.0	1.0	0.0	0.0	0.0	
4	5.0	3170.000000	1.0	1.0	0.0	0.0	0.0	
...
85	86.0	15400.000000	2.0	5.0	2.0	0.0	0.0	
86	87.0	15400.000000	3.0	5.0	2.0	0.0	0.0	
87	88.0	15400.000000	6.0	5.0	5.0	0.0	0.0	
88	89.0	15400.000000	3.0	5.0	2.0	0.0	0.0	
89	90.0	3681.000000	1.0	5.0	0.0	0.0	0.0	

90 rows × 83 columns

TASK 1

Create a NumPy array from the column `Class` in `data`, by applying the method `to_numpy()` then assign it to the variable `Y`, make sure the output is a Pandas series (only one bracket `df['name of column']`).

```
In [35]: Y=data.Class.to_numpy()
Y
```

```
Out[35]: array([0, 0, 0, 0, 0, 0, 1, 1, 0, 0, 0, 0, 1, 0, 0, 0, 1, 0, 0, 1, 1, 1,
        1, 1, 0, 1, 1, 0, 1, 1, 0, 1, 1, 1, 0, 1, 1, 1, 1, 1, 1, 1, 1, 1,
        1, 0, 0, 0, 1, 1, 0, 0, 1, 1, 1, 1, 1, 1, 1, 0, 0, 1, 1, 1, 1, 1,
        1, 0, 1, 1, 1, 1, 0, 1, 0, 1, 0, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
        1, 1], dtype=int64)
```

TASK 2

Standardize the data in `X` then reassign it to the variable `X` using the transform provided below.

```
In [37]: # students get this
transform = preprocessing.StandardScaler()
transform.fit(X)
X=transform.transform(X)
```

We split the data into training and testing data using the function `train_test_split`. The training data is divided into validation data, a second set used for training data; then the models are trained and hyperparameters are selected using the function `GridSearchCV`.

TASK 3

Use the function `train_test_split` to split the data `X` and `Y` into training and test data. Set the parameter `test_size` to 0.2 and `random_state` to 2. The training data and test data should be assigned to the following labels.

`X_train, X_test, Y_train, Y_test`

```
In [38]: X_train,X_test,Y_train,Y_test=train_test_split(X,Y,test_size=0.2,random_state=2)
```

we can see we only have 18 test samples.

```
In [39]: Y_test.shape
```

```
Out[39]: (18,)
```

TASK 4

Create a logistic regression object then create a `GridSearchCV` object `logreg_cv` with `cv = 10`. Fit the object to find the best parameters from the dictionary `parameters`.

```
In [40]: parameters ={'C':[0.01,0.1,1],  
                    'penalty':['l2'],  
                    'solver':['lbfgs']}
```

```
In [48]: parameters ={"C":[0.01,0.1,1], 'penalty':['l2'], 'solver':['lbfgs']}# l1 lasso l2 ridge  
lr=LogisticRegression()  
logreg_cv=GridSearchCV(lr,parameters,cv=10)  
logreg_cv.fit(X_train,Y_train)
```

```
Out[48]: GridSearchCV(cv=10, estimator=LogisticRegression(),  
                    param_grid={'C': [0.01, 0.1, 1], 'penalty': ['l2'],  
                                'solver': ['lbfgs']})
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

We output the `GridSearchCV` object for logistic regression. We display the best parameters using the data attribute `best_params_` and the accuracy on the validation data using the data attribute `best_score_`.

```
In [49]: print("tuned hyperparameters : (best parameters) ",logreg_cv.best_params_)  
         print("accuracy :",logreg_cv.best_score_)
```

```
tuned hyperparameters :(best parameters) {'C': 0.01, 'penalty': 'l2', 'solver': 'lbfgs'}  
accuracy : 0.8464285714285713
```

TASK 5


Calculate the accuracy on the test data using the method `score` :

```
In [81]: score=logreg_cv.score(X_test,Y_test)  
score
```

```
Out[81]: 0.8333333333333334
```

Lets look at the confusion matrix:

```
In [51]: yhat=logreg_cv.predict(X_test)  
plot_confusion_matrix(Y_test,yhat)
```

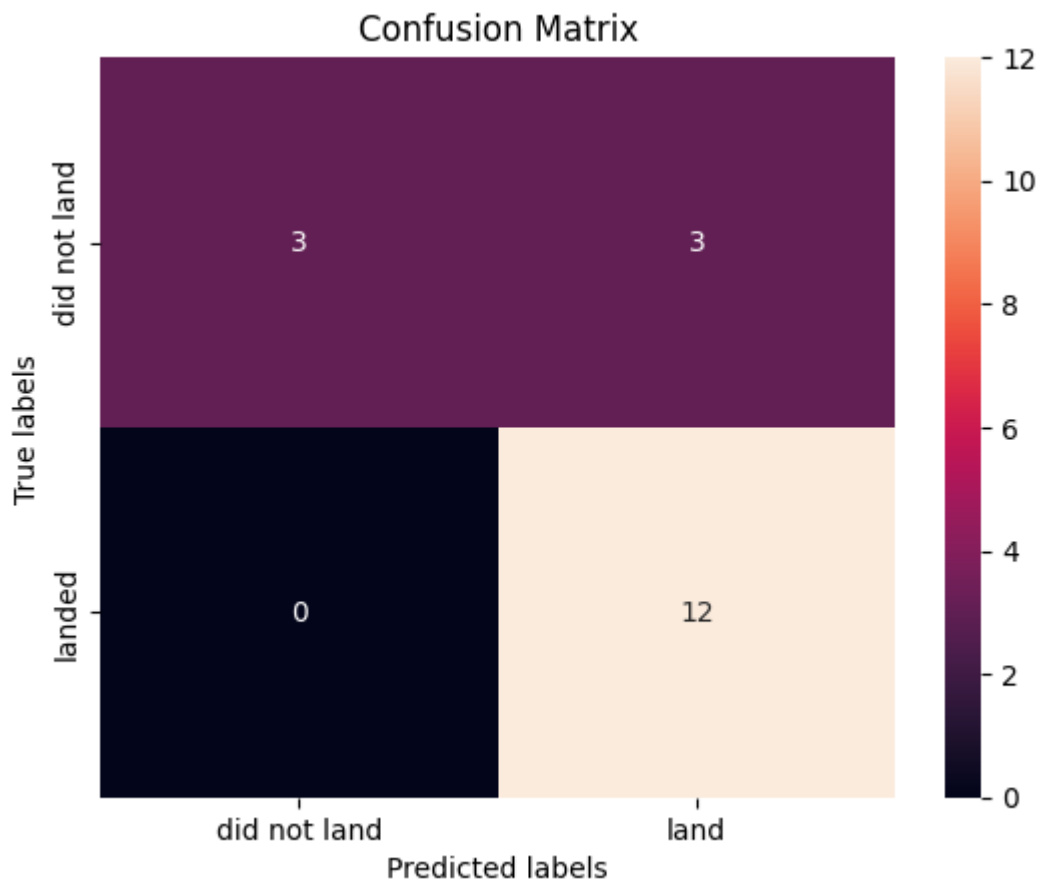

Examining the confusion matrix, we see that logistic regression can distinguish between the different classes. We see that the major problem is false positives.

TASK 6

Create a support vector machine object then create a `GridSearchCV` object `svm_cv` with `cv = 10`. Fit the object to find the best parameters from the dictionary `parameters`.

```
In [55]: parameters = {'kernel':('linear', 'rbf','poly','rbf', 'sigmoid'),
                      'C': np.logspace(-3, 3, 5),
                      'gamma':np.logspace(-3, 3, 5)}

svm = SVC()
svm_cv=GridSearchCV(svm,parameters,cv=10)
svm_cv.fit(X_train,Y_train)
```

```
Out[55]: GridSearchCV(cv=10, estimator=SVC(),
                      param_grid={'C': array([1.00000000e-03, 3.16227766e-02, 1.00000000e+00, 3.16227766e+01,
                      1.00000000e+03]),
                      'gamma': array([1.00000000e-03, 3.16227766e-02, 1.00000000e+00, 3.16227766e+01,
                      1.00000000e+03]),
                      'kernel': ('linear', 'rbf', 'poly', 'rbf', 'sigmoid')})
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

```
In [ ]:
```

```
In [56]: print("tuned hyperparameters :(best parameters) ",svm_cv.best_params_)
          print("accuracy :",svm_cv.best_score_)
```

```
tuned hyperparameters :(best parameters) {'C': 1.0, 'gamma': 0.03162277660168379, 'kernel': 'sigmoid'}
accuracy : 0.8482142857142856
```

TASK 7

Calculate the accuracy on the test data using the method `score` :

```
In [82]: score1=svm_cv.score(X_test,Y_test)
          score1
```

```
Out[82]: 0.8333333333333334
```

We can plot the confusion matrix

```
In [58]: yhat=svm_cv.predict(X_test)
          plot_confusion_matrix(Y_test,yhat)
```


In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

```
In [77]: print("tuned hpyerparameters :(best parameters) ",tree_cv.best_params_)
         print("accuracy :",tree_cv.best_score_)
```

```
tuned hpyerparameters :(best parameters) {'criterion': 'gini', 'max_depth': 18, 'max_
features': 'sqrt', 'min_samples_leaf': 4, 'min_samples_split': 2, 'splitter': 'best'}
accuracy : 0.8732142857142857
```

TASK 9


Calculate the accuracy of tree_cv on the test data using the method `score` :

```
In [83]: score2=tree_cv.score(X_test,Y_test)
         score2
```

```
Out[83]: 0.9444444444444444
```

We can plot the confusion matrix

```
In [79]: yhat = tree_cv.predict(X_test)
         plot_confusion_matrix(Y_test,yhat)
```

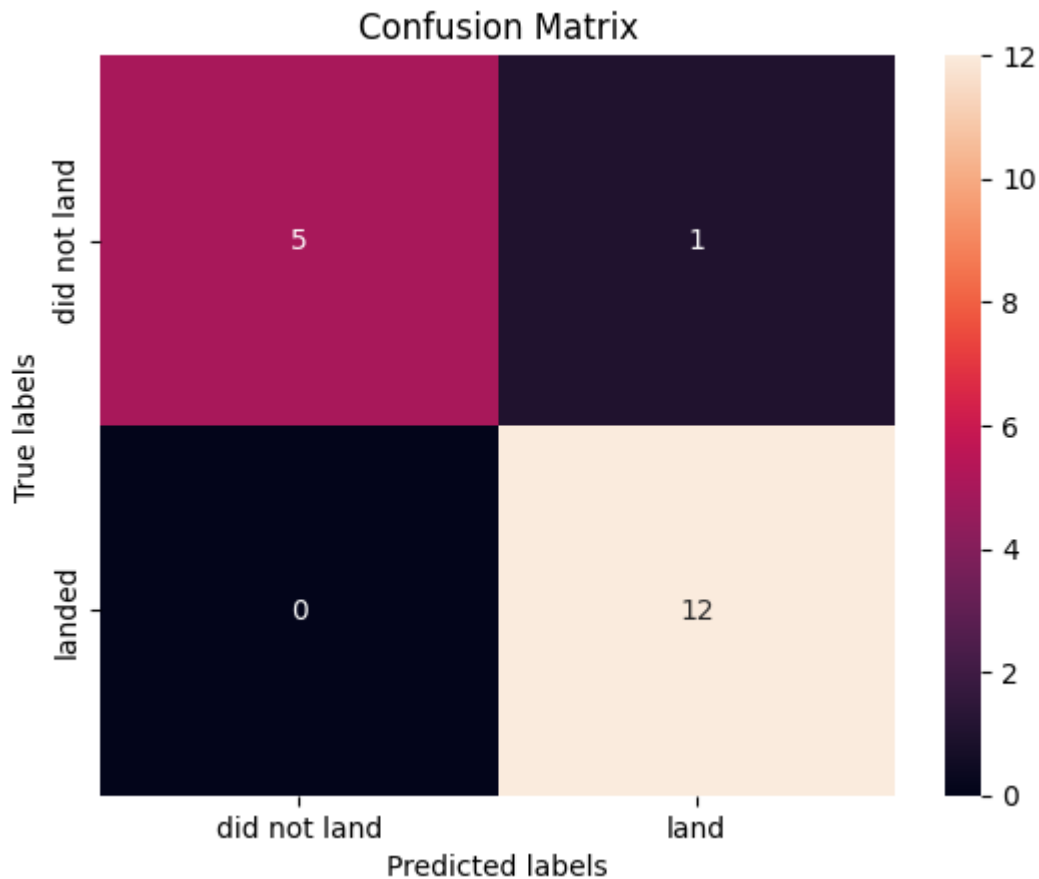

TASK 10

Create a k nearest neighbors object then create a `GridSearchCV` object `knn_cv` with `cv = 10`. Fit the object to find the best parameters from the dictionary `parameters`.

```
In [68]: parameters = {'n_neighbors': [1, 2, 3, 4, 5, 6, 7, 8, 9, 10],
                        'algorithm': ['auto', 'ball_tree', 'kd_tree', 'brute'],
                        'p': [1,2]}

KNN = KNeighborsClassifier()
```

```
In [69]: knn_cv=GridSearchCV(KNN,parameters)
knn_cv.fit(X_train,Y_train)
```

```
Out[69]: GridSearchCV(estimator=KNeighborsClassifier(),
                        param_grid={'algorithm': ['auto', 'ball_tree', 'kd_tree', 'brut
e'],
                                   'n_neighbors': [1, 2, 3, 4, 5, 6, 7, 8, 9, 10],
                                   'p': [1, 2]})
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.

On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

```
In [70]: print("tuned hpyerparameters :(best parameters) ",knn_cv.best_params_)
print("accuracy :",knn_cv.best_score_)
```

```
tuned hpyerparameters :(best parameters) {'algorithm': 'auto', 'n_neighbors': 8, 'p':
1}
accuracy : 0.8609523809523811
```

TASK 11


Calculate the accuracy of knn_cv on the test data using the method `score` :

```
In [84]: score3=knn_cv.score(X_test,Y_test)
score3
```

```
Out[84]: 0.8333333333333334
```

We can plot the confusion matrix

```
In [80]: yhat = knn_cv.predict(X_test)
plot_confusion_matrix(Y_test,yhat)
```

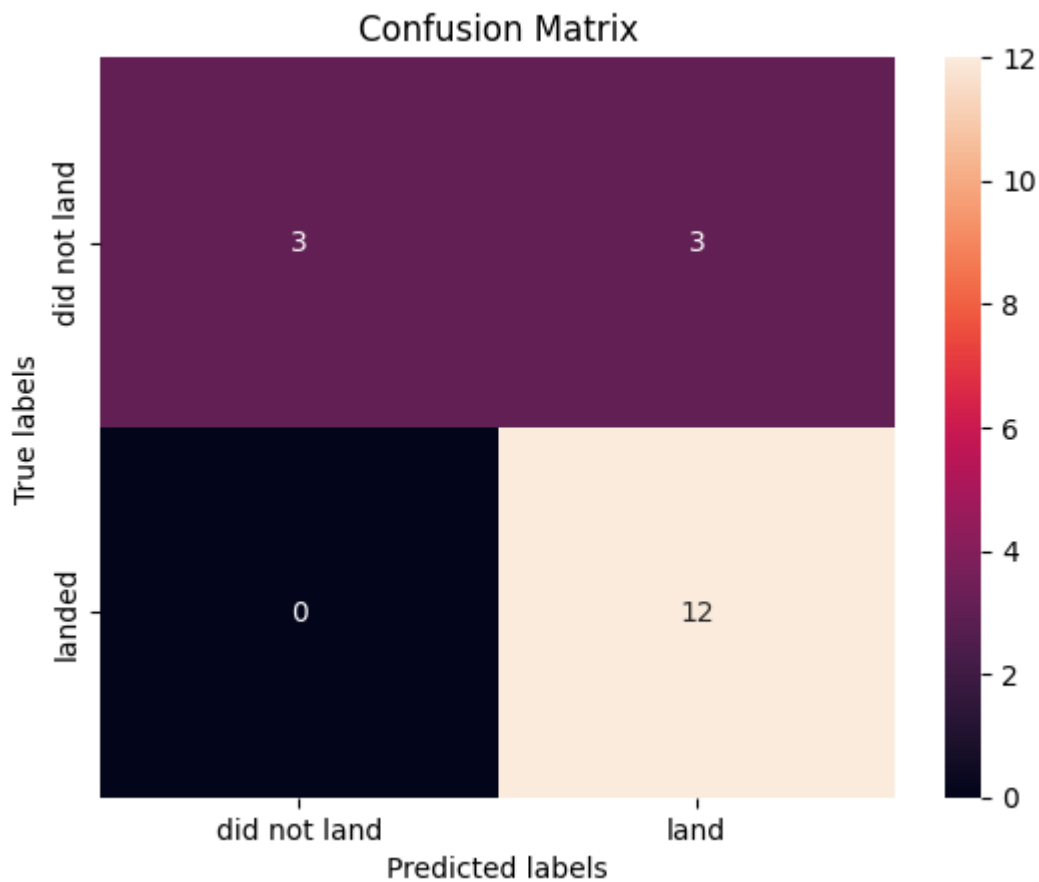

TASK 12

Find the method performs best:

```
In [90]: method={"method":["log","DecisionTreeClassifier","KNN","svm"],"score":[score,score2,
pd.DataFrame(method)
```

Out[90]:

	method	score
0	log	0.833333
1	DecisionTreeClassifier	0.944444
2	KNN	0.833333
3	svm	0.833333

best option is decesion tree classifier

Authors

[Pratiksha Verma](#)

Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2022-11-09	1.0	Pratiksha Verma	Converted initial version to Jupyterlite

IBM Corporation 2022. All rights reserved.