Summary in Graph

Exam Summary (GO Classes GATE CS | C-Programming | Weekly Quiz 4)

Qs. Attempted:	0 (0 + 0)	Correct Marks:	0 (0 + 0)
Correct Attempts:	0 (0 + 0)	Penalty Marks:	0 (0 + 0)
Incorrect Attempts:	0 (0 + 0)	Resultant Marks:	0 (0 + 0)

Total Questions:	20 (10 + 10)
Total Marks:	30 (10 + 20)
Exam Duration:	60 Minutes
Time Taken:	0 Minutes

Individual Question Statistics

Select Metric: Marks Obtained

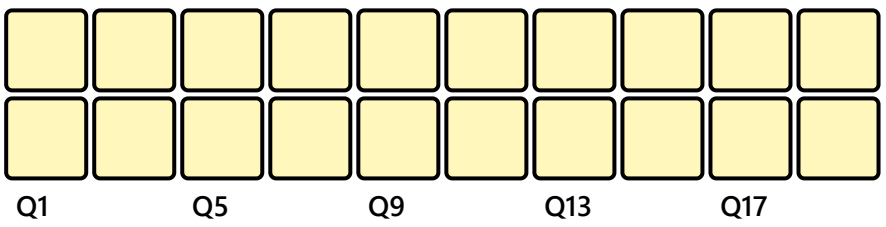

* Average Stats based on first-attempt stats of Top 10% (37) out of 367 users

EXAM RESPONSE | EXAM STATS | FEEDBACK

Technical

Q #1 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

Which of the following(s) function declarations can be used to pass the following array?

```
char myArray[3][4];
```

A.
```
void fun(char a[3][]);
```

B.
```
void fun(char a[][4]);
```

C.
```c
void fun(char (*a)[4]);
```

D.
```c
void fun(char **a);
```

Your Answer: | Correct Answer: B;C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #2

Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be printed by the following program?

```c
#include<stdio.h>
struct card
{
    int face ;
};
typedef struct card Card ;
Card c ;
void pass(Card c);
int main()
{
    c.face = 1;
    printf("%d ", c.face);
    pass(c);
    printf("%d",c.face);
}

void pass(Card c)
{
    c.face = 5;
    printf("%d ",c.face);
}
```

A. 1 1 1
B. 1 5 1
C. 1 5 5
D. None of these

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #3

Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming and DS

What will be the output if we compile and execute the following C code?

```c
#include<stdio.h>
void main(){
int i=10;
static int x=i;
if(x==i)
    printf("Equal");
else if(x>i)
    printf("Greater than");
else
    printf("Less than");
}
```

A. Equal
B. Greater than
C. Less than
D. Compiler error

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #4 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output if you compile and execute the following C code?

```
    extern int x;
    void main()
    {
        printf("%d",x);
5.      x=2;
    }
    int x=23;
```

A. 0
B. 2
C. 23
D. Compiler error

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 01sec | Discuss

Q #5 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

Consider below two files p1.c and p2.c

```
C program file 1 (p1.c):
==========================

extern int a;

void f1()
{
    a = 1;      //  (1)

    int a;      //  (2)
    a = 1;
}

void f2(int a)
{
   {
    int a;       //  (3)
    a = 1;
   }
}


void f3(int a)
{

   a = 1;     // (4)
}

int a;
static int b;
```

```
C program file 2 (p2.c):
==========================

void f4()
{
    extern int a;

    a = 1;       //   (5)
}

void f5()
{
    extern int b;

    b = 1;       //   (6)
}

int main()
{
   a = 1;       //   (7)

   f1();
   f2(1);
   f3(1);
   f4();
   f5();
}
```

We compile both files independently and link them in case the compilation is successful.

Which of the following(s) is/are TRUE?

A. p1.c can not be compiled as there is no main function in the file.
B. Line 3 in p1.c will produce a compilation error because of the redefinition of variable a.
C. Line 6 in p2.c will produce a compilation error since the extern does not allocate memory to variables.
D. Line 7 in p2.c will produce a compilation error.

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #6 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Assume that an int variable takes 4 bytes and a char variable takes 1 byte. What is the output of the code below?

```
int main()
{
    int arr[]={10,20,30,40,50,60};
    int *ptr1=arr;
    int *ptr2=arr+5;
    printf("Number of elements between two pointer are: %d.",
    (ptr2 - ptr1));
    printf("Number of bytes between two pointer are: %d.",
    (char*)ptr2 - (char*)ptr1);
}
```

A. Number of elements between two pointer are: 5. Number of bytes between two pointers are: 20
B. Number of elements between two pointer are: 20. Number of bytes between two pointers are: 20
C. Number of elements between two pointer are: 5. Number of bytes between two pointers are: 5
D. Compile time error

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #7 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What is the output of the following code?

```
#include<stdio.h>
int main() {
    unsigned int x = 1;
    int y = -2;
    (x + y > 0) ? printf("WRONG ANSWER") : printf("CORRECT ANSWER");
}
```

A. WRONG ANSWER
B. CORRECT ANSWER
C. Prints nothing
D. None of these

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #8 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output of the following C program?

```
#include<stdio.h>
void main()
{
    int i=6;
    for(--i; --i; i--)
    {
      printf("%d",i);
    }
}
```

A. 42
B. 31
C. Infinite loop
D. None of these

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #9 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

```c
void mystery(int n) {
  if (n <= 1) {
    printf("%d", n);
  }
  else {
    printf("%d, ", n);

    mystery(n/2);
    printf(", %d", n);
  }
}
```

What will be the output printed by $\text{mystery}(12)$?

A. $12, 6, 3, 1, 3, 6, 12$
B. $12, 6, 3, 1, 3, 6,$
C. $12, 6, 3, 1, 3, 6, 12,$
D. None of these

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #10 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output of the following program?

```c
main()
{
    int a[2][2] = { {1,2},{3,4} };
    int(*p)[2][2];
    p = &a;
    printf("%d", (*p)[0][0]);
}
```

A. 1
B. 3
C. 4
D. None of these

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #11 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C code?

```c
#include<stdio.h>
void fun (char *p){
    p++[1]= 'E';
    ++*p++;
    printf("%c",*p);
}
int main(){
    char c[]= "IISc";
    fun(c);
}
```

A. I
B. S
C. E
D. c

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #12 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

Consider the following declaration of a.

```
int a[100][200][30];
```

What will be the integer value of $a[50][300] - a[10][500]$?

Your Answer: | Correct Answer: 234000 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #13 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following program?

```
#include<stdio.h>
struct _myst{
    char b[20];
    char *a;
    struct _myst *c;
}x[2] = {"GATE", "Overflow", x+1, "GO", "Classes", x}, *p = x;
typedef struct _myst myst;

myst* mystry(myst *p, int n){
    if (n<=0) return p++;
    if(n%2) return mystry(p->c, n-2);
    else return mystry(p->c, n-1);
}
int main()
{
    printf("%s",mystry(p,2023)->a);
}
```

A. GATE
B. Overflow
C. Run time error
D. Compile-time error

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #14 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following program?

```c
struct s{
    int i;
    struct s *p;
};

struct s arr[4] = { 7, arr+3,
    8, arr+2,
    9, arr,
    10, arr+1,
};

struct s *ap[] = {arr+3, arr+2, arr+1, arr};
struct s **pp =ap;
int main()
{
    printf("%d", ap[pp[0]->p->i%2]->i++);
}
```

A. 7
B. 10
C. 9
D. 8

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #15 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
void main()
{
    int b=20, c=30;
    printf("%d%d\n", b<<2>>4, c<<2>>4);
}
```

Your Answer: | Correct Answer: 57 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #16 Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following declaration of pointer variable p.

```c
int (*p)[10];
```

If the initial value of p is 1100, then what will be the value of p$+1$?

It is given that, system has 8 bytes of address size and 4 bytes of integer size.

A. 1140
B. 1180
C. 1104
D. 1108

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #17 Multiple Select Type | Award: 2 | Penalty: 0 | Programming in C

After executing following lines of C code, &arr[1][2] is same as:

```
int (*a)[3];
int arr[2][3];
a = arr+1;
```

A. `&a[0][2]`

B. `(*a+2)`

C. `(int *)(&arr+1)-1`

D. `*(a+2)`

Your Answer: | Correct Answer: A;B;C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #18

Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following program?

```
int main()
{
    int arr[3][3] = {{1,2,3}, {4,5,6}, {7,8,9}};
    int *p;
    p = (int *)(arr+2);
    printf("%d", *(p-2));
}
```

Your Answer: | Correct Answer: 5 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #19

Numerical Type | Award: 2 | Penalty: 0 | Programming in C

Assume starting addresses of array arrop and twoD are 1000 and 2000 respectively. Also, assume that addresses are of 8 bytes and integers are of 4 bytes.

What will be the value of *pp[1] after the last line (pp++) of the following program?

```
int main()
{
    int **pp;
    int *arrop[3];
    int twoD[3][3] = {{1,2,3}, {7,8,9}, {4,5,6}};
    pp = arrop;
    arrop[0] = (int *)(twoD+2);
    arrop[1] = (int *)(twoD+1);
    arrop[2] = (int *)(twoD);
    pp++;
}
```

Your Answer: | Correct Answer: 1 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #20

Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following program ?

```c
#include<stdio.h>
void fun(int c[2][2]){
    c = c+1;
    *c[1] = 5;
    (*c)[1] = 6;
}
int main()
{
    int a[3][2] = {{1,2}, {10,20}, {40, 50}};
    fun(a);
    printf("%d %d", a[2][0], a[1][0]);
}
```

A. $5\ 10$
B. $10\ 5$
C. $10\ 40$
D. Error since c is a two-dimensional array, and we can not update the value of c using $c = c + 1$.

Your Answer: | **Correct Answer: A** | **Not Attempted** | **Time taken: 00min 00sec** | **Discuss**

Copyright & Stuff