Summary in Graph

Exam Summary (GO Classes GATE CS/DA | DBMS | Normalization | Weekly Quiz 5)

Qs. Attempted:	0 (0 + 0)	Correct Marks:	0 (0 + 0)
Correct Attempts:	0 (0 + 0)	Penalty Marks:	0 (0 + 0)
Incorrect Attempts:	0 (0 + 0)	Resultant Marks:	0 (0 + 0)

Total Questions:	10 (5 + 5)
Total Marks:	15 (5 + 10)
Exam Duration:	30 Minutes
Time Taken:	0 Minutes

Individual Question Statistics

Select Metric: Marks Obtained

Q1 Q2 Q3 Q4 Q5 Q6 Q7 Q8 Q9 Q10

* Average Stats based on first-attempt stats of Top 10% (56) out of 556 users

EXAM RESPONSE EXAM STATS FEEDBACK

Technical

Q #1 Multiple Choice Type Award: 1 Penalty: 0.33 Databases

Which normal form is based on the concept of 'full functional dependency' is

A. First Normal Form
B. Second Normal Form
C. Third Normal Form
D. Fourth Normal Form

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #2 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Databases

Normalization from which is based on transitive dependency is classified as:

A. First normal form.
B. Second normal form.
C. Fourth normal form.
D. Third normal form.

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #3 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Databases

A relational scheme is in..... if it is in 1NF and if all non prime attributes are fully functionally dependent on the relation key

A. Second Normal Form
B. Boyce Codd Normal Form
C. Fourth Normal Form
D. First Normal Form

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #4 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Databases

Consider a schema $R(MNPQ)$ and functional dependencies $M \rightarrow N, P \rightarrow Q$. Then the decomposition of R into $R_1\ (MN)$ and $R_2\ (PQ)$ is _____.

A. Dependency preserving but not lossless join
B. Dependency preserving and lossless join
C. Lossless join but not dependency preserving
D. Neither dependency preserving nor lossless join.

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #5 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Databases

Consider the following dependencies and the BOOK table in a relational database design. Determine the normal form of the given relation.

ISBN $\rightarrow$ Title

ISBN $\rightarrow$ Publisher

Publisher $\rightarrow$ Address

A. First Normal Form
B. Second Normal Form
C. Third Normal Form
D. BCNF

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #6 | Multiple Select Type | Award: 2 | Penalty: 0 | Databases

Let relation $R(A, B, C, D)$ satisfy the following functional dependencies:
$A \rightarrow B, B \rightarrow C, C \rightarrow A$
Call this set S1. A different set S2 of functional dependencies is equivalent to S1 if exactly the same FDs follow from S1 and S2. Which of the following sets of FDs is equivalent to the set above?

A. $\mathrm{B} \rightarrow \mathrm{A}, \mathrm{B} \rightarrow \mathrm{C}, \mathrm{C} \rightarrow \mathrm{B}$
B. $\mathrm{A} \rightarrow \mathrm{BC}, \mathrm{C} \rightarrow \mathrm{AB}$
C. $\mathrm{A} \rightarrow \mathrm{BC}, \mathrm{B} \rightarrow \mathrm{AC}$
D. $\mathrm{C} \rightarrow \mathrm{B}, \mathrm{B} \rightarrow \mathrm{A}, \mathrm{A} \rightarrow \mathrm{C}$

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #7 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Databases

Consider the following table

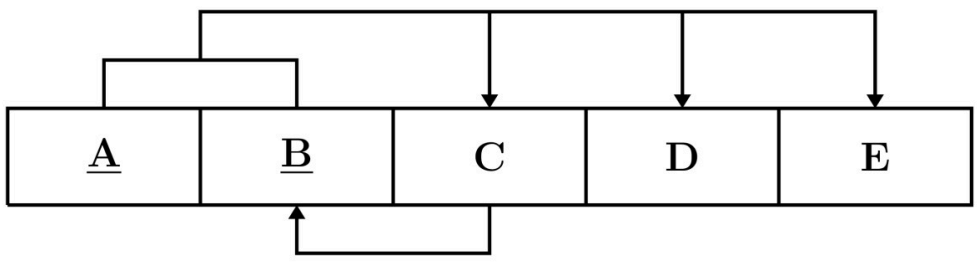

The table is in which normal form?

A. First Normal Form
B. Second Normal Form
C. Third Normal Form but not BCNF
D. Third Normal Form and BCNF

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #8 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Databases

Consider a relational table R that is in $3NF$, but not in BCNF. Which one of the following statements is TRUE?

A. R has a nontrivial functional dependency $X \rightarrow A$, where X is not a superkey and A is a prime attribute.
B. R has a nontrivial functional dependency $X \rightarrow A$, where X is not a superkey and A is a non-prime attribute and X is not a proper subset of any key.
C. R has a nontrivial functional dependency $X \rightarrow A$, where X is not a superkey and A is a non-prime attribute and X is a proper subset of some key
D. A cell in R holds a set instead of an atomic value.

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #9 Multiple Choice Type | Award: 2 | Penalty: 0.67 | Databases

Let $pk(R)$ denotes primary key of relation R. A many-to-one relationship that exists between two relations R_1 and R_2 can be expressed as follows:

A. $pk(R_2) \rightarrow pk(R_1)$
B. $pk(R_1) \rightarrow pk(R_2)$
C. $pk(R_2) \rightarrow R_1 \cap R_2$
D. $pk(R_1) \rightarrow R_1 \cap R_2$

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #10 Numerical Type | Award: 2 | Penalty: 0 | Databases

Suppose relation $R(A, B, C, D, E)$ has the functional dependencies:
$\mathrm{A} \rightarrow \mathrm{B}; \mathrm{BC} \rightarrow \mathrm{D}; \mathrm{BE} \rightarrow \mathrm{C}; \mathrm{AD} \rightarrow \mathrm{E}; \mathrm{CE} \rightarrow \mathrm{A}$ Let the number of candidate keys of R be M . Of the five given FDs, let the number of FDs that violate the BCNF condition be N . What is $\mathrm{M}+\mathrm{N}$??

Your Answer: | Correct Answer: 7 | Not Attempted | Time taken: 00min 02sec | Discuss

Copyright & Stuff