Summary in Graph

Exam Summary (GATE Overflow CS Test Series 2026 | Programming | Test 1)

Qs. Attempted:	0 (0 + 0)	Correct Marks:	0 (0 + 0)
Correct Attempts:	0 (0 + 0)	Penalty Marks:	0 (0 + 0)
Incorrect Attempts:	0 (0 + 0)	Resultant Marks:	0 (0 + 0)

Total Questions:	30 (10 + 20)
Total Marks:	50 (10 + 40)
Exam Duration:	90 Minutes
Time Taken:	0 Minutes

Individual Question Statistics

Select Metric: Marks Obtained

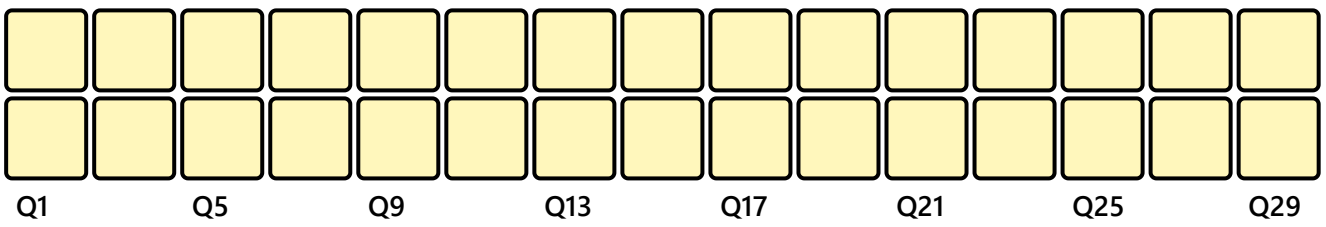

* Average Stats based on first-attempt stats of Top 10% (10) out of 103 users

EXAM RESPONSE | EXAM STATS | FEEDBACK

Technical

Q #1 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

Consider the following C code fragment (... denote further statements):

```
int main()
{
    int my_array[30][40][50];
    init_array(&my_array);
    ...
}
```

Which of the following is a valid declaration for the function init_array? Mark all the correct options.

A.
```
void init_array(int ** array[30][40][50]);
```

B.
```
void init_array(int (* array)[30][40][50]);
```

C.
```
void init_array(int *** array);
```

D.
```
void init_array(int ** array[30][40]);
```

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #2 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output of the following C program:

```
#include<stdio.h>
int main()
{
  char* my_words[] = {"Abin", "Mahesh", "Seema", "Palak"};
  char *p;
  p = my_words[3];
  printf("%s, ", p+3);
  printf("%c", *p+3);
}
```

A. ak, S
B. , a
C. Possible Runtime Error
D. ak, a

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 02sec | Discuss

Q #3 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output of the following C program:

```
#include<stdio.h>
int main()
{
   char* disease = "COVID-19";
   (*disease)++;
   printf("%s",disease);
}
```

A. DPWJE-20

B. DOVID-19
C. COVID-19
D. Possible Runtime Error

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #4 | Numerical Type | Award: 1 | Penalty: 0 | Programming in C

The number of characters (including whitespaces if any) printed by the following C program is

```
#define sum(a, b) #a "+"#b "=%d"
#include<stdio.h>
int main()
{
  printf(sum(6,9), 6+9);
}
```

Your Answer: | Correct Answer: 6 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #5 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

Which of the below statement is a correct way to print the statement “Hello World”? (Mark all the appropriate choices)

A.
```
printf ("Hello World");
```

B.
```
printf ("%s", "Hello World");
```

C.
```
char *p = "Hello";
printf(p, " World");
```

D.
```
char * p = "Hello %s";
char *q = "World";
printf(p,q);
```

Your Answer: | Correct Answer: A;B;D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #6 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C program:

```c
#include<stdio.h>
extern int getMyMonth();
int main()
{
    enum Month {January, February, March, April,
        May, June, July, August, September,
        October, November, December};
    int my_month = getMyMonth();
    int my_inc=0;
    switch(my_month)
    {
        case January:
        case March:
        case May:
        case July:
        case August:
        case October:
        case December:
        my_inc++;
        default:
        my_inc += 30;
        case February:
        my_inc -=2;
    }
    printf("%d", my_inc);
}
```

What will be the output of the above program if the external function getMyMonth() returns 1?

A. 31
B. 30
C. 28
D. None of the above

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #7 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Which of the following is the correct replacement for "<my_decl>" to define a global integer variable?

```c
#include<stdio.h>
<my_decl> my_global;
int main()
{
    printf("%d", my_global);
}
```

A. global int
B. extern int
C. static int
D. int

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 01sec | Discuss

Q #8 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
struct my_struct
{
    int field1;
    float field2;
    double field3;
};
int main()
{
    struct my_struct try1, try2;
    try1.field1 = 10.1;
    try1.field2 = 10.1;
    try1.field3 = 10.1;
    try2 = try1;
    printf("%d %.1f %.1lf",
    try2.field1, try2.field2, try2.field3);
}
```

A. 10 10.1 10.1
B. 10.1 10.1 10.1
C. Possible Runtime Error
D. Garbage Value

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #9

Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Which of the following correctly declare a pointer to function returning a pointer to an integer and accepting a pointer to a one-dimensional integer array of size 10 as input?

A.
```c
int * (*p)(int * my_array[10])
```

B.
```c
int * (*p)(int (* my_array)[10])
```

C.
```c
int * p(int * my_array[10])
```

D.
```c
int * (*p) (int * my_array)
```

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #10

Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Which of the following assignments causes an overflow? (Assume size of int is 4 bytes and long int is 8 bytes)

A. int a = 123456789;
B. int a = 123456789123456789L;
C. unsigned a = 123456789;
D. long int a = 123456789123456789;

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #11 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?(Assume IEEE -754 standard being Used)

```c
#include<stdio.h>
int main()
{
  float a = 8.0625;
  if(a == 8.0625)
   {
     printf("1");
   }
  else
   {
     printf("0");
   }
}
```

Your Answer: | Correct Answer: 1 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #12 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

Consider the following C program fragment:

```c
double a = getMyDouble();
float b, c;
b = getMyFloat();
c = a + b;
```

If the assembly instruction corresponding to the addition is "ADD R0, R1" where R0 is having the value corresponding to the variable b, the minimum required size in bytes of the register R0 is ____ bytes.

Your Answer: | Correct Answer: 8 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #13 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
int main()
{
   int myinc = -1;
   if(++myinc || --myinc)
   {
     myinc--;
   }
   printf("%d", myinc);
}
```

Your Answer: | Correct Answer: -2 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #14 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
int main()
{
   int myinc = 0;
   if(++myinc && --myinc)
   {
     myinc--;
   }
   printf("%d", myinc);
}
```

Your Answer: | Correct Answer: 0 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #15

Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following C structure declaration.

```c
struct abc
{
    double myfield1;
    int myfield2;
}myobj;
```

Which of the following pointer declarations would not cause any undefined behaviour for the above given structure fields?

A.
```c
char *p = (char*) &myobj.myfield2;
```

B.
```c
int *p = (int*) &myobj.myfield1;
```

C.
```c
double *p = (double*) &myobj.myfield2;
```

D.
Both B and C

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #16

Numerical Type | Award: 2 | Penalty: 0 | Programming in C

If the values printed by the following C program are a, b, c and d respectively, then $a + 2b + 3c + 4d =$____

```c
#include<stdio.h>
#include<string.h>
int main()
{
    char* p = "GATE Overflow";
    char q[] = "GATE Overflow";
    printf("%lu %lu %lu %lu",
        sizeof(*p), sizeof(q), strlen(p), strlen(q));
}
```

Your Answer: | Correct Answer: 120 | Not Attempted | Time taken: 00min 01sec | Discuss

Q #17 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following C program fragment:

```c
#include<stdio.h>
int my_array[20][10];
int main()
{
    int *p = my_array, i;
    for(i = 0; i < 10*20; i++)
    {
        *(p+X) = i;
    }
    ...
}
```

The correct replacement for 'X' so that every position in the array my_array gets initialized is

A. (i / 20) * 10 + (i% 20) * 10;
B. (i % 20) * 10 + (i / 20) * 10;
C. (i / 10) * 20 + (i% 10) * 20;
D. (i % 10) + (i / 10) * 10;

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #18 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

The number of times the "return" statement gets executed when the following function is called with an argument 5 is _____

```c
unsigned int fib(unsigned int n)
{
    if(n == 0) return 0;
    if(n == 1) return 1;
    return fib(n-1) + fib(n-2);
}
```

Your Answer: | Correct Answer: 15 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #19 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
int main()
{
    int a, b = 2, c = 3;
    a = b, c++;
    printf("%d %d %d", a, b, c);
}
```

A. Compiler Error
B. $3\ 3\ 4$
C. $2\ 2\ 4$
D. None of the above

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #20 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```c
#include <stdio.h>
int main()
{
    int a[10][20][30]={0};
    printf("%d %d %d",&a+1 - &a,
       a[10][20] - a[10][10], a[10] - a[5]);
    return 0;
}
```

A. 1 300 100
B. 600 300 100
C. 1 100 5
D. None of the above

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #21 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include <stdlib.h>
int* fun();
int main()
{
    int a = 5;
    int *p = &a;
    p = fun();
    printf("%d",*p);
    return 0;
}
int* fun()
{
    int *a =(int*) malloc(sizeof(int));
    *a = 1;
    return a;
}
```

Your Answer: | Correct Answer: 1 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #22 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

How many $1s$ will be printed by the below function when called with the argument 9? (Assume sizeof int as 4 bytes)

```c
#include <stdio.h>
int fun(int a)
{
    char *arr[] = {"0000", "0001","0010","0011","0100",
        "0101","0110","0111","1000","1001","
        1010","1011","1100","1101","1110","1111"};
    unsigned char* p = (unsigned char*) &a ;
    p+=3;
    int i;
    for(i = 0; i < sizeof a; i++) {
        int d = (*p)>>4;
        printf("%s", arr[d]);
        d = (*p) & 0xf;
        printf("%s ", arr[d]);
        p--;
    }
}
```

Your Answer: | Correct Answer: 2 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #23 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

```c
if (x != 0)
    a = b;
else
    a = c;
```

What of the following can functionally substitute the if-else statement given above?

A.
```c
a = (!!x)*b || c;
```

B.
```c
a = b || c;
```

C.
```c
a = (x>0)? c : b;
```

D.
```c
a = (!!x)*b + !x * c;
```

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #24 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
int main()
{
    int a = 1, b = 0;
    printf("%d", ~a | ~b & a && ++b - a);
}
```

Your Answer: | Correct Answer: 0 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #25 Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Match the following expressions with the functions they are doing:

$A.$!(n & n-1)	1. Sets the $(d+1)^{th}$ bit from right of n to 1
$B.$ n | (1<<d)	2. Unsets the $(d+1)^{th}$ bit from right of n to 0
$C.$ n & (1<<d)	3. Checks if n is a power of 2
$D.$ n ^ (1<<d)	4. Complements the $(d+1)^{th}$ bit from right of n
	5. Something else

A. $A-3, B-1, C-2, D-4$
B. $A-3, B-2, C-1, D-4$
C. $A-3, B-1, C-5, D-4$
D. $A-5, B-2, C-1, D-3$

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #26 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the maximum value printed by the following C program?

```c
#include<stdio.h>
int main()
{
    int i = 0;
    char* p = "THISISRIDICULOUS";
    while(*(p+i) != '\0')
    {
        printf("%d ", *(p+i++) - 'A');
    }
}
```

Your Answer: | Correct Answer: 20 | Not Attempted | Time taken: 00min 01sec | Discuss

Q #27 Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program:

```c
#include<stdio.h>
#define hello "myhello" "myhi"
int main()
{
    printf(hello);
}
```

A. myhello
B. myhi
C. myhellomyhi
D. myhello myhi

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #28 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#define macro(a,b) (a+b)
#include<stdio.h>
int main()
{
    printf("%d", macro(3,4) * macro(3,4));
}
```

Your Answer: | Correct Answer: 49 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #29 Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include<stdio.h>
void foo(int a, int *p1, int **p2)
{
    **p2 = 5;
    *p1 = 6;
    a = 7;
}
int main()
{
    int a, *p1 = &a, **p2 = &p1;
    a = 9;
    foo(a, p1, p2);
    printf("%d", a);
}
```

Your Answer: | Correct Answer: 6 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #30 Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```c
#include<stdlib.h>

struct node
{
    int value;
    struct node * next;
};
void init_list(struct node *list)
{
    list = malloc(sizeof(struct node));
    list -> value = 5;
    list -> value++;
}
#include<stdio.h>
int main()
{
    struct node *list;
    init_list(list);
    printf("%d", list-> value);
}
```

A. 5
B. Garbage Value
C. 6
D. Possible Runtime Error

Your Answer: | **Correct Answer: D** | **Not Attempted** | **Time taken: 00min 00sec** | **Discuss**

Copyright & Stuff