1. **Frontend (Node.js with Express)**:

- Create a frontend using Express and Node.js.
- Include a form similar to the one from the Flask Assignment 2.
- Configure the form to send a request to the Flask backend.
- **Backend (Flask)**:
- Use the Flask backend to handle the form submission and process the data.
- **Folder Structure**:
- Organize the project with separate folders for the frontend and backend.
- **Docker Configuration**:
- Create a `Dockerfile` for both the frontend and backend.
- Write a `.yaml` file (Docker Compose) to connect both services in the same network.
- Upload both images to docker hub and push your whole code to github and add the node_modules and other non required files(.vscode) in .gitignore

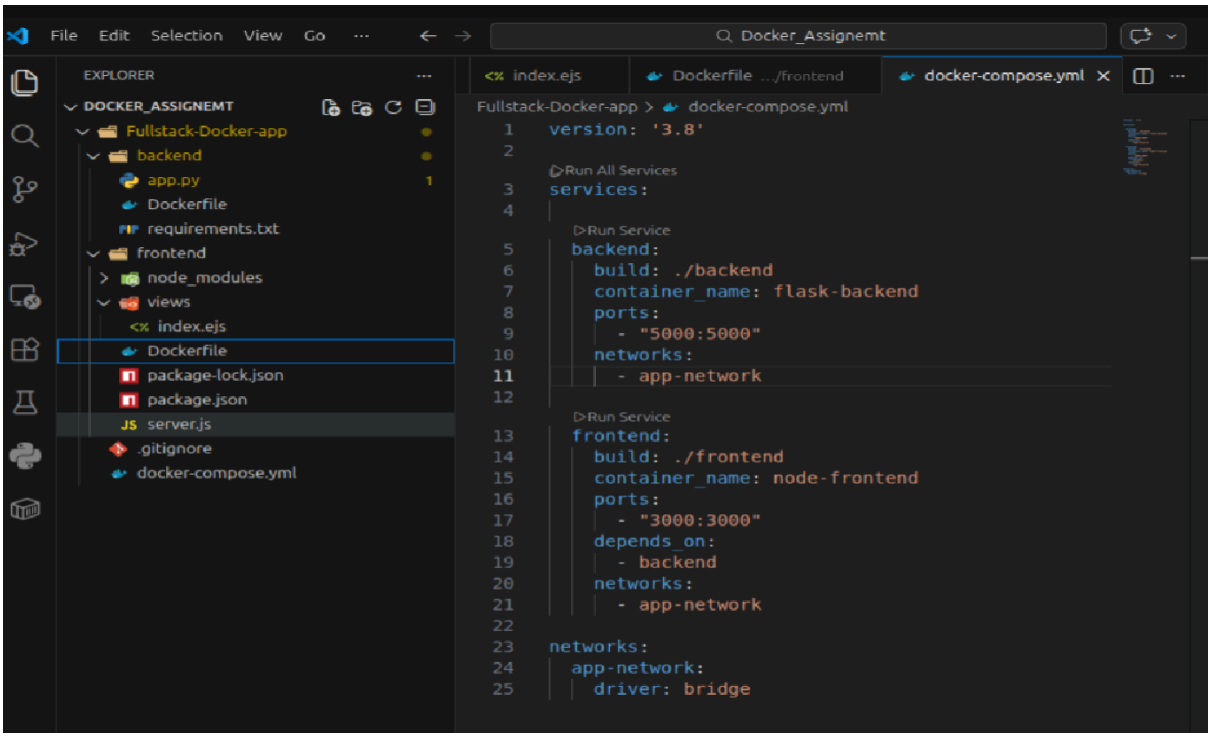

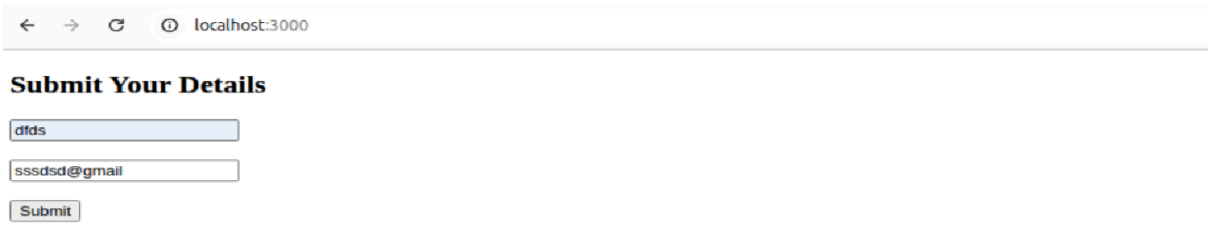

localhost:3000/submit

Pretty-print

{"email":"sssdsd@gmail","message":"Data received successfully!","name":"dfds"}

- Create a `Dockerfile` for both the frontend and backend.
- Write a `.yaml` file (Docker Compose) to connect both services in the same network.

- Write a `.yaml` file (Docker Compose) to connect both services in the same network.
- Upload both images to docker hub and push your whole code to github and add the node_modules and other non required files(.vscode) in .gitignore

```
Your one-time device confirmation code is: GJPR-HWFX
Press ENTER to open your browser or submit your device code here: https://login.docker.com/activate
Waiting for authentication in the browser…
^Clogin canceled
devil@ubuntut1:~/Dockers/Docker_Assignemt/Fullstack-Docker-app$ docker login

USING WEB-BASED LOGIN

i Info → To sign in with credentials on the command line, use 'docker login -u <username>'


Your one-time device confirmation code is: XWJB-WNDG
Press ENTER to open your browser or submit your device code here: https://login.docker.com/activate

Waiting for authentication in the browser…

WARNING! Your credentials are stored unencrypted in '/home/devil/.docker/config.json'.
Configure a credential helper to remove this warning. See
https://docs.docker.com/go/credential-store/

Login Succeeded
```

```
devil@ubuntut1:~/Dockers/Docker_Assignemt/Fullstack-Docker-app$ docker network ls
NETWORK ID     NAME                                DRIVER    SCOPE
e9d411b9257b   bridge                              bridge    local
3ec19e80f09f   fullstack-docker-app_app-network    bridge    local
5ba3c2471a81   host                                host      local
66db0e190023   none                                null      local
devil@ubuntut1:~/Dockers/Docker_Assignemt/Fullstack-Docker-app$
```

```
devil@ubuntut1:~/Dockers/Docker_Assignemt/Fullstack-Docker-app$ docker container ls -a
CONTAINER ID   IMAGE                          COMMAND            CREATED          STATUS                      PORTS
   NAMES
df9f84940e2a   fullstack-docker-app-frontend  "node server.js"   21 minutes ago   Exited (137) 12 minutes ago
   node-frontend
80749908ca62   fullstack-docker-app-backend   "python app.py"    21 minutes ago   Exited (137) 12 minutes ago
```
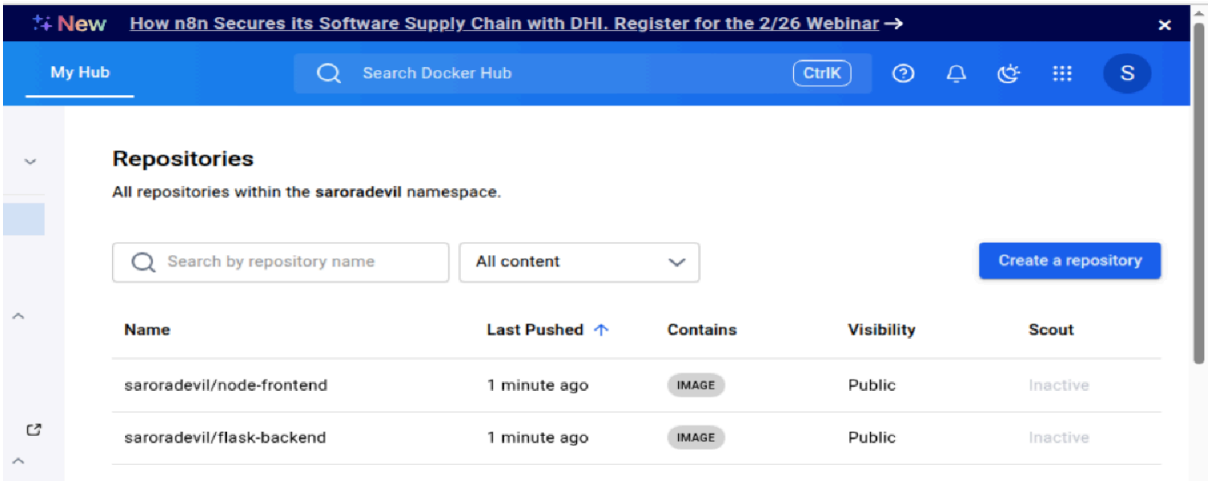
```
devil@ubuntut1:~/Dockers/Docker_Assignemt/Fullstack-Docker-app$ docker push saroradevil/flask-backend
docker push saroradevil/node-frontend
Using default tag: latest
The push refers to repository [docker.io/saroradevil/flask-backend]
9008197b8dd: Pushed
2292b8739836: Pushed
27711589a568: Pushed
2d35ebdb57d9: Pushed
dc36772d1d3e: Pushed
9806928fa0da: Pushed
fcebeb83a1da: Pushed
58b1ba6825d6: Pushed
0a7e4d26f16a: Pushed
latest: digest: sha256:1dd5333ce8f5d0b40a5af7c99cc978d4b57417f1ab78225ebb62673c6a7dd08f size: 856
Using default tag: latest
The push refers to repository [docker.io/saroradevil/node-frontend]
d70b5e8e3b3d: Pushed
25ff2da83641: Pushed
dd71dde834b5: Pushed
f3554fa2ae1a: Pushed
38edbcf94304: Pushed
7de46f080907: Pushed
1e5a4c89cee5: Pushed
f18232174bc9: Pushed
5808d5f41809: Pushed
latest: digest: sha256:0b76b0b76b2ad3958cc6c65f596246cd3a0c25f92eac3c3925220ee8124bf4b0 size: 856
devil@ubuntut1:~/Dockers/Docker_Assignemt/Fullstack-Docker-app$
```