## CLI\_Lab



By: Nourah Almutlg

## Sarraa Almudayfir

And I'm using a mac

## CLI-Lab1

Using the command line to do the following:


- Create a new directory and name it "LAB-1 CLI".
- Go inside the "LAB-1 CLI" directory.
- Create a new file "whoAmI.txt".

```
[(base) sarraa@sras-MacBook-Air Desktop % mkdir "LAB-1_CLI
[(base) sarraa@sras-MacBook-Air Desktop % cd "LAB-1_CLI
[(base) sarraa@sras-MacBook-Air "LAB-1_CLI % touch whoAml.txt
[(base) sarraa@sras-MacBook-Air "LAB-1_CLI % ls
whoAml.txt
```

• Open the new file, and write an introduction about yourself. Then save the file.

```
[(base) sarraa@sras-MacBook-Air "LAB-1_CLI % echo 'This is a small pref about Sarraa ]
' > whoAml.txt
[(base) sarraa@sras-MacBook-Air "LAB-1_CLI % cat whoAml.txt
This is a small pref about Sarraa
(base) sarraa@sras-MacBook-Air "LAB-1_CLI % []
```

Show the content of the whoAmI.txt file.

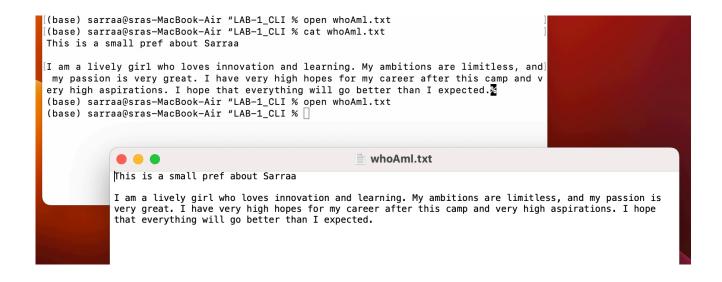

- Create a directory and name it "DS".
- Go inside the "DS" directory.
- Create a new file "toDelete1.txt" with the following text "hello everyone".
- Create another file "toDelete2.txt".
- Go outside the current folder. Back to the "Lab-1\_CLI" directory
- Delete the directory "DS" and all the files inside it.

```
"LAB-1_CLI — -zsh — 85×39

[(base) sarraa@sras-MacBook-Air "LAB-1_CLI % mkdir DS
[(base) sarraa@sras-MacBook-Air DS % touch toDelete1.txt
[(base) sarraa@sras-MacBook-Air DS % echo 'hello everyone' > toDelete1.txt
[(base) sarraa@sras-MacBook-Air DS % cat toDelete1.txt
| (base) sarraa@sras-MacBook-Air DS % touch toDelete2.txt
| (base) sarraa@sras-MacBook-Air DS % touch toDelete2.txt
| (base) sarraa@sras-MacBook-Air DS % ls
| toDelete1.txt toDelete2.txt
| (base) sarraa@sras-MacBook-Air DS % cd ...
| (base) sarraa@sras-MacBook-Air "LAB-1_CLI % rm -r DS
| (base) sarraa@sras-MacBook-Air "LAB-1_CLI % LS
| whoAml.txt
| (base) sarraa@sras-MacBook-Air "LAB-1_CLI % IS
```