

```

library(readxl)
library(lme4)

## Loading required package: Matrix
library(lmerTest)

##
## Attaching package: 'lmerTest'
## The following object is masked from 'package:lme4':
##
##      lmer
## The following object is masked from 'package:stats':
##
##      step
library(car)

## Loading required package: carData
library(MuMIn)
library(afex)

## *****
## Welcome to afex. For support visit: http://afex.singmann.science/
## - Functions for ANOVAs: aov_car(), aov_ez(), and aov_4()
## - Methods for calculating p-values with mixed(): 'S', 'KR', 'LRT', and 'PB'
## - 'afex_aov' and 'mixed' objects can be passed to emmeans() for follow-up tests
## - NEWS: emmeans() for ANOVA models now uses model = 'multivariate' as default.
## - Get and set global package options with: afex_options()
## - Set orthogonal sum-to-zero contrasts globally: set_sum_contrasts()
## - For example analyses see: browseVignettes("afex")
## *****

##
## Attaching package: 'afex'
## The following object is masked from 'package:lme4':
##
##      lmer
library(ggplot2)

data <- read_excel("../Data/PredictingOutcomes_ParticipantPredictions.xlsx", sheet = "Study 1B")

# divide the data based on the generator
data1 <- data[data$generator == "analyst",]
data2 <- data[data$generator == "bingo",]
data3 <- data[data$generator == "stock",]


calculate the proportion of participants who predicted the prediction_recode=1 for each terminal_streak_length from 1 to 7

prop1 <- aggregate(data1$prediction_recode, by = list(data1$terminal_streak_length), FUN = mean)
prop2 <- aggregate(data2$prediction_recode, by = list(data2$terminal_streak_length), FUN = mean)
prop3 <- aggregate(data3$prediction_recode, by = list(data3$terminal_streak_length), FUN = mean)

```

```
plot(prop1$Group.1,prop1$x, type = "l",ylim=c(0.0,0.9), xlab = "Terminal Streak", ylab = "Proportion of
lines(prop2$Group.1,prop2$x, col = "red")
lines(prop3$Group.1,prop3$x, col = "blue")
abline(h = 0.5, col = "green")
legend("topright", legend = c("Analyst", "Bingo", "Stock"), col = c("black", "red", "blue"), lty = 1:3)
```

Proportion of Prediction Recode=1 for each Terminal Streak

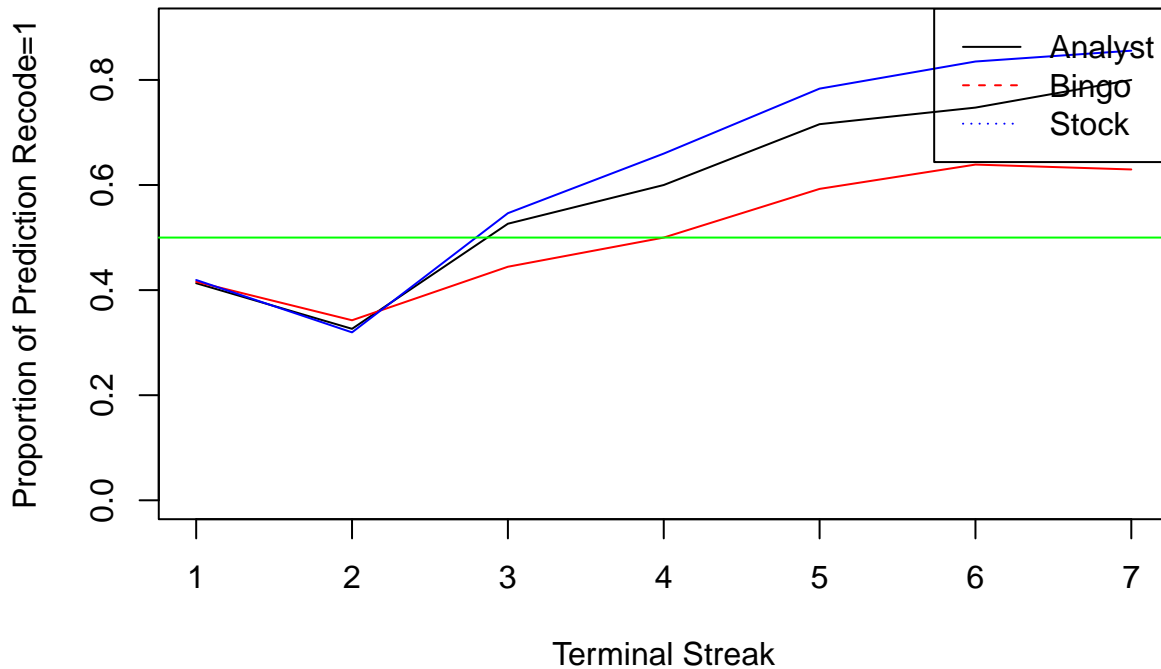

```
aov1<-aov_ez('participant_id','prediction_recode',data, between=c('generator'),within=c('terminal_streak'))

## Converting to factor: generator

## Warning: More than one observation per design cell, aggregating data using `fun_aggregate = mean`.
## To turn off this warning, pass `fun_aggregate = mean` explicitly.

## Contrasts set to contr.sum for the following variables: generator
aov1

## Anova Table (Type 3 tests)
##
## Response: prediction_recode
##              Effect              df    MSE          F ges p.value
## 1              generator              2, 297 0.50      5.59 ** .014   .004
## 2 terminal_streak_length 5.28, 1567.01 0.15 61.50 *** .114  <.001
## 3 generator:terminal_streak_length 10.55, 1567.01 0.15      1.96 * .008   .031
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '+' 0.1 ' ' 1
##
## Sphericity correction method: GG

pairwise.t.test(data$prediction_recode, data$generator, p.adjust.method = "bonferroni")

##
```


```
## Pairwise comparisons using t tests with pooled SD
##
## data: data$prediction_recode and data$generator
##
##      analyst bingo
## bingo 0.2181  -
## stock 0.7279  0.0079
##
## P value adjustment method: bonferroni

id <- unique(data1$participant_id)

slope <- c()

for (i in id){
  x <- as.character(i)
  datax <- data1[data1$participant_id == x,]
  # datax <- datax[datax$terminal_streak_length != "1",]
  model <- glm(prediction_recode ~ terminal_streak_length, data = datax)
  beta <- coef(model)[2]
  odds <- exp(beta)
  slope <- c(slope, beta)
}

slope <- slope*500
hist(slope,breaks=30,xlim=c(-200,200),prob=TRUE,main="AnalystUnknown")
curve(dnorm(x, mean = mean(slope), sd = sd(slope)), add = TRUE, col = "black")
```

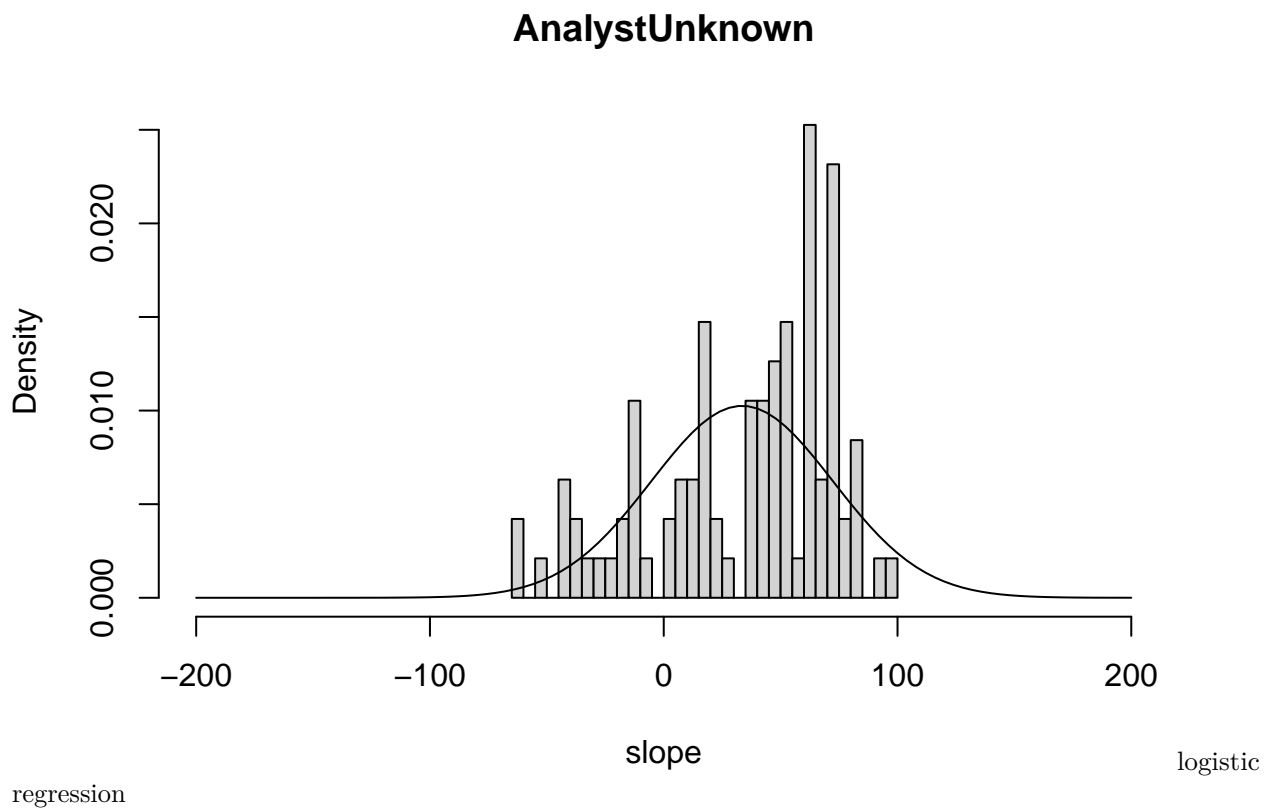

```


id <- unique(data2$participant_id)

slope <- c()

for (i in id){
  x <- as.character(i)
  datax <- data2[data2$participant_id == x,]
  model <- glm(prediction_recode ~ terminal_streak_length, data = datax)
  slope <- c(slope, coef(model)[2])
}
slope <- slope*500

hist(slope,breaks=30,xlim=c(-200,200),prob=TRUE,main="BingoUnknown")
curve(dnorm(x, mean = mean(slope), sd = sd(slope)), add = TRUE, col = "black")

```

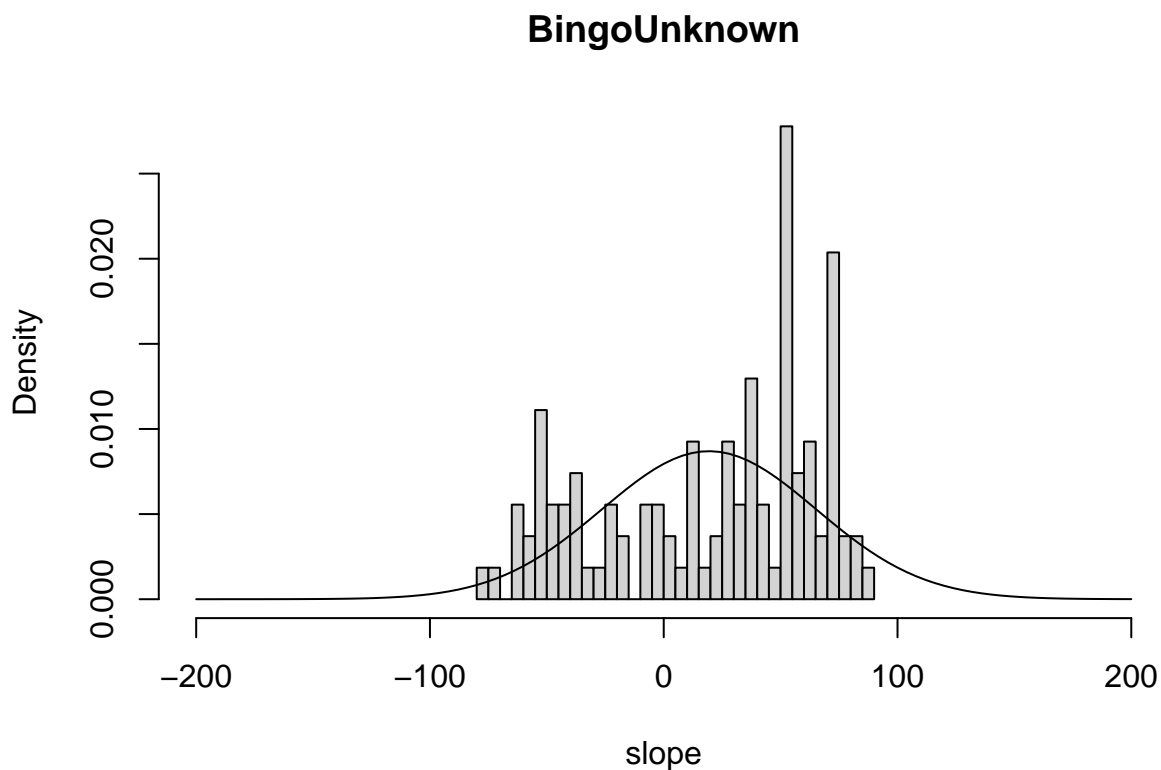

```


id <- unique(data3$participant_id)

slope <- c()

for (i in id){
  x <- as.character(i)
  datax <- data3[data3$participant_id == x,]
  model <- glm(prediction_recode ~ terminal_streak_length, data = datax)
  slope <- c(slope, coef(model)[2])
}
slope <- slope*500

hist(slope,breaks=30,xlim=c(-200,200),prob=TRUE,main="StockUnknown")
curve(dnorm(x, mean = mean(slope), sd = sd(slope)), add = TRUE, col = "black")

```

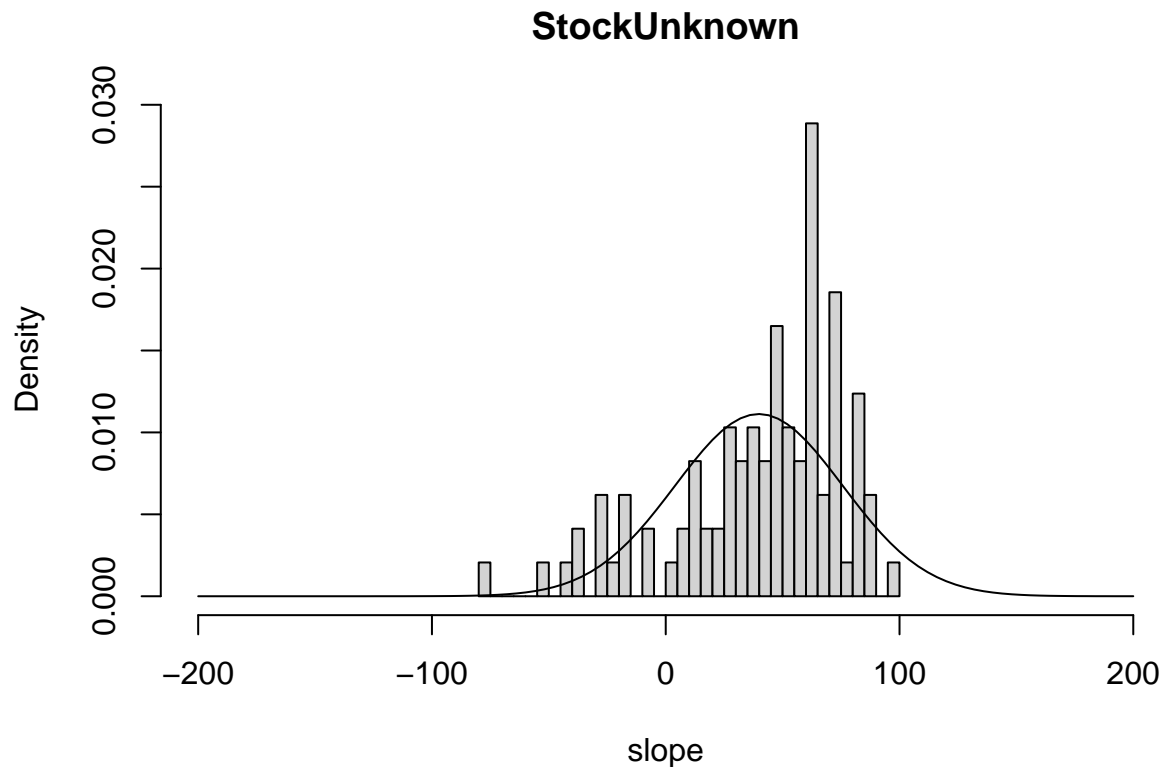

```
data_dem<- read_excel("../Data/PredictingOutcomes_ParticipantDemographics.xlsx", sheet = "Study 2B")
```

```
# print(data)
```

create a map like data structure to store the unique participant id with there corresponding gender

```
map <- data.frame(unique(data_dem$participant_id), data_dem$gender)
colnames(map) <- c("participant_id","gender")
# map
```

```
dataf <- data[,c(2,3,8,10)]
# print(data1)
```

```
df <- merge(dataf, map, by = "participant_id")
df_total <- df[df$gender=='0' | df$gender=='1',]
# male <- df[df$gender=='0',]
# female <- df[df$gender=='1',]
# chisq.test(male$prediction_recode, female$prediction_recode,correct=FALSE)
check <- table(df_total$gender, df_total$terminal_streak_length)
print(check)
```

```
##
##      1      2      3      4      5      6      7
## 0 1872  156  156  156  156  156  156
## 1 1704  142  142  142  142  142  142
```

```
test <- table(df_total$gender, df_total$prediction_recode)
print(test)
```

```
##
##      0      1
## 0 1467 1341
```

```
## 1 1333 1223
chisq.test(test)

##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data: test
## X-squared = 0.0015883, df = 1, p-value = 0.9682
df <- df_total[df_total$generator=='analyst',]
test <- table(df$gender, df$prediction_recode)
print(test)

##
##      0  1
## 0 410 400
## 1 476 424
chisq.test(test)

##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data: test
## X-squared = 0.79247, df = 1, p-value = 0.3734
df <- df_total[df_total$generator=='bingo',]
test <- table(df$gender, df$prediction_recode)
print(test)

##
##      0  1
## 0 559 449
## 1 485 415
chisq.test(test)

##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data: test
## X-squared = 0.41034, df = 1, p-value = 0.5218
df <- df_total[df_total$generator=='stock',]
test <- table(df$gender, df$prediction_recode)
print(test)

##
##      0  1
## 0 498 492
## 1 372 384
chisq.test(test)

##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data: test
```

```
## X-squared = 0.16469, df = 1, p-value = 0.6849
```

Correlation testing and box-plot form a table with mean of prediction recode on the basis of participant_id and terminal_streak_length


```
cdata <- aggregate(prediction_recode~participant_id+terminal_streak_length,data ,FUN = mean)
cdata1 <- aggregate(data1$prediction_recode, by = list(data1$participant_id, data1$terminal_streak_length), FUN = mean)
cdata2 <- aggregate(data2$prediction_recode, by = list(data2$participant_id, data2$terminal_streak_length), FUN = mean)
cdata3 <- aggregate(data3$prediction_recode, by = list(data3$participant_id, data3$terminal_streak_length), FUN = mean)
colnames(cdata) <- c( "participant_id","terminal_streak_length","prediction_recode")
colnames(cdata1) <- c( "participant_id","terminal_streak_length","prediction_recode")
colnames(cdata2) <- c( "participant_id","terminal_streak_length","prediction_recode")
colnames(cdata3) <- c( "participant_id","terminal_streak_length","prediction_recode")
nrow(cdata)
```

```
## [1] 2100
```

```
# cdata
```

draw box plot using ggplot2

```
ggplot(cdata, aes(x = as.factor(terminal_streak_length), y = prediction_recode)) +geom_boxplot(aes(colour = "red", size = 2, color = "blue")) + ggtitle("Boxplot of prediction recode for each terminal streak length")
```

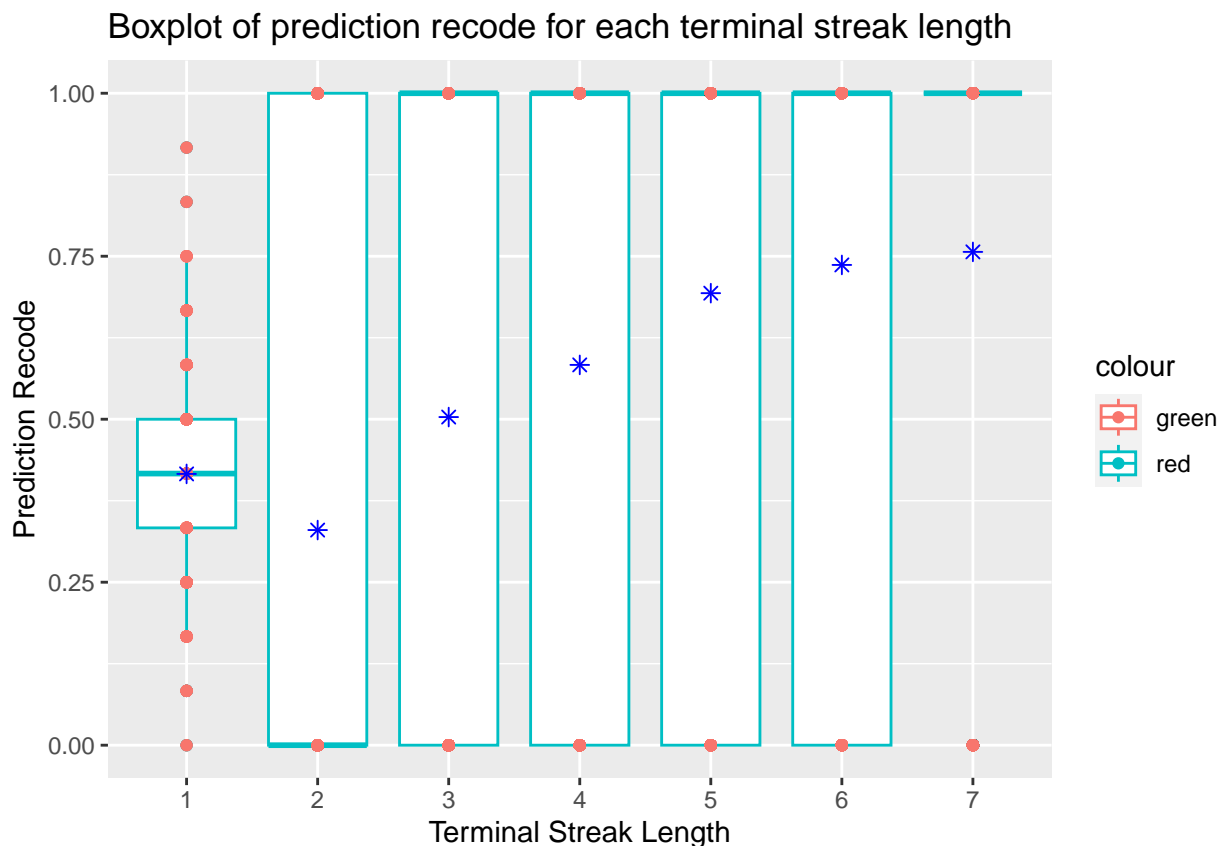

ply pearson correlation test on the data

```
cor.test(cdata$terminal_streak_length, cdata$prediction_recode, method = "pearson")
```

```
##
## Pearson's product-moment correlation
##
```

```
## data:  cdata$terminal_streak_length and cdata$prediction_recode
## t = 15.1, df = 2098, p-value < 2.2e-16
## alternative hypothesis: true correlation is not equal to 0
## 95 percent confidence interval:
##  0.2739860 0.3511626
## sample estimates:
##      cor
## 0.3130911
```

```
cor.test(cdata1$terminal_streak_length, cdata1$prediction_recode, method = "pearson")
```

```
##
## Pearson's product-moment correlation
##
## data:  cdata1$terminal_streak_length and cdata1$prediction_recode
## t = 9.3329, df = 663, p-value < 2.2e-16
## alternative hypothesis: true correlation is not equal to 0
## 95 percent confidence interval:
##  0.2717788 0.4062701
## sample estimates:
##      cor
## 0.3407666
```

```
cor.test(cdata2$terminal_streak_length, cdata2$prediction_recode, method = "pearson")
```

```
##
## Pearson's product-moment correlation
##
## data:  cdata2$terminal_streak_length and cdata2$prediction_recode
## t = 5.9286, df = 754, p-value = 4.65e-09
## alternative hypothesis: true correlation is not equal to 0
## 95 percent confidence interval:
##  0.1418743 0.2781612
## sample estimates:
##      cor
## 0.2110432
```

```
cor.test(cdata3$terminal_streak_length, cdata3$prediction_recode, method = "pearson")
```

```
##
## Pearson's product-moment correlation
##
## data:  cdata3$terminal_streak_length and cdata3$prediction_recode
## t = 11.699, df = 677, p-value < 2.2e-16
## alternative hypothesis: true correlation is not equal to 0
## 95 percent confidence interval:
##  0.3455118 0.4708054
## sample estimates:
##      cor
## 0.4100916
```

do linear regression on the data

```
model <- lm(prediction_recode ~ terminal_streak_length, data = cdata)
summary(model)
```

```
##
```



```
## Call:
## lm(formula = prediction_recode ~ terminal_streak_length, data = cdata)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.7912 -0.4296  0.2088  0.3535  0.5704
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.28492    0.02142    13.3  <2e-16 ***
## terminal_streak_length 0.07232    0.00479    15.1  <2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.439 on 2098 degrees of freedom
## Multiple R-squared:  0.09803, Adjusted R-squared:  0.0976
## F-statistic: 228 on 1 and 2098 DF, p-value: < 2.2e-16
```

```
model <- lm(prediction_recode ~ terminal_streak_length, data = cdata1)
summary(model)
```

```
##
## Call:
## lm(formula = prediction_recode ~ terminal_streak_length, data = cdata1)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.8247 -0.4333  0.1753  0.3319  0.5667
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.276692    0.037515   7.376 4.9e-13 ***
## terminal_streak_length 0.078289    0.008389   9.333 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.4326 on 663 degrees of freedom
## Multiple R-squared:  0.1161, Adjusted R-squared:  0.1148
## F-statistic: 87.1 on 1 and 663 DF, p-value: < 2.2e-16
```

```
model <- lm(prediction_recode ~ terminal_streak_length, data = cdata2)
summary(model)
```

```
##
## Call:
## lm(formula = prediction_recode ~ terminal_streak_length, data = cdata2)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.6572 -0.4598  0.1389  0.4415  0.5896
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.311728    0.037230   8.373 2.73e-16 ***
## terminal_streak_length 0.049355    0.008325   5.929 4.65e-09 ***
```

```
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.4578 on 754 degrees of freedom
## Multiple R-squared:  0.04454,    Adjusted R-squared:  0.04327
## F-statistic: 35.15 on 1 and 754 DF,  p-value: 4.65e-09

model <- lm(prediction_recode ~ terminal_streak_length, data = cdata3)
summary(model)

##
## Call:
## lm(formula = prediction_recode ~ terminal_streak_length, data = cdata3)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.9075 -0.4472  0.1448  0.2766  0.5615
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.263132   0.035186    7.478 2.34e-13 ***
## terminal_streak_length 0.092047   0.007868   11.699 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.41 on 677 degrees of freedom
## Multiple R-squared:  0.1682, Adjusted R-squared:  0.1669
## F-statistic: 136.9 on 1 and 677 DF,  p-value: < 2.2e-16
```