

EXPERIMENT NO : 5 - CONFIGURING A CRYPTOCURRENCY WALLET USING METAMASK AND INTEGRATING IT WITH A DAPP

AIM : To configure a cryptocurrency wallet using MetaMask, connect it to the Sepolia test network, and integrate the wallet with a decentralized application (DApp) to perform and verify a test ETH transaction.

THEORY :

A cryptocurrency wallet is a digital application used to manage blockchain accounts and interact with decentralized networks. It does not directly store physical coins; instead, it stores and manages the cryptographic keys required to access blockchain assets.

MetaMask is a browser-based cryptocurrency wallet that supports Ethereum and other Ethereum-compatible blockchain networks. It provides users with a public wallet address for receiving assets and securely manages private keys for authorizing transactions. The public address can be shared, but the Secret Recovery Phrase and private key must never be shared.

A blockchain network is a distributed ledger maintained by multiple nodes. Ethereum provides a platform for executing smart contracts and decentralized applications. For development and testing, networks such as Sepolia are used. Sepolia is an Ethereum test network where test ETH has no real monetary value and is used to pay transaction gas fees during testing.


A DApp, or decentralized application, is an application that interacts with a blockchain through smart contracts. A DApp uses MetaMask to request permission to access the user's wallet address and to authorize blockchain transactions. The connection between the DApp and MetaMask is generally established through the Ethereum provider interface.

The **eth_accounts** method is used to retrieve the wallet address connected to the DApp. The DApp can also request permission to connect to the wallet. However, MetaMask does not expose the user's private key to the DApp. Instead, the DApp sends transaction requests to MetaMask, and the user reviews and approves them.


An EIP-1559 transaction is an Ethereum transaction format that includes a base fee and a priority fee. The base fee is determined by the network, while the priority fee acts as a tip to the validator. MetaMask displays the transaction details and estimated gas fee before the user confirms the transaction.

In this experiment, MetaMask was configured with the Sepolia test network, test ETH was obtained from a faucet, and the wallet was connected to the MetaMask Test DApp. An EIP-1559 transaction was then authorized through MetaMask and verified in the wallet's activity section.


MetaMask Wallet Successfully Created and Ready to Use

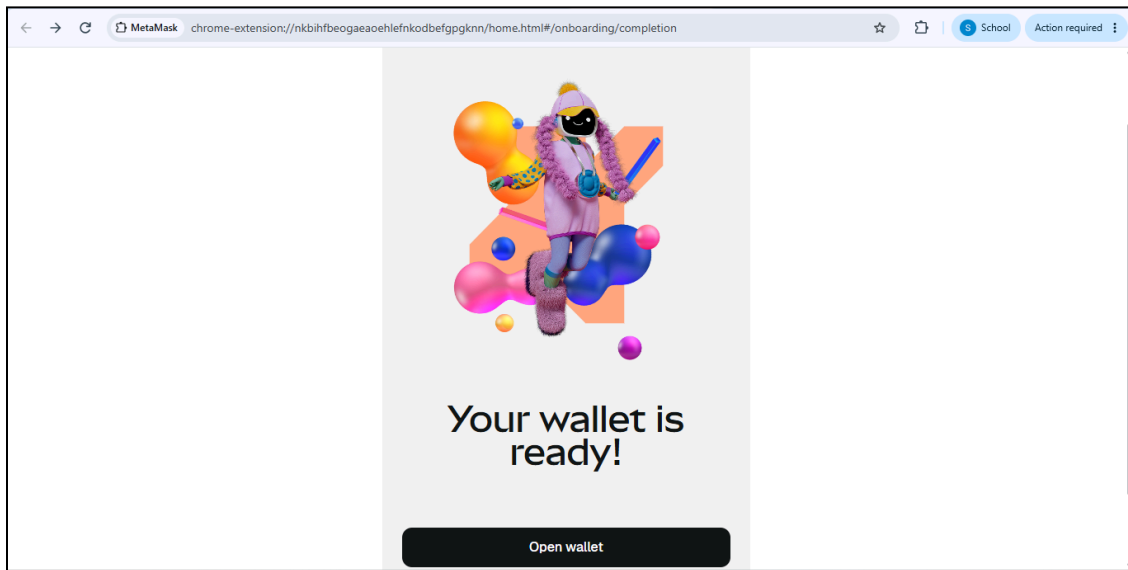


MetaMask Wallet Dashboard Showing Account and Funding Options

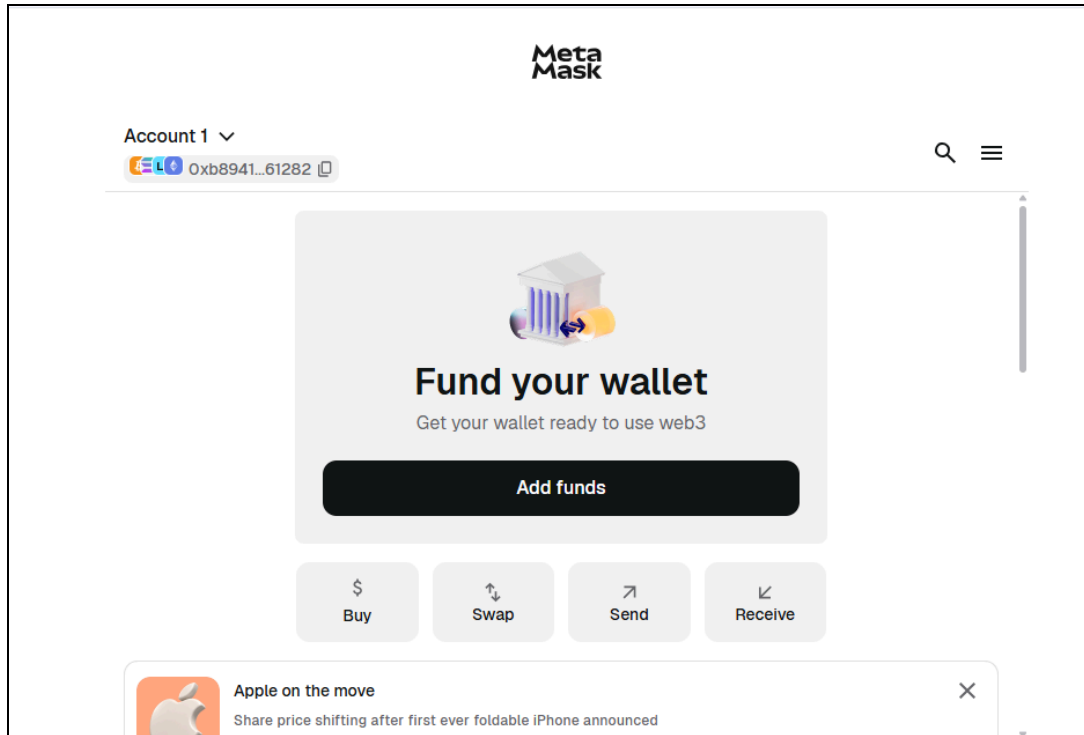


MetaMask Manage Networks Interface Showing Sepolia Test Network

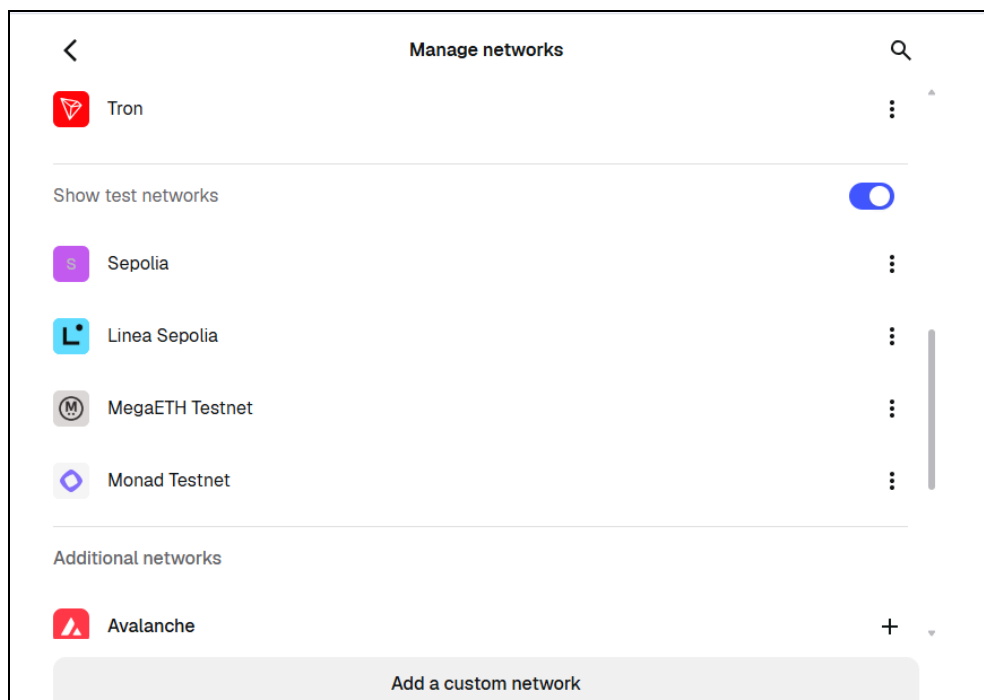

Infura Dashboard Showing Quick-Start Steps for API Key Configuration

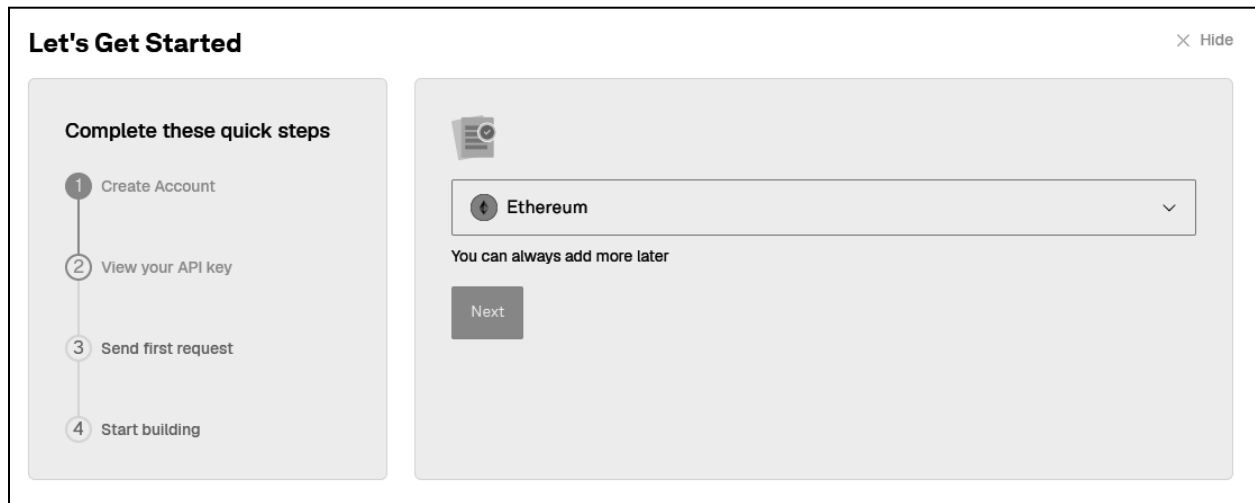

Infura Dashboard Displaying the Generated API Key and HTTPS Endpoint

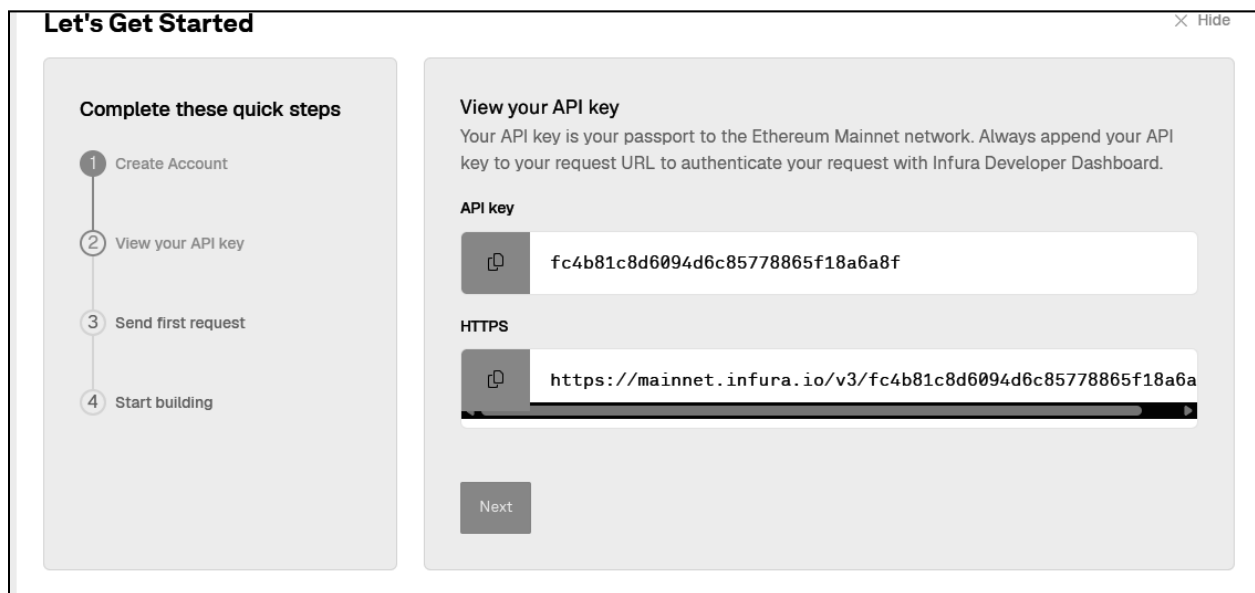

Infura Dashboard Showing the “Send Your First Request” Step

Let's Get Started

Complete these quick steps

- 1 Create Account
- 2 View your API key
- 3 Send first request
- 4 Start building

Send your first request

To send your first request, click "Send request" below. If you have configured your API key to require API key secret, JWTs, or allowlists please disable these in your settings before sending your first request.

Latest Block Number ▾

```
curl --url https://mainnet.infura.io/v3/fc4b81c8d6094d6c85778865f18a6a8f \
-X POST \
-H "Content-Type: application/json" \
-d '{"jsonrpc": "2.0", "method": "eth_blockNumber", "params": [], "id": 1}'
```

Send Request →

See your response here

Previous

Next

MetaMask Test DApp Showing Sepolia Network and Connection Actions

USE WINDOW.ETHEREUM

Status

Network: 11155111

ChainId: 0xaa36a7

Accounts:

Connect Actions

CONNECT

WALLET CONNECT

SDK CONNECT

ETH_ACCOUNTS

eth_accounts result:

Permissions Actions

REQUEST PERMISSIONS

GET PERMISSIONS

REVOKE ACCOUNTS PERMISSION

Permissions result:

Network Picker

CURRENT NETWORK: SEPOLIA


38°C Partly sunny

Search


ENG IN 10-09-2026

MetaMask Test DApp Showing Active MetaMask Provider and Sepolia Wallet Connection


5

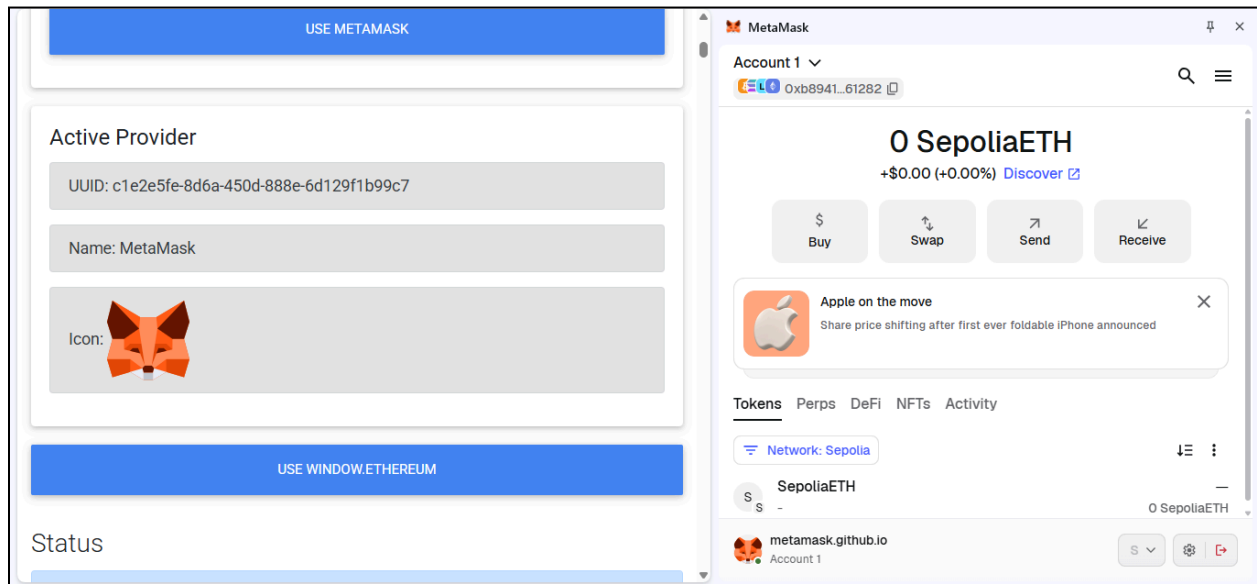


MetaMask Test DApp Successfully Connected and Wallet Address Retrieved Using `eth_accounts`

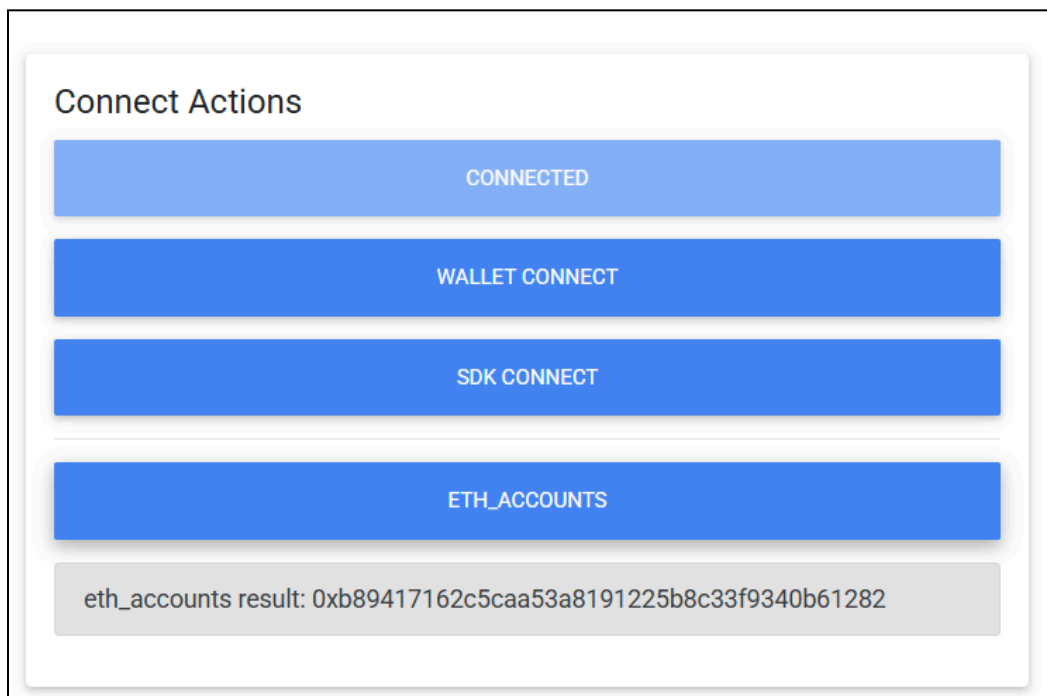

DApp Permissions Result Showing Authorized Account and Permitted Chains

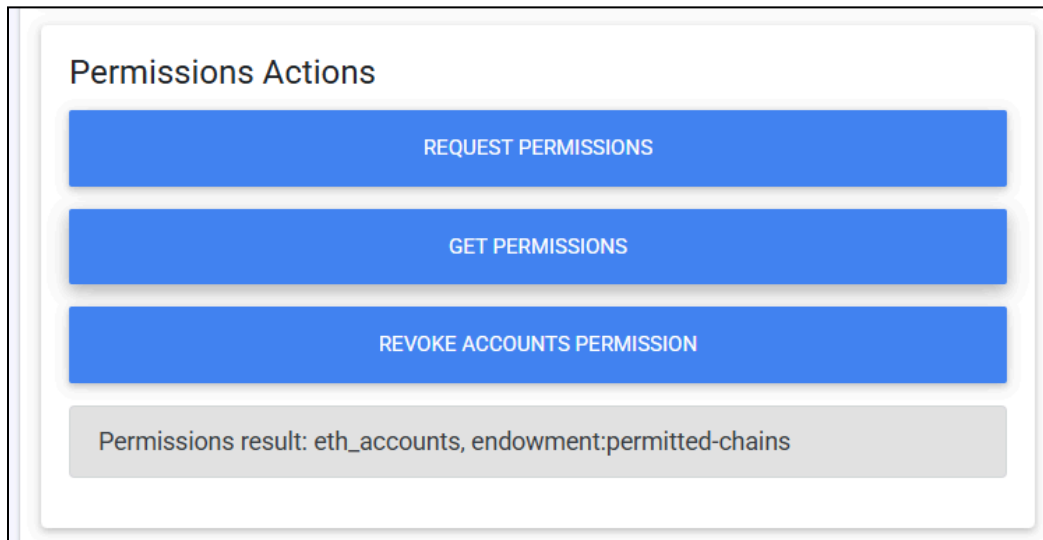

MetaMask Transaction Confirmation Request on the Sepolia Test Network

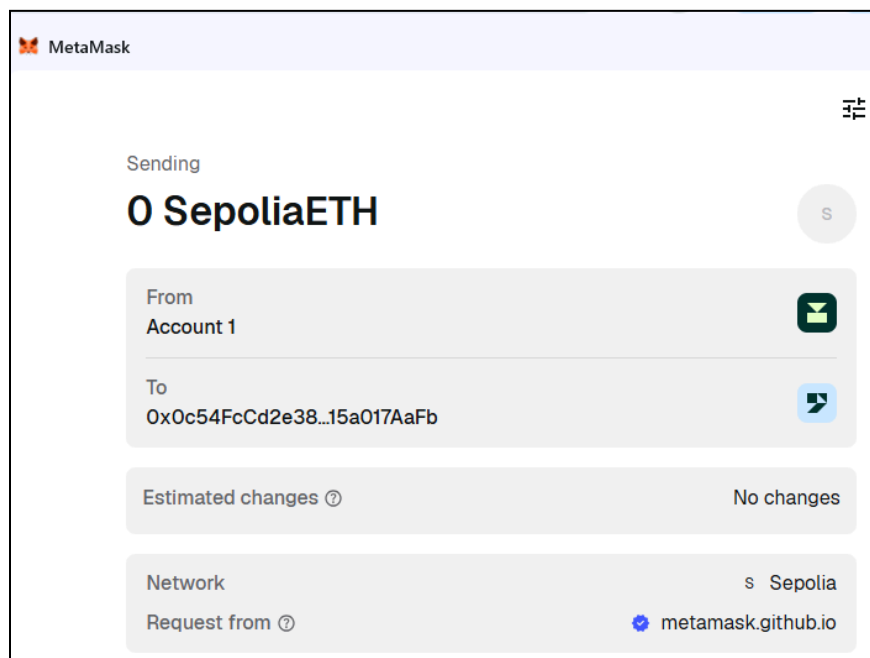


Requesting Sepolia Test ETH from a Cryptocurrency Faucet

The screenshot shows the ZALALENA FAUCET website. The header includes the logo, navigation links (Home, Guides, Faucets, About Us, Contact Us), and a Donate button. The main heading is "Ethereum Sepolia Faucet". Below it, a subheading reads "Free ETH for Smart Contract Testing on Sepolia Testnet" followed by a "Distributed & Cloud Computing" badge. A status bar indicates "No login • No balance • Instant claim". A green bar shows "Online" and "Avg. Response Time: 14.3s". A central box displays "2,720 Claims • 30.36 ETH Distributed" and a wallet address "0xb89417162C5Caa53a8191225B8C3". Below this is a green "I am human" button with a checkmark and an hCaptcha logo. At the bottom of the central box is a large green button labeled "Claim 0.001 ETH".


Successful Sepolia Test ETH Claim from Zalalena Faucet

The screenshot shows the ZALALENA FAUCET website after a successful claim. The header is the same. The central box now shows "2,721 Claims • 30.36 ETH Distributed" and the same wallet address. The "I am human" button now has a green square icon. The large green button is still present. Below the central box, a message states "Next claim available in: 59:55" and "Transaction sent successfully", with a link to "View on Explorer". A chat bubble icon with "0" is at the bottom left.

MetaMask Transaction Confirmation Screen for an EIP-1559 Transaction on Sepolia

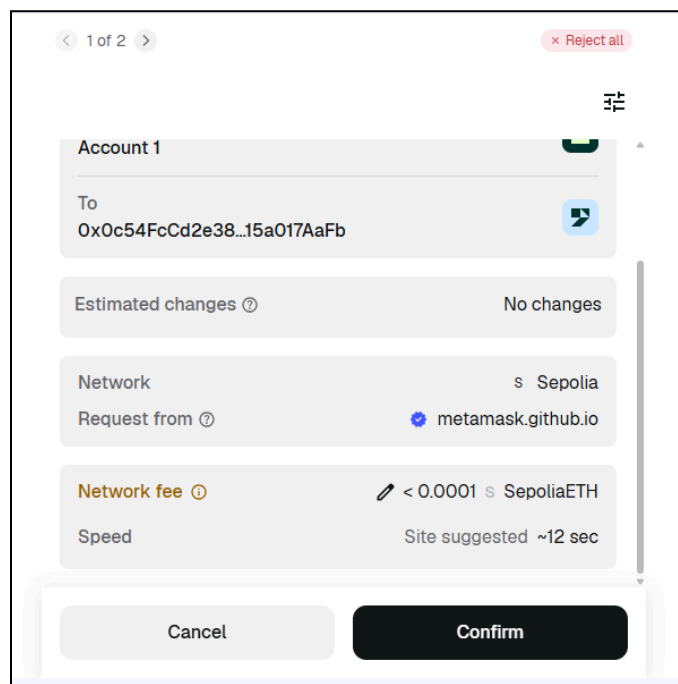

MetaMask Activity Tab Showing Successful Sepolia ETH Transaction

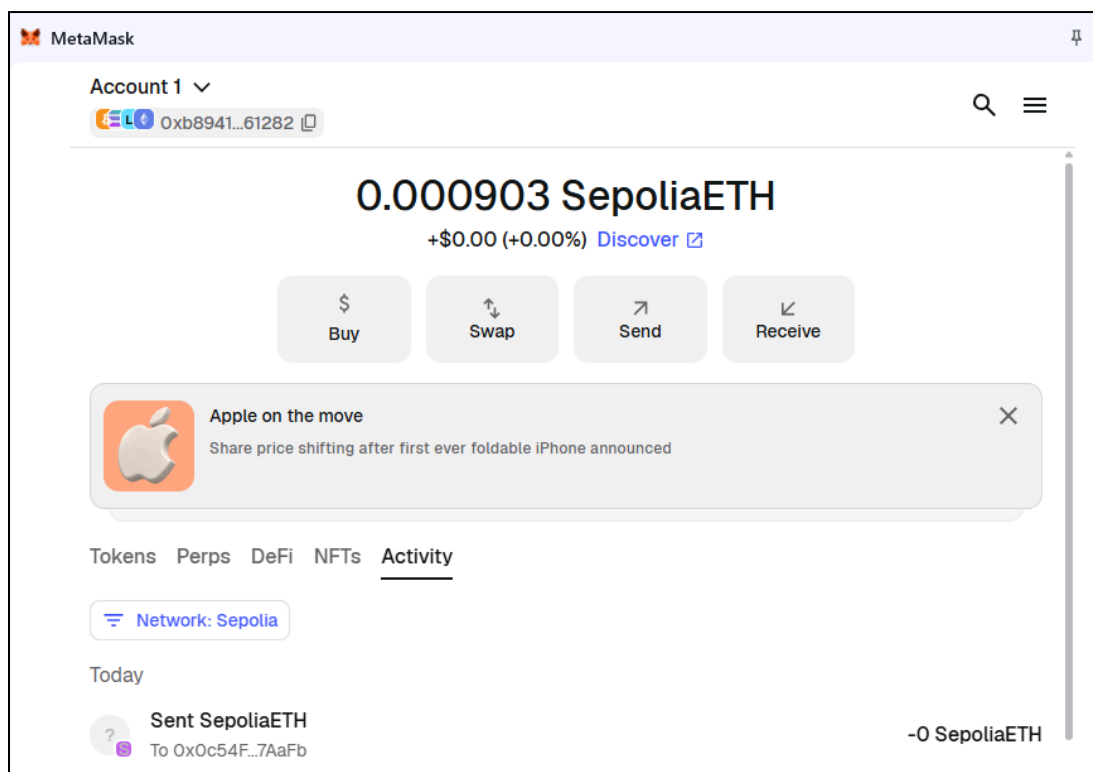

CONCLUSION :

The cryptocurrency wallet was successfully created and configured using MetaMask. The Sepolia test network was added, and test ETH was obtained through a faucet. The wallet was then connected to the MetaMask Test DApp, where the account address and permissions were successfully retrieved. Finally, an EIP-1559 transaction was authorized and displayed in the MetaMask Activity tab, demonstrating successful interaction between the wallet, DApp, and blockchain test network.