


BENCHMARK(BM-EMPTY)

→ Args({10, 100})

Creates 2 instances of
benchmark → one for each
argument.

Creates one runner
per instance.

Small note on Runner:

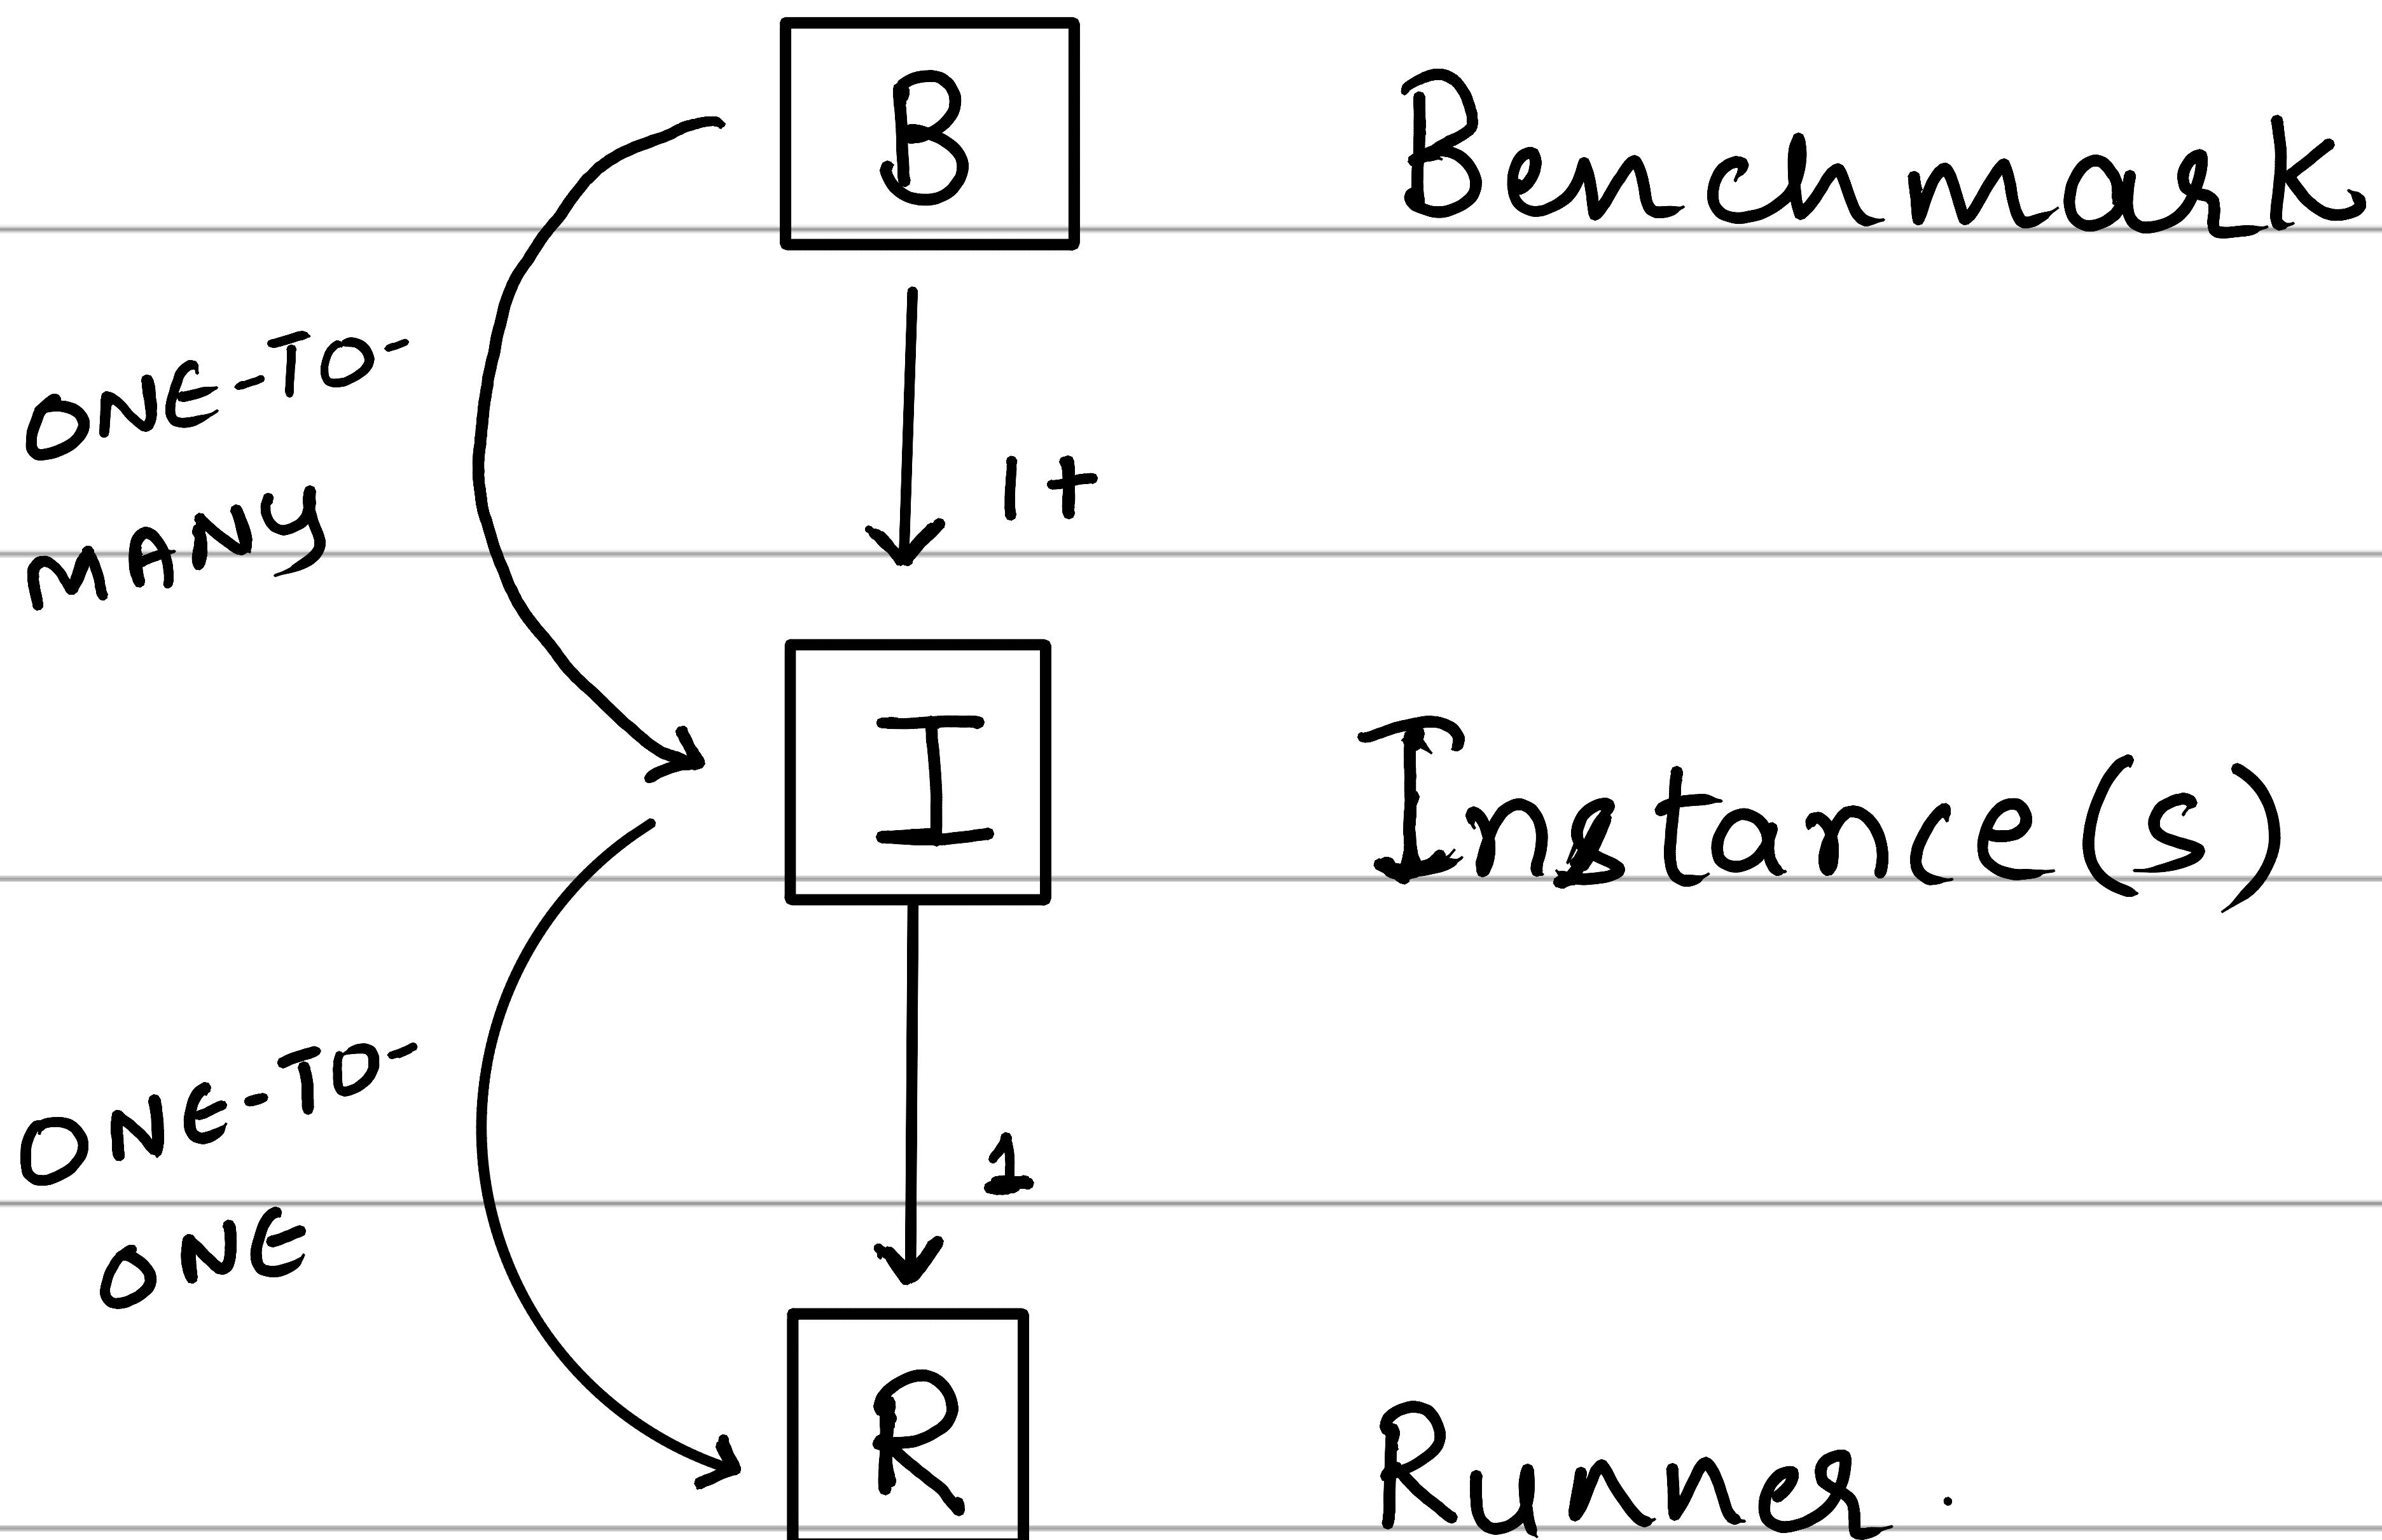

Assume a benchmark creates 1

instance & has one runner.

This runner will run N times,


thereby running the benchmark

instance N times. To achieve this,

Google benchmark maintains

= repetition indices. Assume 2

runners r_1 r_2 with repetition count as 3 & 5.

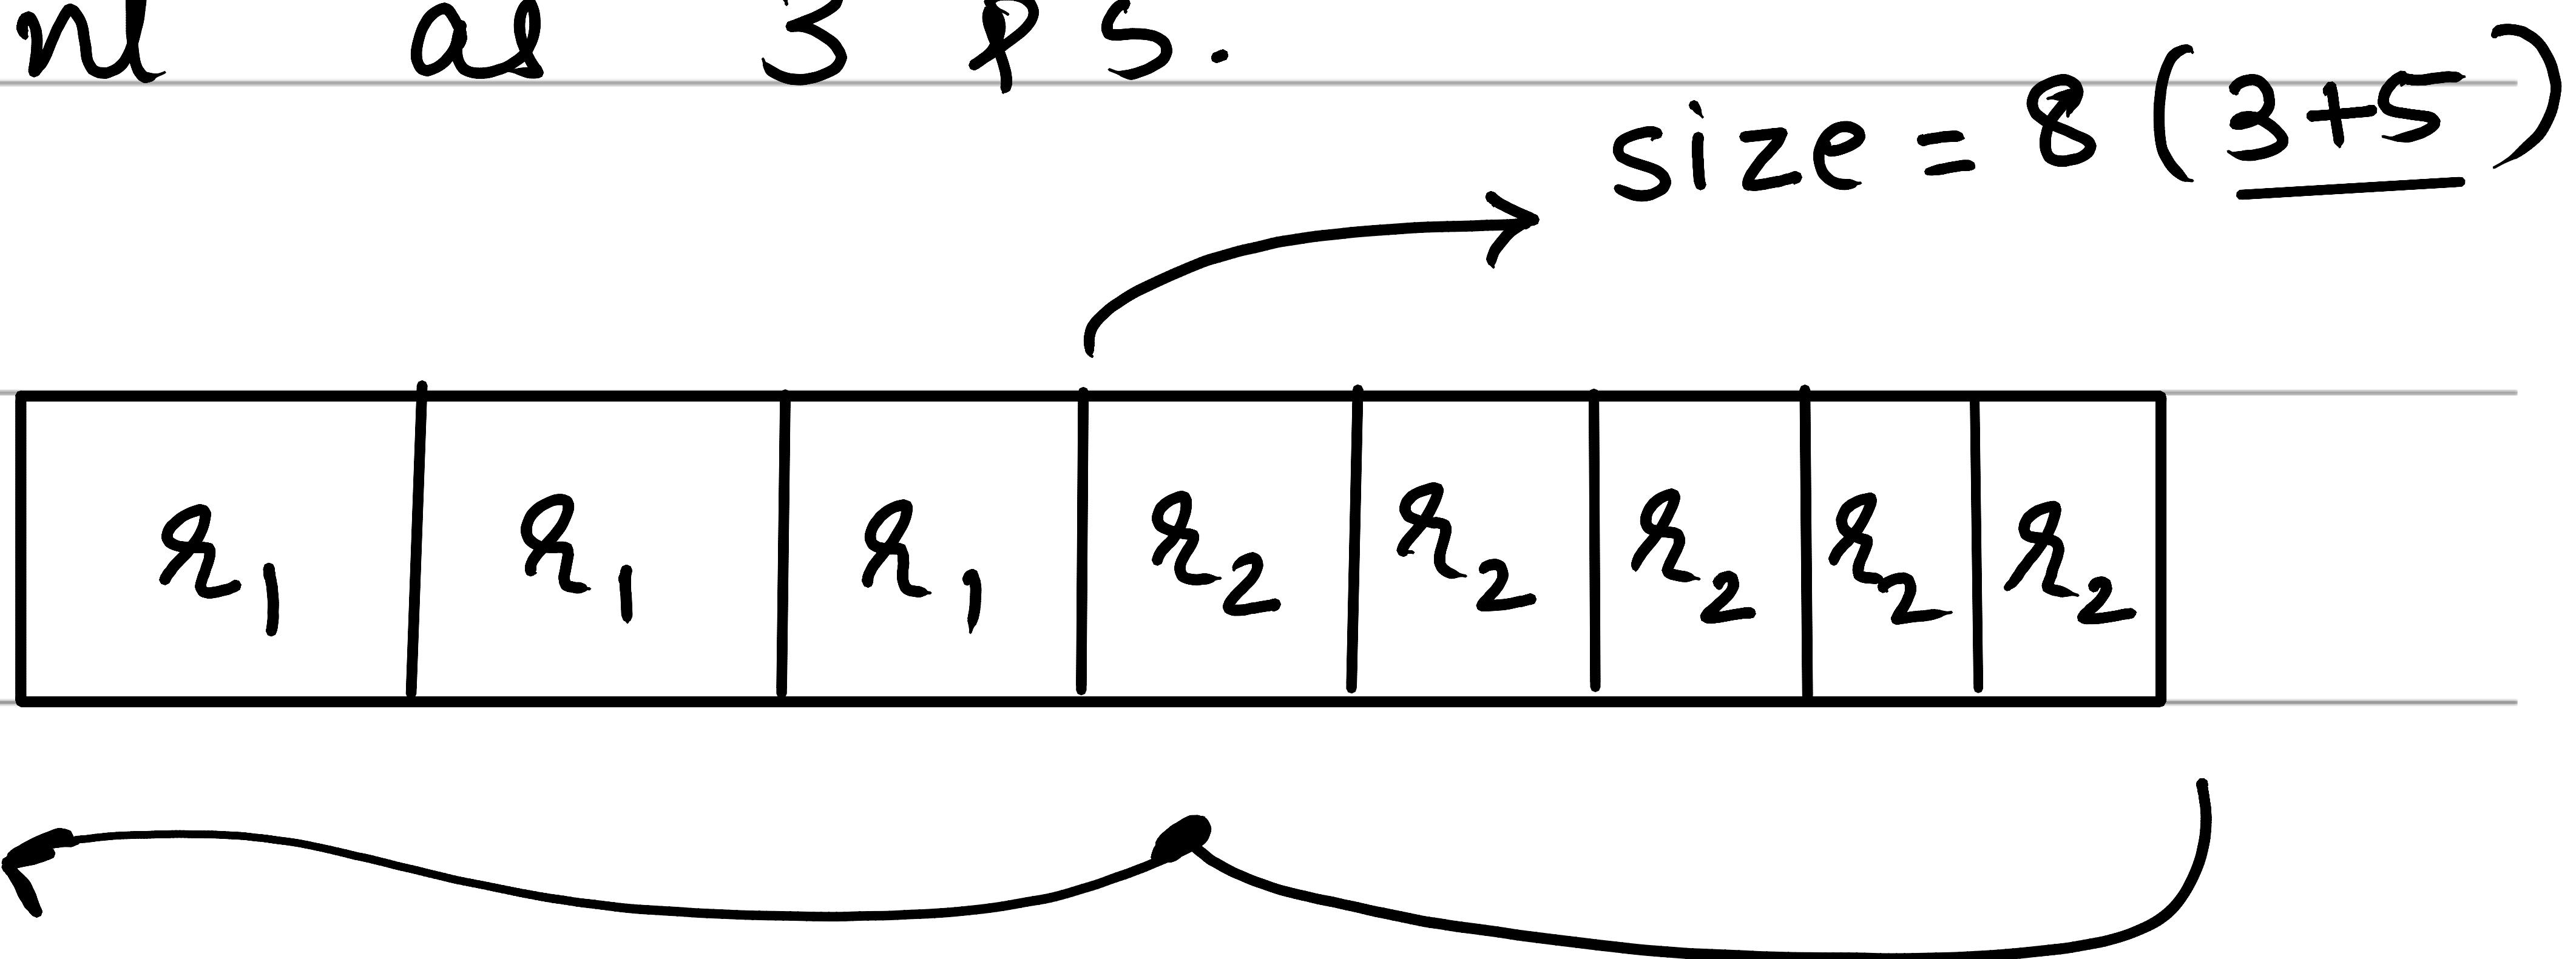

repetition indices

containing references

to runners. This way a runner

will run N times, thereby

running an instance desired no.

of times.