





STAR OVERVIEW ALL RWYS



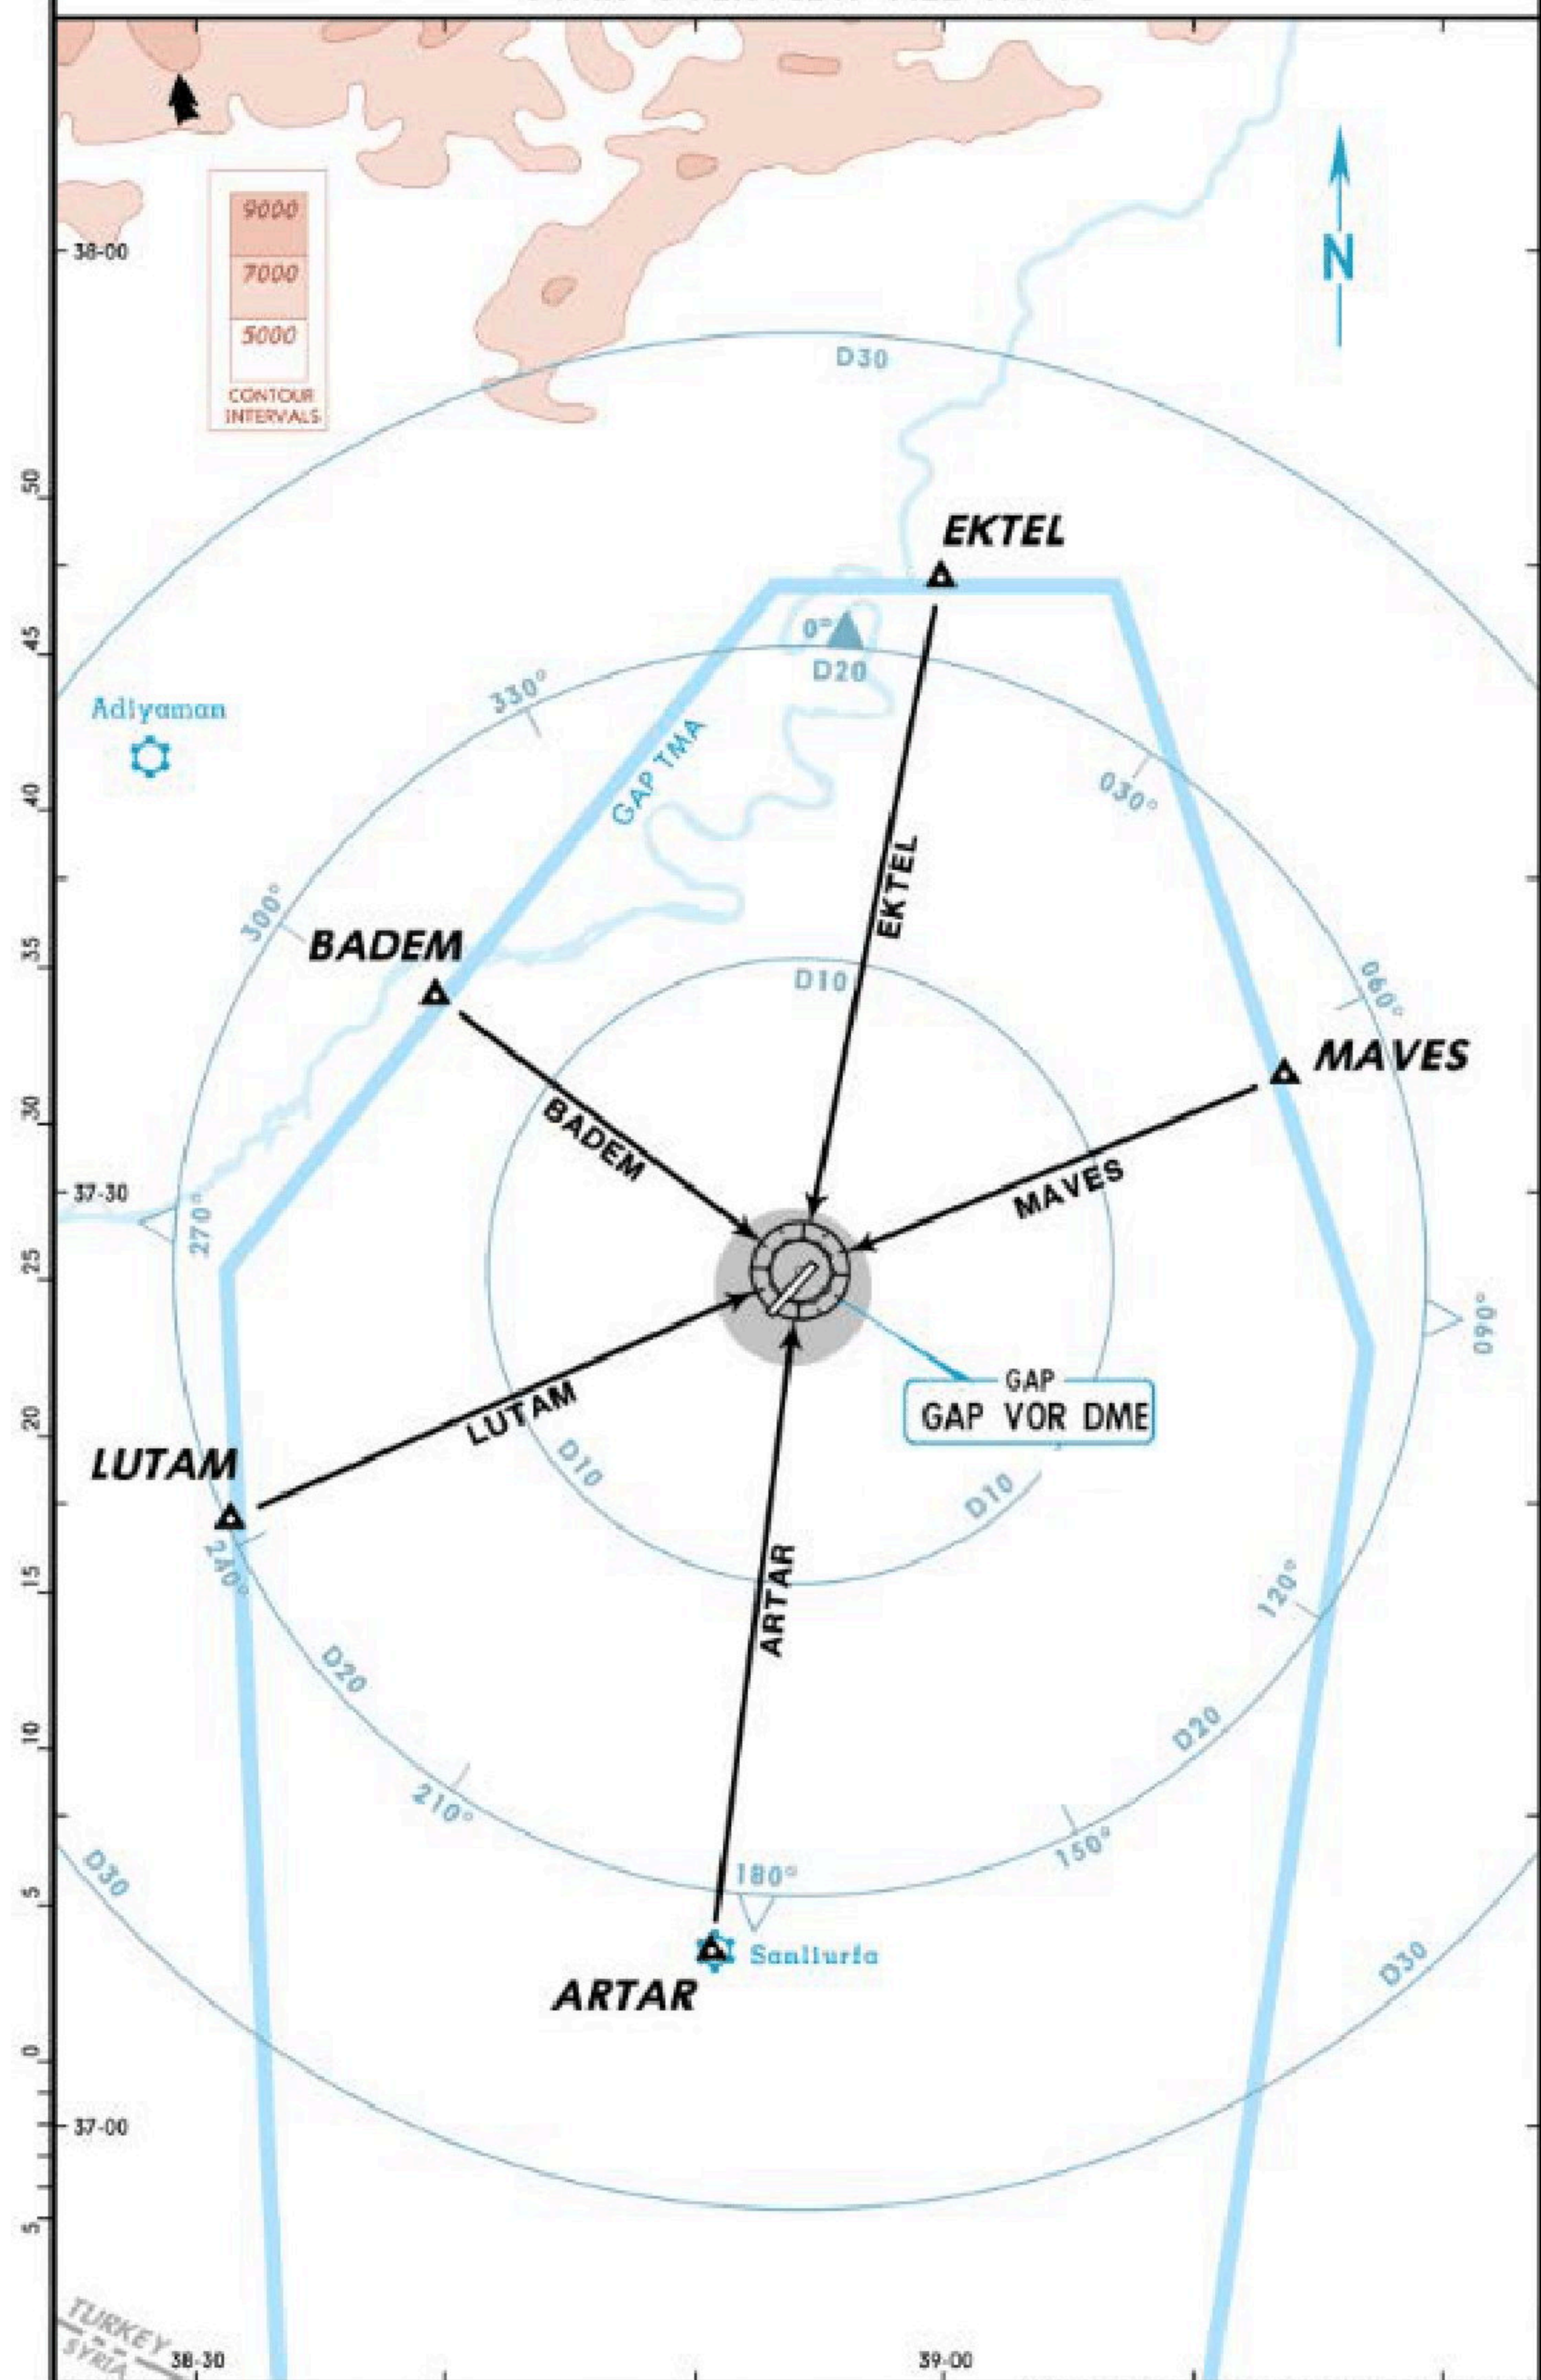


*ATIS 128.250	Apt Elev 2703'	Alt Set: hPa Trans level: By ATC Trans alt: 10000'	
------------------	-------------------	--	--

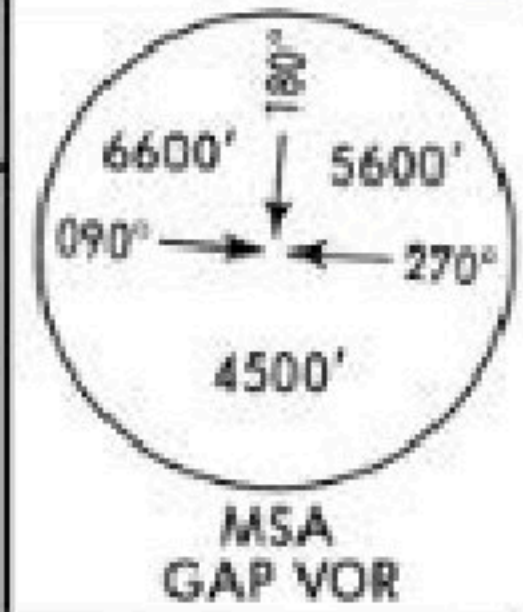


ARTAR 1E [ARTA1E]
BADEM 1E [BADE1E]
EKTEL 1E [EKTE1E]
LUTAM 1E [LUTA1E]
MAVES 1E [MAVE1E]
RWY 04

ARTAR 1F [ARTA1F]
BADEM 1F [BADE1F]
EKTEL 1F [EKTE1F]
LUTAM 1F [LUTA1F]
MAVES 1F [MAVE1F]
RWY 22

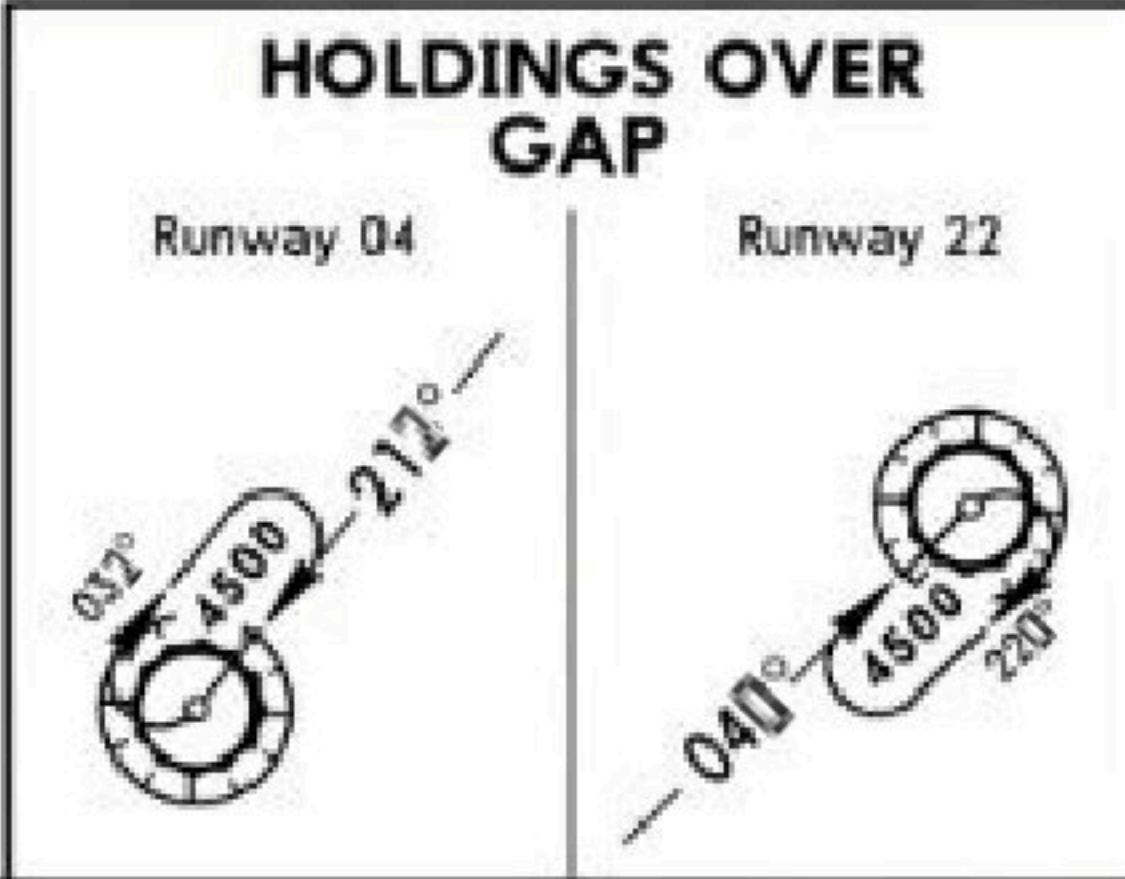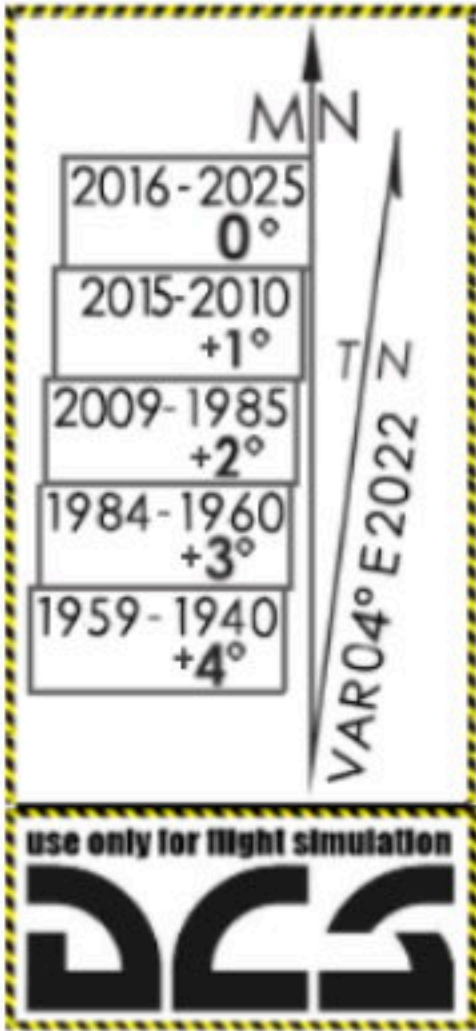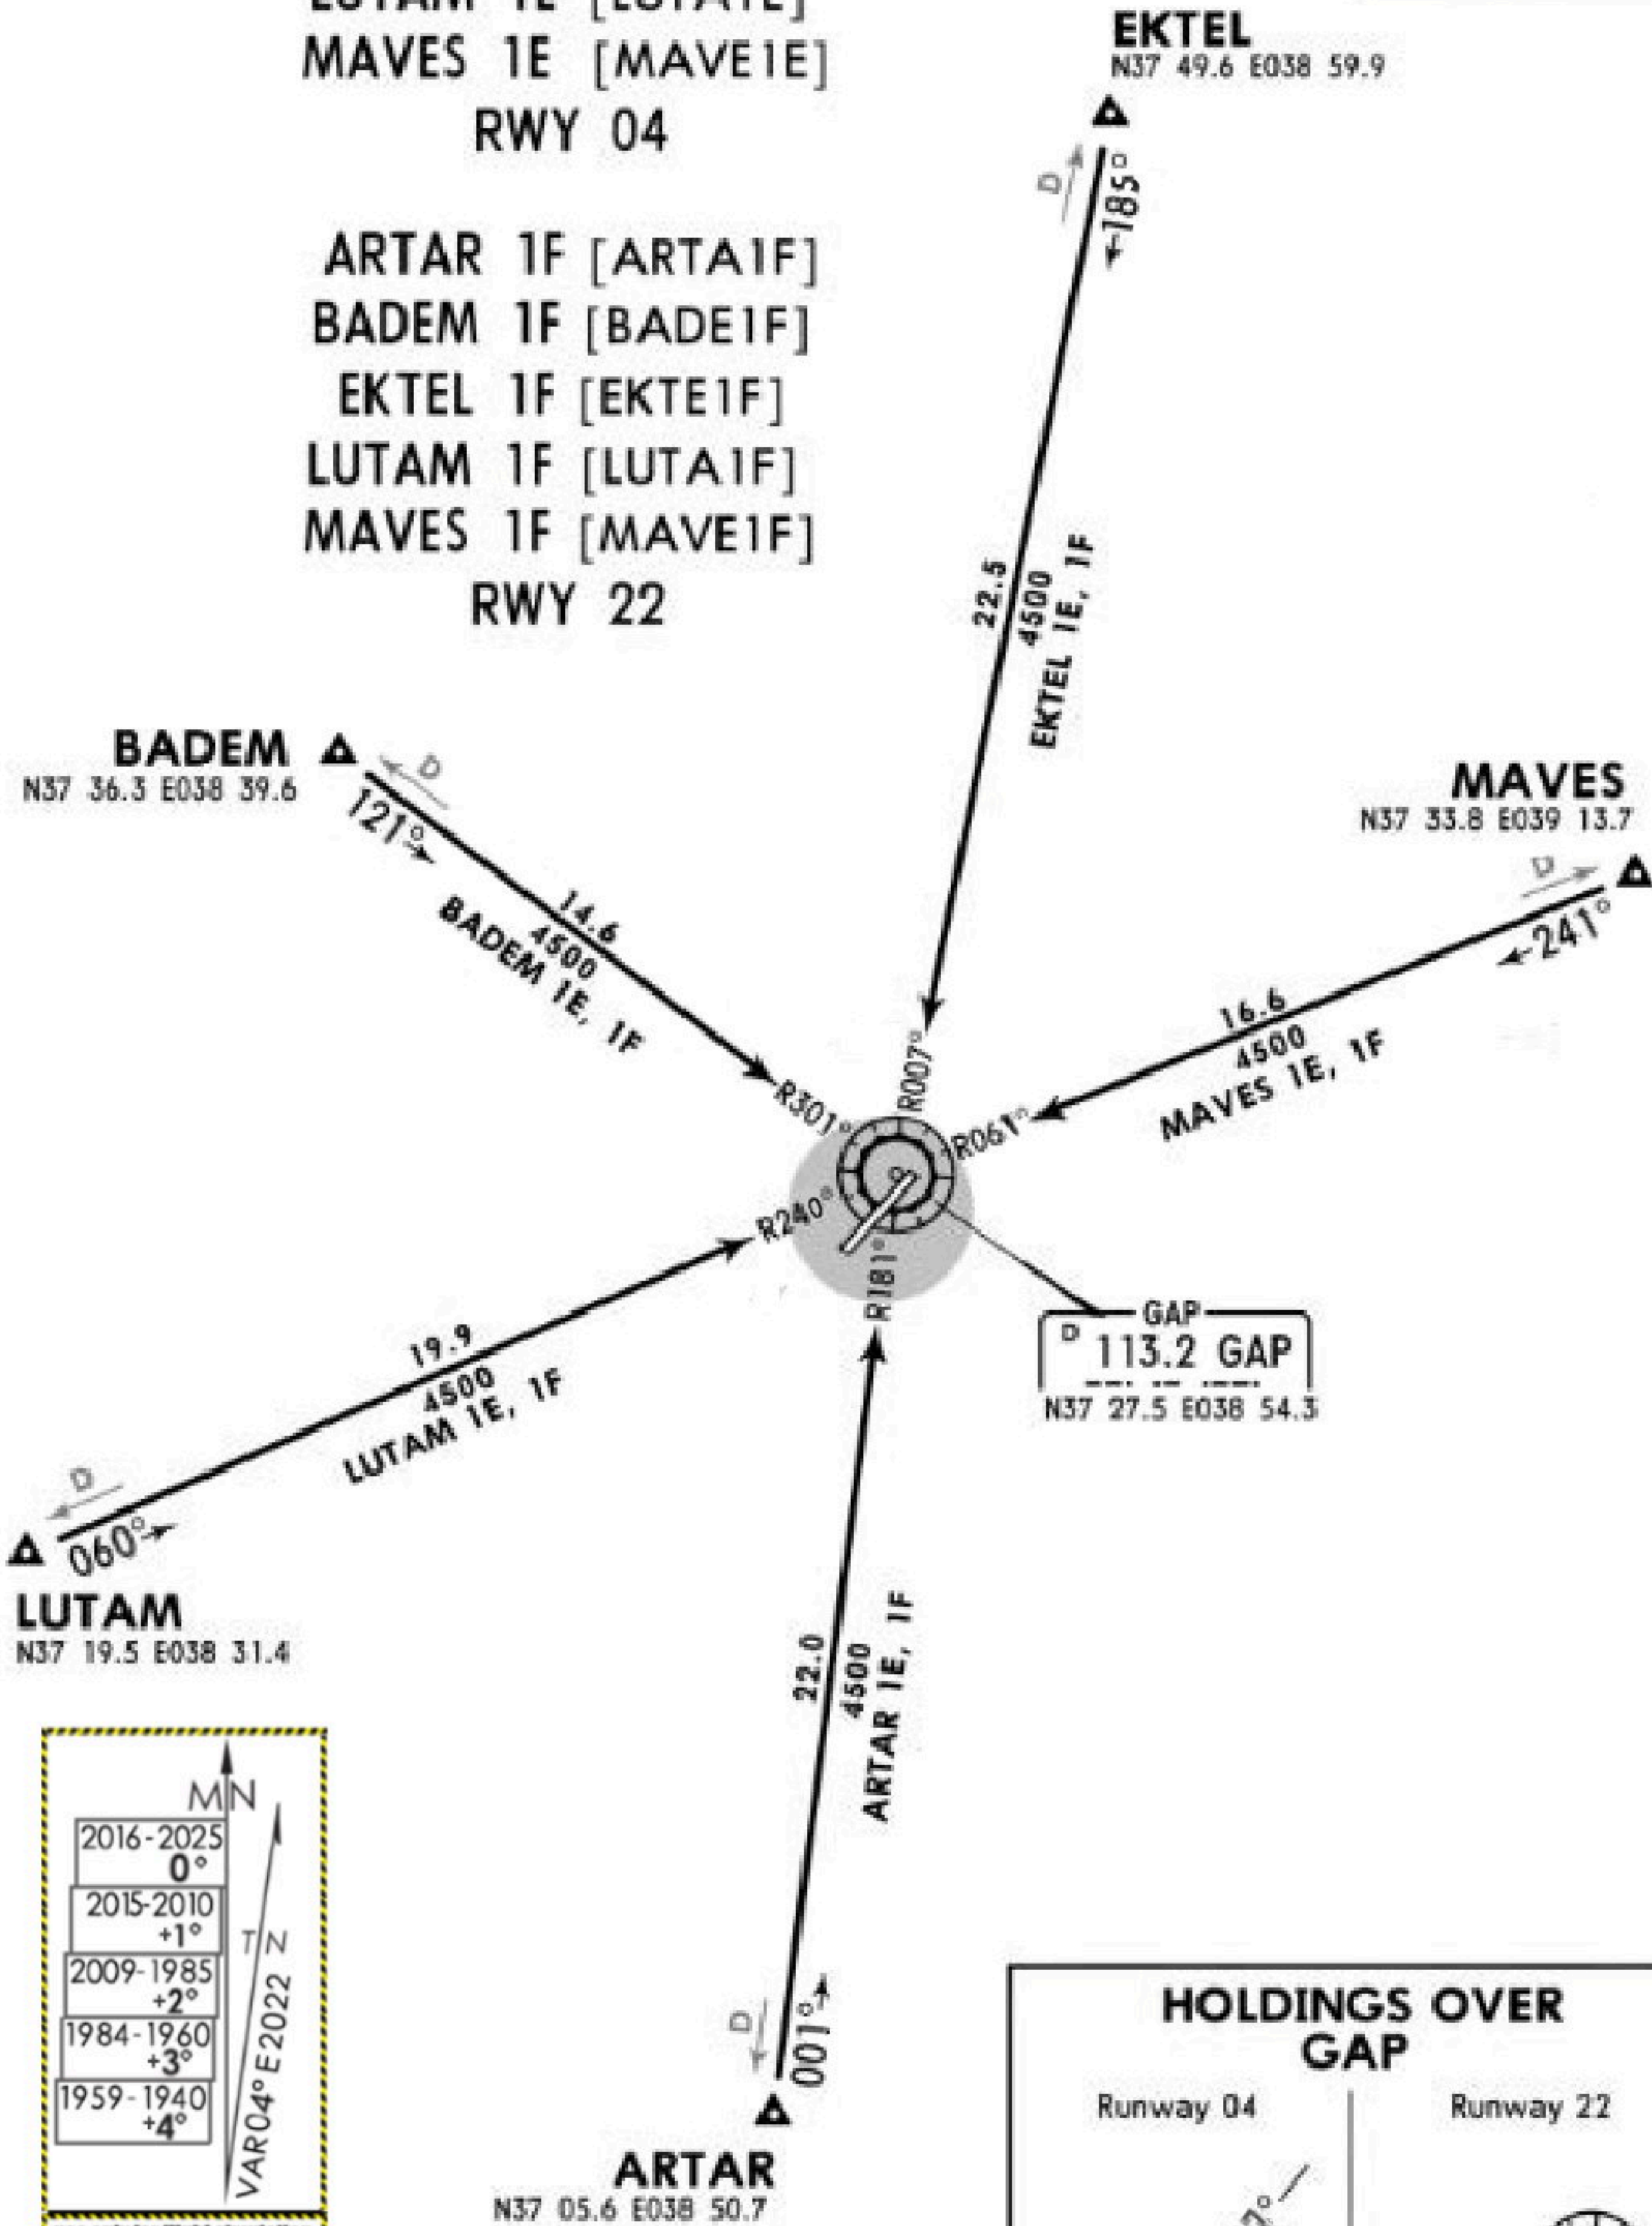




SID OVERVIEW ALL RWYS

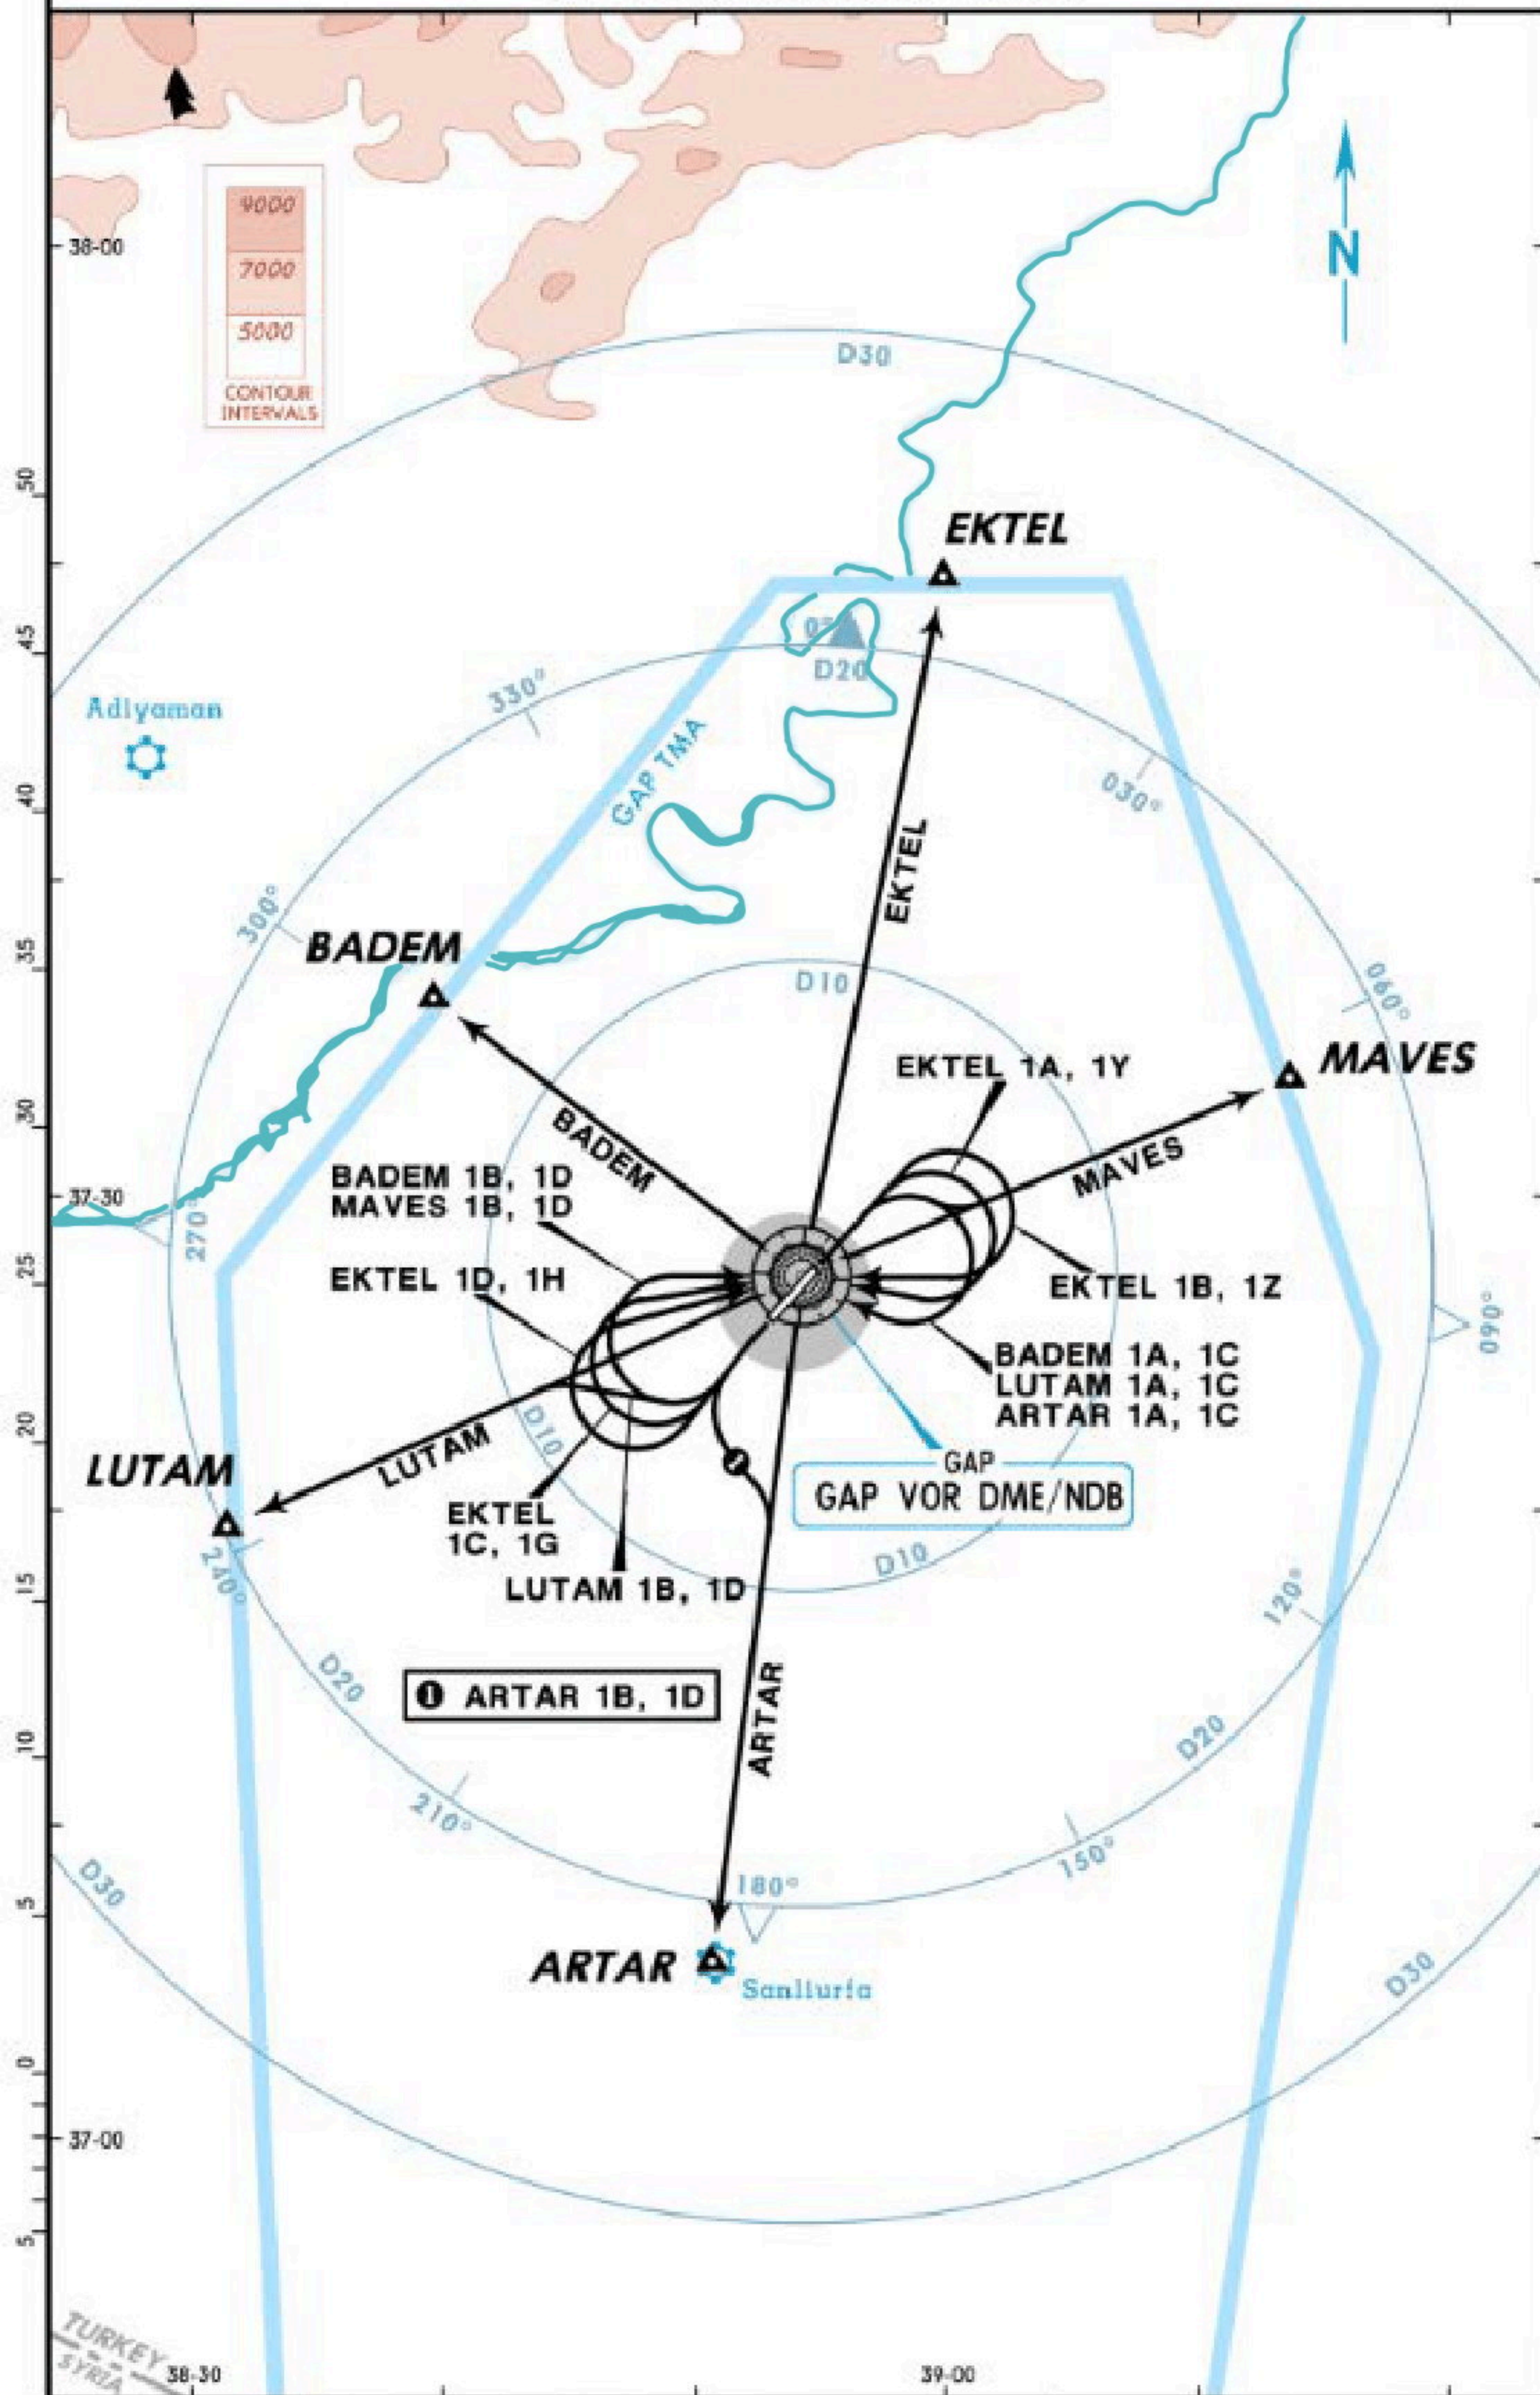





Apt Elev
2703'

Trans level: By ATC Trans alt: 10000'

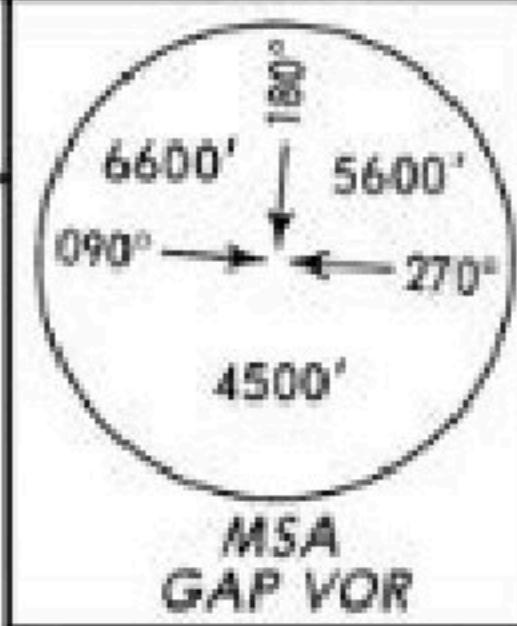

ARTAR ONE ALFA (ARTAR 1A) [ARTA1A]
BADEM ONE ALFA (BADEM 1A) [BADE1A]
EKTEL ONE ALFA (EKTEL 1A) [EKTE1A]
EKTEL ONE BRAVO (EKTEL 1B) [EKTE1B]
LUTAM ONE ALFA (LUTAM 1A) [LUTA1A]
MAVES ONE ALFA (MAVES 1A) [MAVE1A]
RWY 04 DEPARTURES
BASED ON GAP VOR

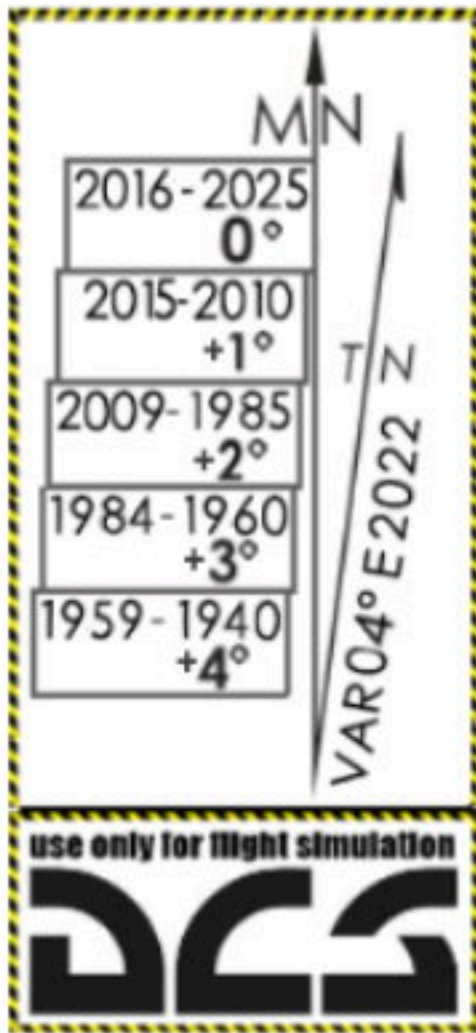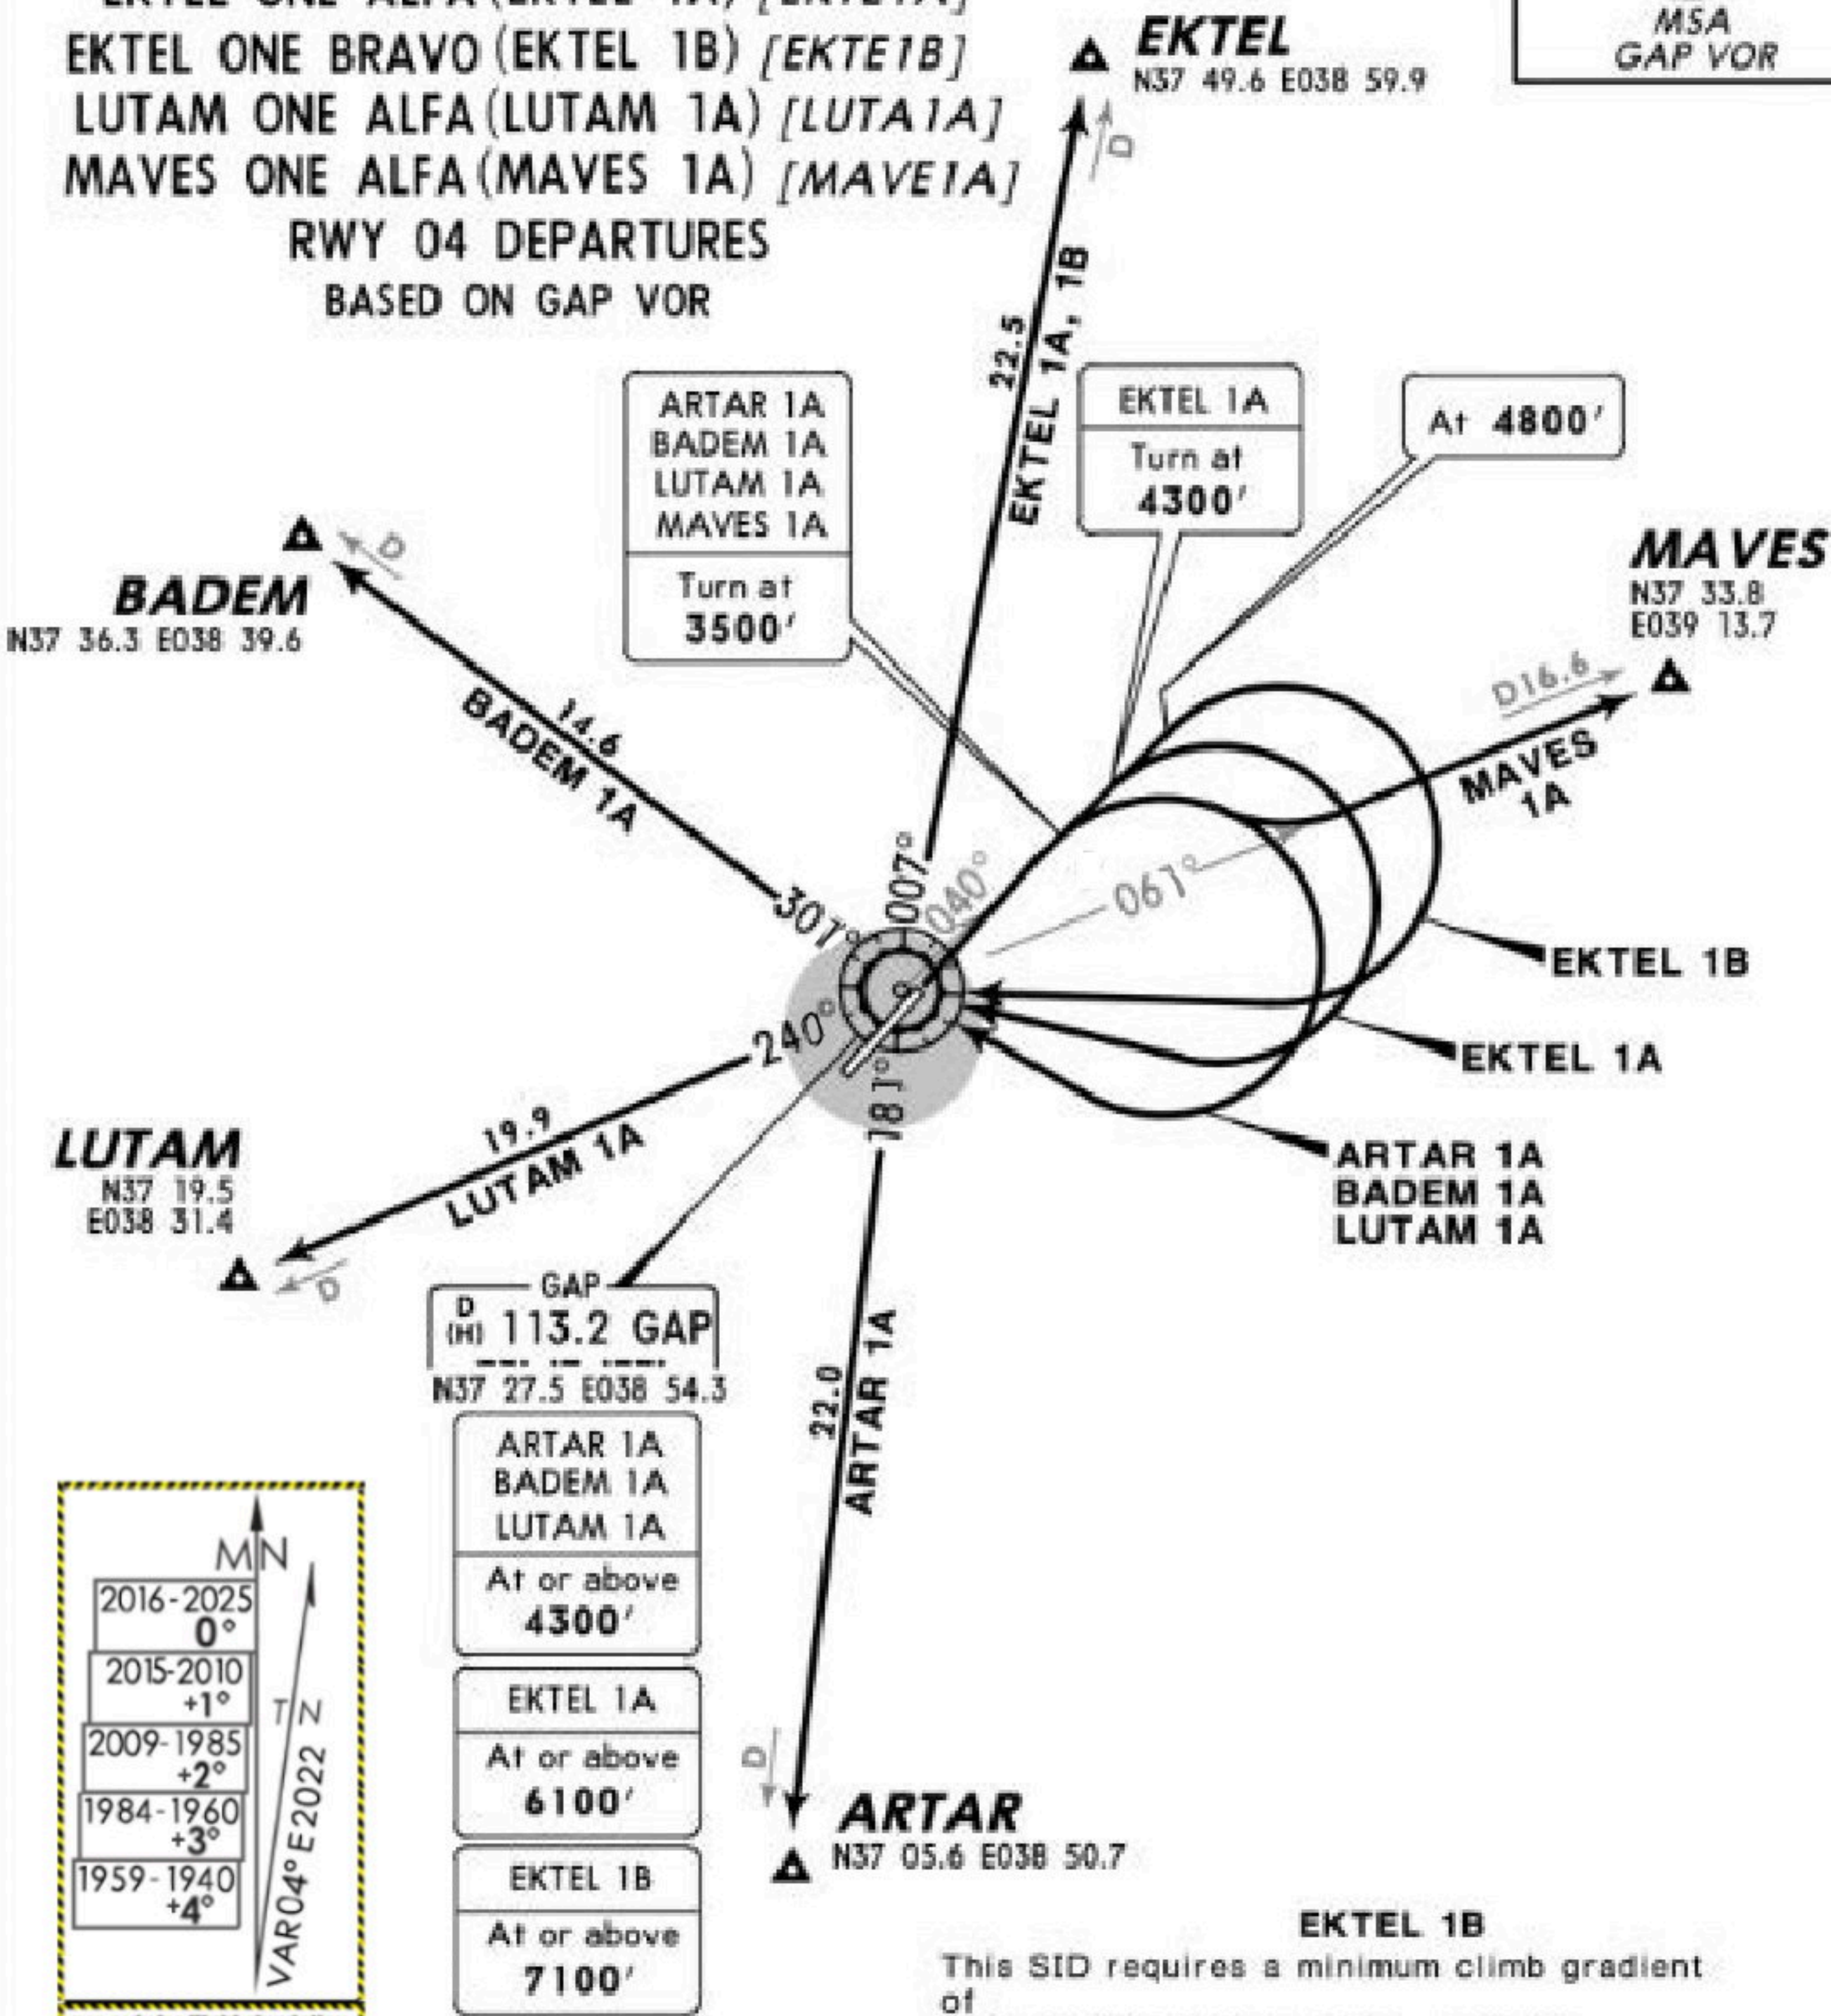


This SID requires a minimum climb gradient of 273' per NM (4.5%) up to 13000'.



Gnd speed-KT	75	100	150	200	250	300
273' per NM	342	456	684	911	1139	1367

SID	ROUTING
ARTAR 1A	Climb on GAP R-042 to 3500', turn RIGHT to GAP, GAP R-183 to ARTAR.
BADEM 1A	Climb on GAP R-042 to 3500', turn RIGHT to GAP, GAP R-303 to BADEM, then join airway.
EKTEL 1A	Climb on GAP R-042 to 4300', turn RIGHT to GAP, GAP R-007 to EKTEL, then join airway.
EKTEL 1B	Climb on GAP R-042 to 4800', turn RIGHT to GAP, GAP R-007 to EKTEL, then join airway.
LUTAM 1A	Climb on GAP R-042 to 3500', turn RIGHT to GAP, GAP R-242 to LUTAM, then join airway.
MAVES 1A	Climb on GAP R-042 to 3500', turn RIGHT, intercept GAP R-063 to MAVES, then join airway.

Trans level: By ATC Trans alt: 10000'

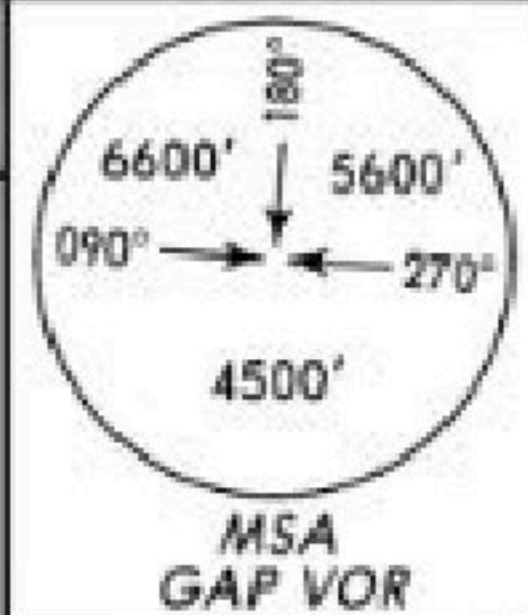

EKTEL
N37 49.6 E038 59.9

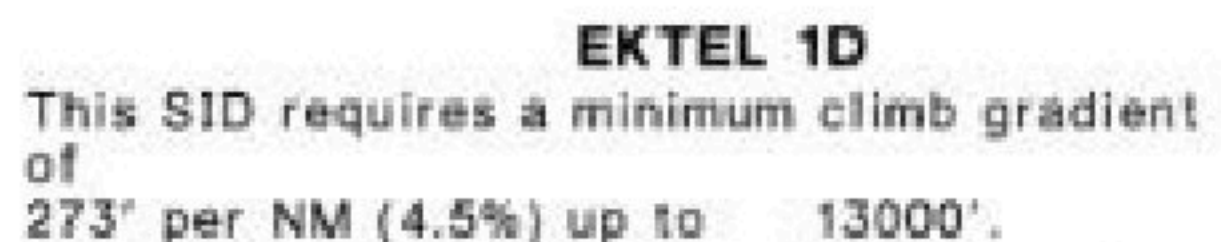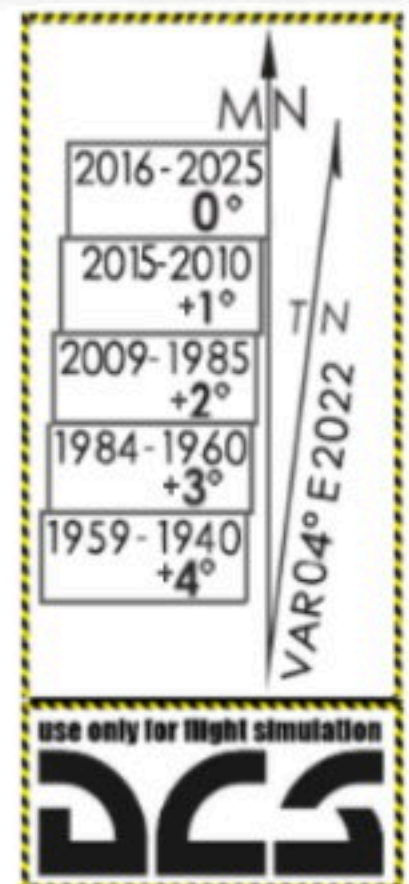

Gnd speed-KT	75	100	150	200	250	300
273' per NM	342	456	684	911	1139	1367

SID	ROUTING
ARTAR 1B	Climb on GAP R-214 to 3500', turn LEFT, intercept GAP R-181 to ARTAR.
BADEM 1B	Climb on GAP R-214 to 3500', turn RIGHT to GAP, GAP R-301 to BADEM, then join airway.
EKTEL 1C	Climb on GAP R-214 to 4300', turn RIGHT to GAP, GAP R-005 to EKTEL, then join airway.
EKTEL 1D	Climb on GAP R-214 to 4800', turn RIGHT to GAP, GAP R-005 to EKTEL, then join airway.
LUTAM 1B	Climb on GAP R-214 to 3500', turn RIGHT, intercept GAP R-240 to LUTAM, then join airway.
MAVES 1B	Climb on GAP R-214 to 3500', turn RIGHT to GAP, GAP R-061 to MAVES, then join airway.

GAP INTL

MIN

2016-2025
0°

2015-2010
+1°

2009-1985
+2°

1984-1960
+3°

1959-1940
+4°

T

VAR04°E2022 Z

use only for flight simulation

DCS

❶ The innermost TDZ lights and markings on left and right side are not located in the same distance from rwy centerline. For rwy 04 TDZ lights and markings are slightly moved to the left and for rwy 22 to the right.

② PAPI-L (3.0°)

③ TAKE-OFF RUN AVAILABLE

RWY 04: From rwy head 13,123' (4000m)
twy A int 7290' (2222m)

RWY 22: From rwy head 13,123' (4000m)
twy B int 7283' (2220m)


TAKE-OFF



	Low Visibility Take-off					
	HIRL, CL & relevant RVR	RL, CL & relevant RVR	RL & CL	Day: RL & RCLM Night: RL or CL	Day: RL or RCLM Night: RL or CL	Adequate vis ref (Day only)
A						
B	TDZ, MID, RO	TDZ, MID, RO				
C	RVR 125m	RVR 150m	RVR 200m	RVR 300m	400m	500m
D						

LTCS/GNY
GAP INTL



SANLIURFA, TURKEY
ILS DME 1 or 2 Rwy 04

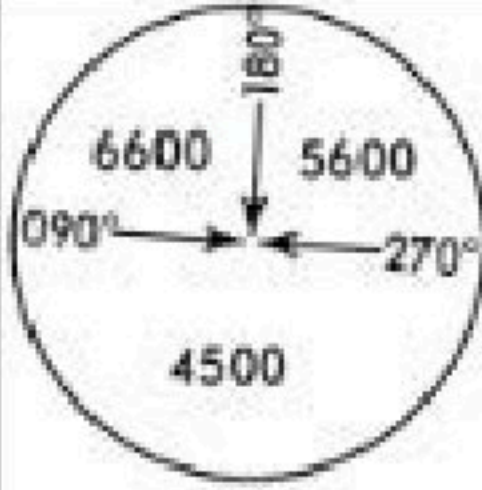ATIS 128.250		GAP Approach 118.850		GAP Tower 118.400 252.350		Ground 121.9
LOC ISUR 111.9	Final Apch Crs 036°	GS D4.0 ISUR 3960' (1283')	ILS DA(H) 2877' (200')	Apt Elev 2703' Rwy 2703'		 MSA GAP VOR/NDB
MISSED APCH: Climb on R-032 GAP (032° from NDB) to 3900', then turn RIGHT to VOR/NDB climbing to 4500' and hold.						
Alt Set: hPa		Rwy Elev: 94 hPa		Trans level: By ATC		
						Trans alt: 10000'

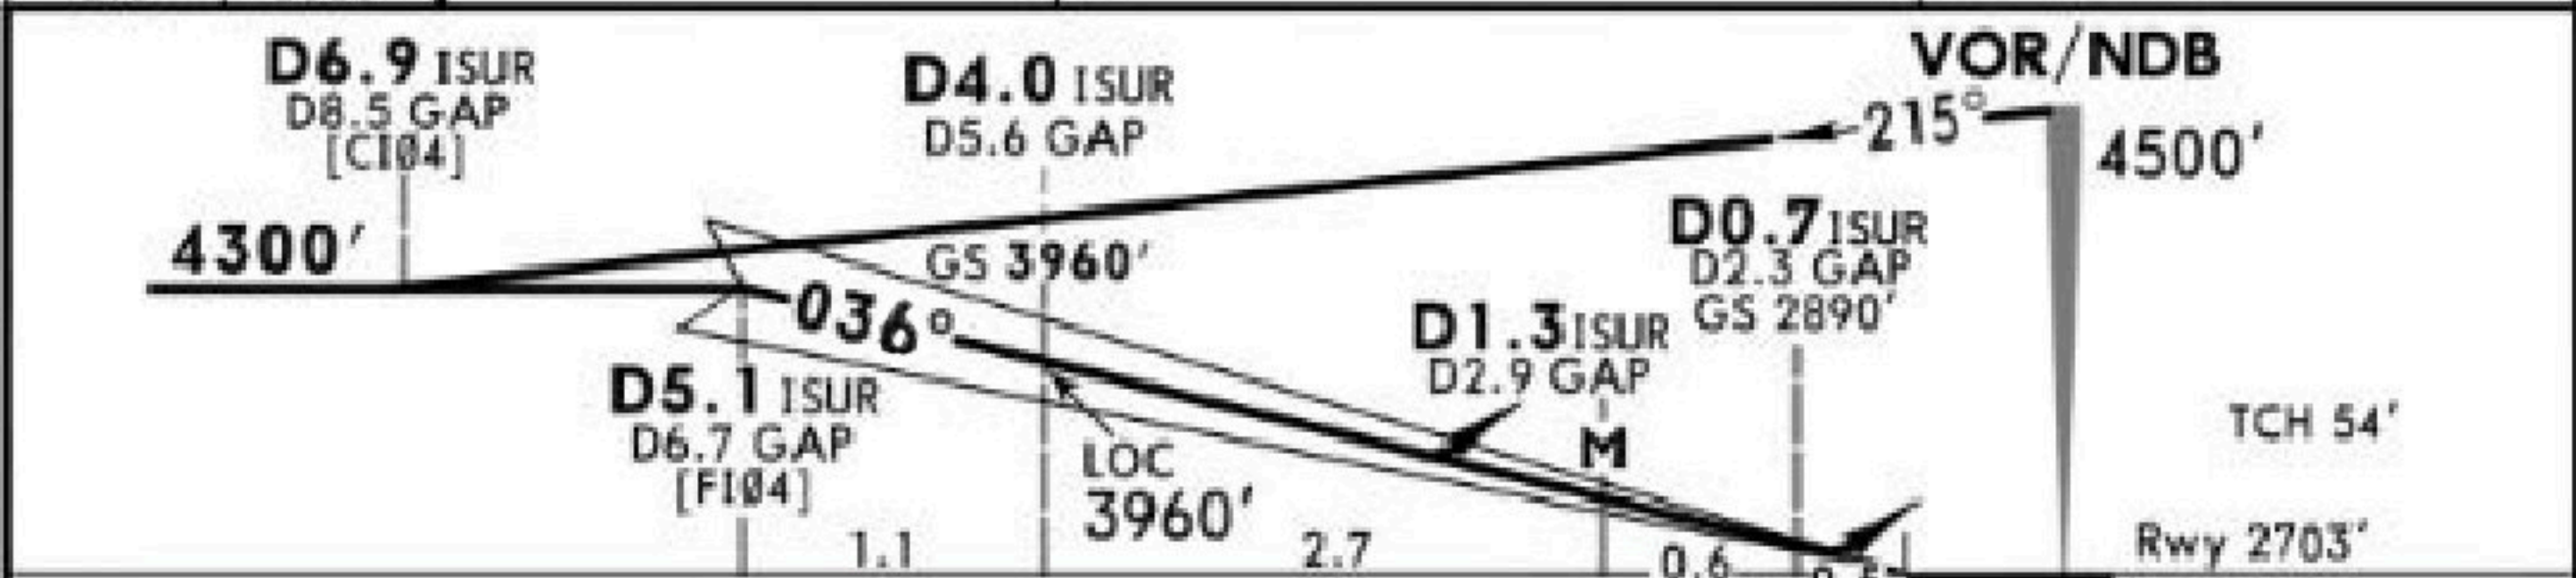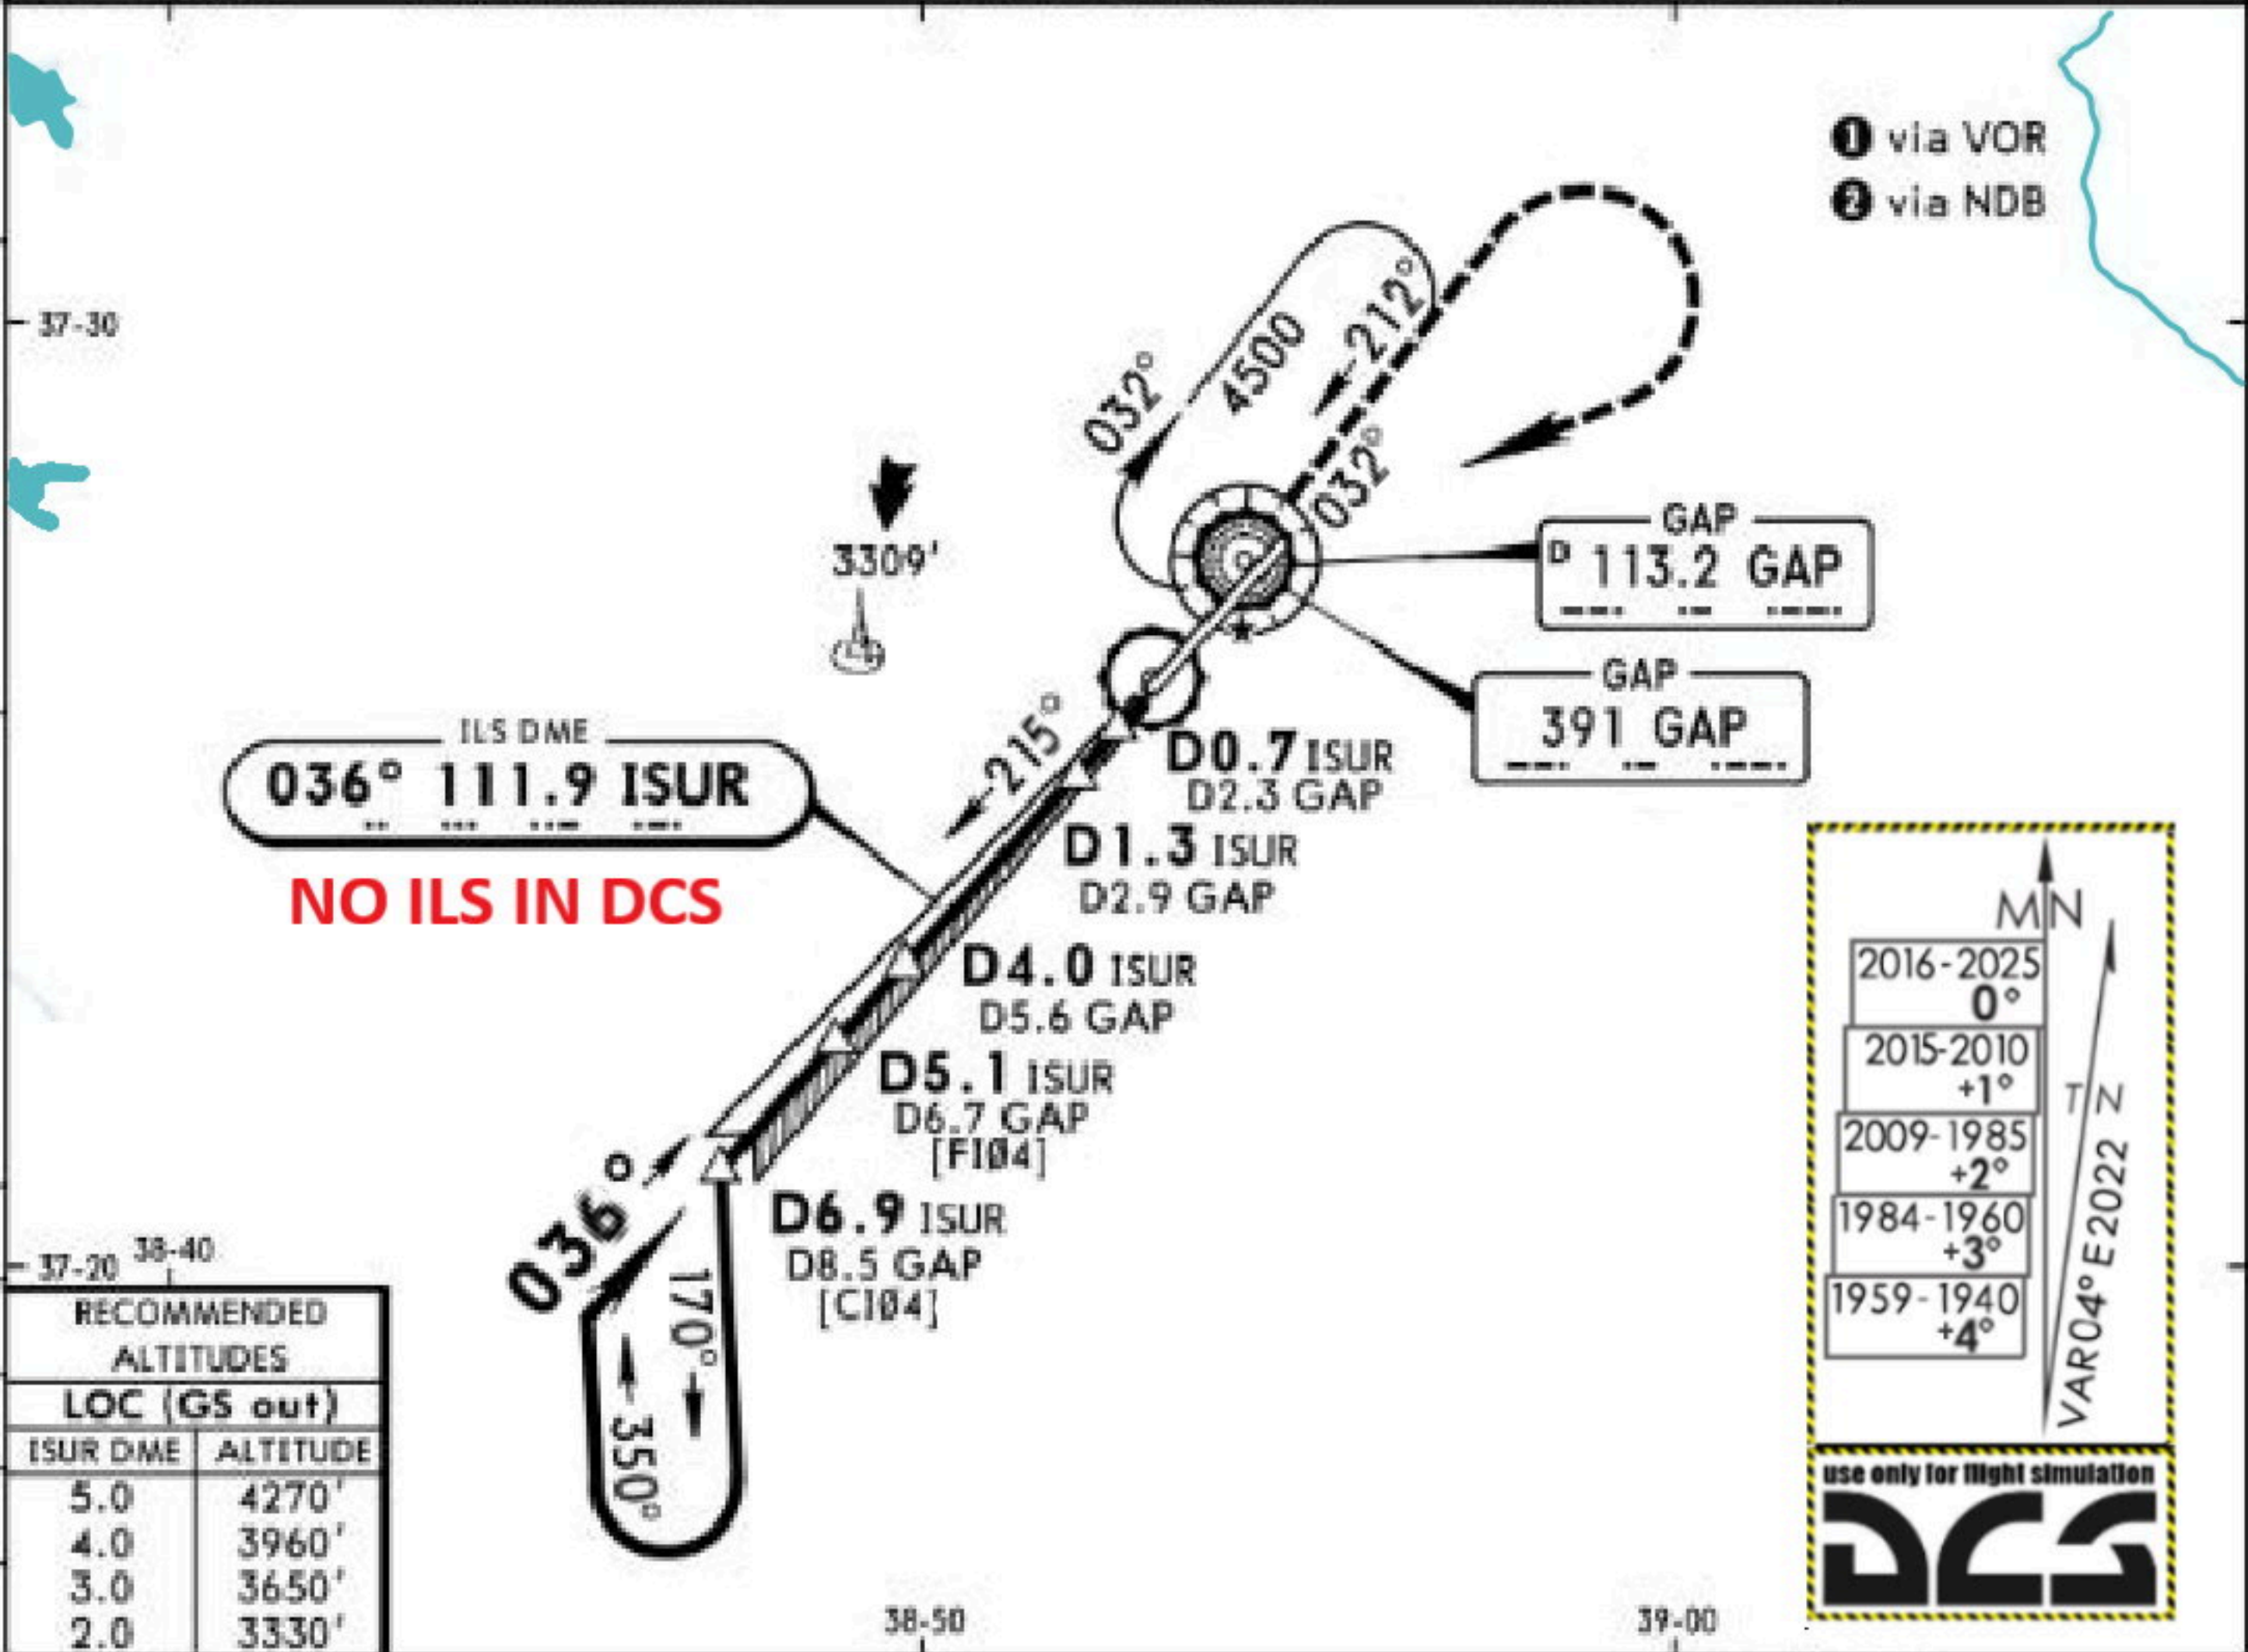

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	Refer to Missed Apch above
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849		
MAP at D1.3 ISUR/D2.9 GAP								

Standard				CIRCLE-TO-LAND			
ILS		LOC (GS out)		CDFA		MDA(H)	
DA(H) 2877' (200')		DA/MDA(H) 3100' (423')		DA/MDA(H) 3100' (423')		MDA(H)	
FULL		ALS out		ALS out		VIS	
A	RVR 750m	RVR 1200m	RVR 1500m		100	3400' (692')	1500m
B			RVR 1500m		135	3400' (692')	1600m
C			RVR 1600m	RVR 2000m	180	3750' (1042')	2400m
D			RVR 1600m	RVR 2000m	205	3750' (1042')	3600m



LTCS/GNY



SANLIURFA, TURKEY
CAT II ILS DME 3 or 4
Rwy 04

GAP INTL



ATIS 128.250		GAP Approach 118.850		GAP Tower 118.400 252.350		Ground 121.9
LOC ISUR 111.9	Final Apch Crs 036°	GS D4.0 ISUR 3960' (1283')	CAT II ILS RA 107' DA(H) 2777' (100')	Apt Elev 2703' Rwy 2703'		 MSA GAP VOR/NDB
MISSED APCH: Climb on R-032 GAP (032° from NDB) to 3900', then turn RIGHT to VOR/NDB climbing to 4500' and hold.						
Alt Set: hPa Rwy Elev: 94 hPa Trans level: By ATC Trans alt: 10000' Special Aircrew & Aircraft Certification Required.						

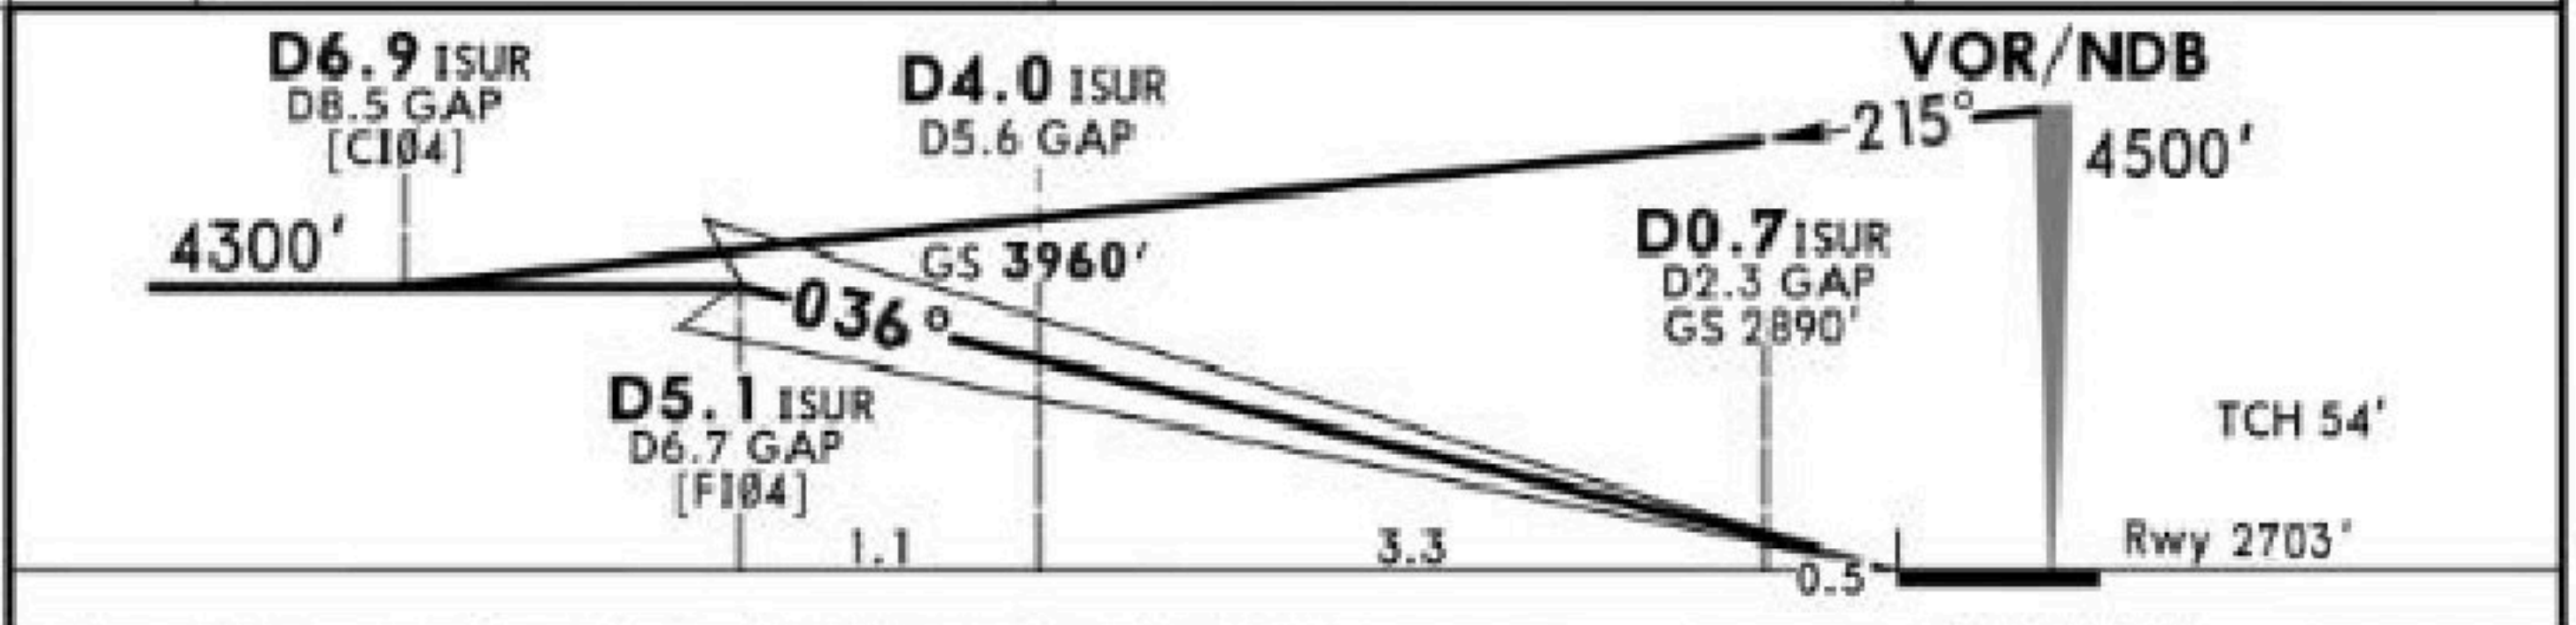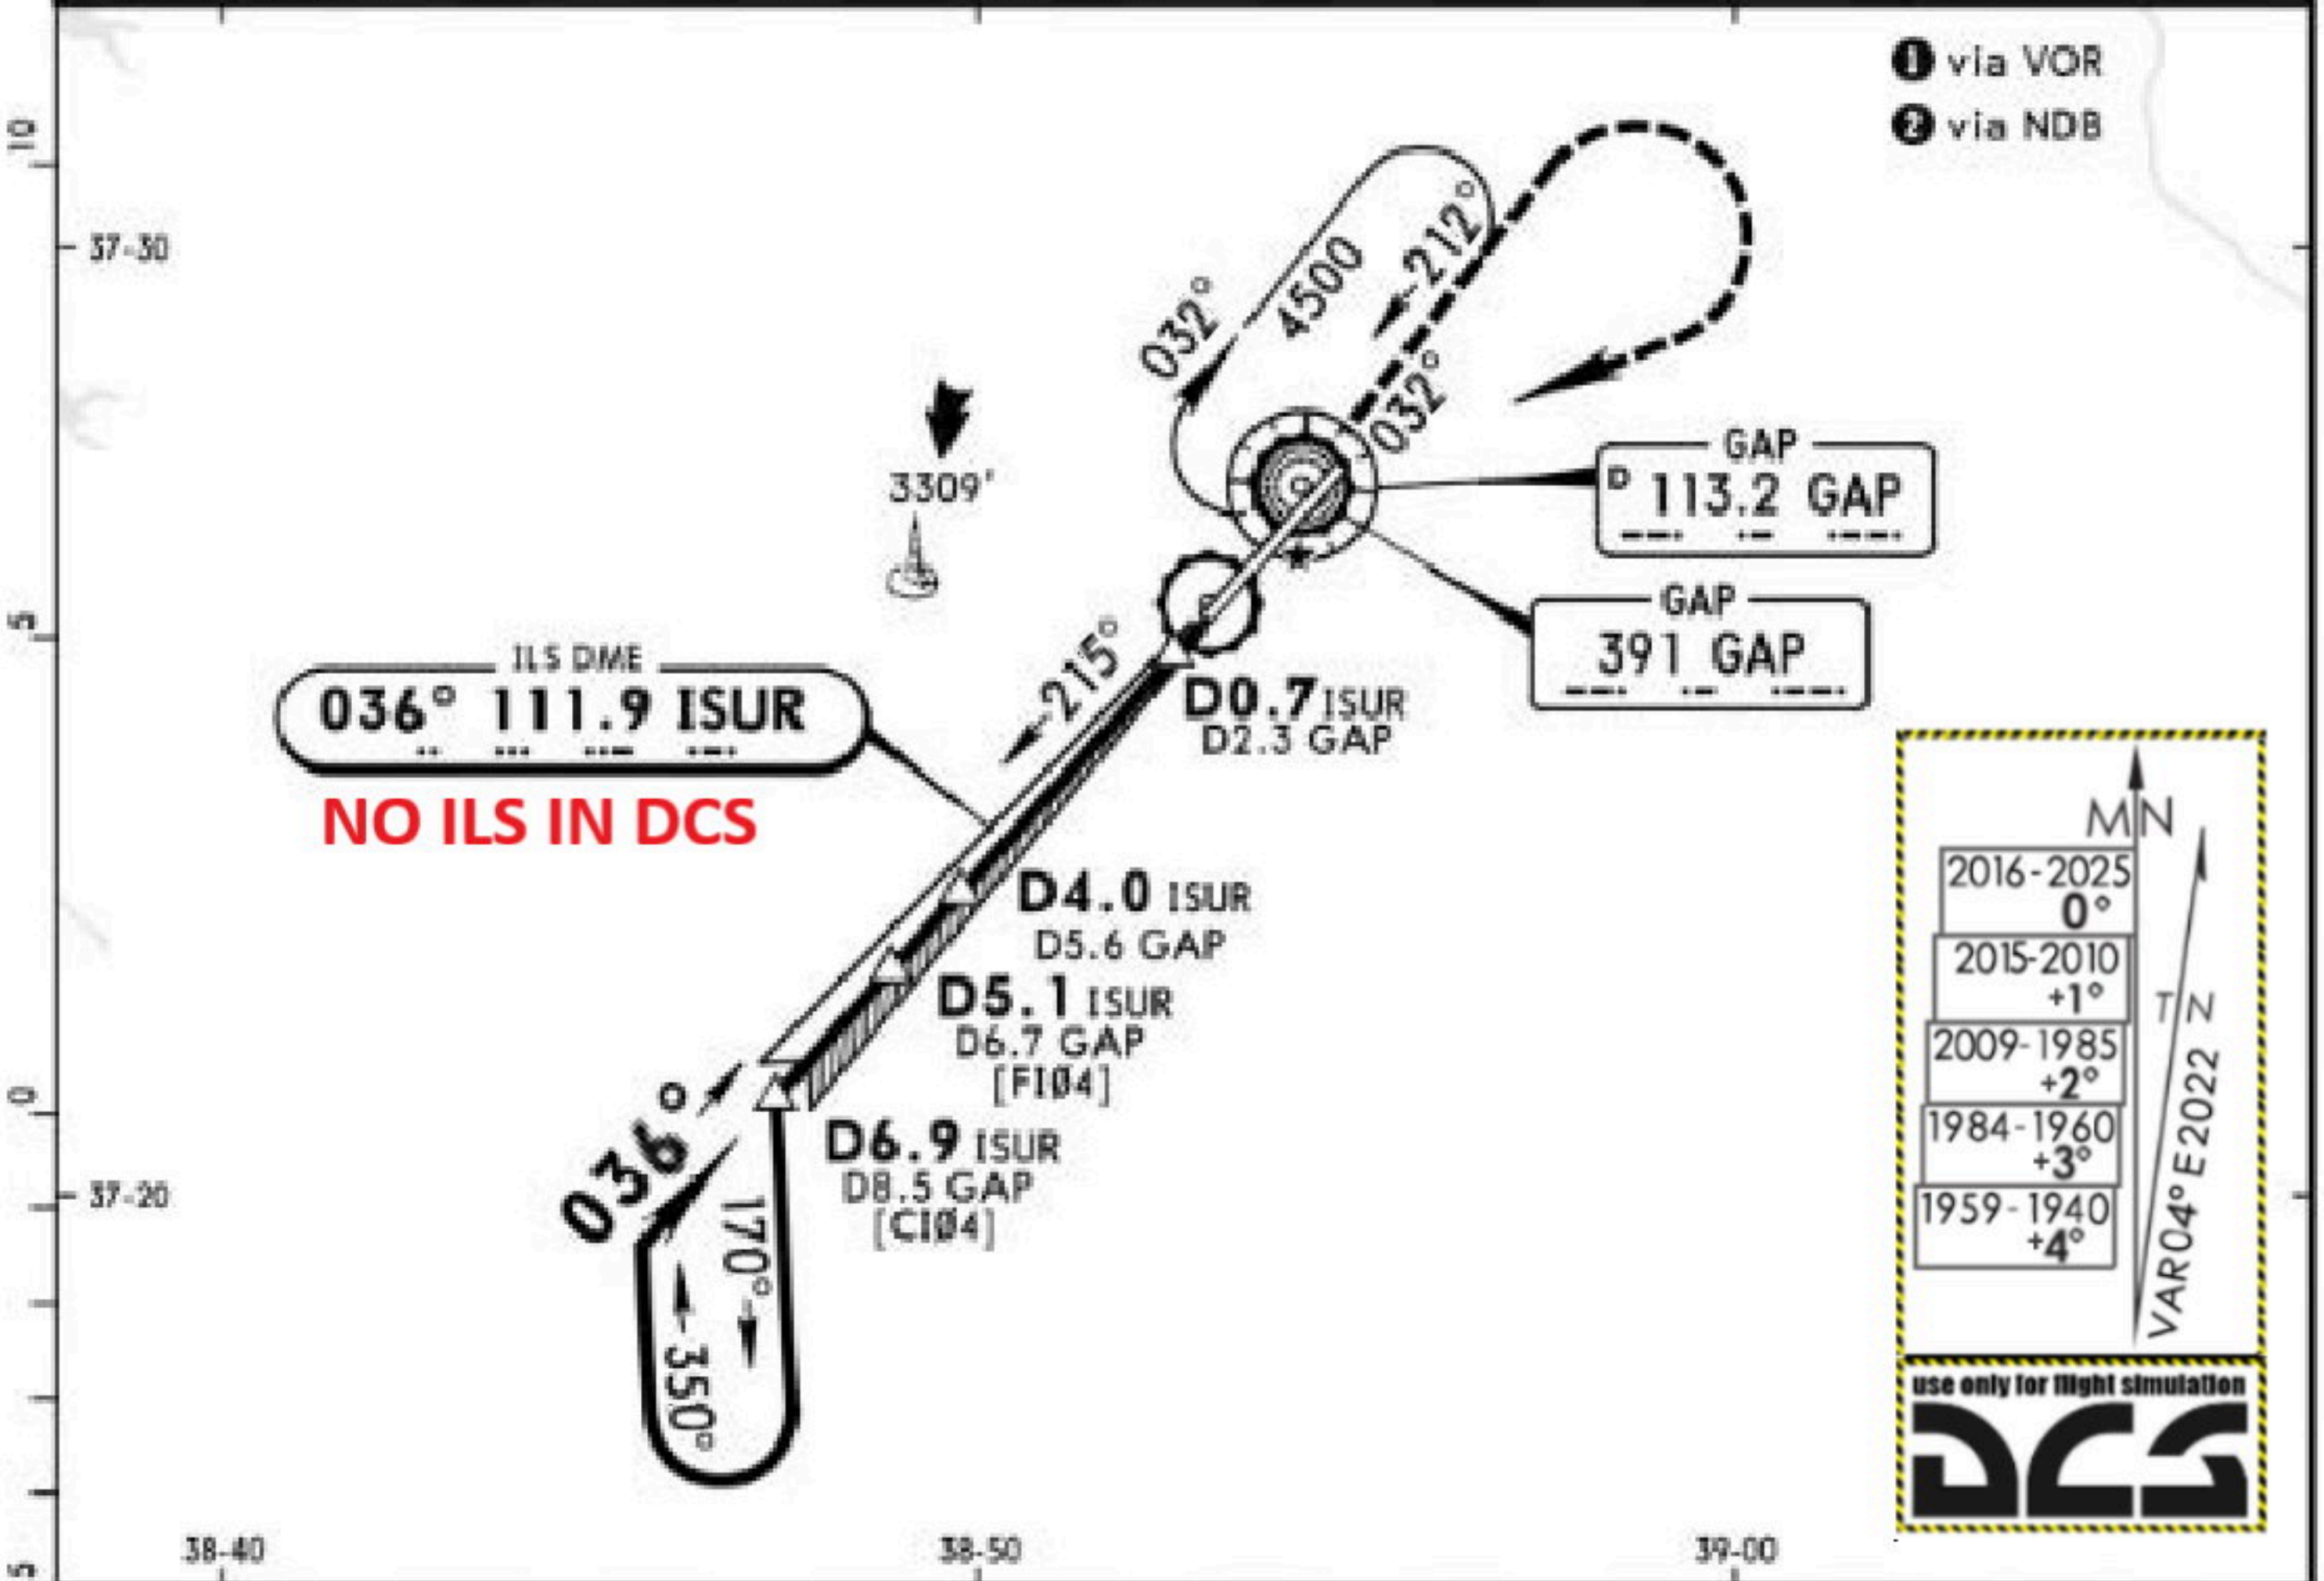

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	Refer to Missed Apch above
GS	3.00°	372	478	531	637	743		

Standard		STRAIGHT-IN LANDING RWY 04 CAT II ILS	
		RA 107' DA(H) 2777' (100')	
		RVR 300m	

ATIS 128.250		GAP Approach 118.850		GAP Tower 118.400 252.350		Ground 121.9
VOR GAP 113.2	Final Apch Crs 032°	Minimum Alt D7.0 4300' (1623')	DA/MDA(H) 3100' (423')	Apt Elev 2703' Rwy 2703'		
MISSED APCH: Climb on R-032 to 3900' then turn RIGHT to VOR climbing to 4500' and hold.						MSA GAP VOR
Alt Set: hPa		Rwy Elev: 94 hPa		Trans level: By ATC		Trans alt: 10000'

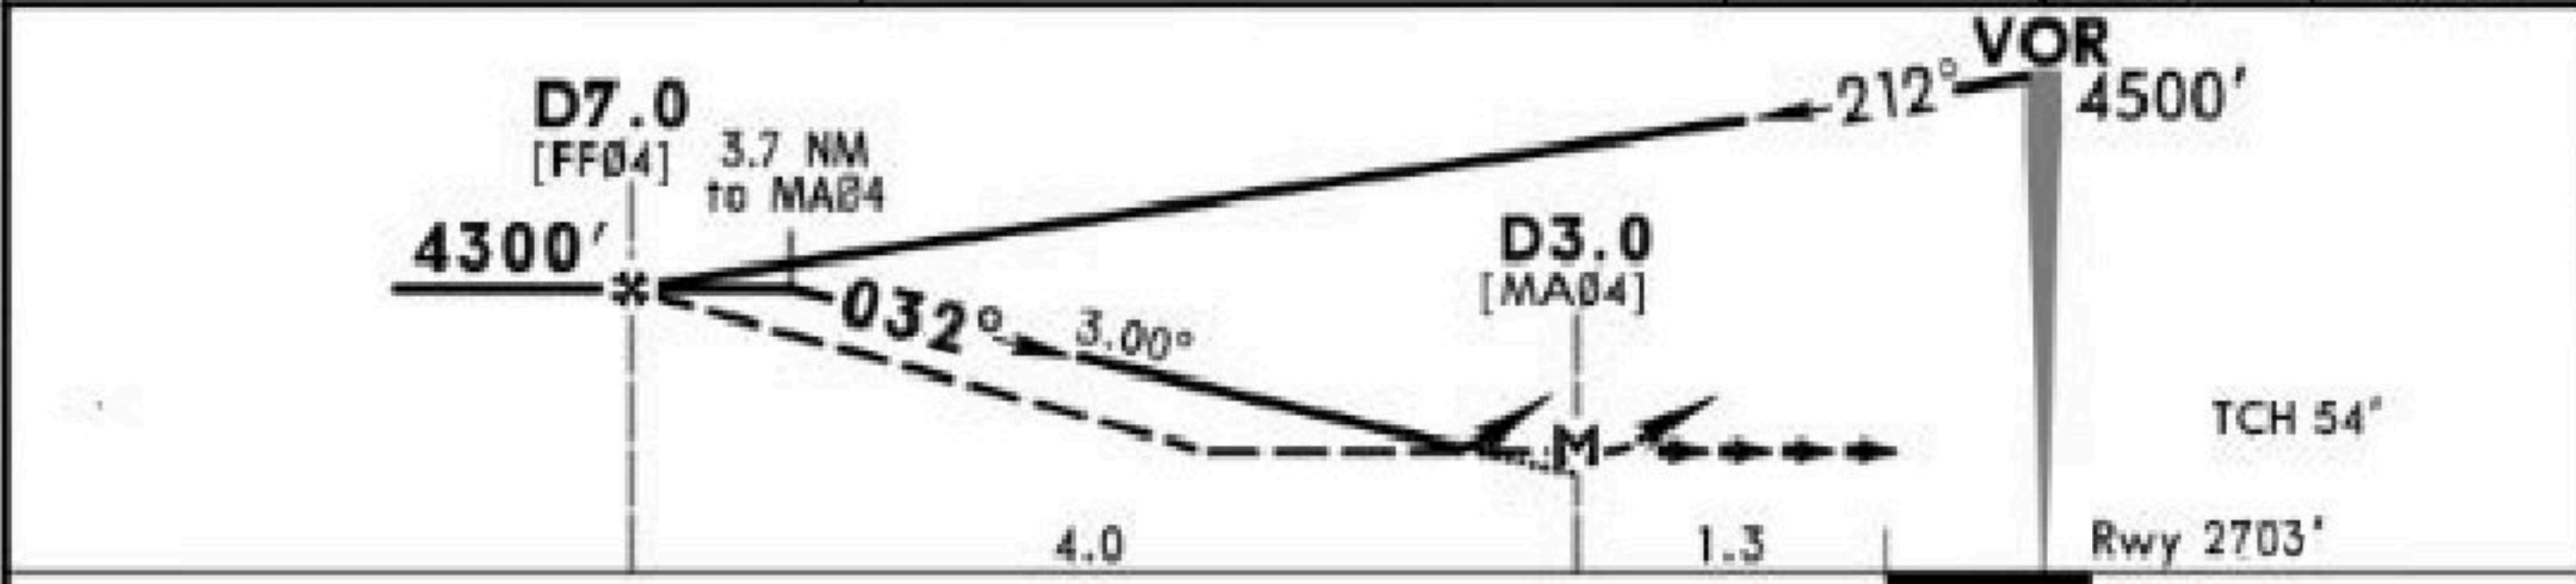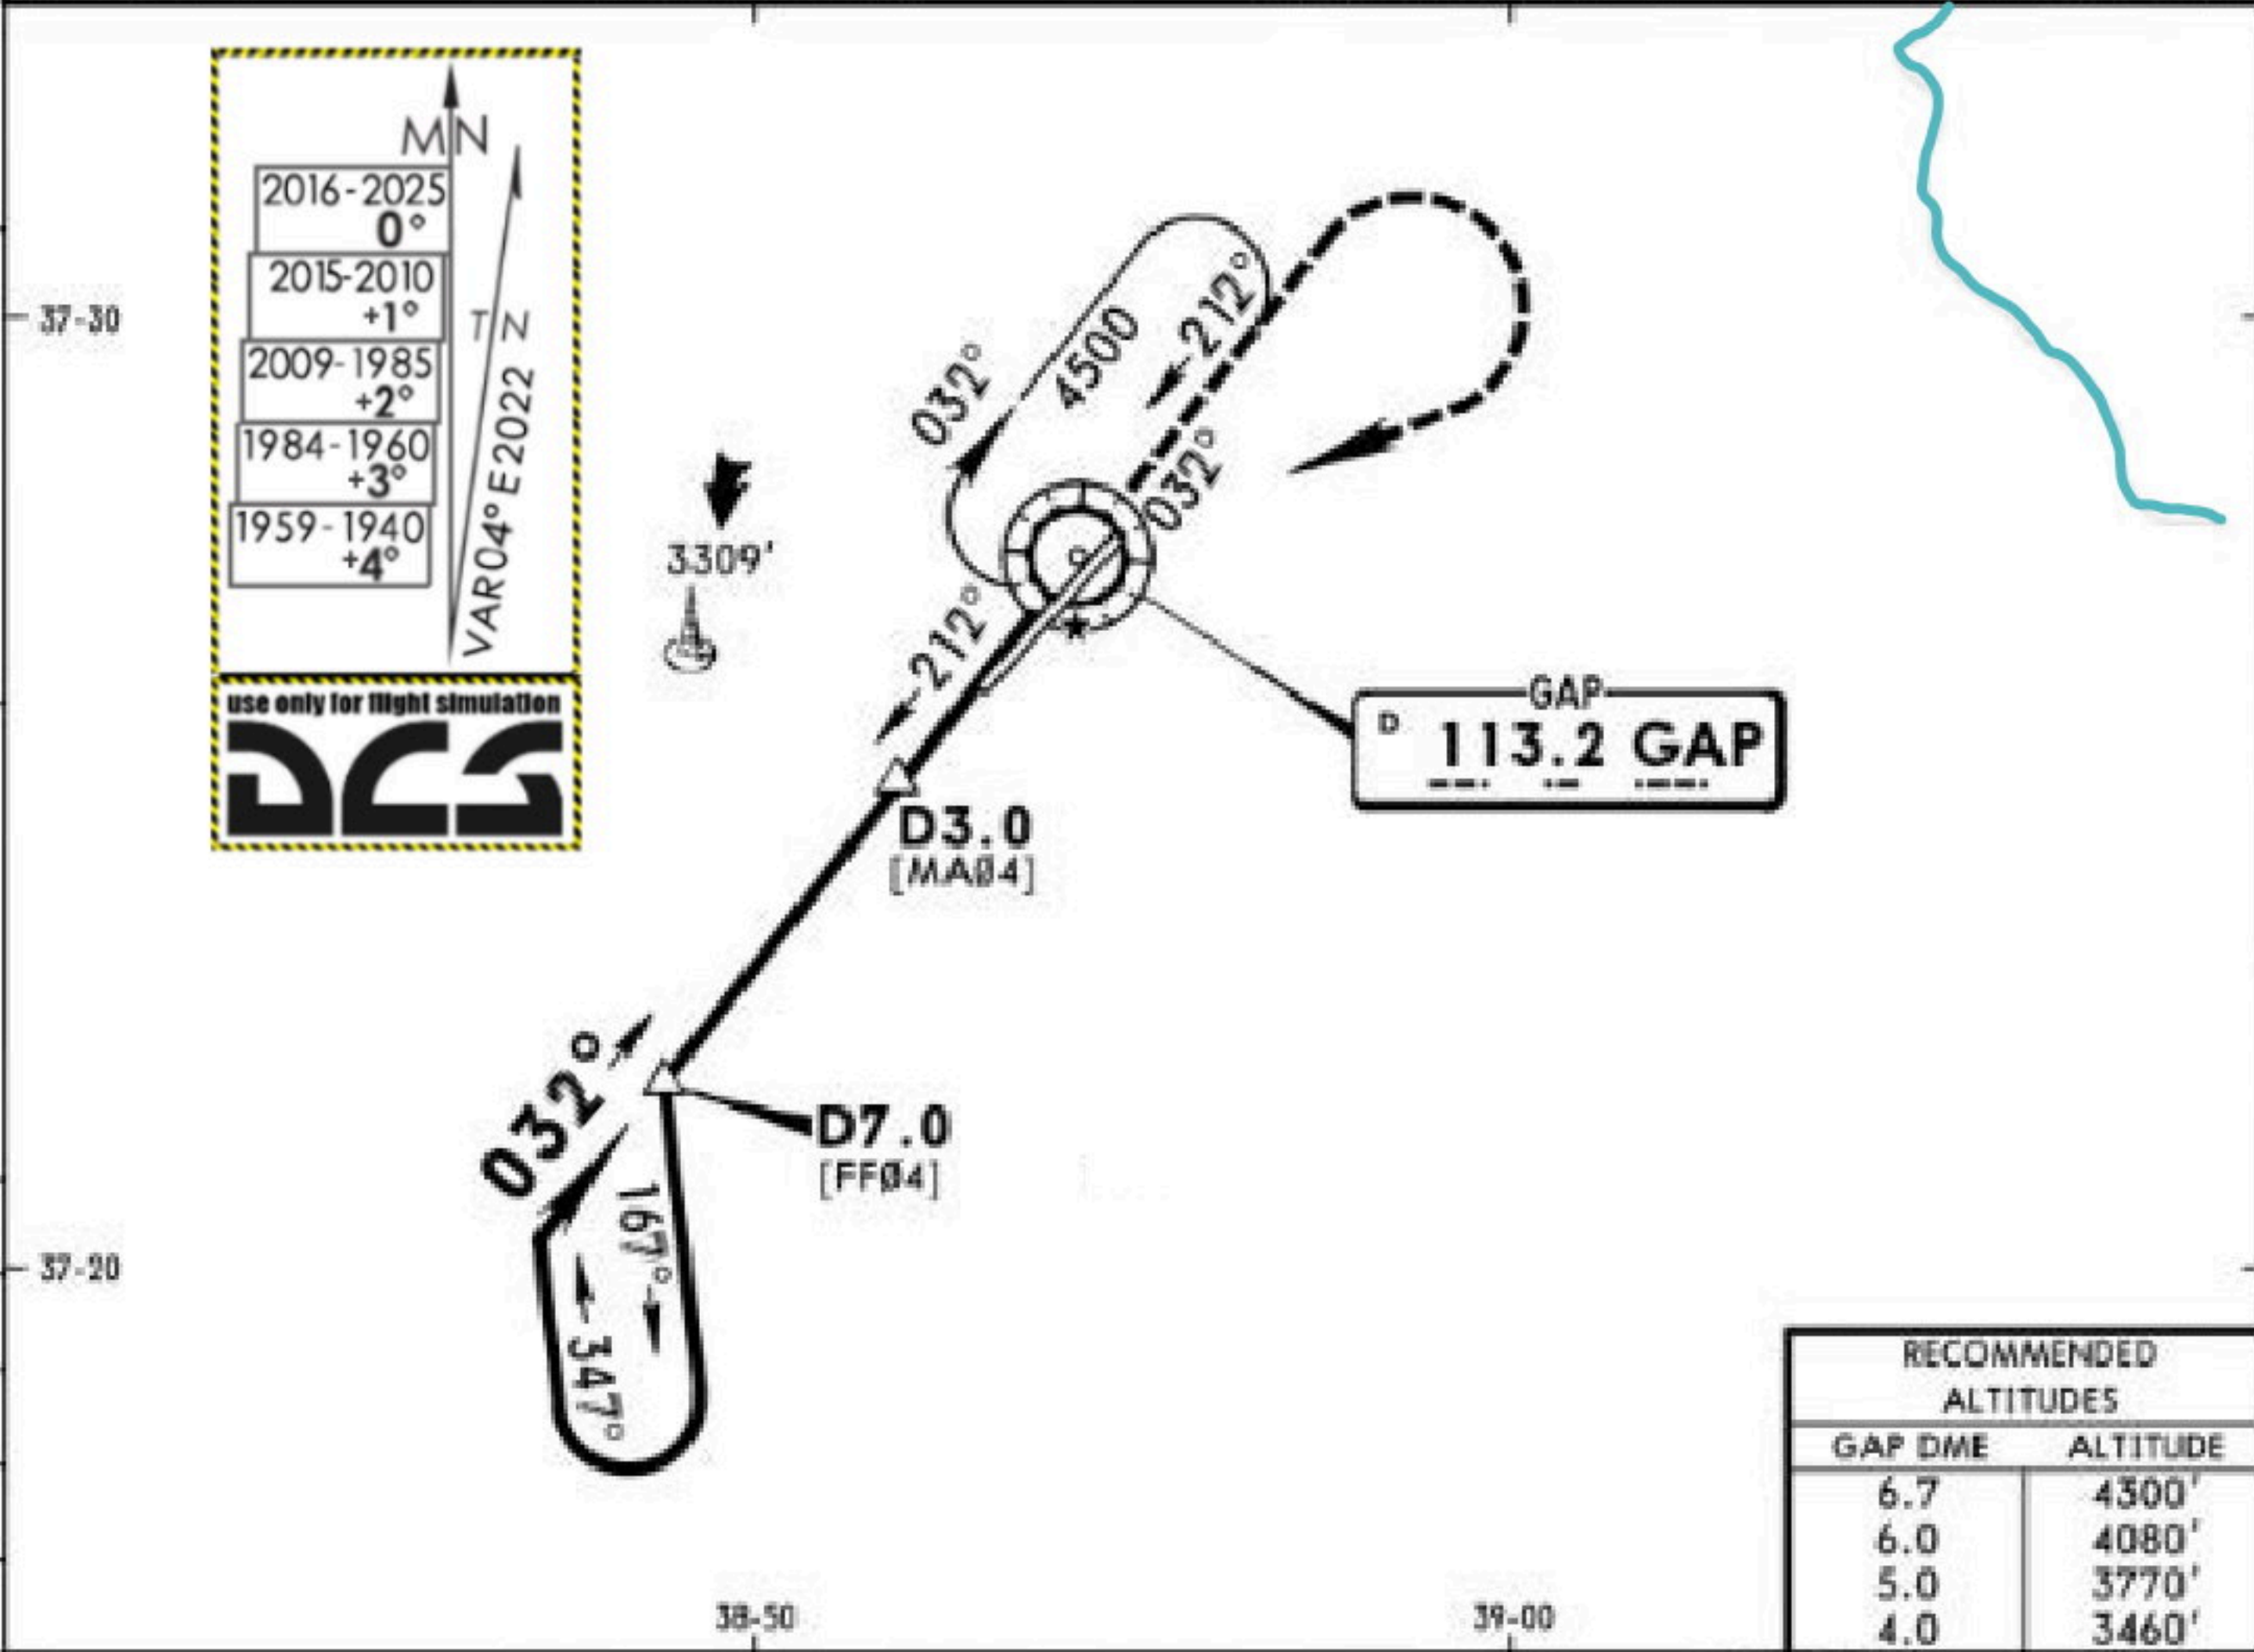


Gnd speed-Kts	70	90	100	120	140	160		3900' on R-032	GAP 113.2
Descent angle	3.00°	372	478	531	637	849			
MAP at D3.0									

Standard				STRAIGHT-IN LANDING RWY 04		CIRCLE-TO-LAND	
CDFA		non-CDFA		Max Kts		MDA(H) VIS	
DA/MDA(H) 3100' (423')		MDA(H) 3100' (423')		ALS out			
A	RVR 1500m	RVR 1800m	RVR 2200m	100	3400' (692')	1	1500m
B				135	3400' (692')	1	1600m
C	RVR 1600m	RVR 2000m	RVR 2400m	180	3750' (1042')		2400m
D				205	3750' (1042')		3600m

1 or higher straight-in minimums

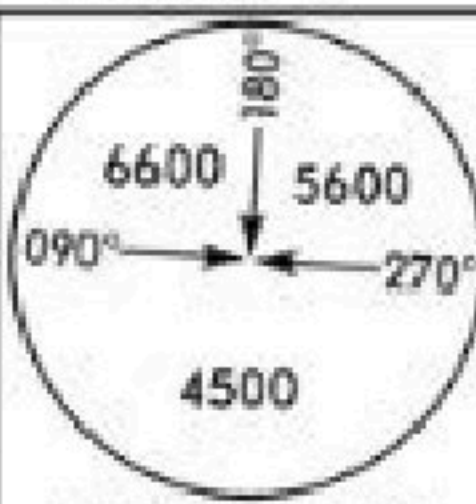

ATIS 128.250		GAP Approach 118.850		GAP Tower 118.400 252.350		Ground 121.9	
VOR GAP 113.2	Final Apch Crs 032°	No FAF		DA/MDA(H) 3150' (473')	Apt Elev 2703' Rwy 2703'	 MSA GAP VOR	
MISSED APCH: Climb on R-032 to 3900' then turn RIGHT to VOR climbing to 4500' and hold.							
Alt Set: hPa		Rwy Elev: 94 hPa		Trans level: By ATC		Trans alt: 10000'	

2016-2025
0°

2015-2010
+1°


2009-1985
+2°

1984-1960
+3°

1959-1940
+4°


VAR04°E2022 N

use only for flight simulation

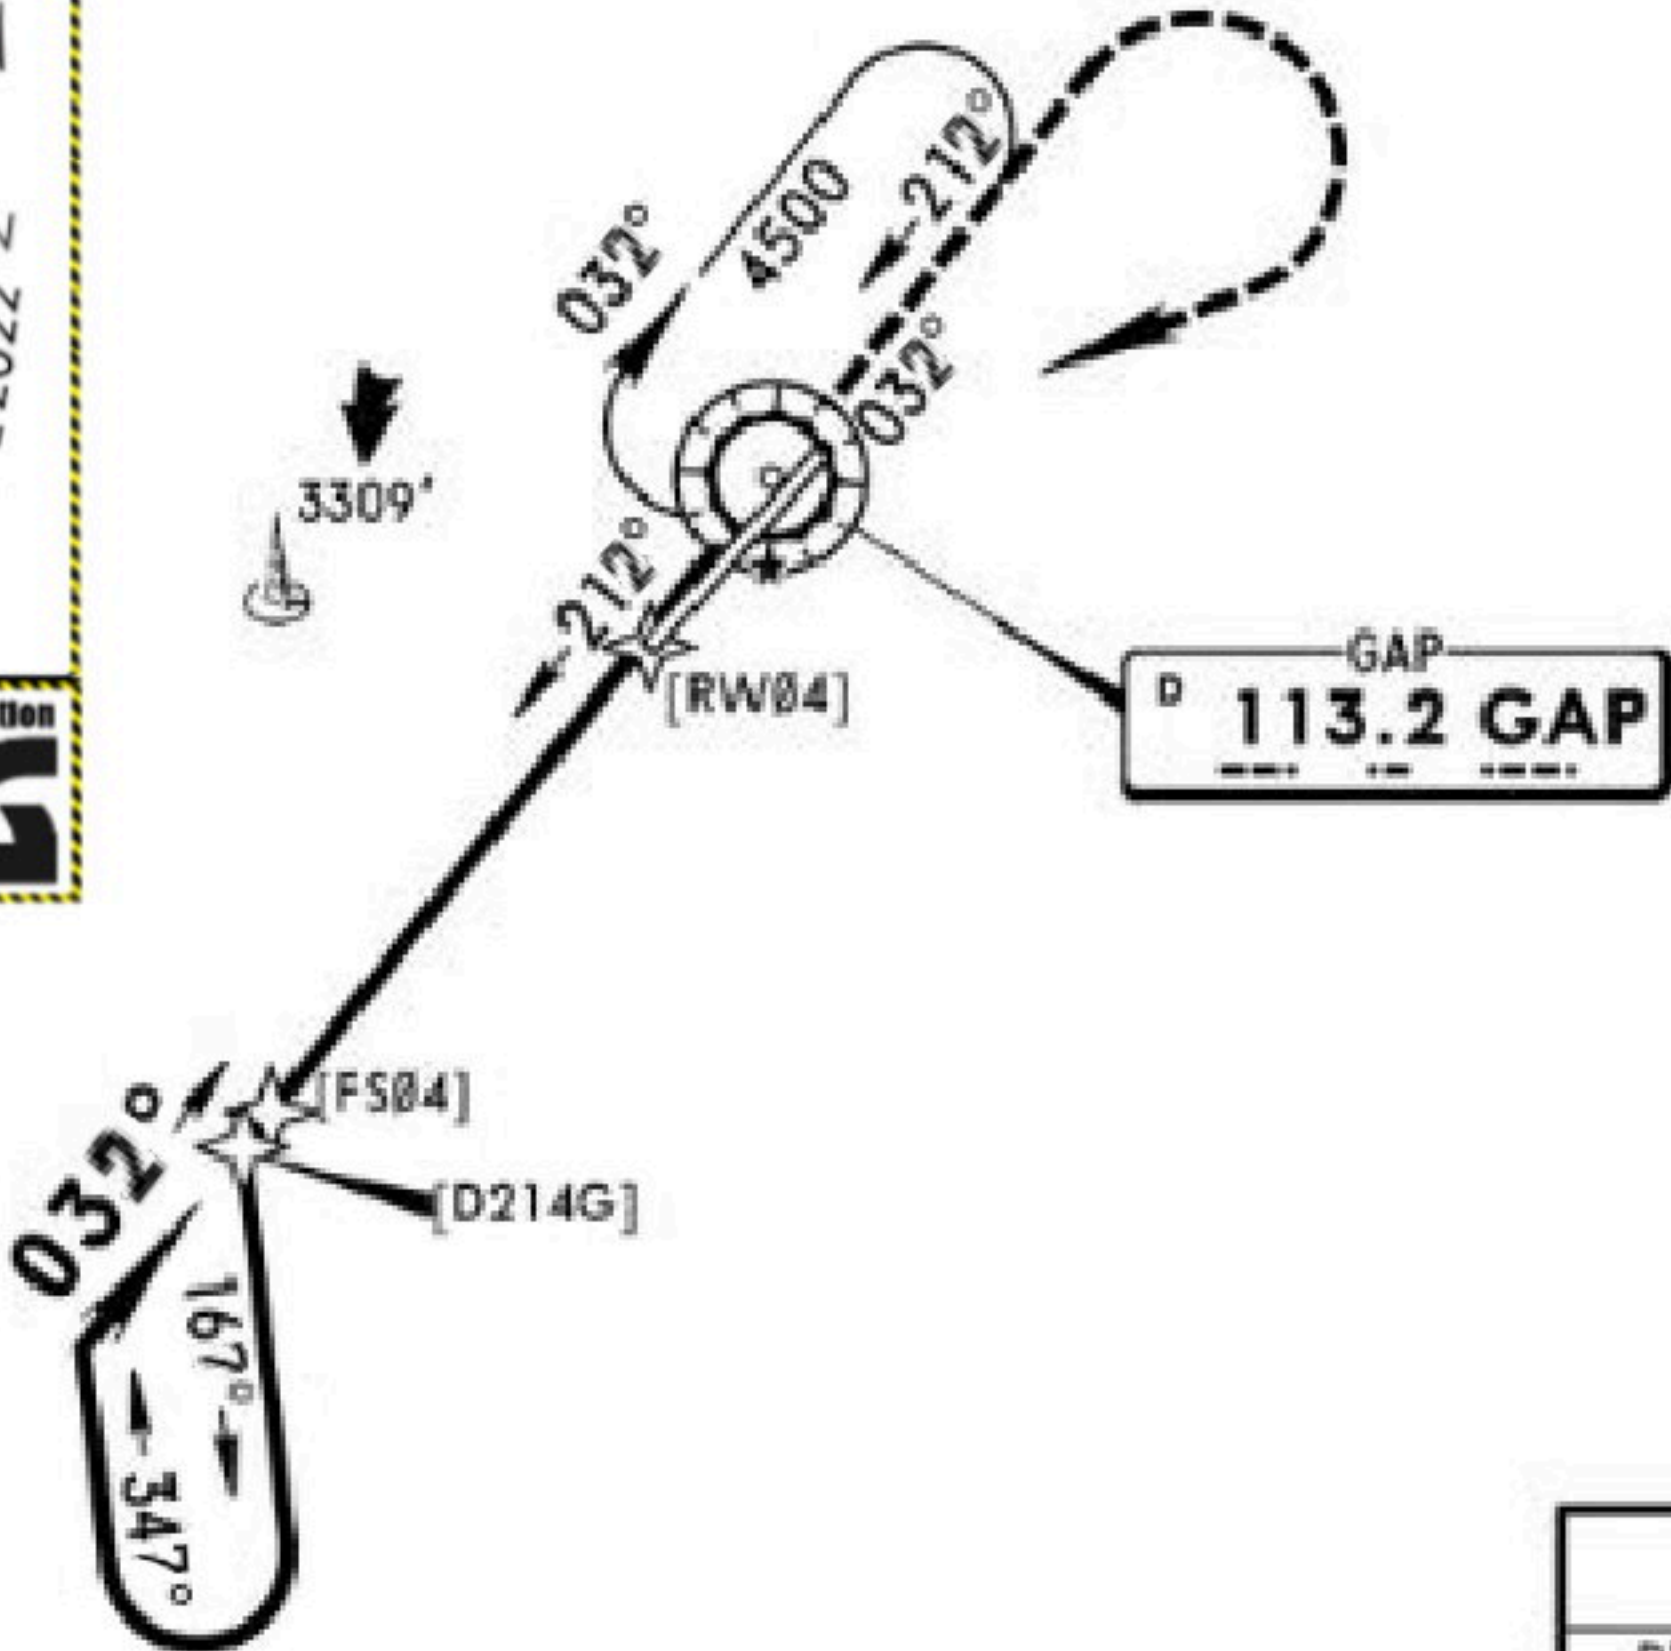

RECOMMENDED ALTITUDES	
DIST to RW04	ALTITUDE
4.0	4010'
3.0	3690'
2.0	3370'

Start turn at
CAT A & B:
3 Min
CAT C & D:
2 Min

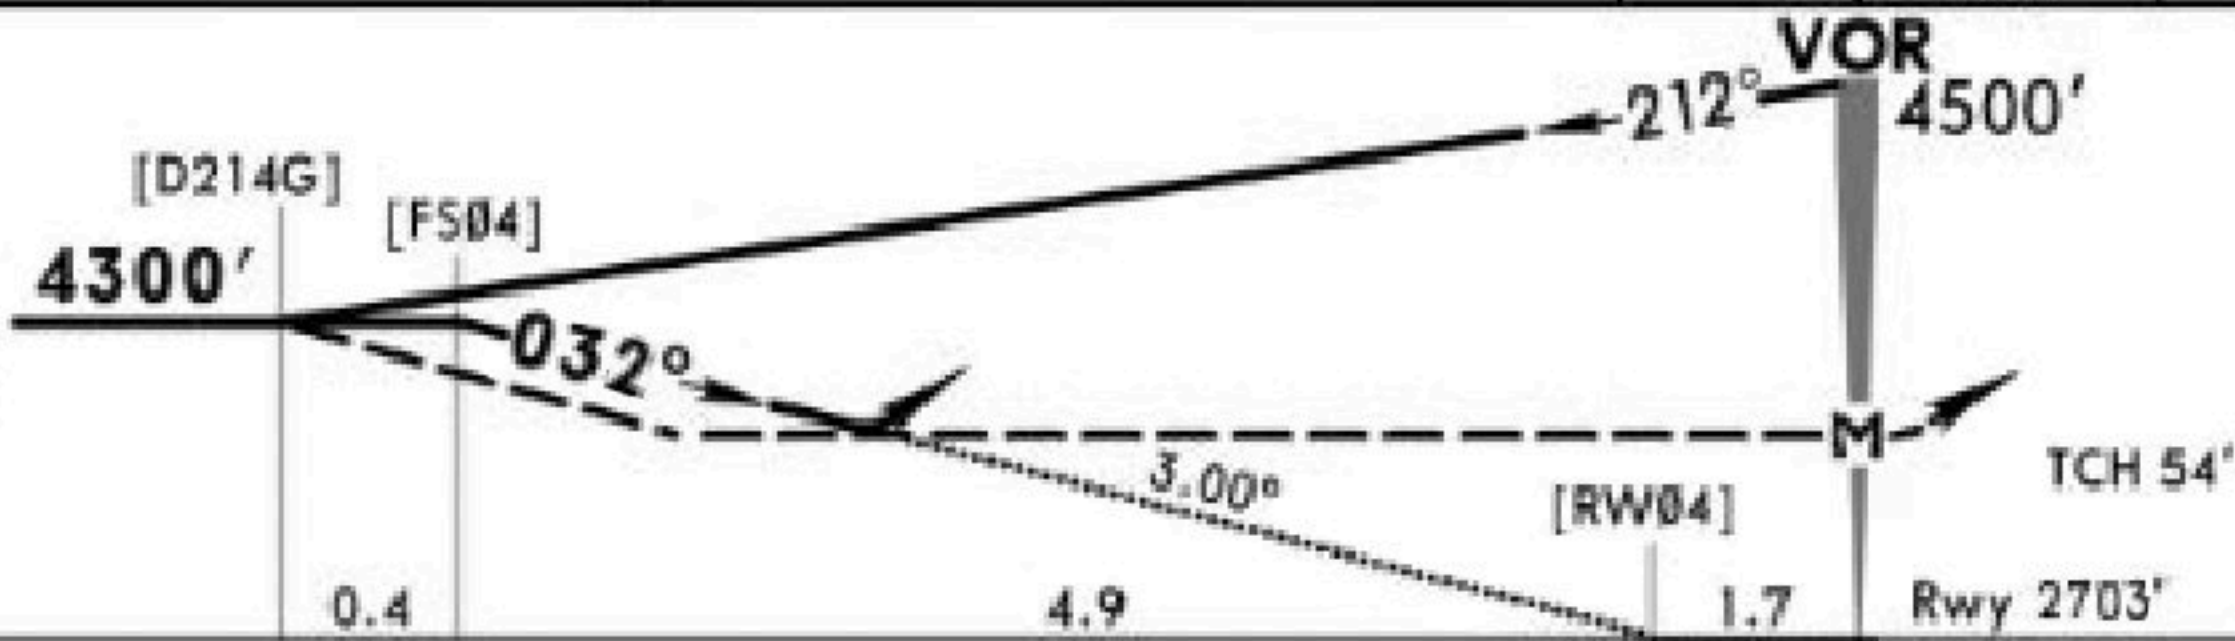


Gnd speed-Kts	70	90	100	120	140	160
Descent angle	3.00°	372	478	531	637	743
MAP at VOR						

HIALS-II
PAPI


3900' on 113.2 R-032

STRAIGHT-IN LANDING RWY 04				CIRCLE-TO-LAND	
CDFA		non-CDFA		Max Kts	MDA(H) VIS
DA/MDA(H) 3150' (473')		MDA(H) 3150' (473')			
ALS out		ALS out			
A	RVR 1500m	RVR 2000m	RVR 2400m	100	3400' (692') 1500m
B				135	3400' (692') 1600m
C	RVR 1800m	RVR 2200m	RVR 2200m	180	3750' (1042') 2400m
D				205	3750' (1042') 3600m


or higher straight-in minimums

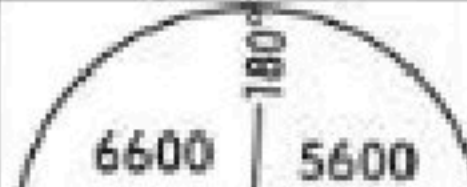ATIS 128.250		GAP Approach 118.850		GAP Tower 118.400 252.350		Ground 121.9
NDB GAP 391	Final Apch Crs 032°	Minimum Alt D7.0 4300' (1623')	DA/MDA(H) 3100' (423')	Apt Elev 2703' Rwy 2703'	 MSA GAP NDB	
MISSED APCH: Climb on 032° from NDB to 3900', then turn RIGHT to NDB climbing to 4500' and hold.						

Alt Set: hPa	Rwy Elev: 94 hPa	Trans level: By ATC	Trans alt: 10000'
--------------	------------------	---------------------	-------------------

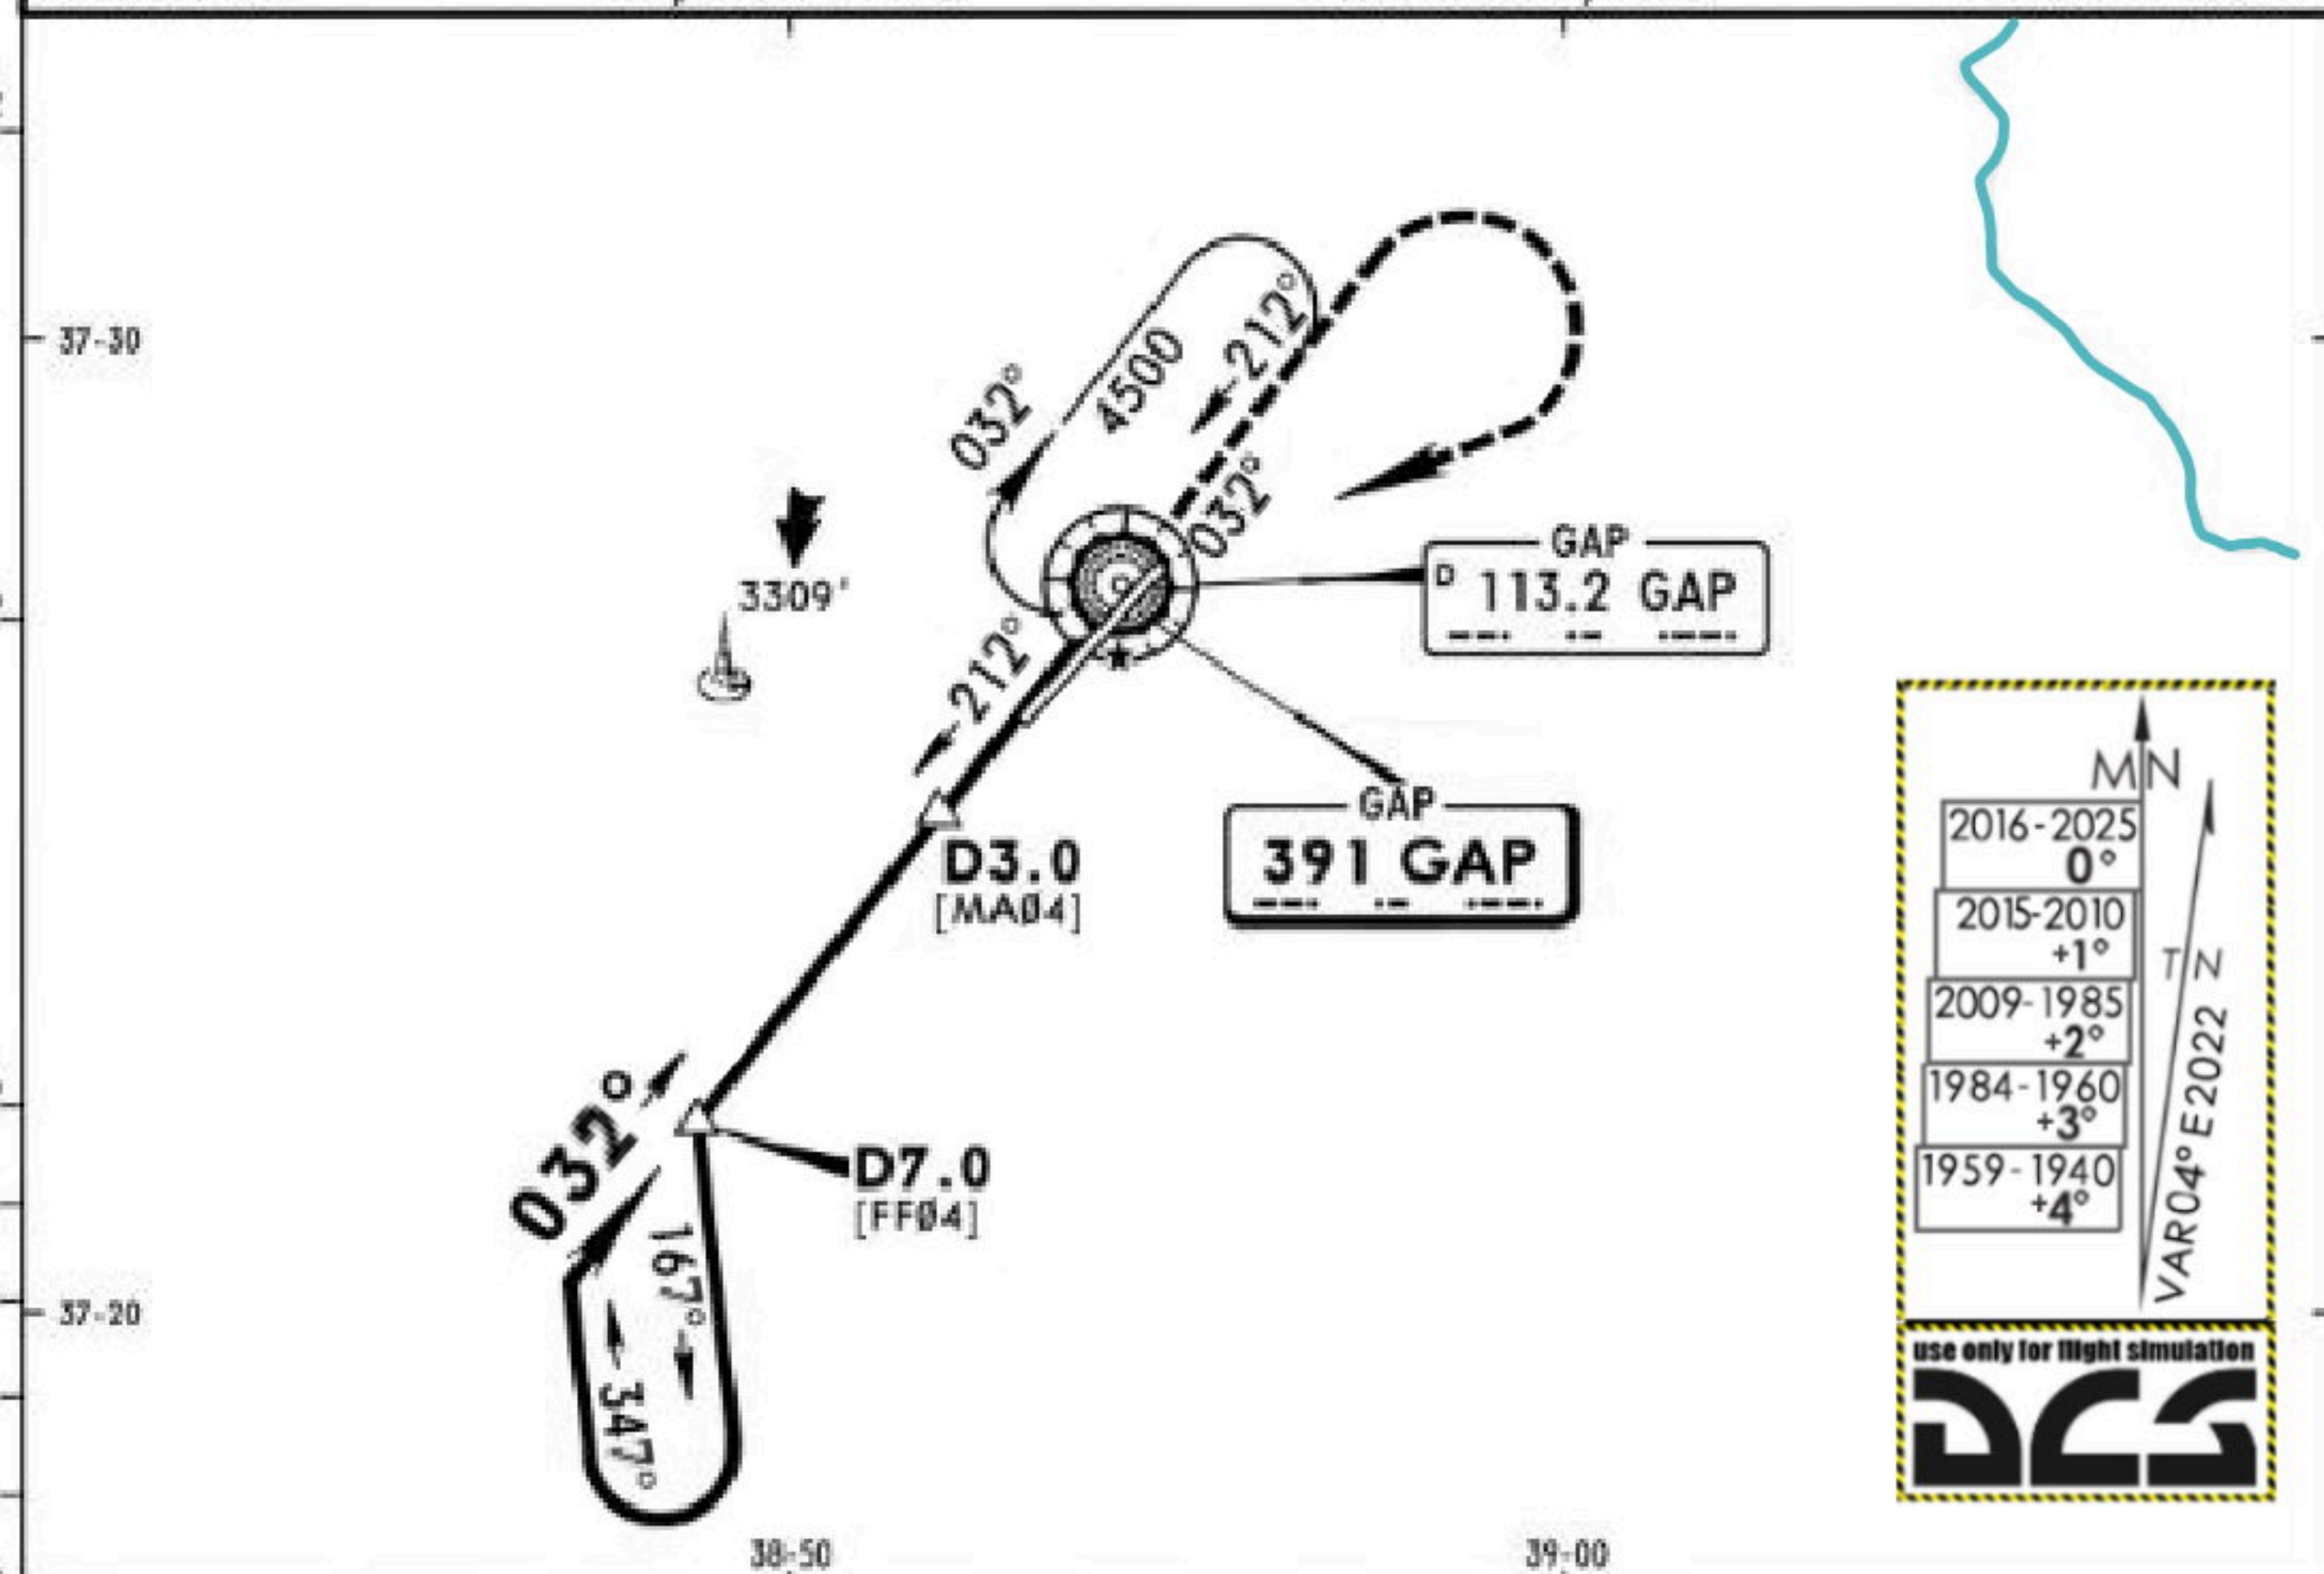

GAP DNE	6.7	6.0	5.0	4.0
ALTITUDE	4300'	4080'	3770'	3460'

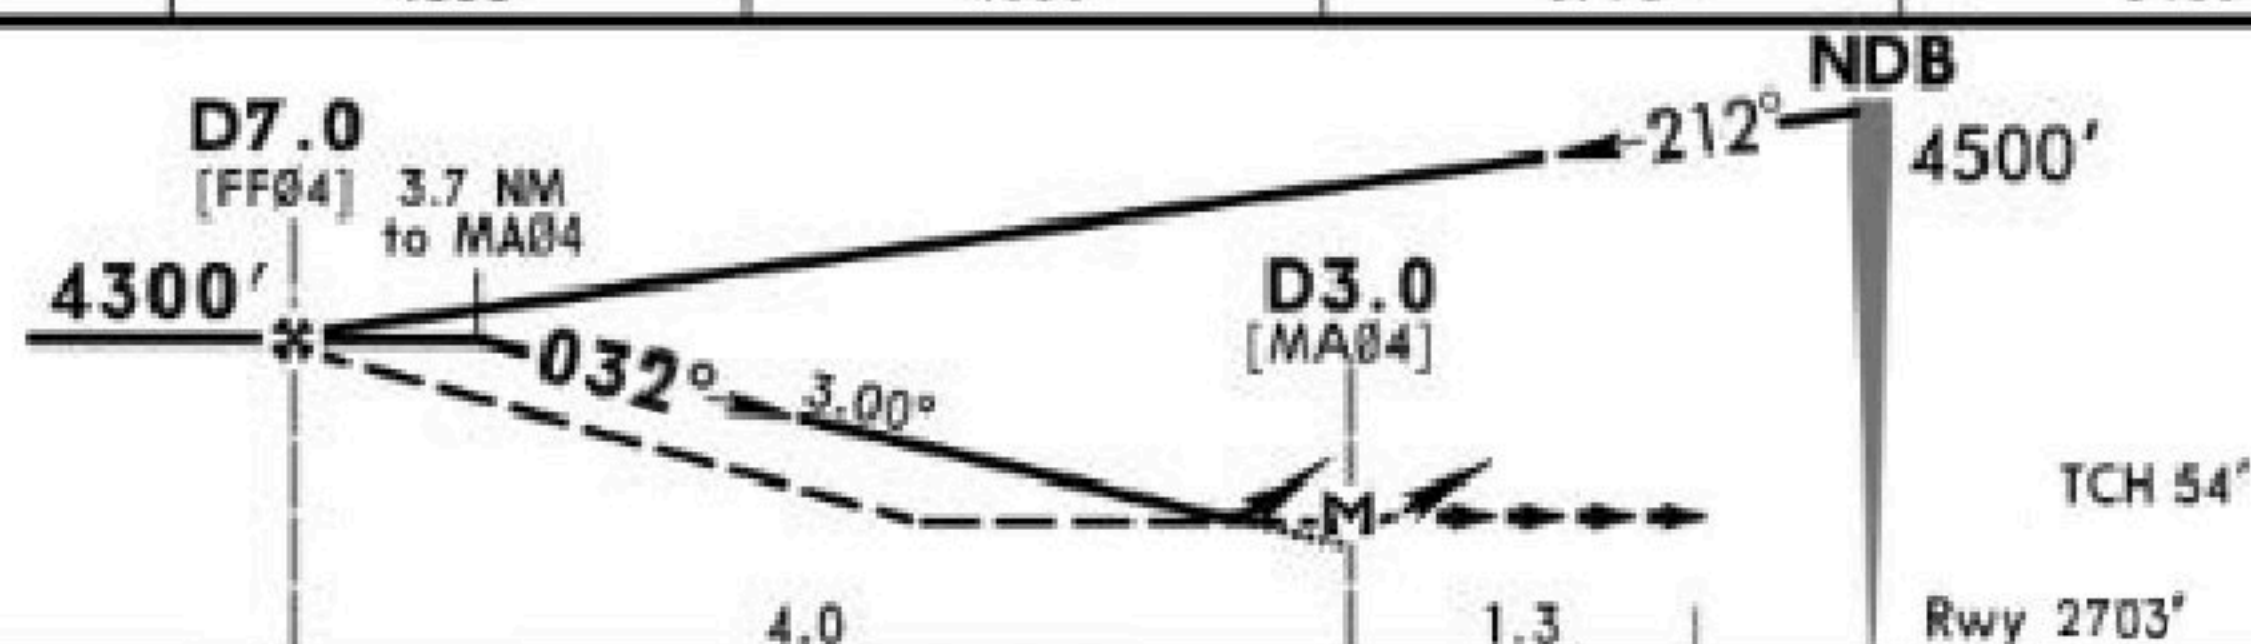

Gnd speed-Kts	70	90	100	120	140	160
Descent angle	3.00°	372	478	531	637	743
MAP at D3.0						

HIALS-II

PAP1



3900'

↑

on

032°

from

GAP

391

Standard		STRAIGHT-IN LANDING RWY 04				CIRCLE-TO-LAND	
CDFA		non-CDFA					
DA/MDA(H) 3100' (423')		MDA(H) 3100' (423')					
ALS out		ALS out				Max Kts	MDA(H) VIS
A	RVR 1500m	RVR 1800m	RVR 2200m	100	3400' (692')	I	1500m
B				135	3400' (692')	I	1600m
C	RVR 1600m	RVR 2000m	RVR 2400m	180	3750' (1042')		2400m
D				205	3750' (1042')		3600m

1 or higher straight-in minimums




ATIS		GAP Approach		GAP Tower		Ground
128.250		118.850		118.400 252.350		121.9
VOR GAP 113.2	Final Apch Crs 220°	Minimum Alt D6.0 4300' (1592')	DA/MDA(H) 3100' (392')	Apt Elev 2703' Rwy 2703'		
MISSED APCH: Climb on R-220 to 3900' then turn LEFT to VOR climbing to 4500' and hold.						
Alt Set: hPa		Rwy Elev: 95 hPa	Trans level: By ATC		Trans alt: 10000	MSA GAP VOR

NO VOR IN DCS

GAP
D 113.2 GAP

MN	
2016-2025	0°
2015-2010	+1°
2009-1985	+2°
1984-1960	+3°
1959-1940	+4°
VAR04°E2022	
use only for flight simulation	
DCS	

GAP DME	2.0	3.0	4.0	5.0	5.3
ALTITUDE	3260'	3580'	3900'	4210'	4300'

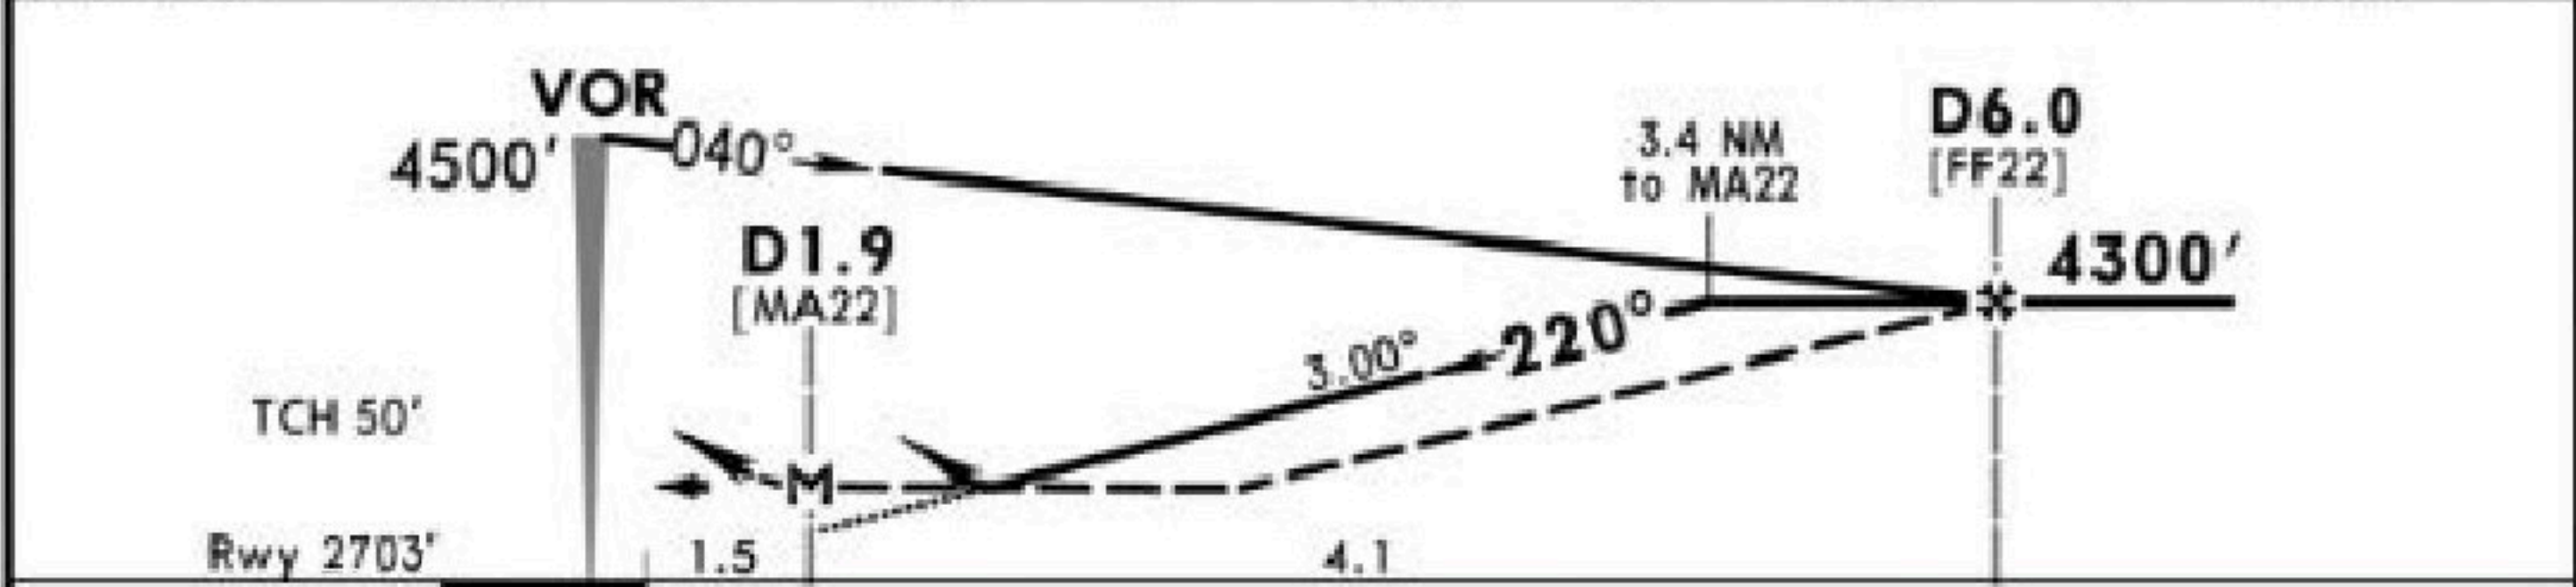


Gnd speed-Kts	70	90	100	120	140	160		3900' on R-220	GAP 113.2
Descent angle	3.00°	372	478	531	637	743			
MAP at D1.9									

Standard		STRAIGHT-IN LANDING RWY 22				CIRCLE-TO-LAND	
		CDFA	non-CDFA			Max Kts	
		DA/MDA(H) 3100' (392')	MDA(H) 3100' (392')				
			ALS out		ALS out		
A	RVR 1100m		RVR 1500m	RVR 1300m	RVR 2000m	100	3400' (692') I 1500m
B						135	3400' (692') I 1600m
C			RVR 1800m	RVR 1500m	RVR 2200m	180	3750' (1042') 2400m
D						205	3750' (1042') 3600m


1 or higher straight-in minimums



ATIS 128.250		GAP Approach 118.850		GAP Tower 118.400 252.350		Ground 121.9
VOR GAP 113.2	Final Apch Crs 220°	No FAF	DA/MDA(H) 3100' (392')	Apt Elev 2703' Rwy 2703'	 MSA GAP VOR	
MISSED APCH: Climb on R-220 to 3900' then turn LEFT to VOR climbing to 4500' and hold.						
Alt Set: hPa		Rwy Elev: 95 hPa		Trans level: By ATC		Trans alt: 10000

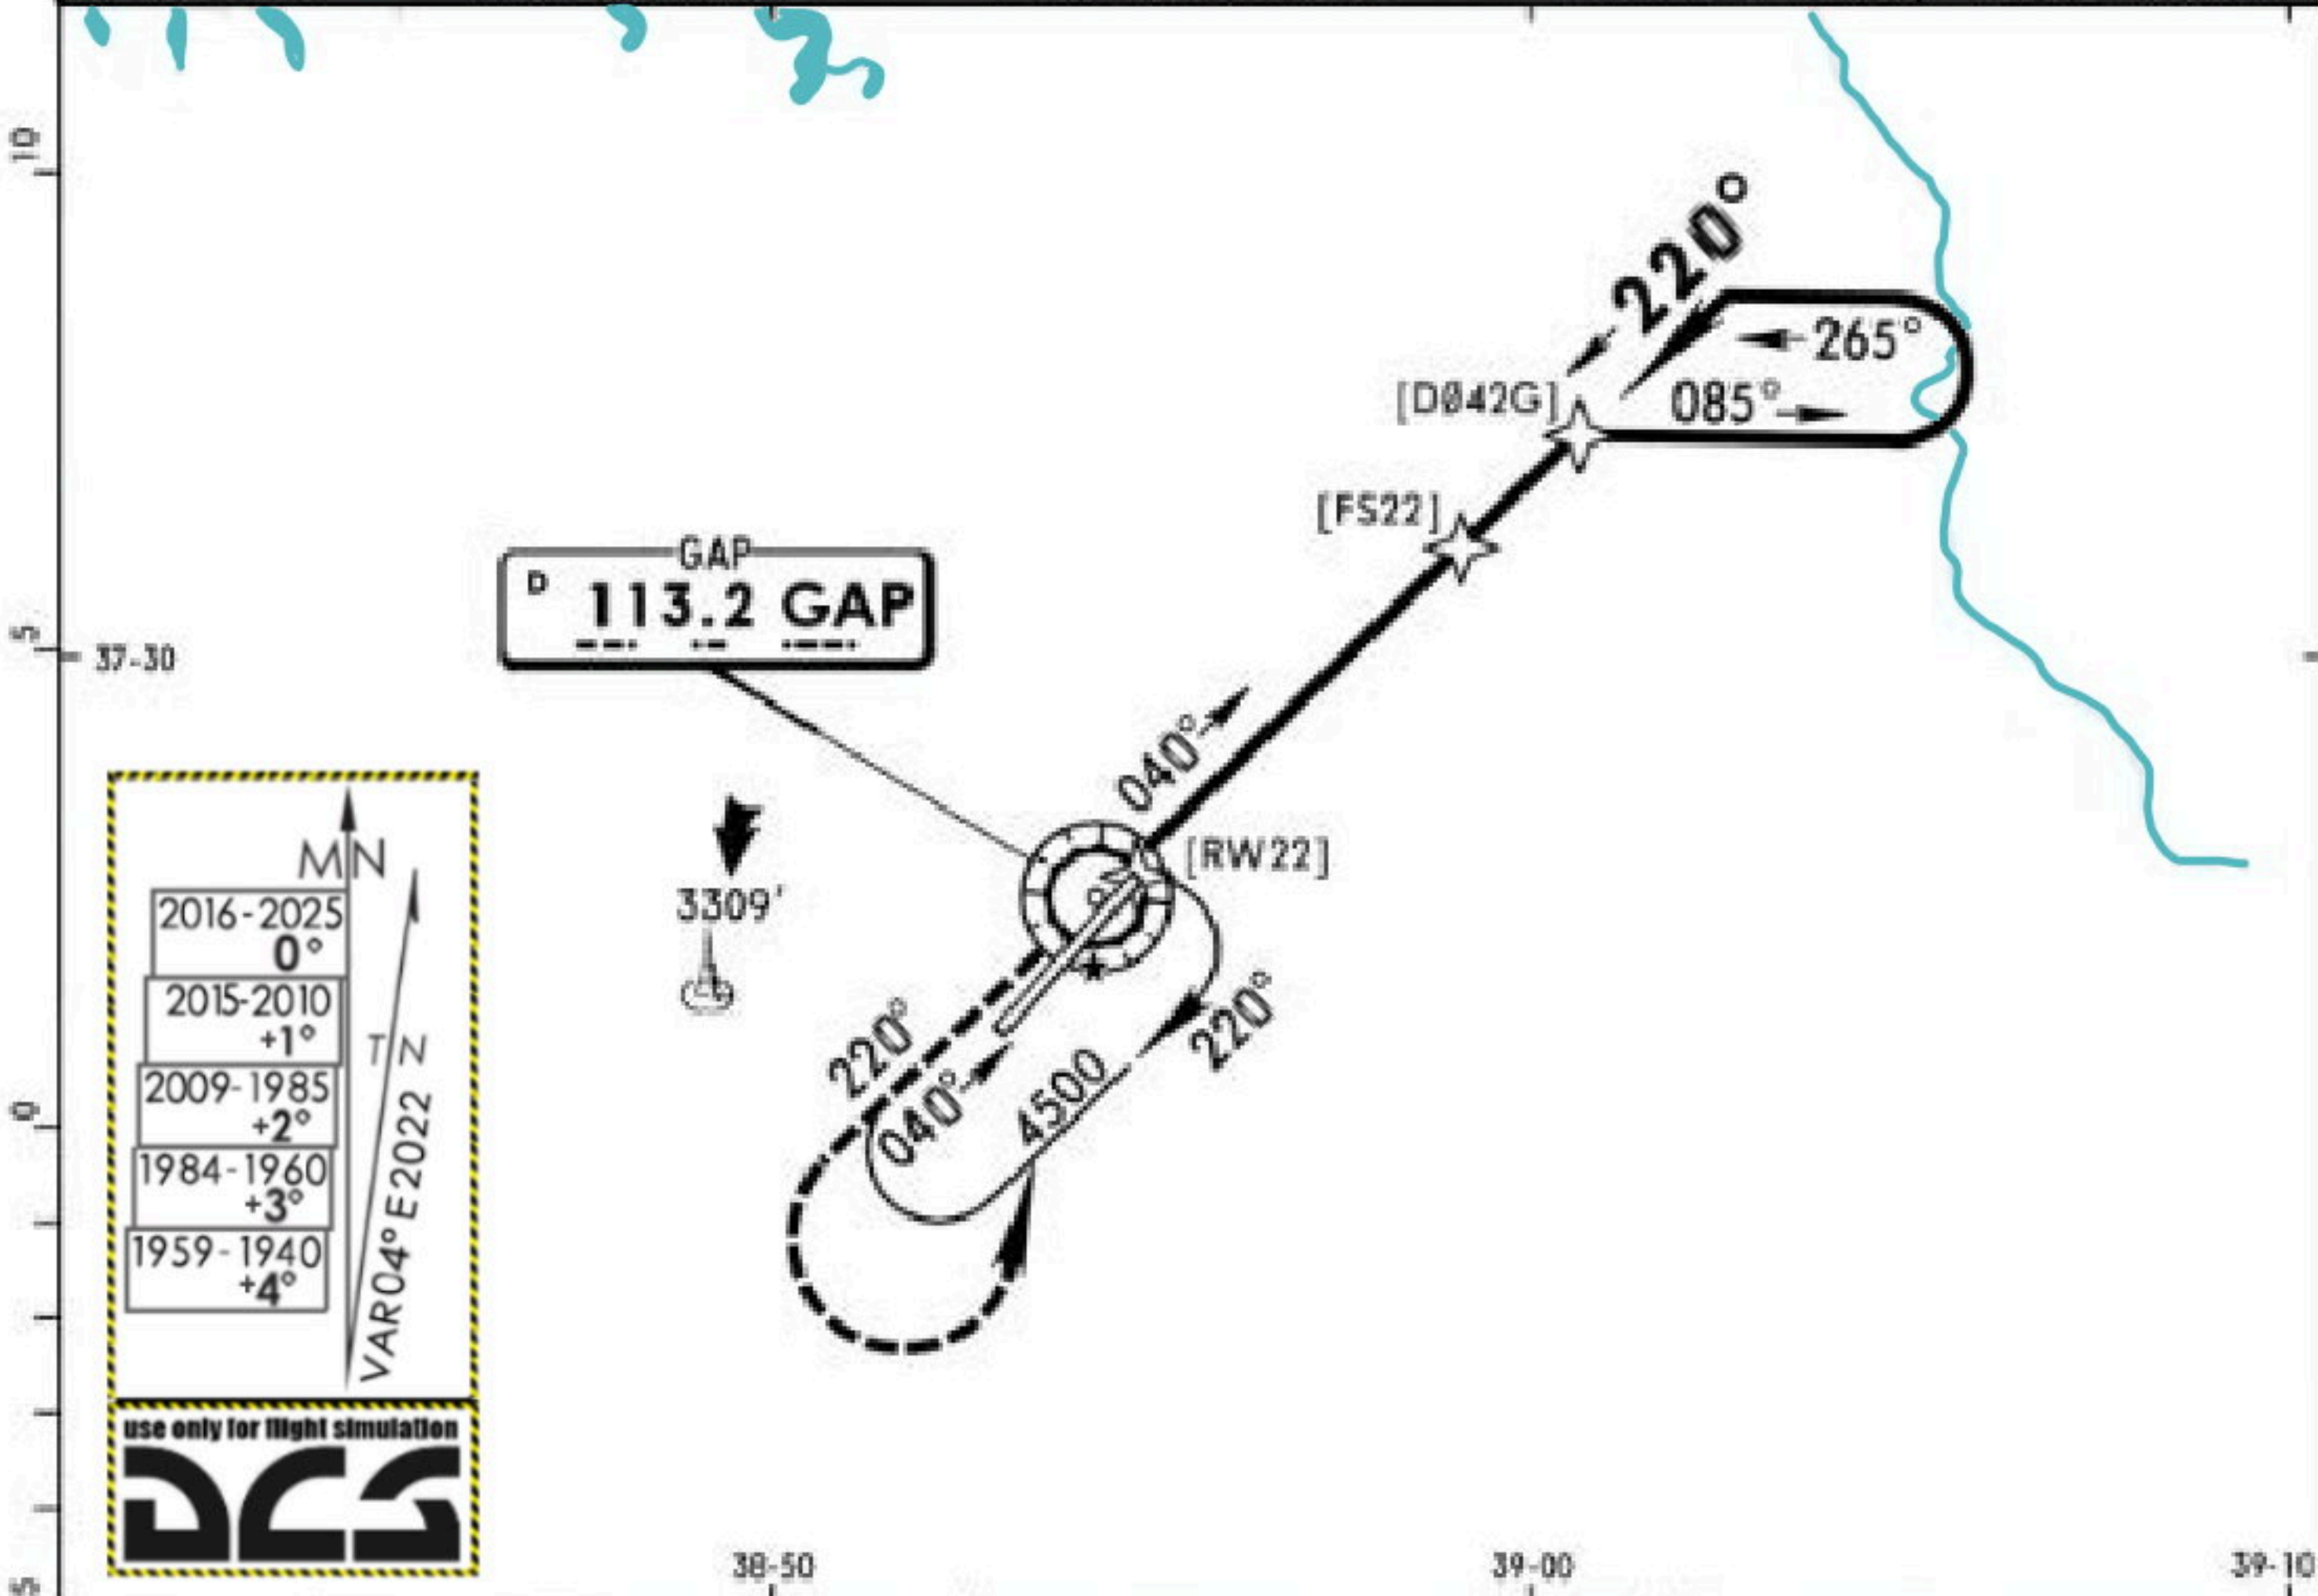

DIST to RW22	2.0	3.0	4.0
ALTITUDE	3390'	3710'	4020'

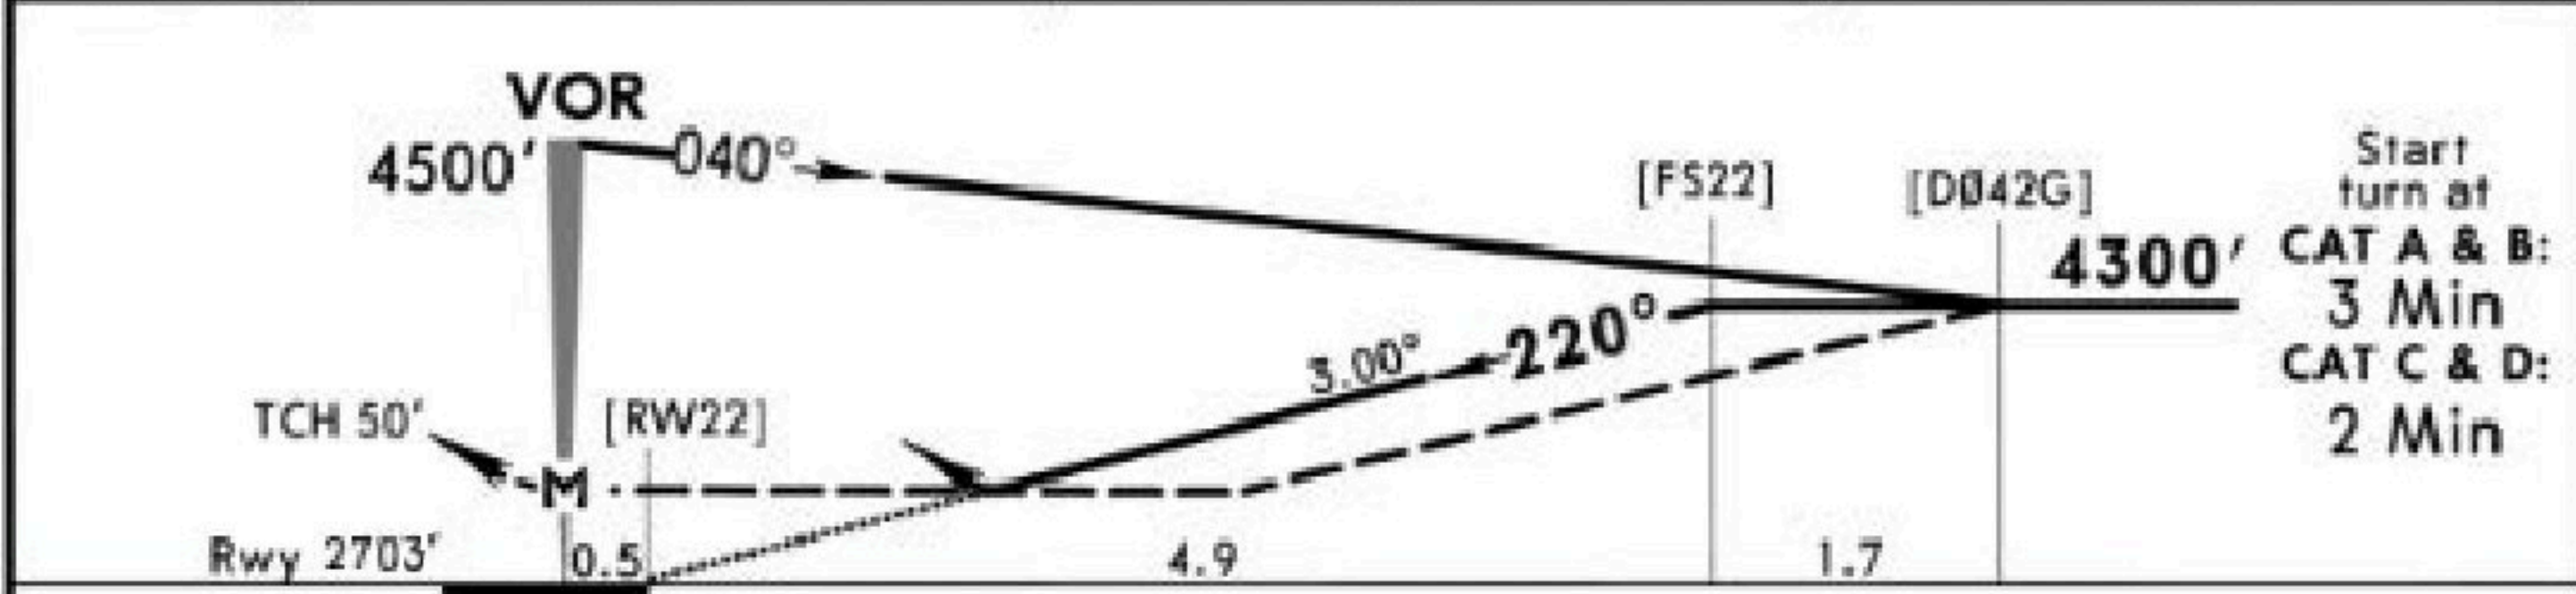

Gnd speed-Kts	70	90	100	120	140	160		3900' GAP 113.2 on R-220
Descent angle	3.00°	372	478	531	637	743		
MAP at VOR								

Standard		STRAIGHT-IN LANDING RWY 22			CIRCLE-TO-LAND		
		CDFA DA/MDA(H) 3100' (392')	non-CDFA MDA(H) 3100' (392')		Max Kts	MDA(H) _____ VIS _____	
		ALS out		ALS out			
A	RVR 1100m	RVR 1500m	RVR 1300m	RVR 2000m	100	3400' (692')	I 1500m
B					135	3400' (692')	I 1600m
C		RVR 1800m	RVR 1500m	RVR 2200m	180	3750' (1042')	2400m
D					205	3750' (1042')	3600m


1 or higher straight-in minimums

LTCS/GNY
GAP INTL




SANLIURFA, TURKEY
NDB DME Rwy 22

ATIS		GAP Approach		GAP Tower		Ground
128.250		118.850		118.400 252.350		121.9
NDB GAP 391	Final Apch Crs 220°	Minimum Alt D6.0 4300' (1592')	DA/MDA(H) 3100' (392')	Apt Elev 2703' Rwy 2703'		
MISSED APCH: Climb on 220° from NDB to 3900' then turn LEFT to NDB climbing to 4500' and hold.						
Alt Set: hPa		Apt Elev: 95 hPa		Trans level: By ATC		Trans alt: 10000'
						MSA GAP NDB

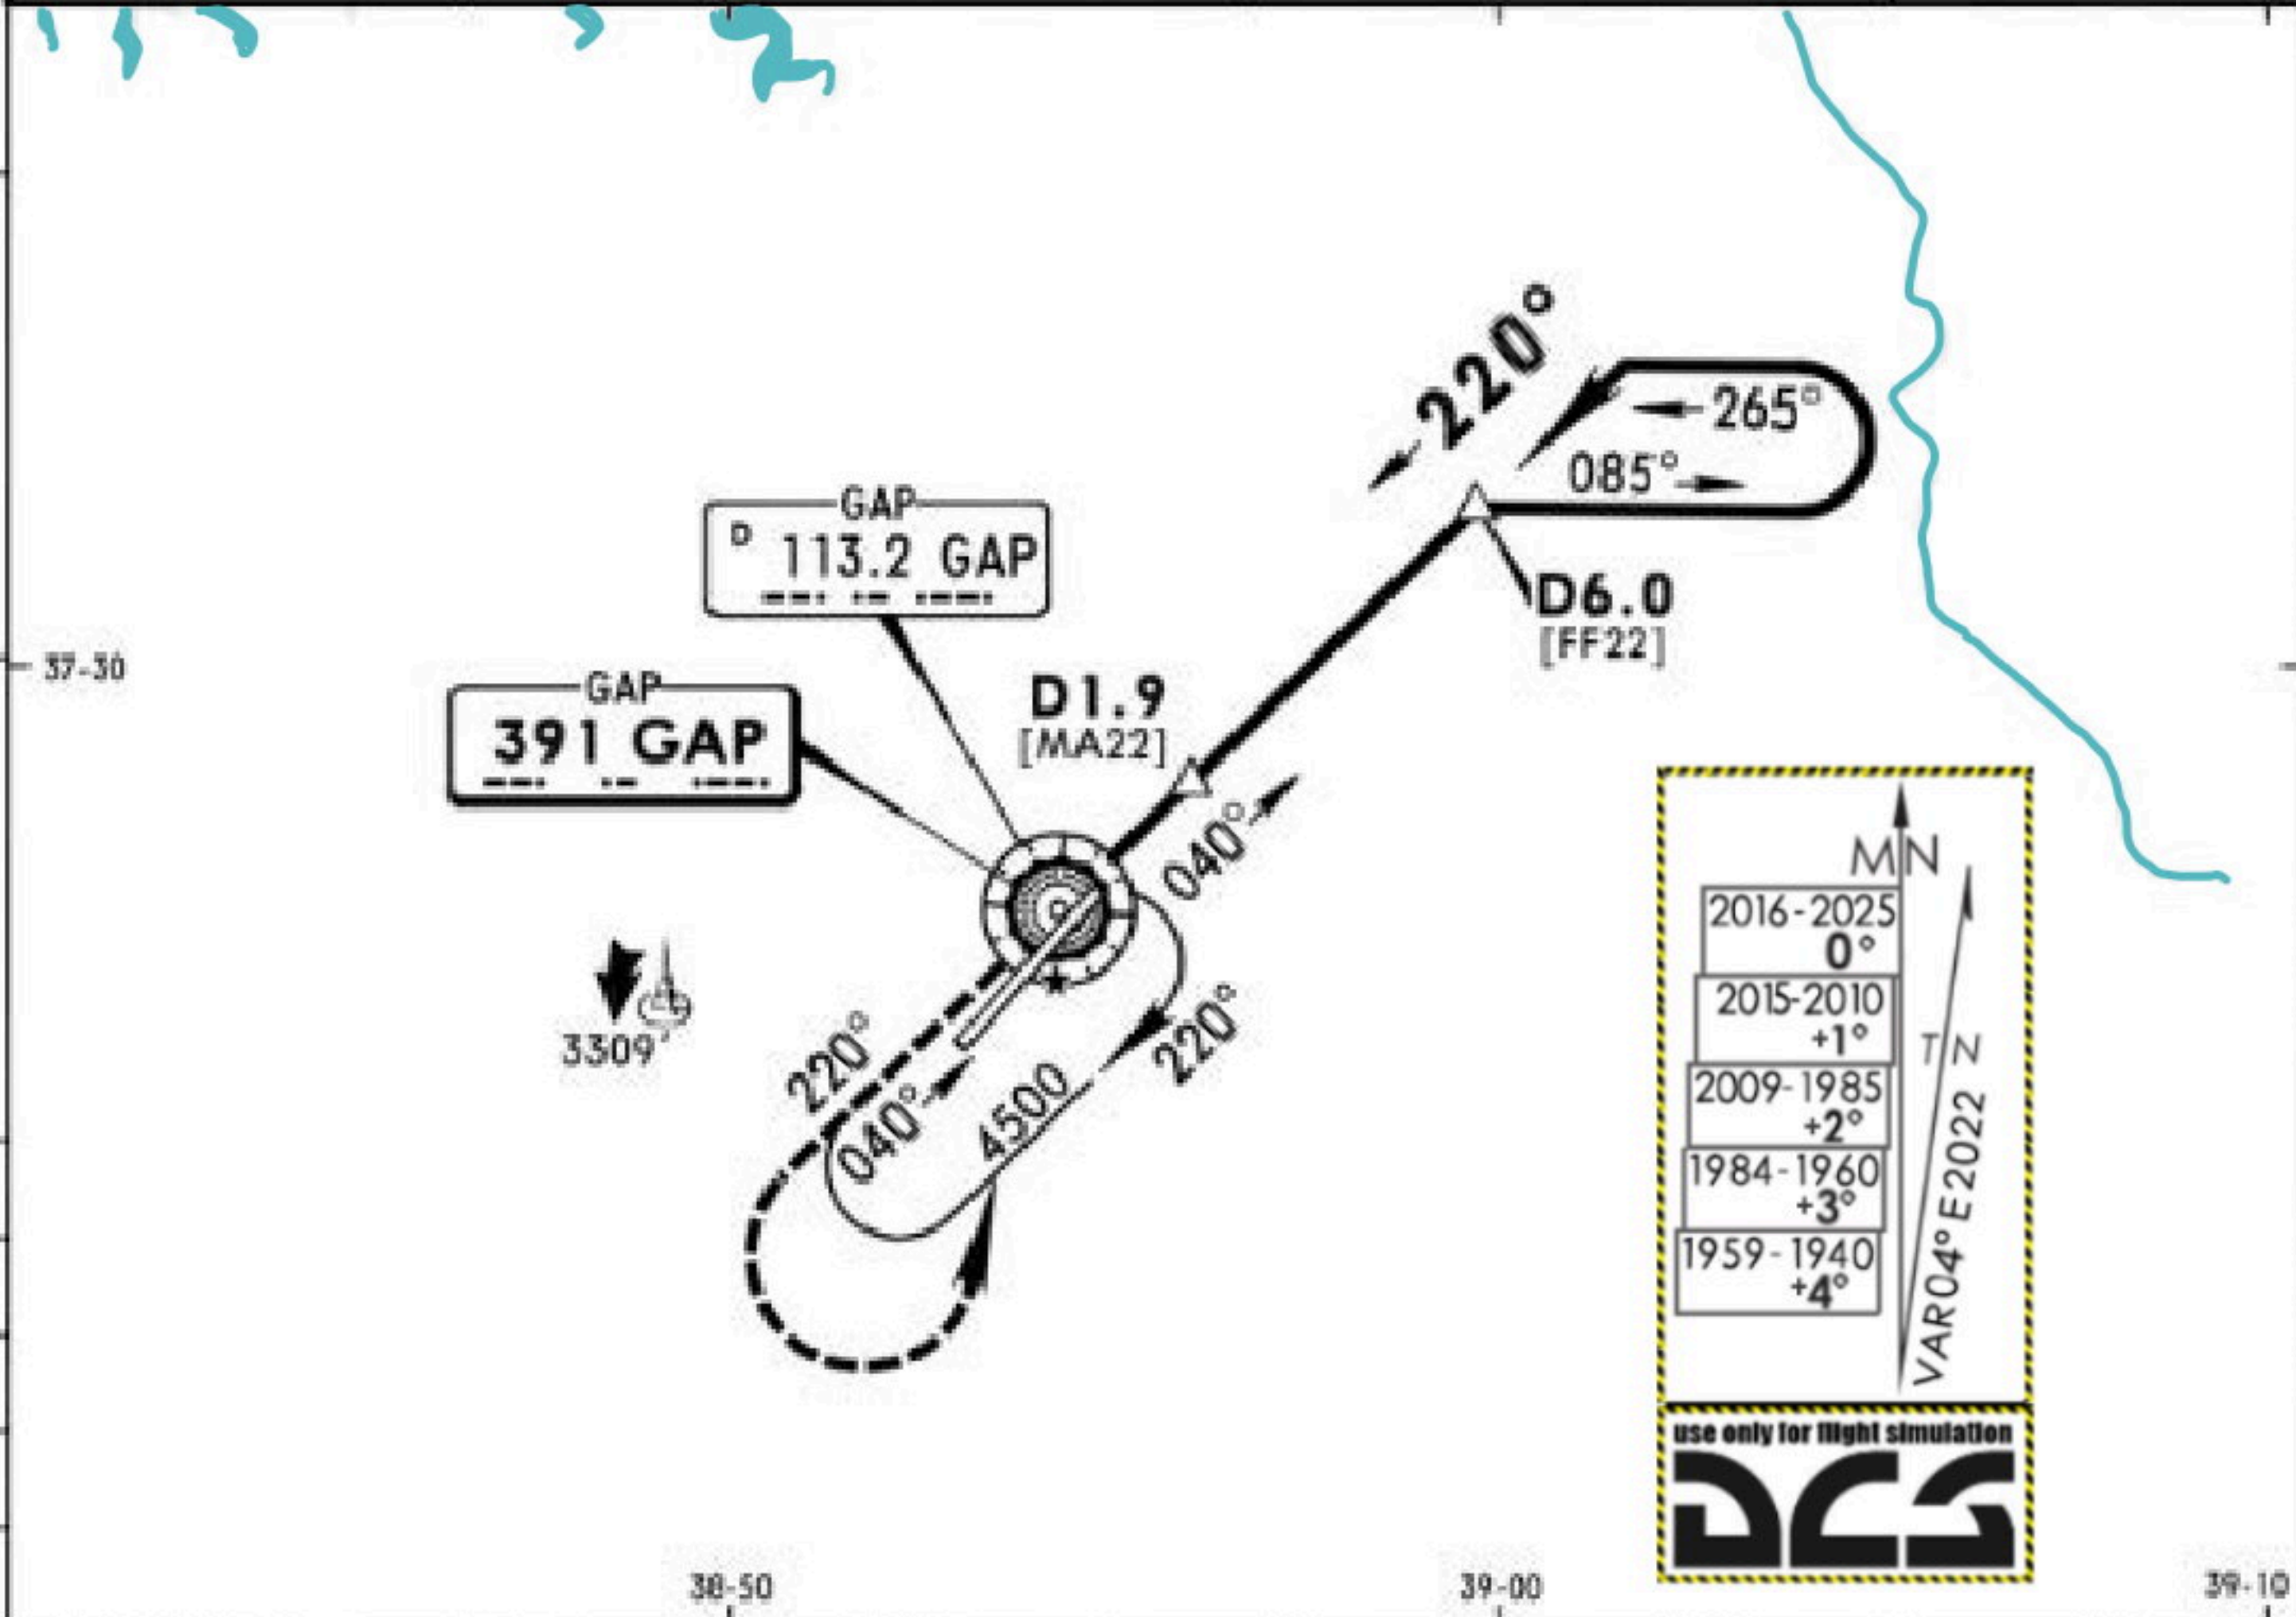

GAP DME	2.0	3.0	4.0	5.0	5.3
ALTITUDE	3270'	3580'	3900'	4210'	4300'

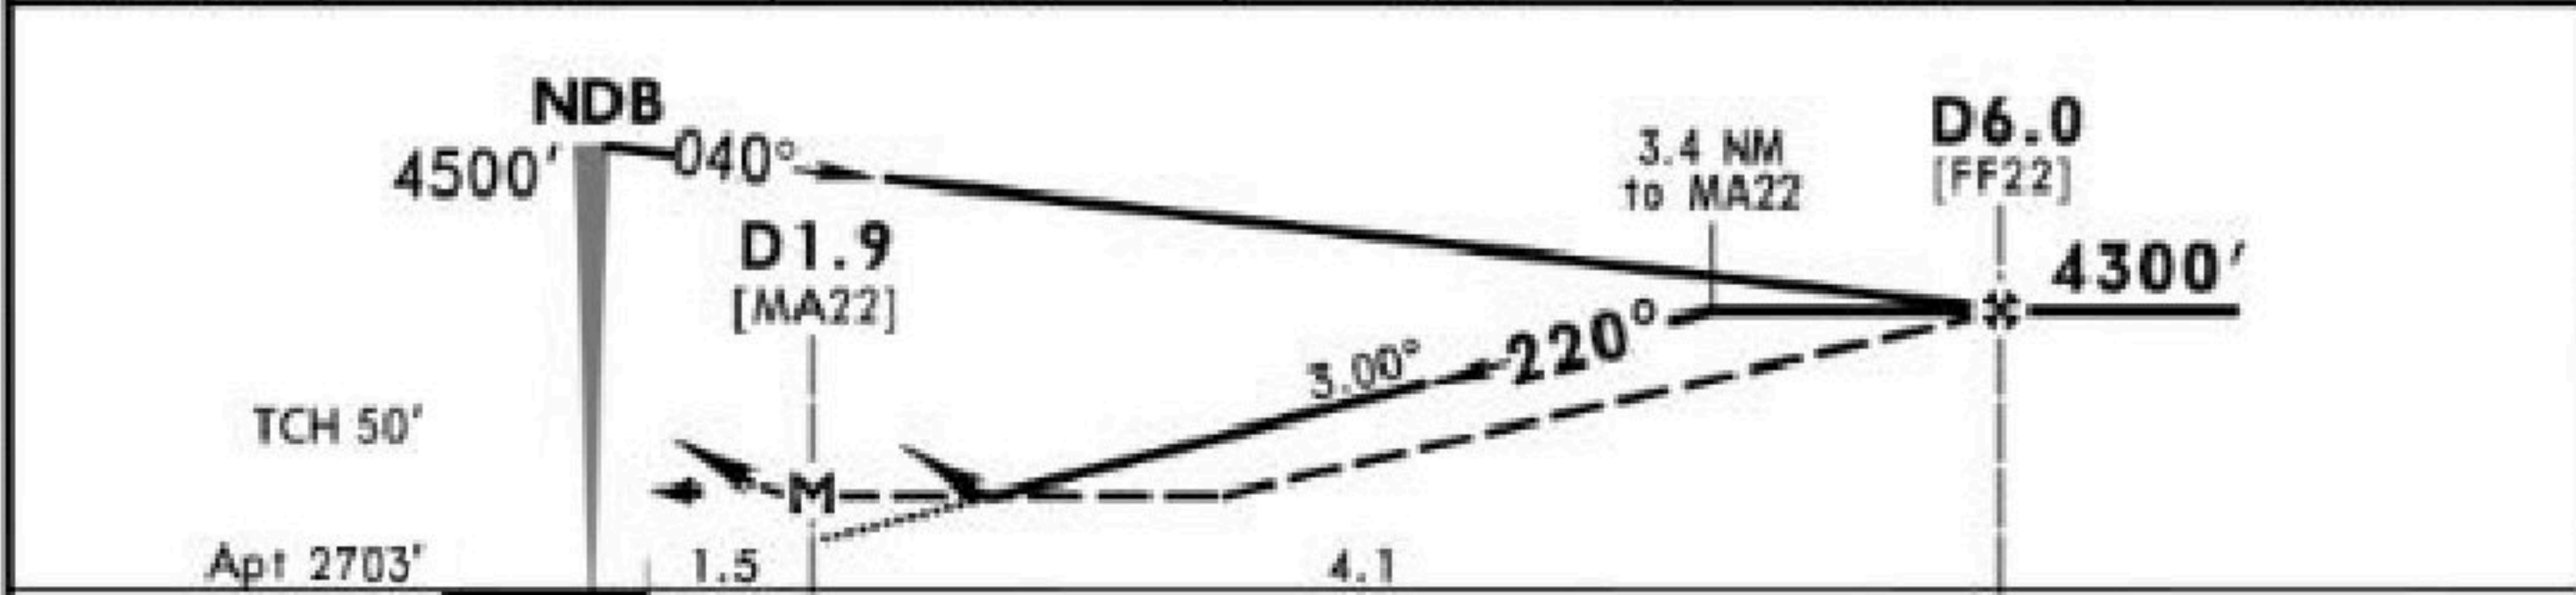

Gnd speed-Kts	70	90	100	120	140	160	
Descent angle	3.00°	372	478	531	637	743	
MAP at D1.9							

STRAIGHT-IN LANDING RWY 22				CIRCLE-TO-LAND			
CDFA DA/MDA(H) 3100' (392')		non-CDFA MDA(H) 3100' (392')					
ALS out		ALS out		Max Kts	MDA(H)	VIS	
RVR 1100m	RVR 1500m	RVR 1300m	RVR 2000m	100	3400' (692')	1500m	
	RVR 1500m	RVR 1300m	RVR 2000m	135	3400' (692')	1600m	
	RVR 1800m	RVR 1500m	RVR 2200m	180	3750' (1042')	2400m	
	RVR 1800m	RVR 1500m	RVR 2200m	205	3750' (1042')	3600m	

1 or higher straight-in minimums