




Apt Elev
1254'

Alt Set: MB
Trans level: FL150 Trans alt: 13000'
STARs are also minimum noise routings.

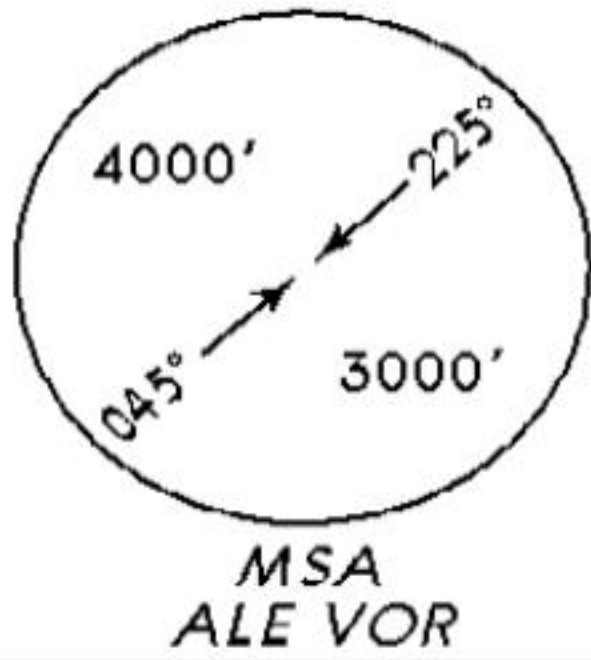

GOLF
N36 24.3 E037 17.4
GOLF 2C
DURING MIL
ACTIVITY
At or above
10000'

DELTA 1C [DELTA1C], DELTA 2C [DELTA2C]
GOLF 1C, GOLF 2C
TANGO 1C [TANG1C], TAN 2C
RWYS 09, 27 ARRIVALS
FROM NORHT, EAST & SOUTHEAST
FOR ARRIVALS TO FINAL APPROACH
REFER TO CHART 10-2B
~~SPEED~~ MAX 250 KT BELOW 10000'
UNLESS INSTRUCTED OTHERWISE BY ATC

ALEPPO
D 114.5 ALE
N36°10'46" E037°12'33"

DELTA
N36 05.8 E037 29.9
DELTA 2C
DURING MIL
ACTIVITY
At or above
FL160

TANGO
N35 57.0 E037 20.1
TAN 2C
At or above
8000'

D20 ALE
At or above
FL160

D40 ALE
At or above
FL240


TANF
D 114.0 TAN
N33°28'56" E038°39'14"






Apt Elev
1254'

Alt Set: MB
Trans level: FL150 Trans alt: 13000'
STARs are also minimum noise routings.

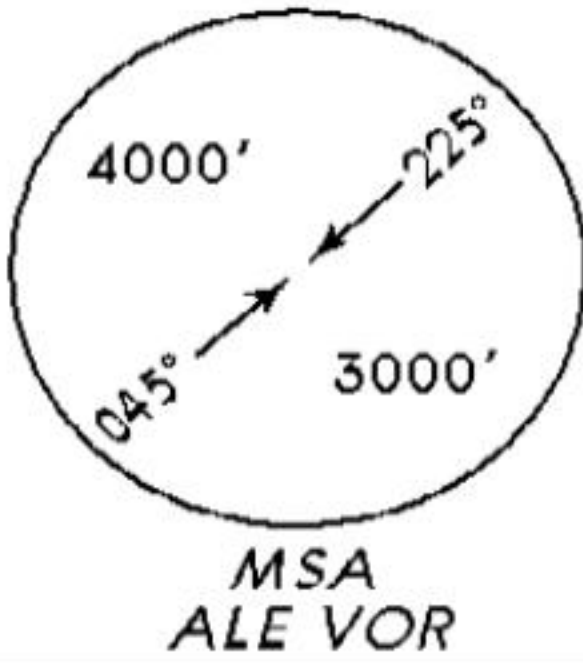


KILO 1C, KTN 2C
LIMA 1C, LUBAM 2C [LUBA2C]
RWYS 09, 27 ARRIVALS
FROM SOUTH & SOUTHWEST
FOR ARRIVALS TO FINAL APPROACH
REFER TO CHART 10-2B
~~SPEED~~ MAX 250 KT BELOW 10000'
UNLESS INSTRUCTED OTHERWISE BY ATC

ALEPPO
D 114.5 ALE
N36°10'46" E037°12'33"

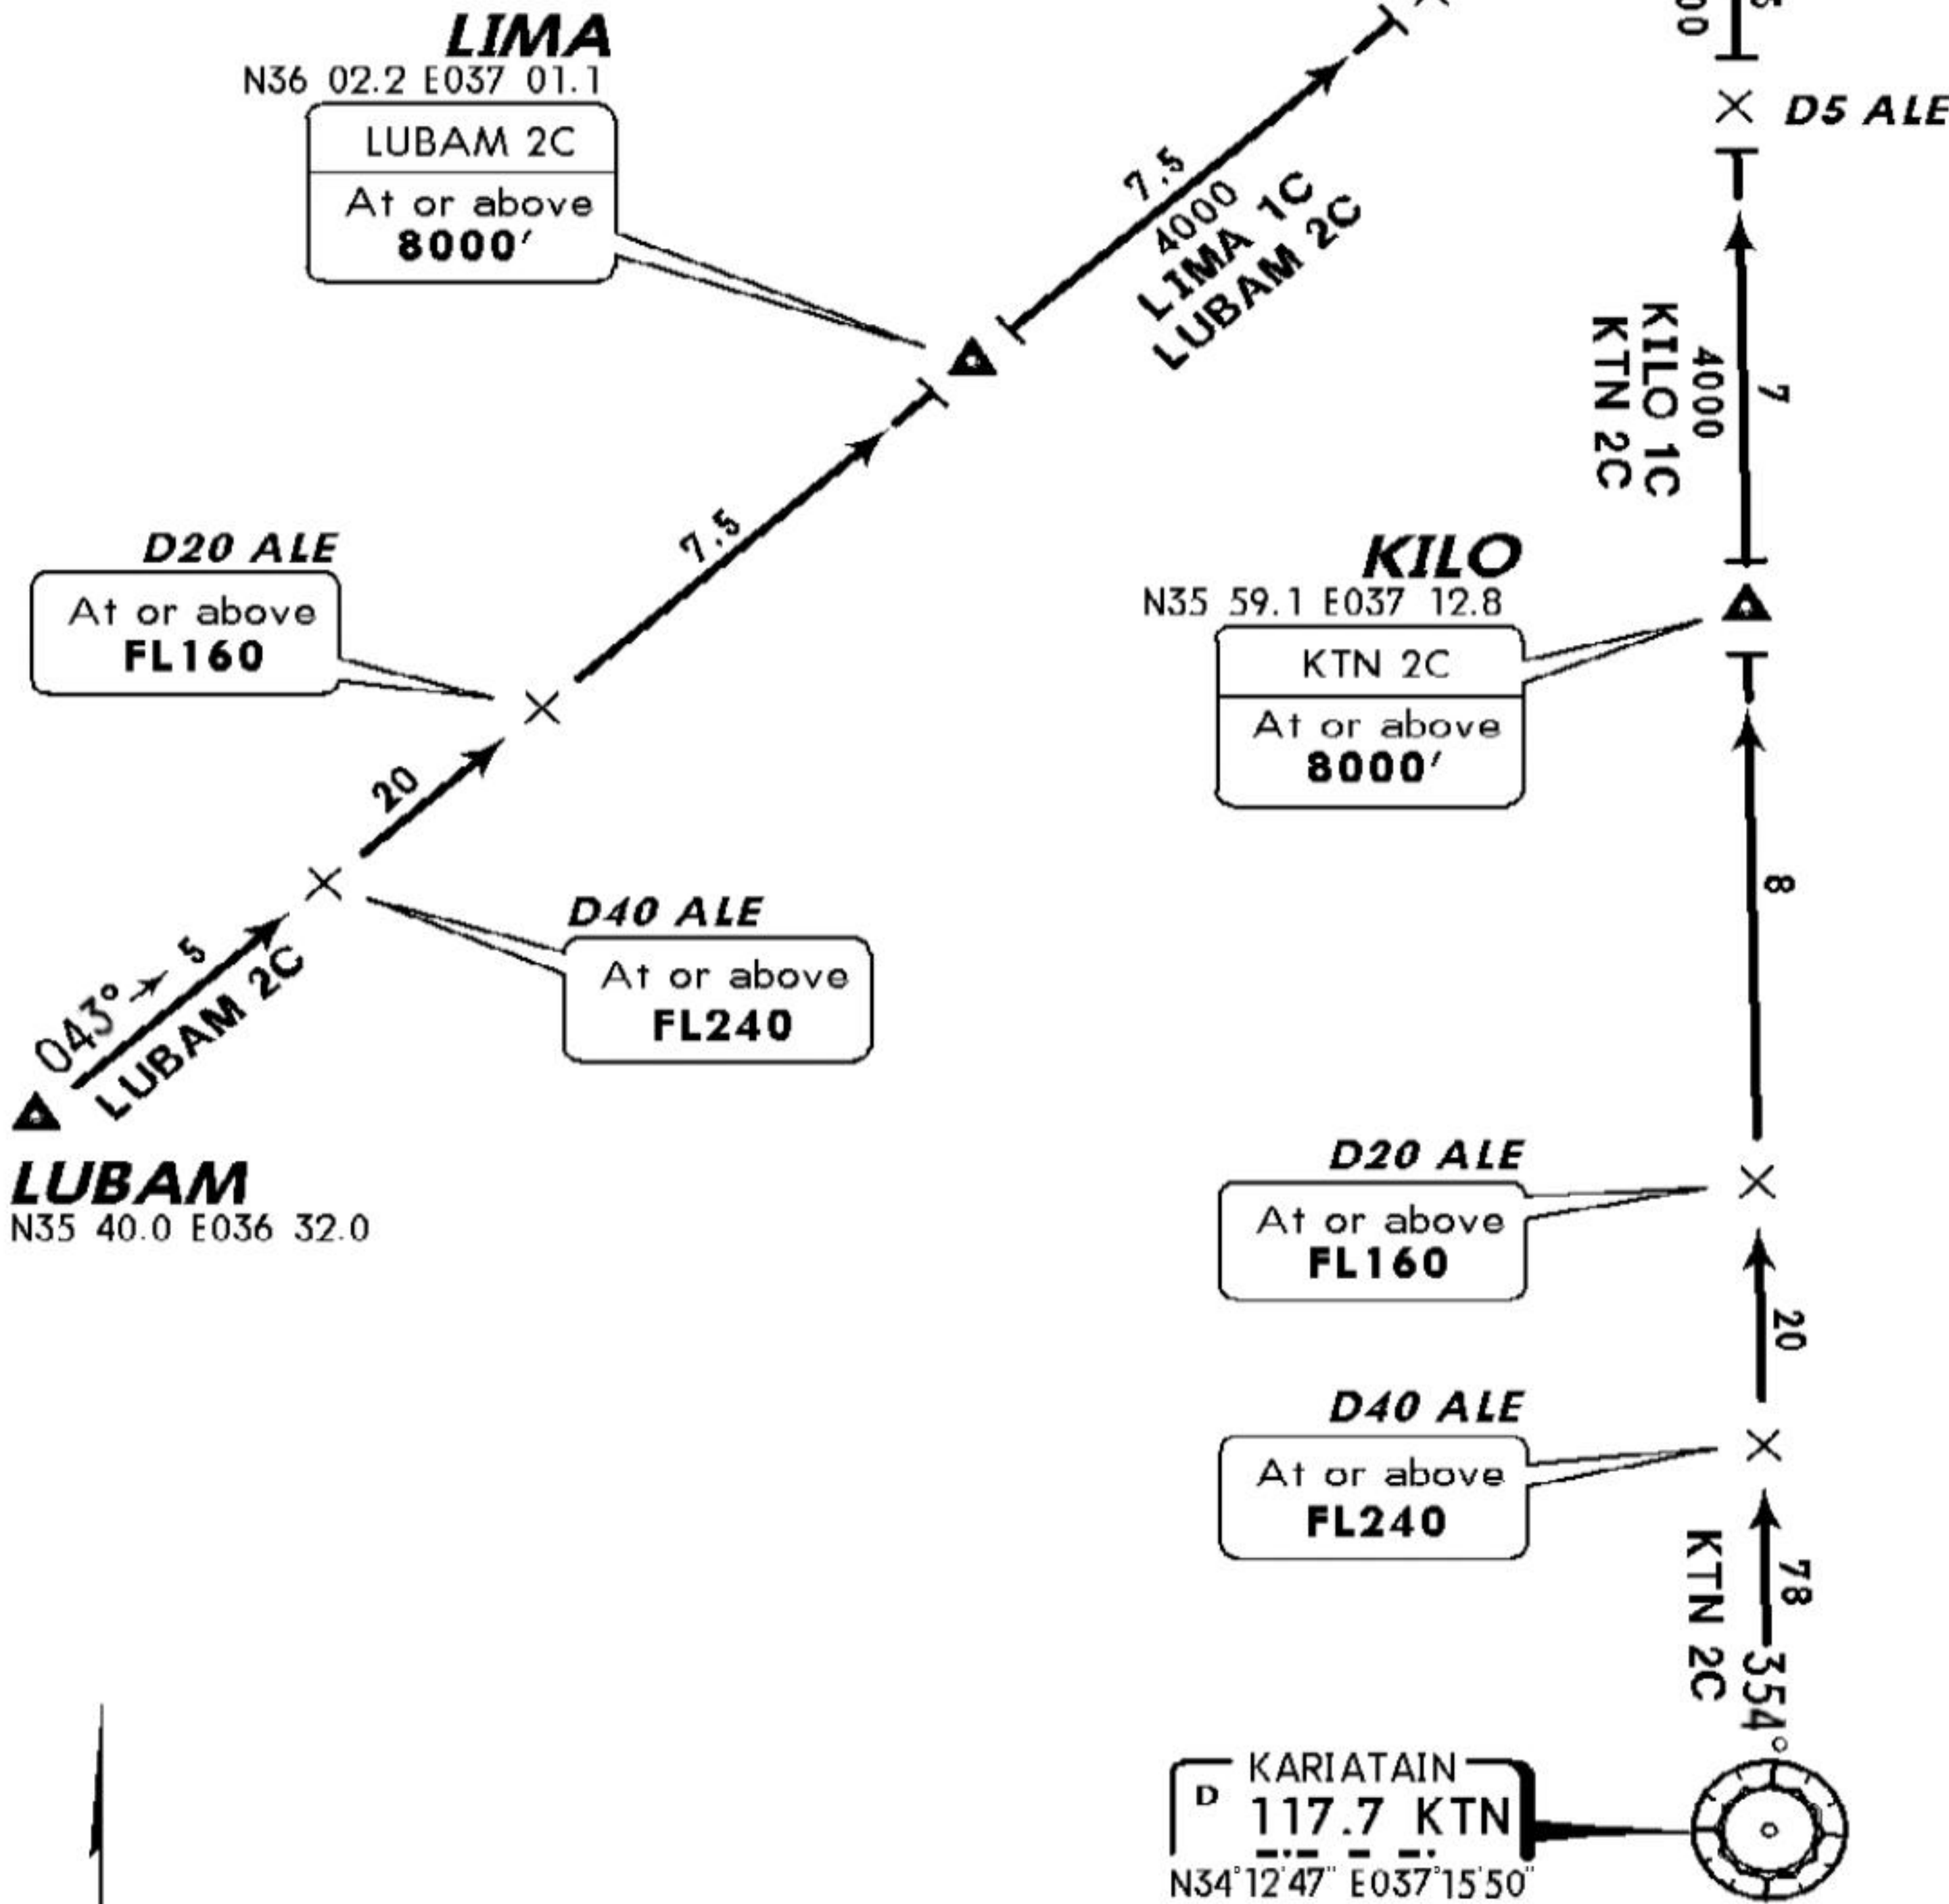


- ① R-106 initial course for arrivals from DELTA,
lead-in radial for ILS approach from KILO, LIMA & TANGO
R-108 lead-in radial for VOR/DME approach from KILO, LIMA & TANGO.
- ② R-082 for ILS approach.
R-080 vor VOR/DME approach.

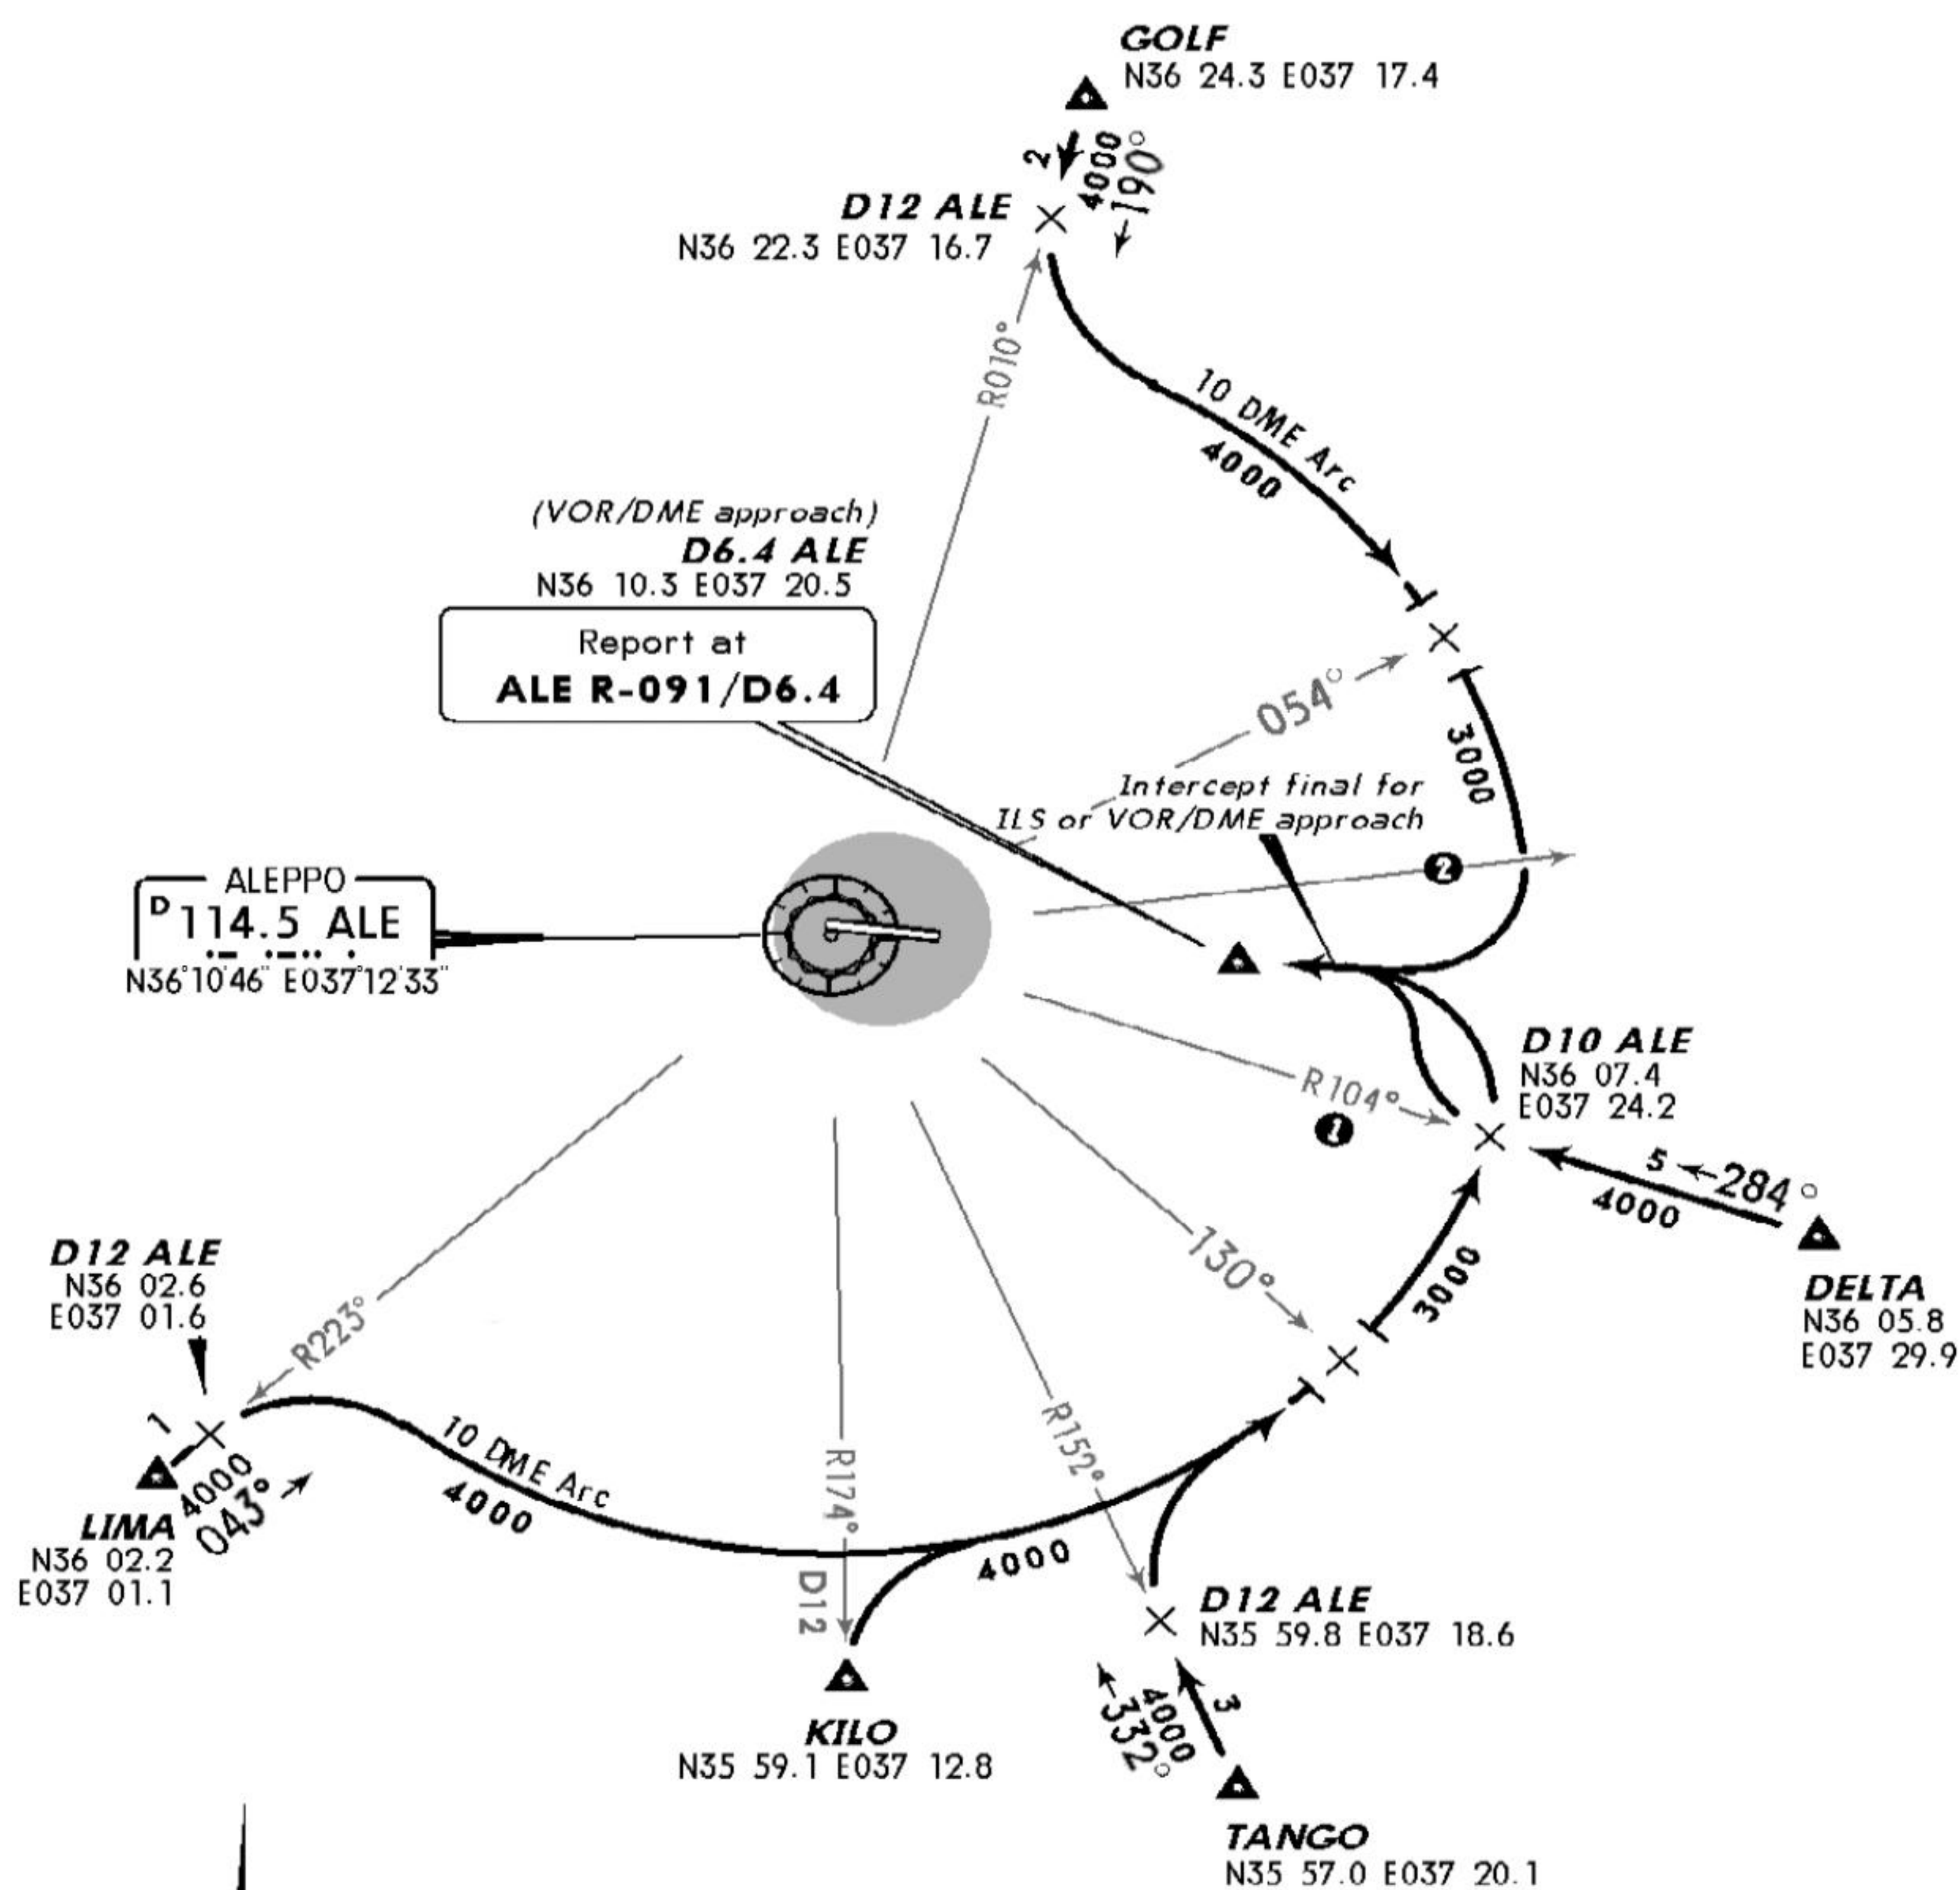

NOT TO SCALE

Apt Elev
1254'


Trans level: FL 150 Trans alt: 13000'
SIDs are also minimum noise routings.

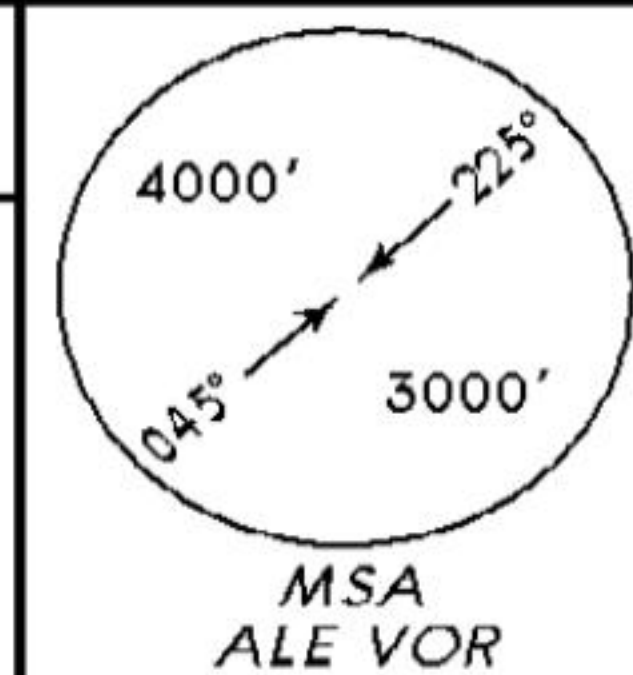

DELTA 1J [DELT1J], GOLF 1J, KILO 1J
LIMA 1J, TANGO 1J [TANG1J]

RWY 09 DEPARTURES

FOR SIDS APPLICABLE
UNDER MILITARY RESTRICTIONS
REFER TO CHART 10-3A

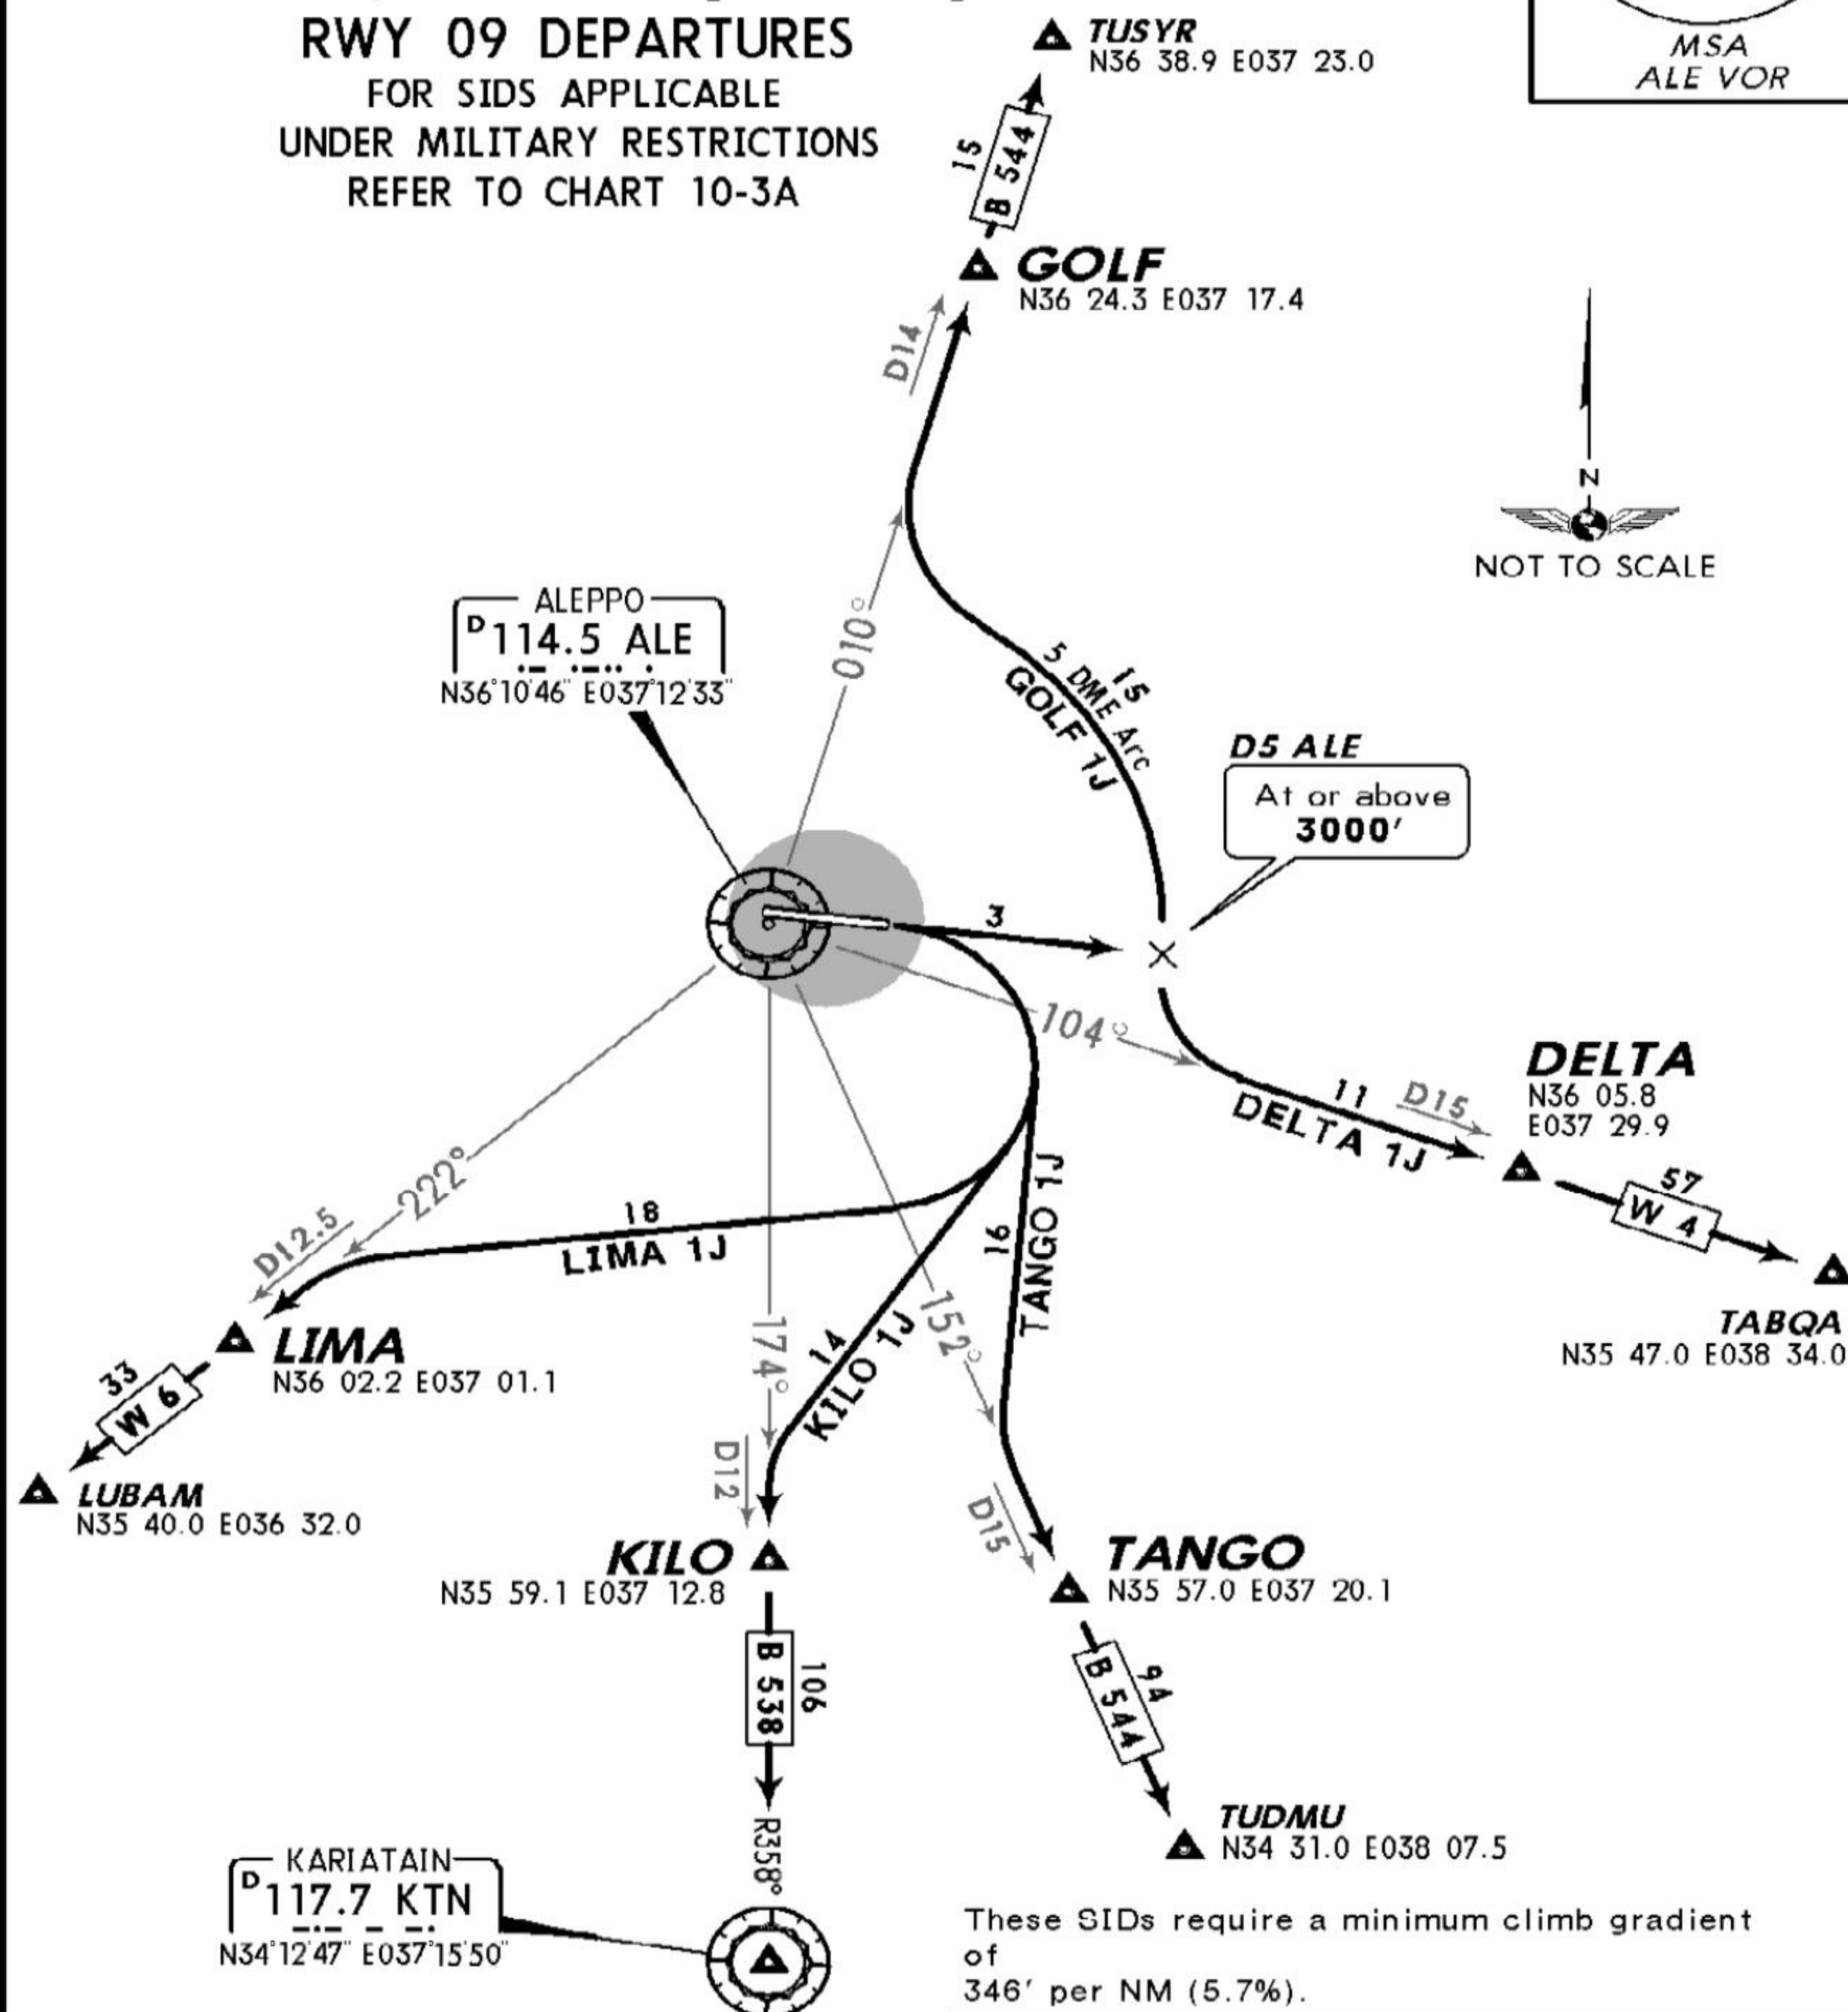


These SIDs require a minimum climb gradient of 346' per NM (5.7%).

Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732


If unable to comply advise ATC.

SID	ROUTING
DELTA 1J	On runway heading to D5 ALE, turn RIGHT, intercept ALE R-106 to DELTA, join airway W 4.
GOLF 1J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544.
KILO 1J	Turn RIGHT, intercept ALE R-176 to KILO, join airway B 538.
LIMA 1J	Turn RIGHT, intercept ALE R-225 to LIMA, join airway W 6.
TANGO 1J	Turn RIGHT, intercept ALE R-154 to TANGO, join airway B 544.

Trans level: FL150 Trans alt: 13000'
SIDs are also minimum noise routings.

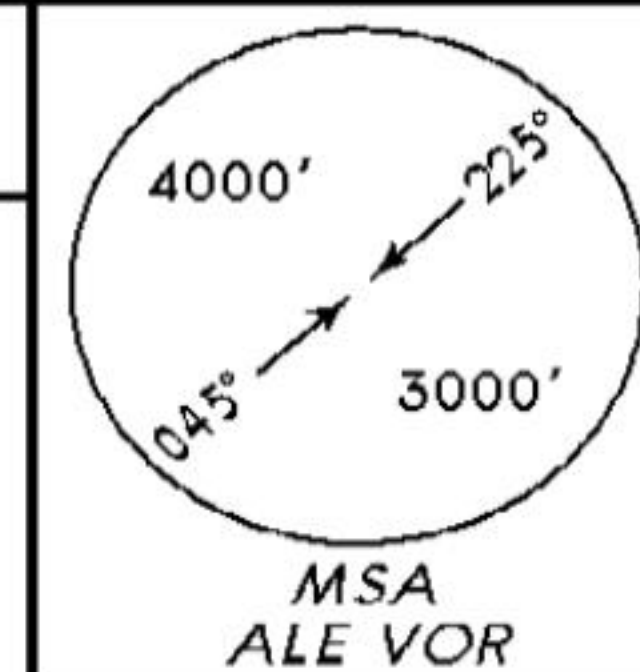

NOT TO SCALE

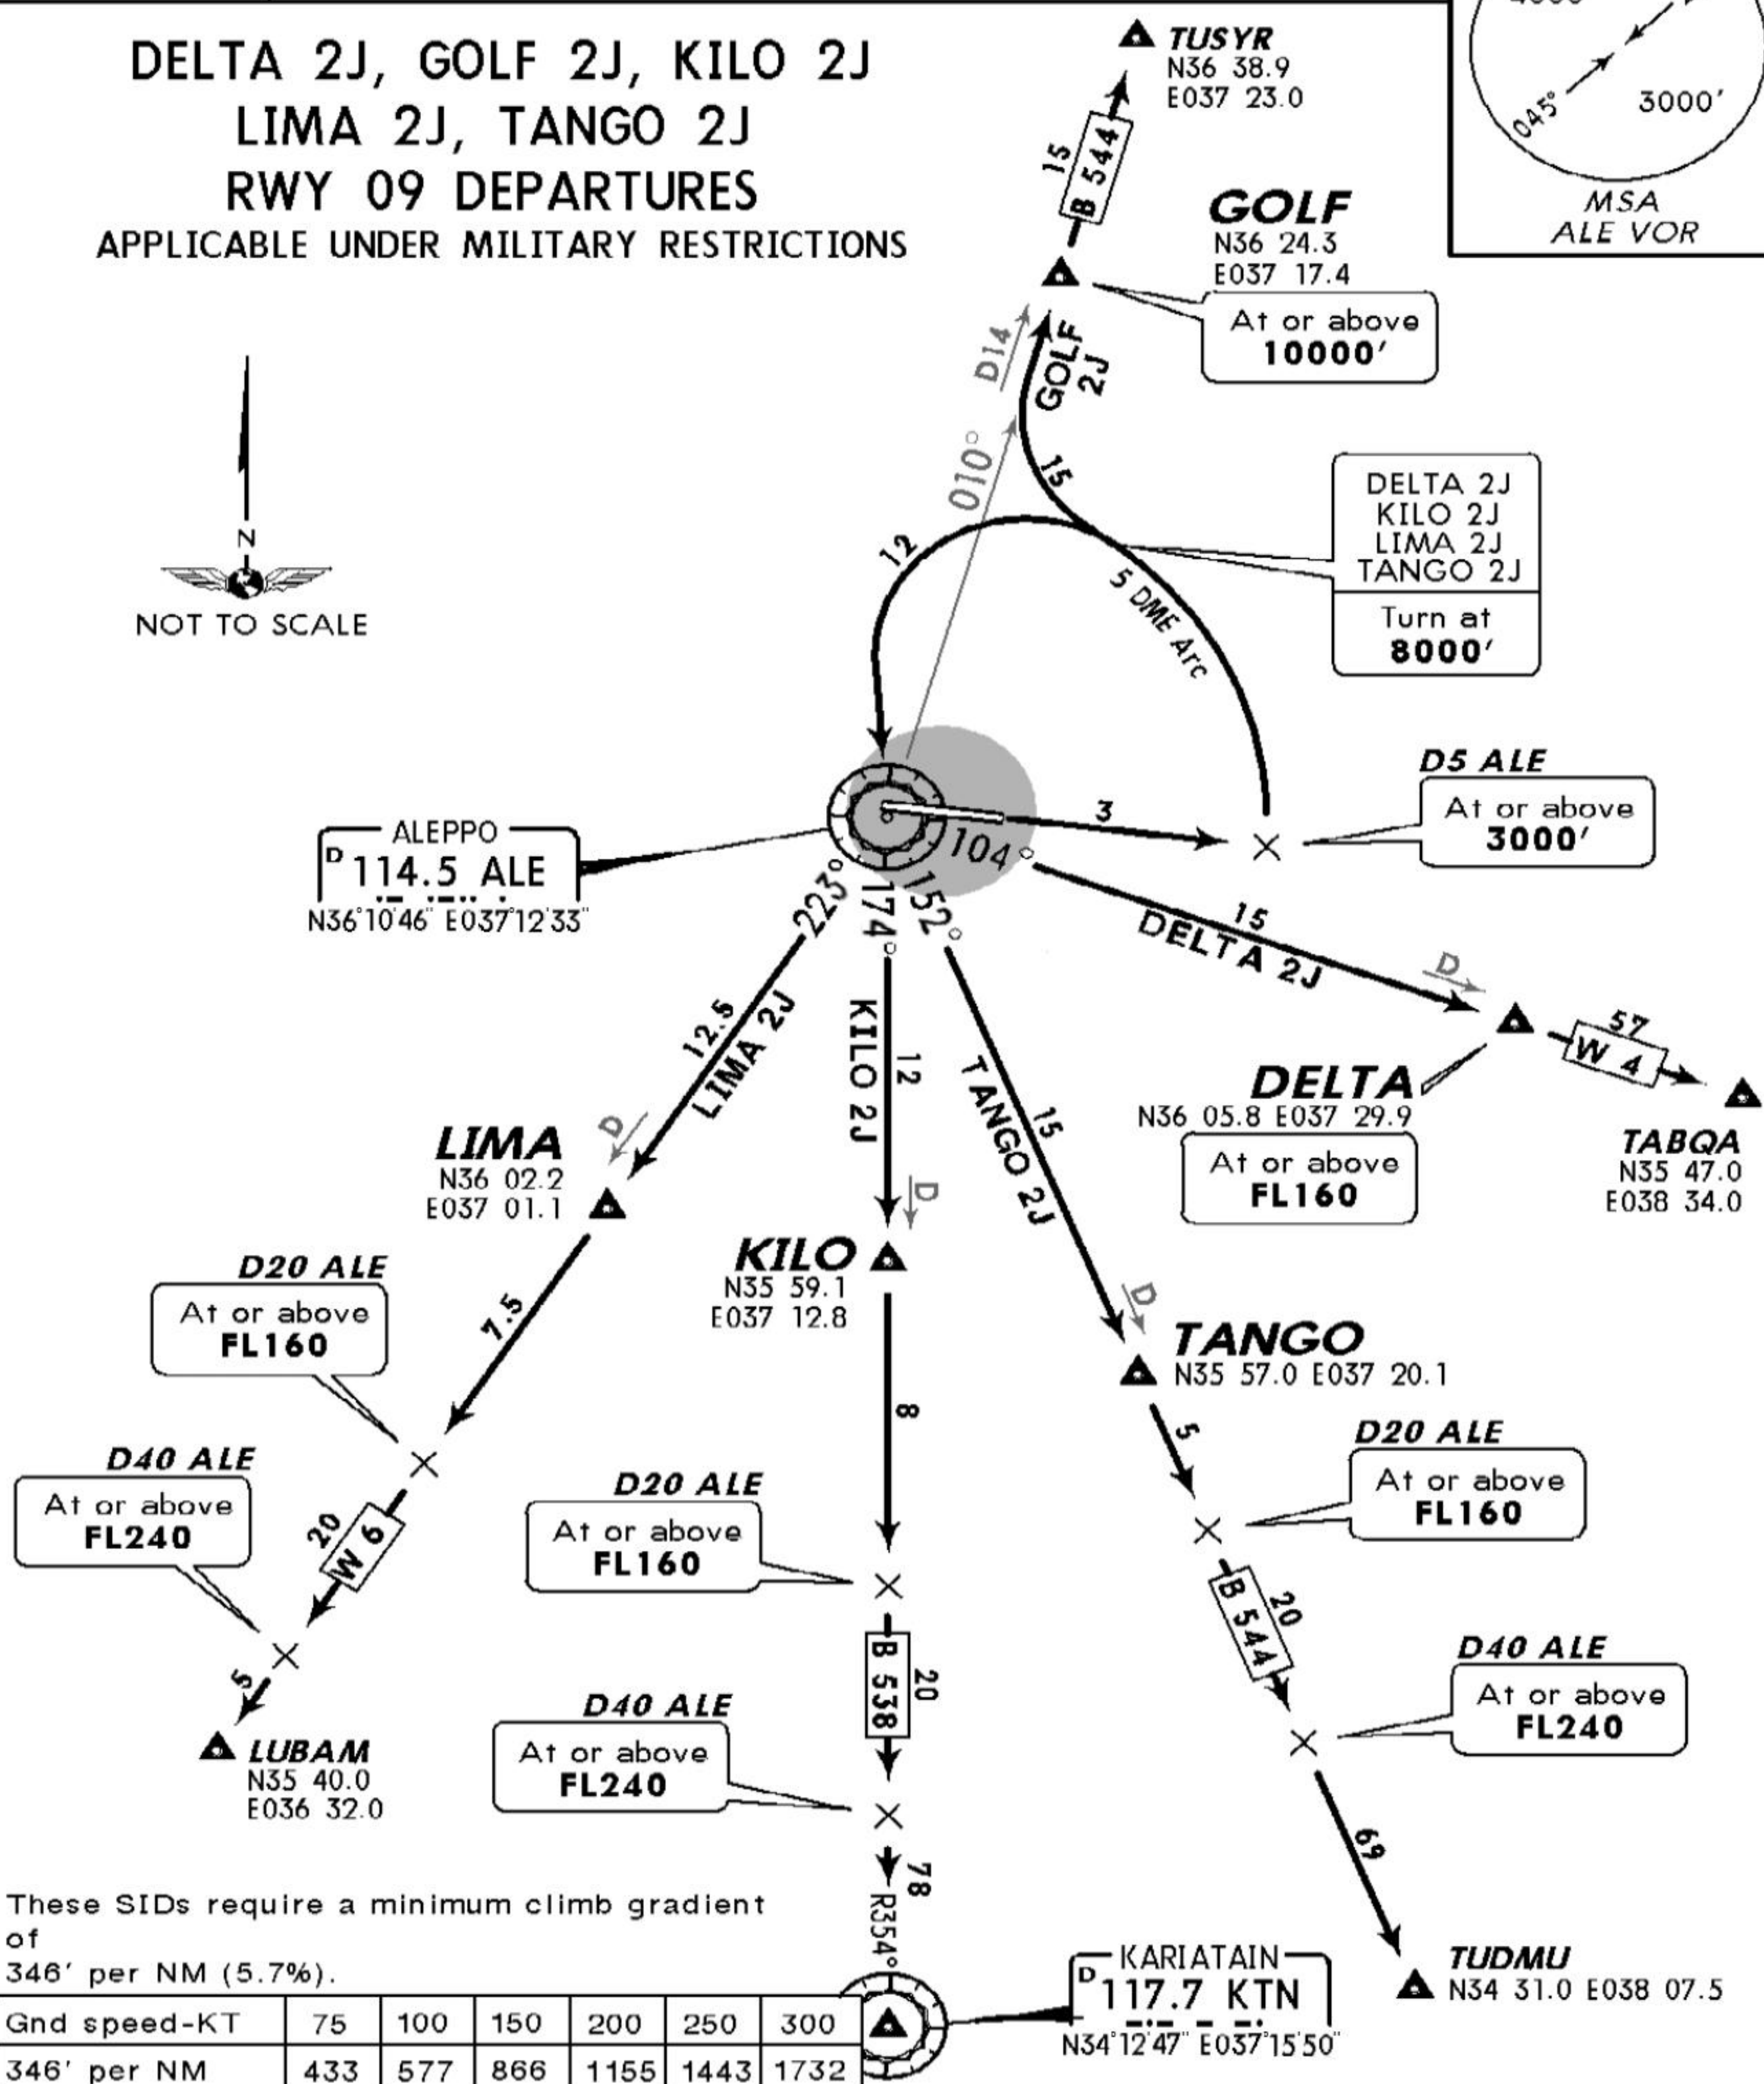

These SIDs require a minimum climb gradient of 346' per NM (5.7%).

Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732

If unable to comply advise ATC.

SID	ROUTING
DELTA 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-106 to DELTA, join airway W 4.
GOLF 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544.
KILO 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-176 to KILO, join airway B 538.
LIMA 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-225 to LIMA, join airway W 6.
TANGO 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-154 to TANGO, join airway B 544.

Apt Elev
1254'

Trans level: FL150 Trans alt: 13000'

1. SIDs are also minimum noise routings.

2. Obstacle at ALE 3.7 DME, approximately 1 NM RIGHT of extended RCL.

DELTA 1R [DELT1R], GOLF 1R, KILO 1R



LIMA 1R, TANGO 1R [TANG1R]

RWY 27 DEPARTURES

FOR SID APPLICABLE UNDER

MILITARY RESTRICTIONS

REFER TO CHART 10-3C

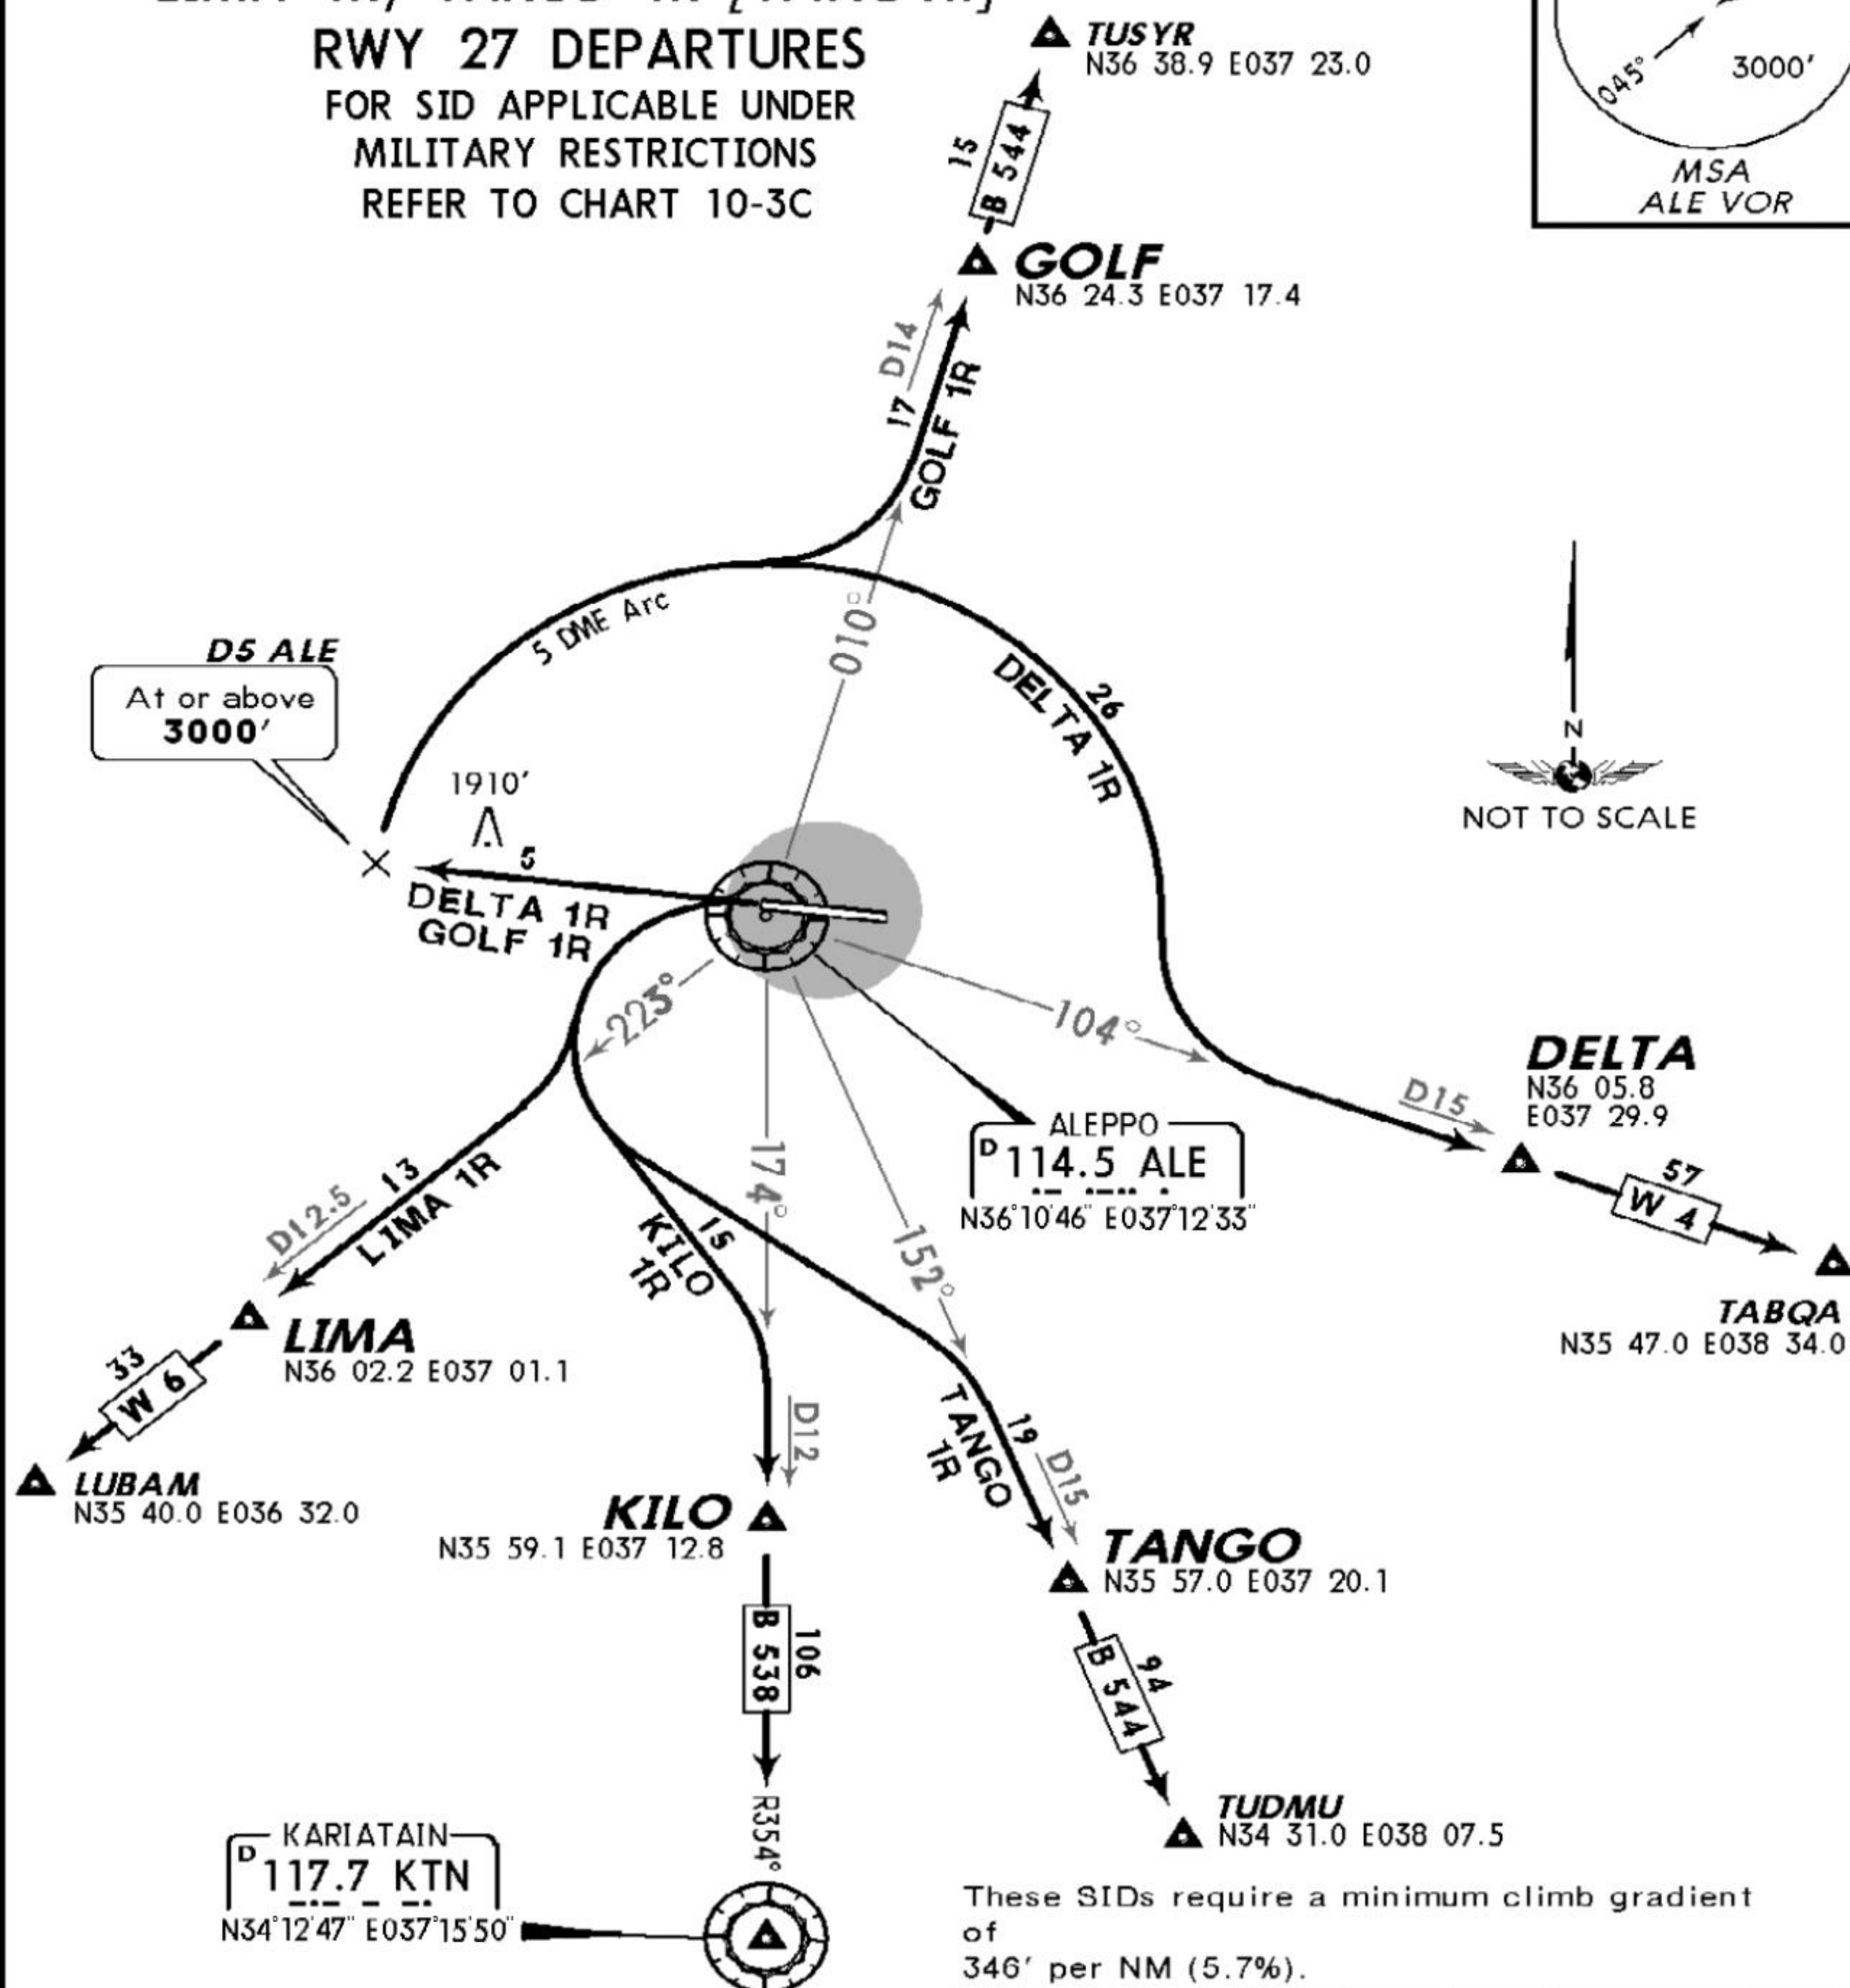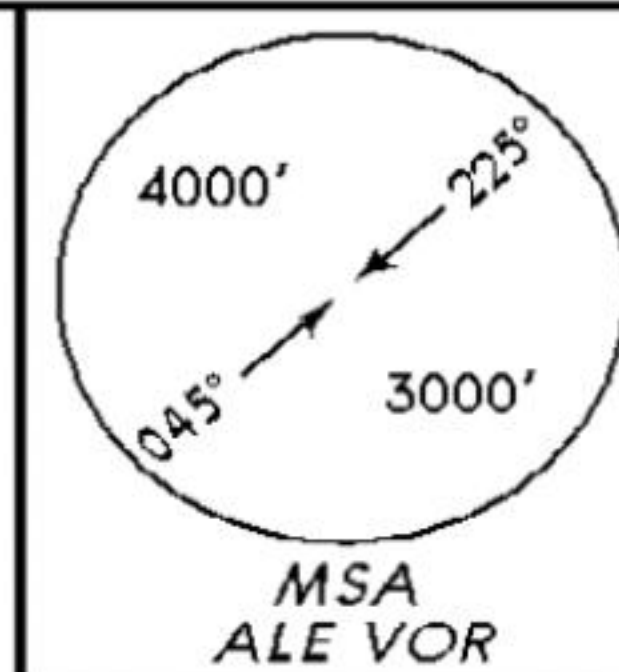

These SIDs require a minimum climb gradient of 346' per NM (5.7%).


Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732

If unable to comply advise ATC.

SID	ROUTING
DELTA 1R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, intercept ALE R-106 to DELTA, join airway W 4.
GOLF 1R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544.
KILO 1R	Turn LEFT, intercept ALE R-176 to KILO, join airway B 538.
LIMA 1R	Turn LEFT, intercept ALE R-225 to LIMA, join airway W 6.
TANGO 1R	Turn LEFT, intercept ALE R-154 to TANGO, join airway B 544.

Apt Elev
1254'Trans level: FL150 Trans alt: 13000'
2. Obstacle at ALE 3.7 DME, approximately 1 NM RIGHT of extended RCL.

1. SIDs are also minimum noise routings.

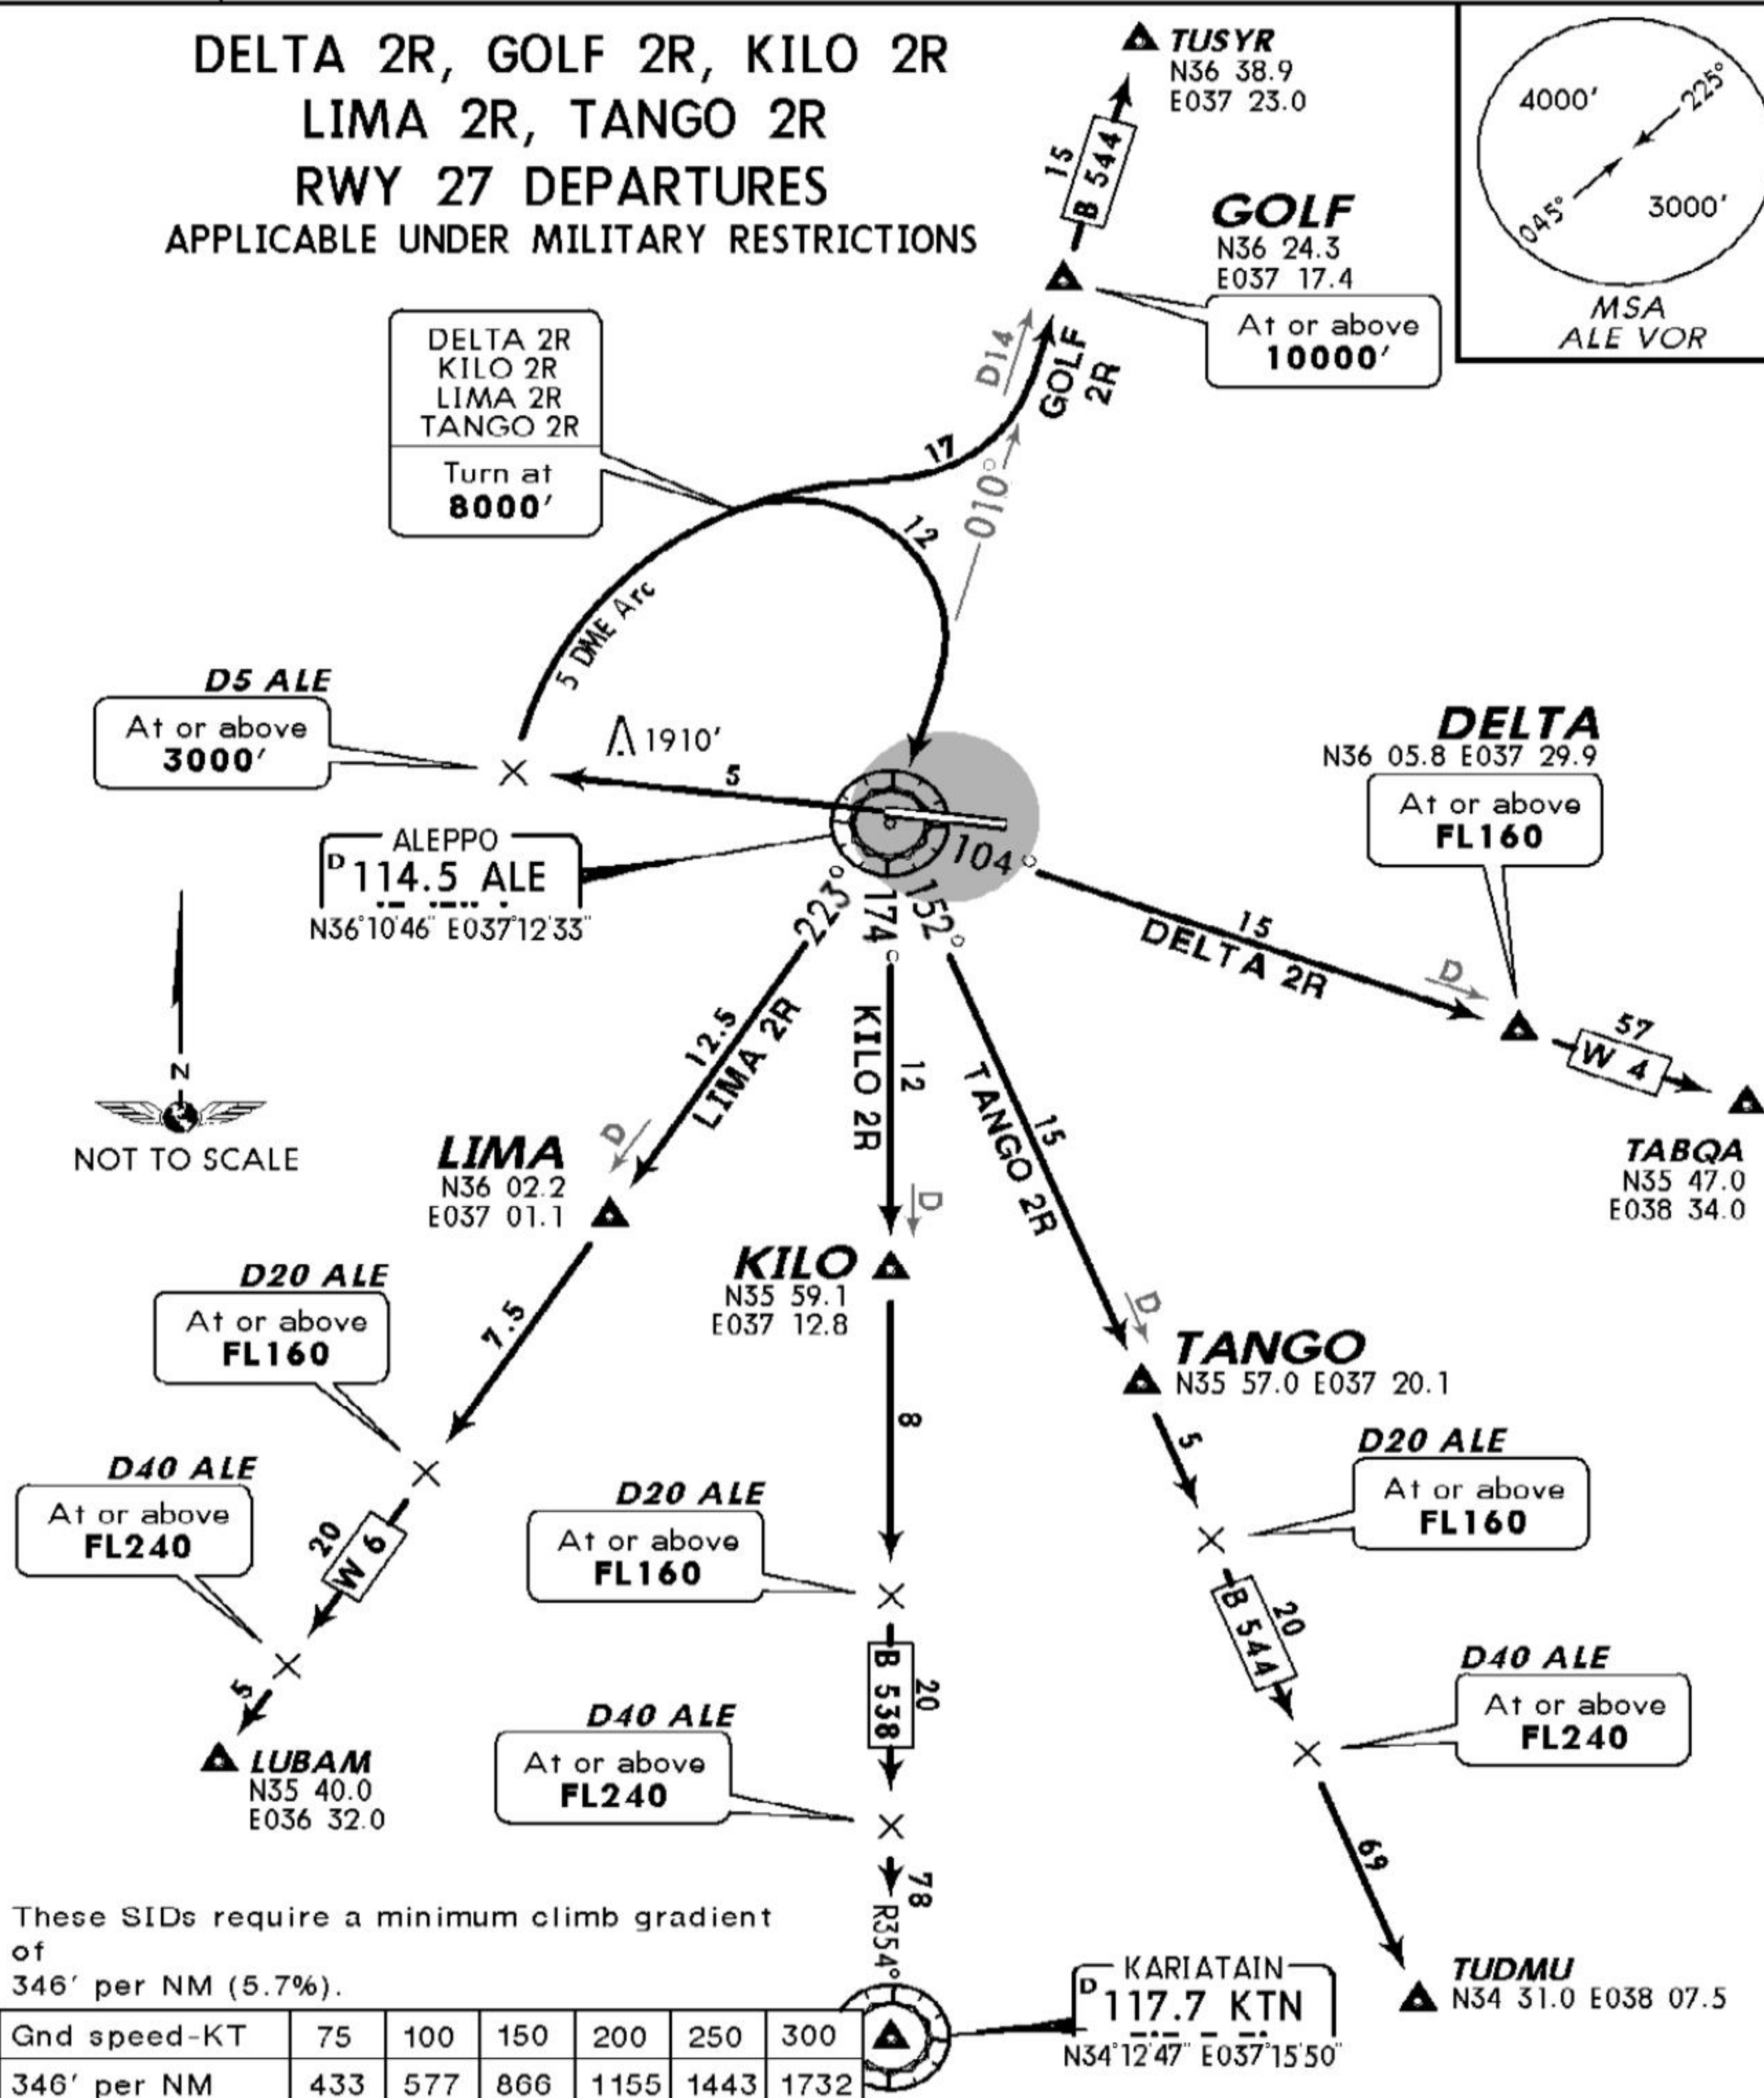DELTA 2R, GOLF 2R, KILO 2R
LIMA 2R, TANGO 2R
RWY 27 DEPARTURES
APPLICABLE UNDER MILITARY RESTRICTIONS


If unable to comply advise ATC.

SID	ROUTING
DELTA 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-106 to DELTA, join airway W 4.
GOLF 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544.
KILO 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-176 to KILO, join airway B 538.
LIMA 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-225 to LIMA, join airway W 6.
TANGO 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-154 to TANGO, join airway B 544.

OSAP/ALP
Apt Elev 1254'
N36 10.8 E037 13.6



ALEPPO, SYRIA
ALEPPO INTL

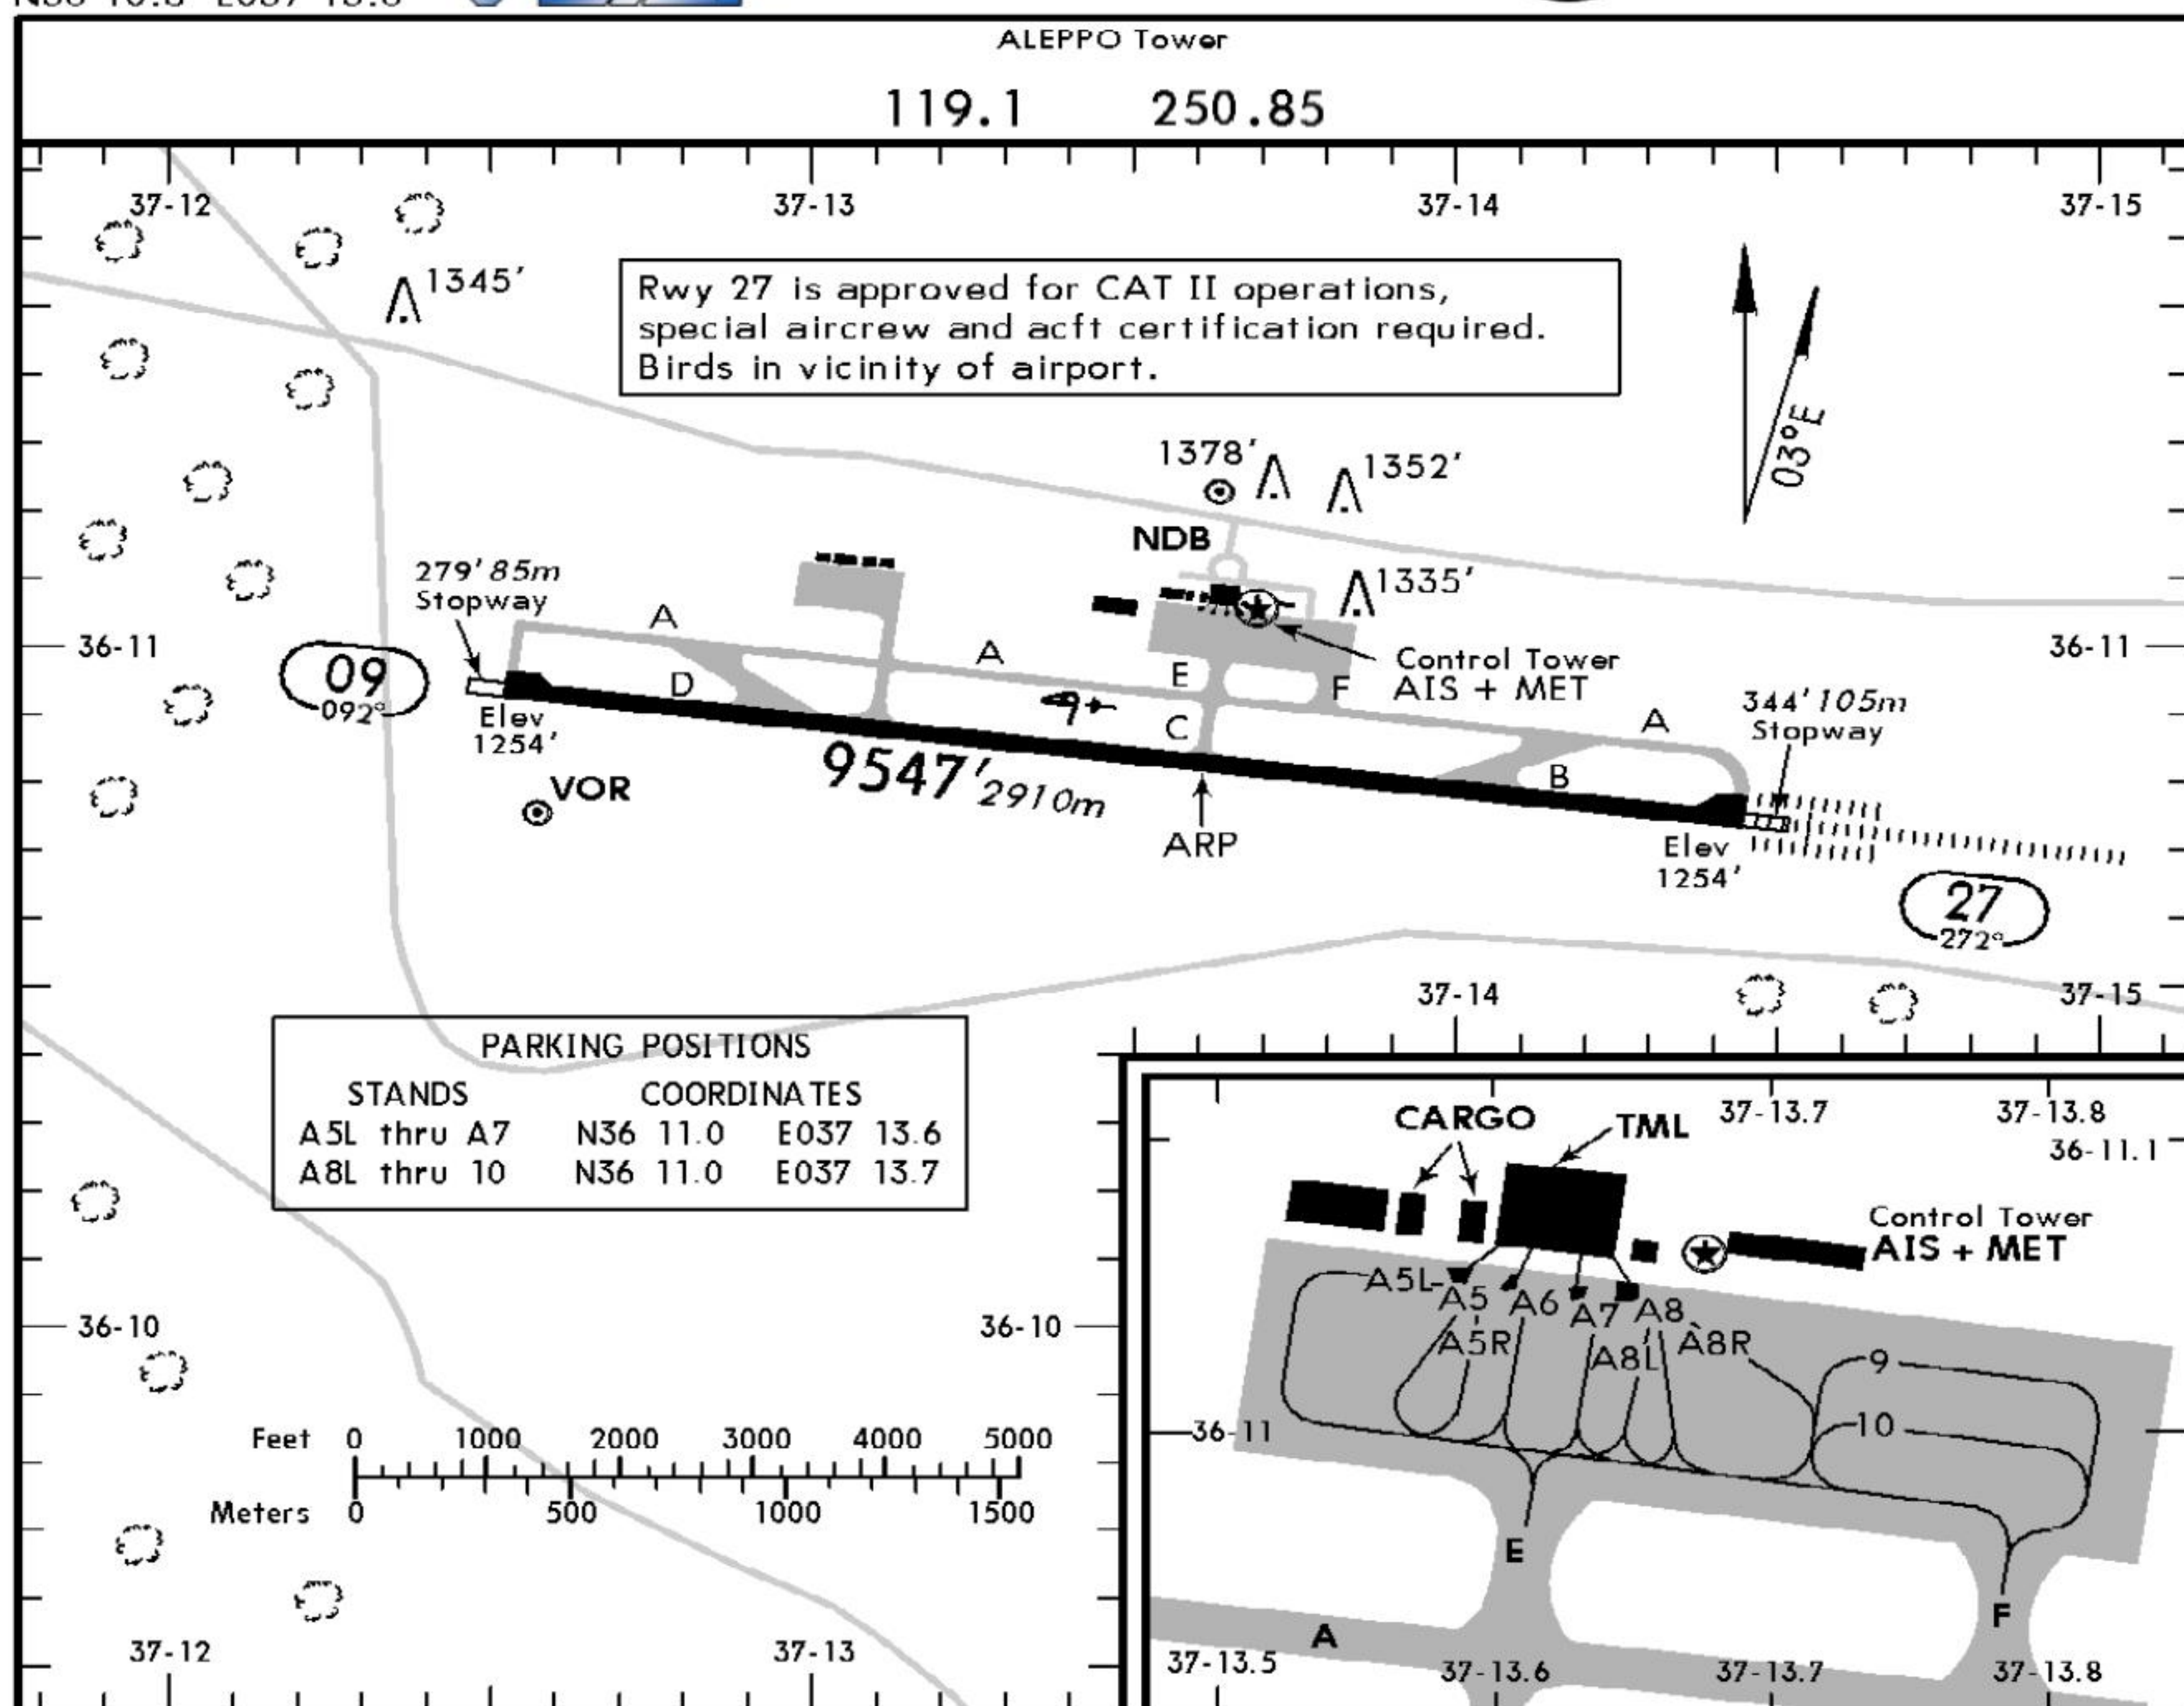

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS			
		LANDING BEYOND		TAKE-OFF	WIDTH
		Threshold	Glide Slope		
09	HIRL (60m) CL HST-B				148'
27	HIRL (60m) CL HIALS-II TDZ PAPI (3.0°) HST-D		8514' 2595m		45m

TAKE-OFF

AIR CARRIER (JAA)
All Rwys

LVP must be in force

	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A			
B	200m	250m	400m
C			
D	250m	300m	




STRAIGHT-IN RWY		A	B	C	D
09	VOR DME	1670' (394')	1670' (394')	1670' (394')	1670' (394')
		1800m	1800m	1800m	2000m
	VOR	2160' (884')	2160' (884')	2160' (884')	2160' (884')
		4400m	4400m	4400m	4400m
27	CAT 2 ILS	1395' (138')	1412' (155')	1424' (167')	1438' (181')
		RA138' R400m	RA155' R450m	RA167' R450m	RA181' R450m
	ILS DME	1483' (226')	1495' (238')	1503' (246')	1513' (256')
		R600m	R600m	R600m	R650m
	ALS out	R1000m	R1000m	R1000m	R1200m
	LOC	1600' (343')	1600' (343')	1600' (343')	1600' (343')
		R900m	R1000m	R1000m	R1400m
	ALS out	R1500m	R1500m	R1800m	R2000m
	VOR DME	1800' (543')	1800' (543')	1800' (543')	1800' (543')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	NDB	1850' (574')	1850' (574')	1850' (574')	1850' (574')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m

TAKE-OFF RWY 09, 27			
LVP must be in force			
RL & CL		RCLM (DAY only) or RL	NIL (DAY only)
A	200m	250m	400m
B			
C			
D	250m	300m	500m


Approach Control through Tower
ALEPPO Tower

119.1 250.85


LOC IALE	Final Apch Crs	GS LOM	ILS DA(H) Refer to Minimums	Apt Elev 1276'	
110.1	272°	2298' (1041')		RWY 1254'	
MISSED APCH: MAX IAS 200 KT. As soon as practicable turn LEFT onto R-230 climb to 3000', then as directed.					
Alt Set: MB	Rwy Elev: 45 MB	Trans level: FL 150	Trans alt: 13000'	MSA ALE VOR	

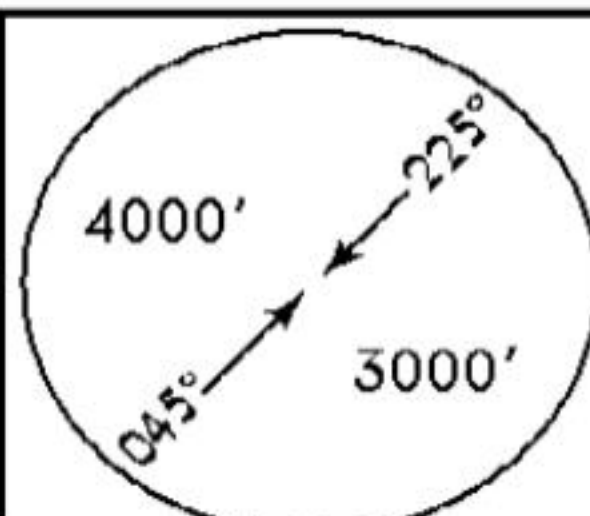

Pas d'ILS dans DCS

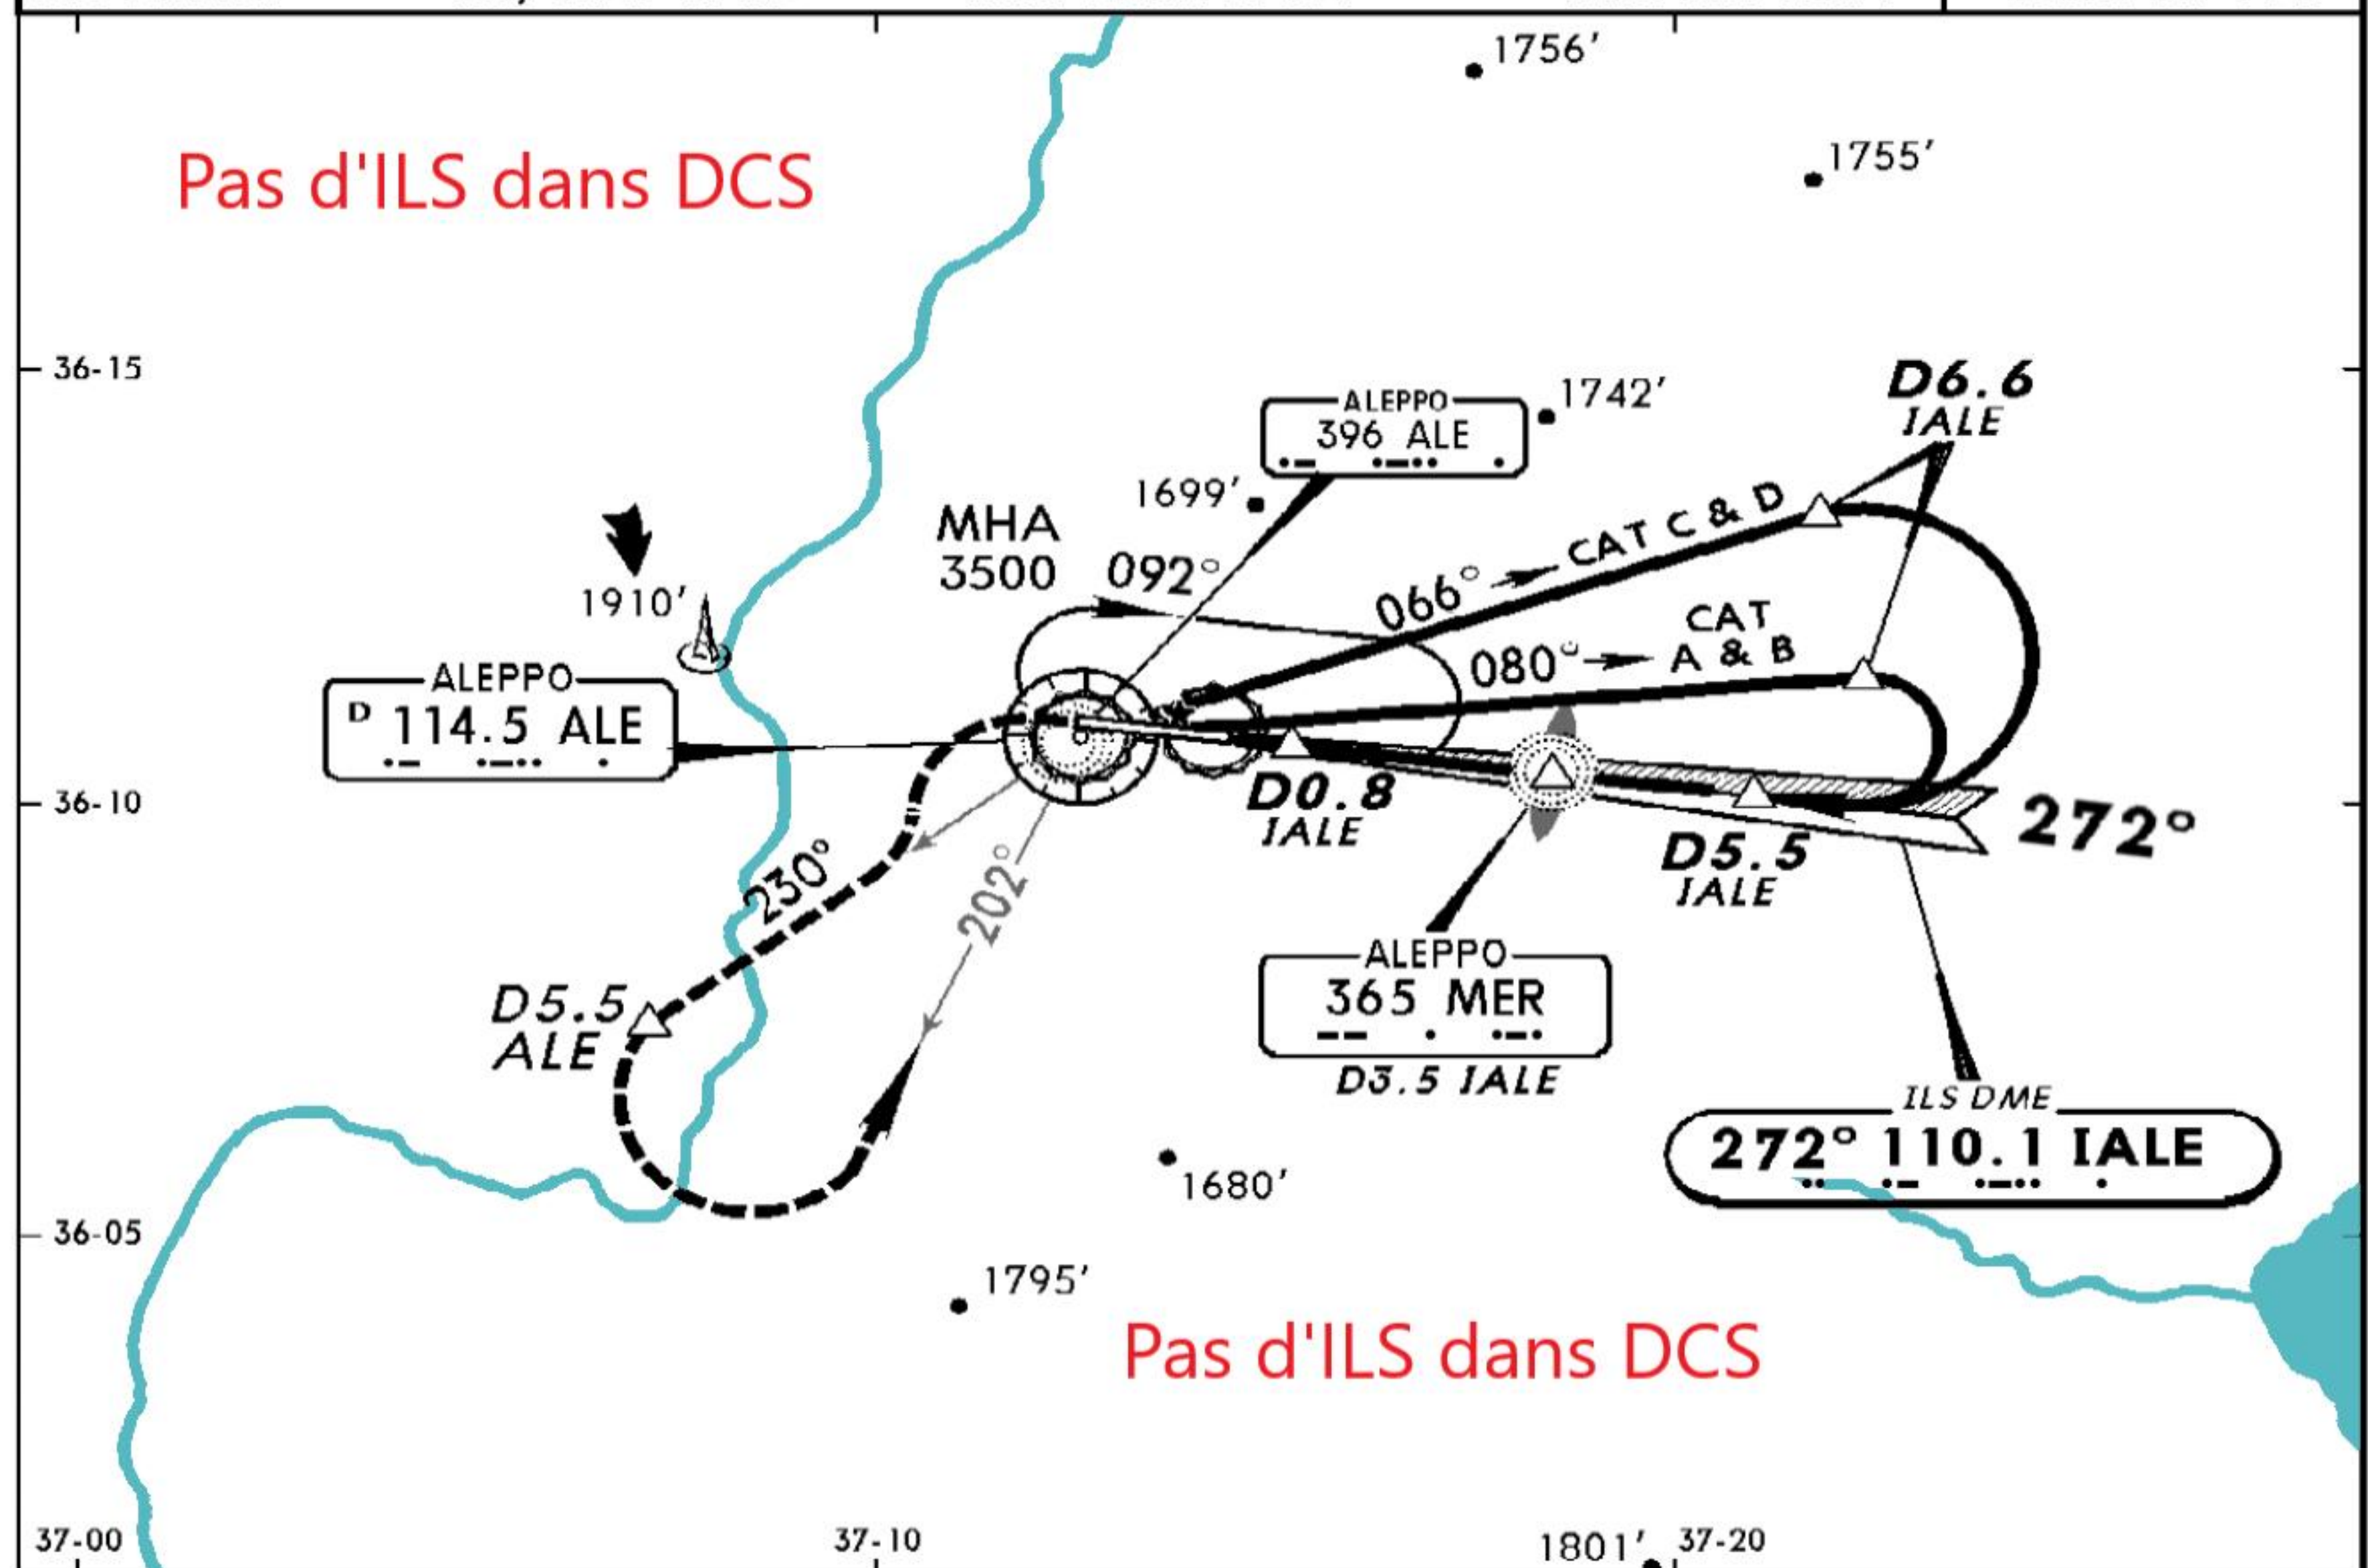

Pas d'ILS dans DCS

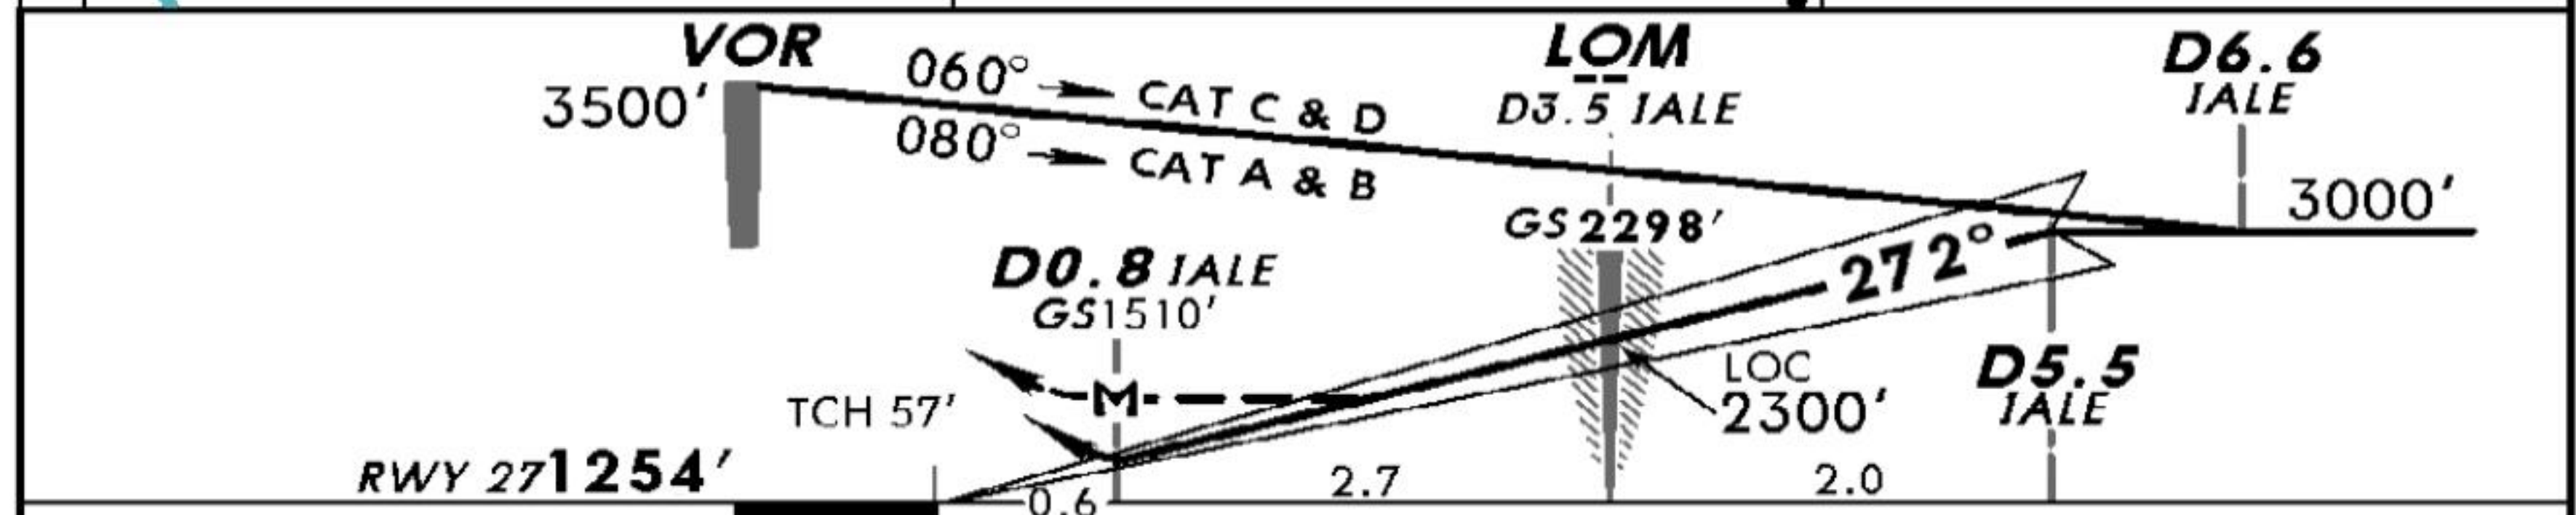

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	200 KT MAX	As soon as practicable	3000' LT	ALE onto 114.5 R-230	
ILS GS 3.00° or LOC Desc Grad 5.2%	377	484	538	646	753	861						
MAP at D0.8 IALE												
STRAIGHT-IN LANDING RWY 27										CIRCLE-TO-LAND		
ILS DA(H) A: 1483' (226') C: 1503' (246') B: 1495' (238') D: 1513' (256')							LOC (GS out) MDA(H) 1600' (343')					
FULL		TDZ or CL out		ALS out				ALS out				
A	800m				1200m		800m		1600m		A	NOT AUTHORIZED
B												
C												
D							1200m		2000m			

Approach Control through Tower

ALEPPO Tower

119.1 250.85

GPS RWY 27

Position threshold
N 36°10.747'
E 037°14.409'

Final
Apch Crs
272°

GS
LOM
2298' (1041')

CAT II ILS
DA(H)
Refer to
Minimums

Apt Elev 1276'
RWY **1254'**

MISSED APCH: MAX IAS 200 KT. As soon as practicable turn LEFT onto R-230 climb to 3000', then as directed.


Alt Set: MB

Rwy Elev: 45 MB



Trans level: FL 150

Trans alt: 13000'

Special Aircrew & Acft Certification Required.

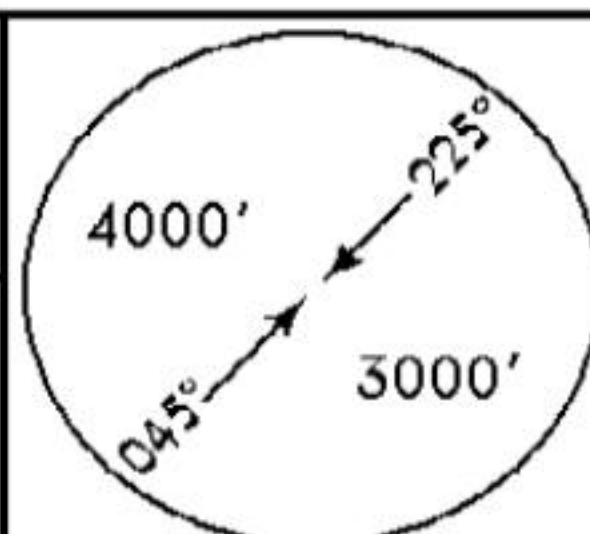

MSA
ALE VOR

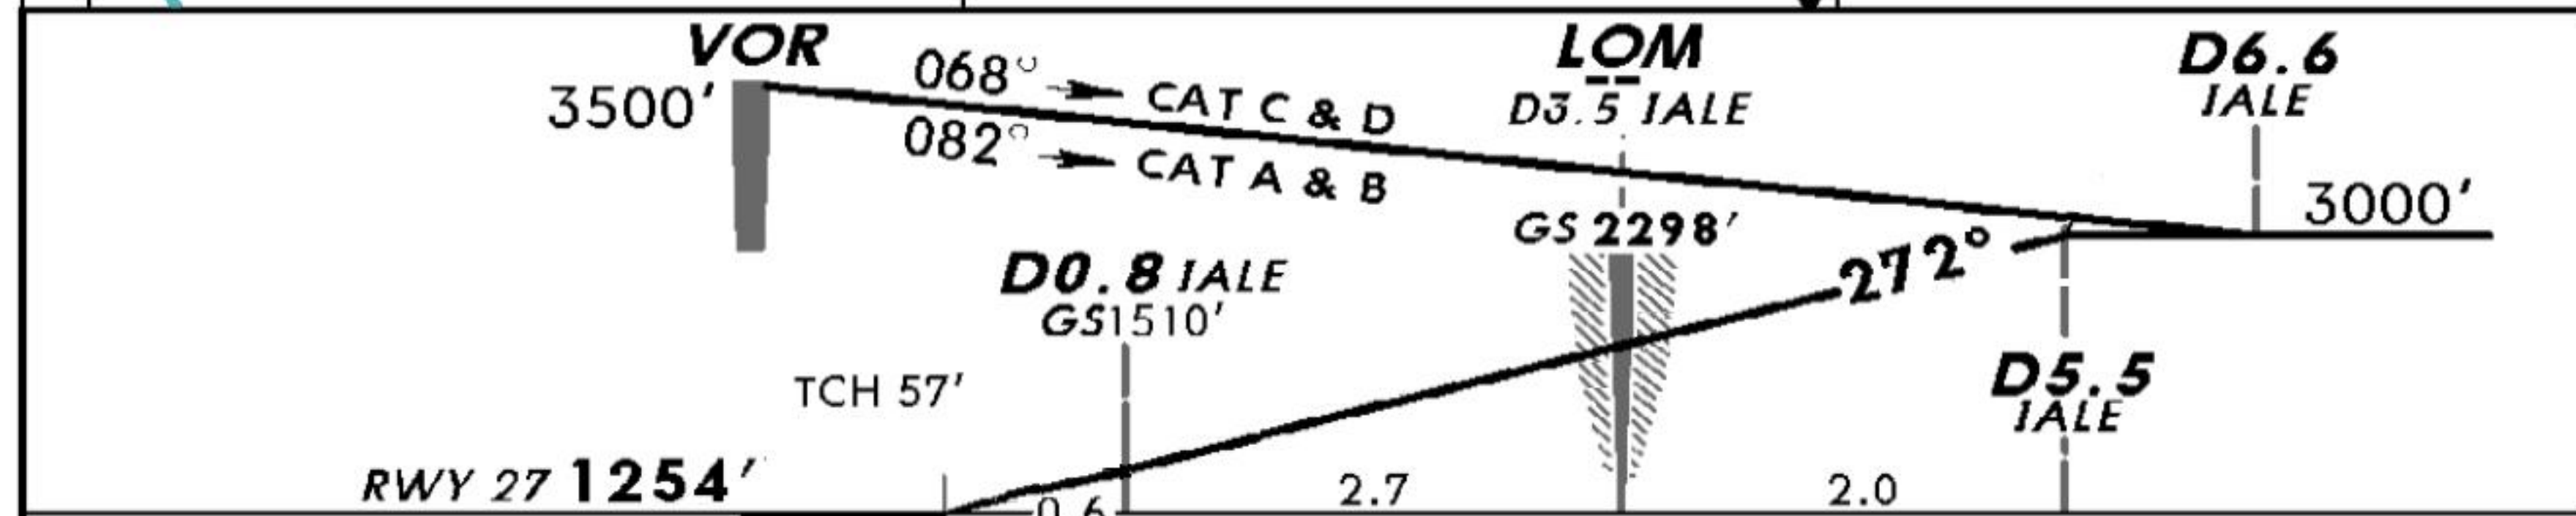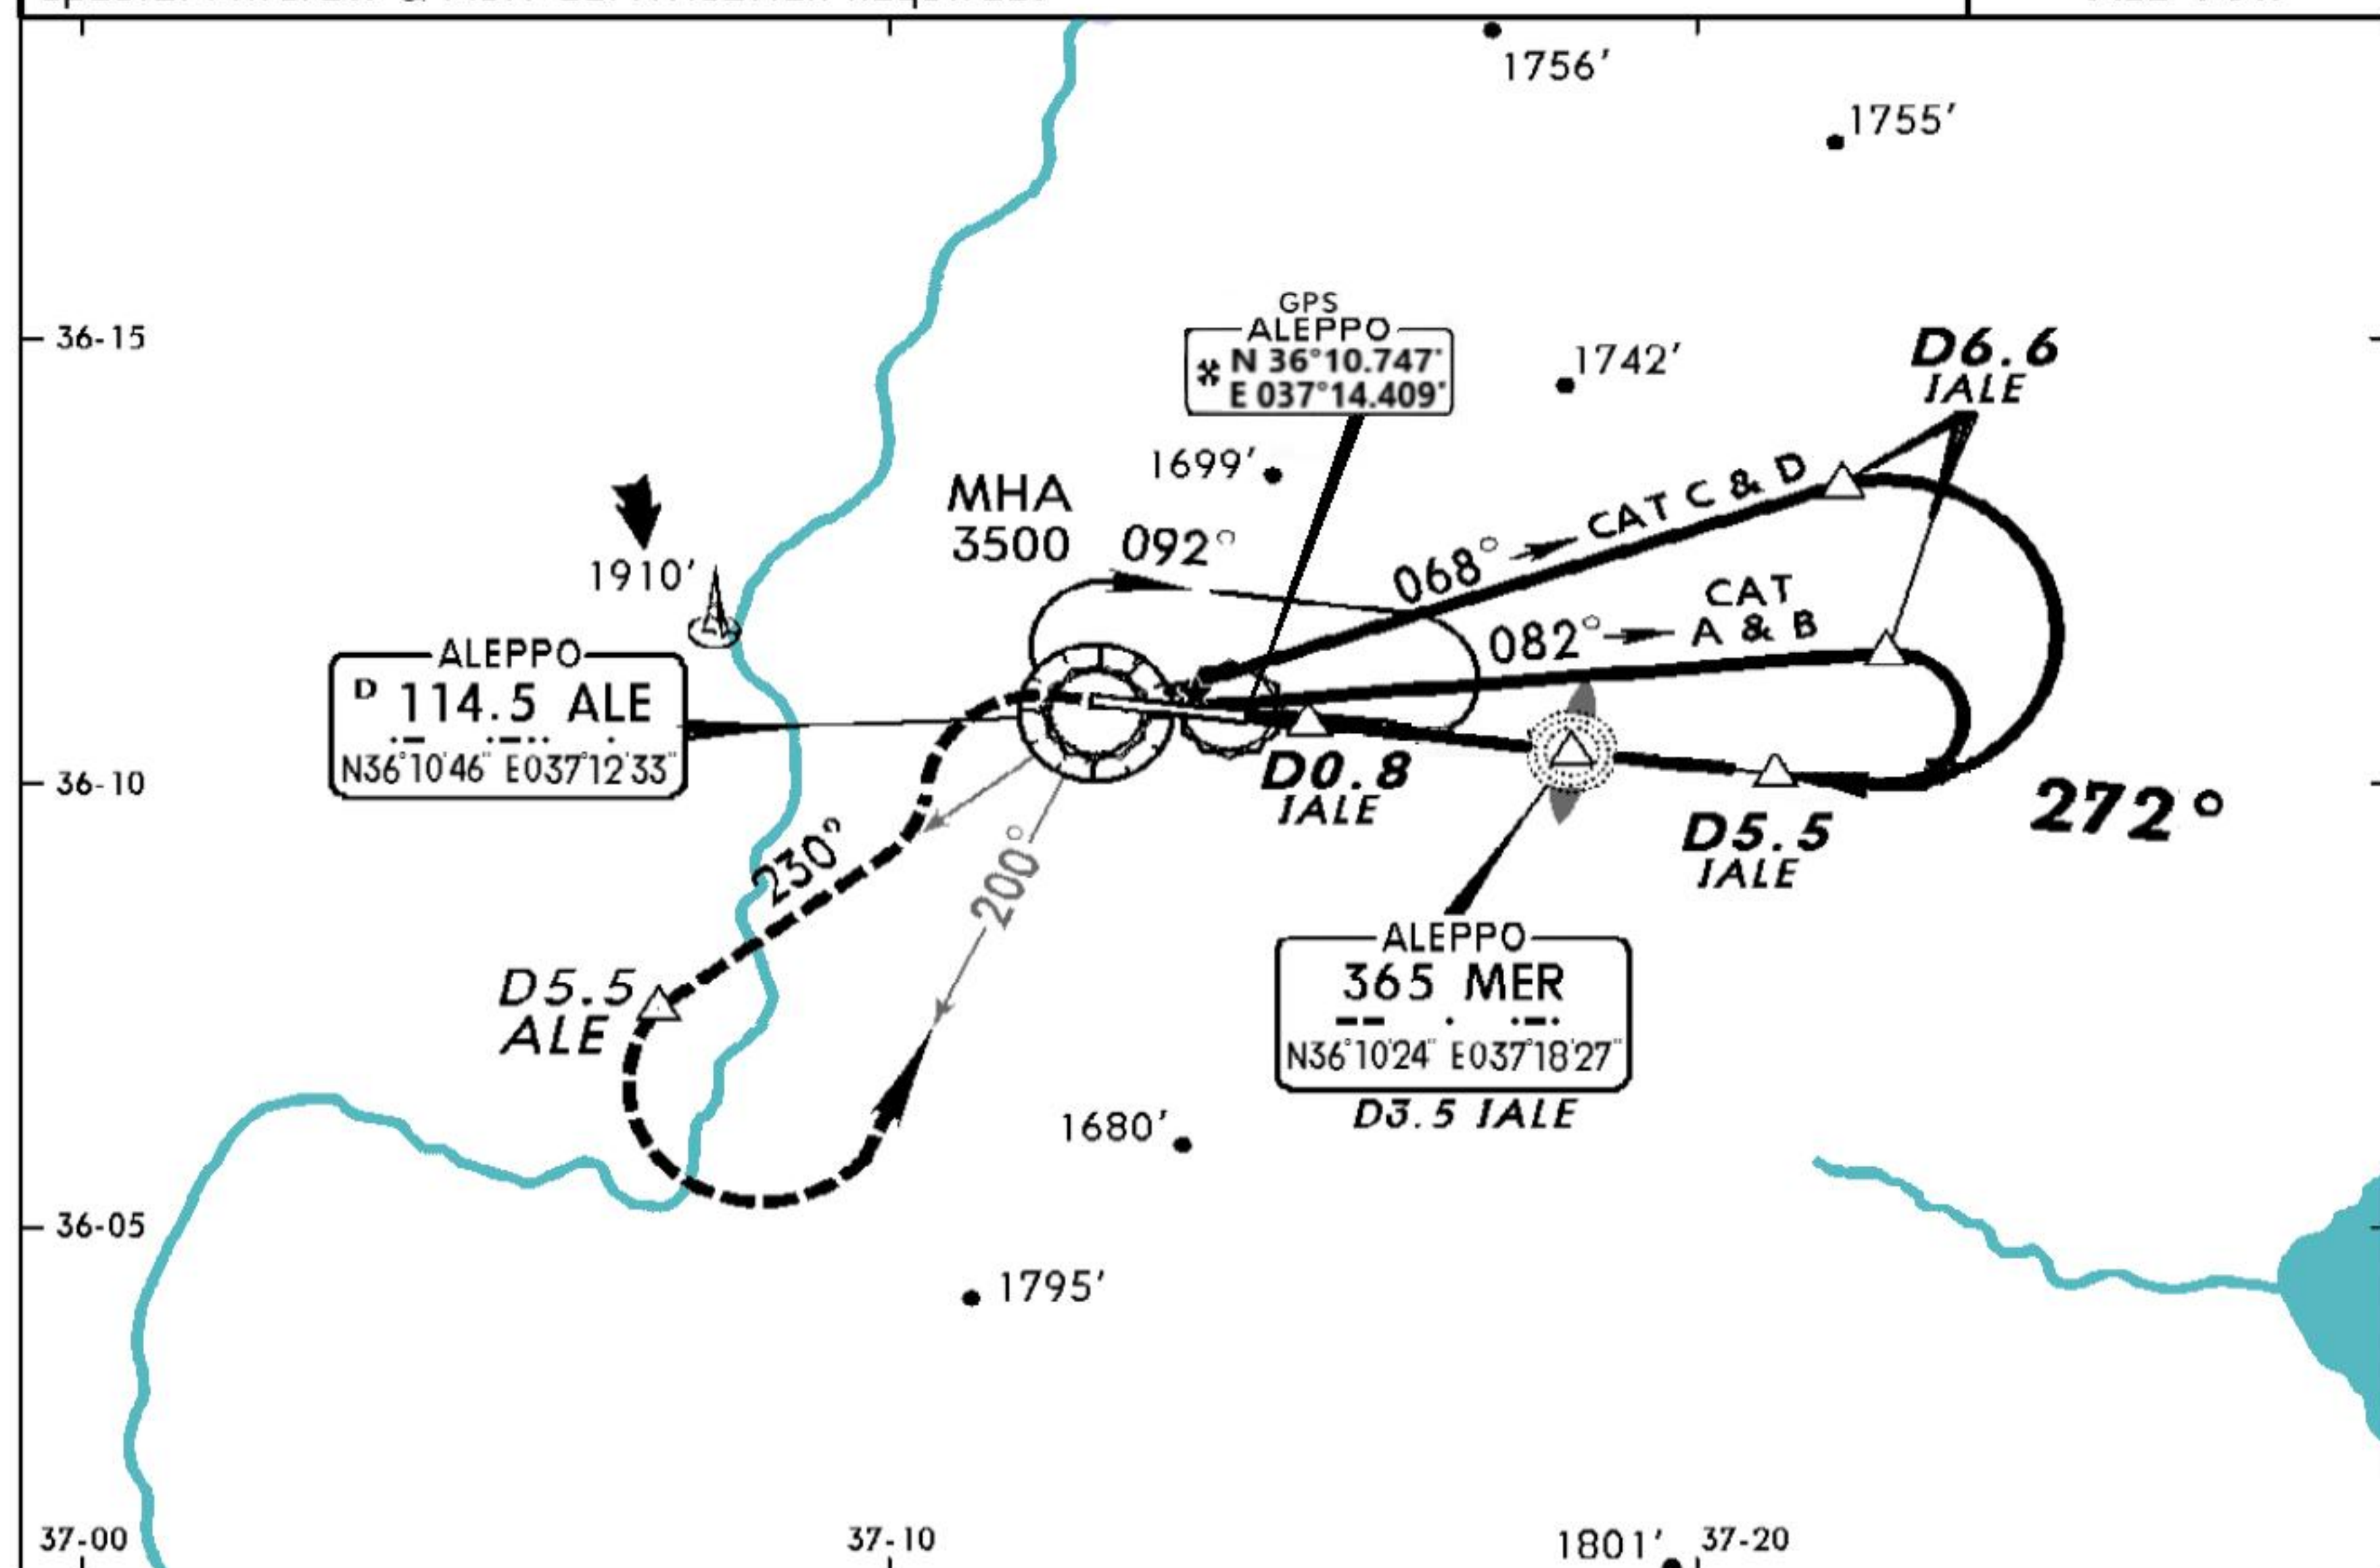

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II	As soon as practicable	3000'	ALE
GS 3.00°	377	484	538	646	753	861	PAPI PAPI	200 KT MAX	LT	onto 114.5 R-230

STRAIGHT-IN LANDING RWY 27

CAT II ILS

A	B	C	D
RA 138'	RA 155'	RA 167'	RA 181'
DA(H) 1395' (138')	DA(H) 1412' (155')	DA(H) 1424' (167')	DA(H) 1438' (181')
RVR 350m	RVR 500m		RVR 550m



ALEPPO Tower

250.85

114.5

N36°10'46"
E037°12'33"

Final
Apch Crs
092°

**With DME
Minimum Alt
D4.9**

3000' (1724')

W/o DME
Minimum Alt
No FAF

With DME
MDA(H)


1670' (394')

W/o DME
MDA(H)

2160' (884')

Apt Elev 1276'

RWY 1254'

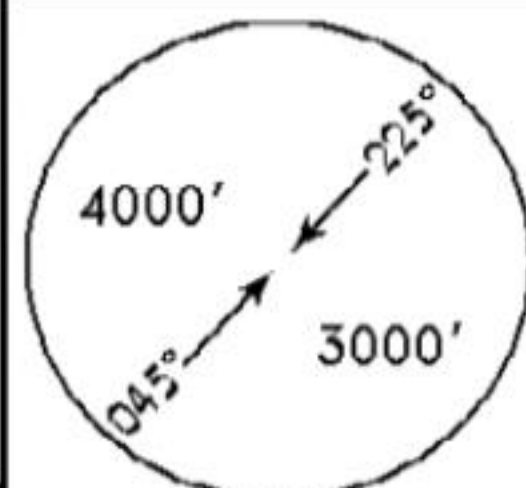

MSA
ALE VOR

MISSED APCH: Turn RIGHT (MAX 185 KT) on R-109 climbing to 4000' to VOR.


Alt Set: MB

Rwy Elev: 46 MB


Trans level: FL 150

Trans alt: 13000'

Procedure based on MAX 185 KT.

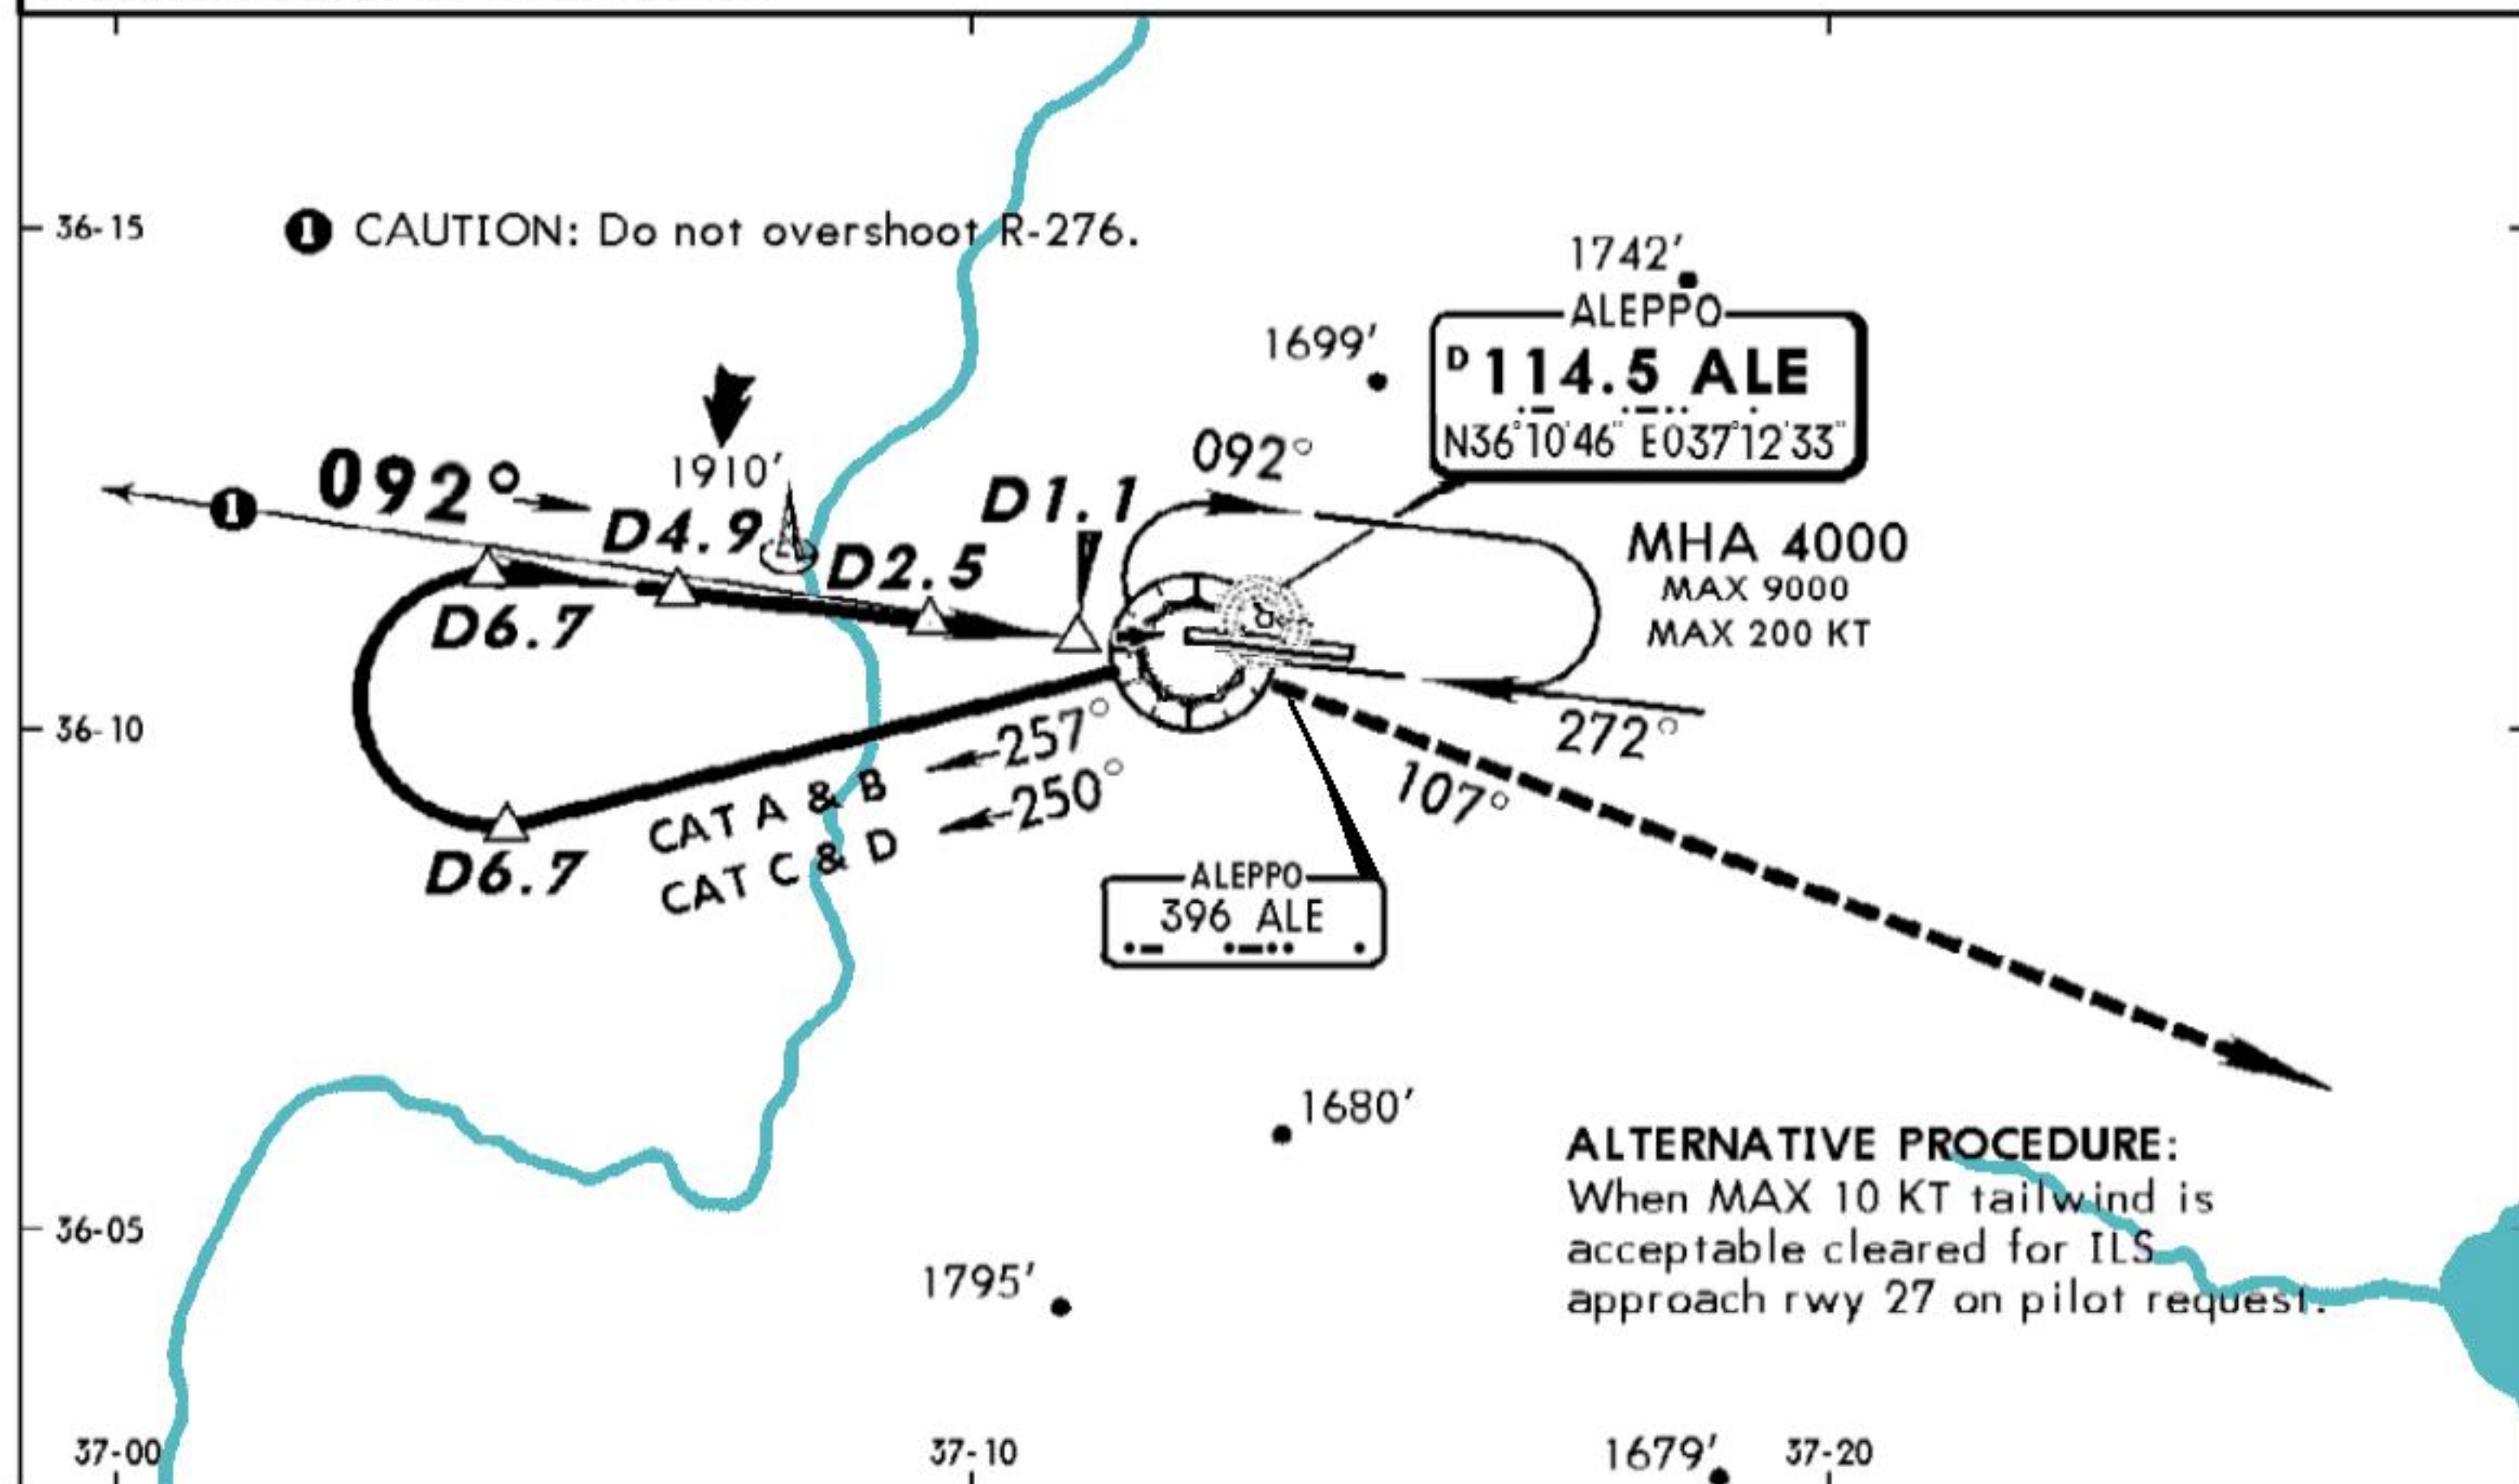

2	ALE DME	4.0	3.0	2.0
	ALTITUDE	2680'	2340'	1990'

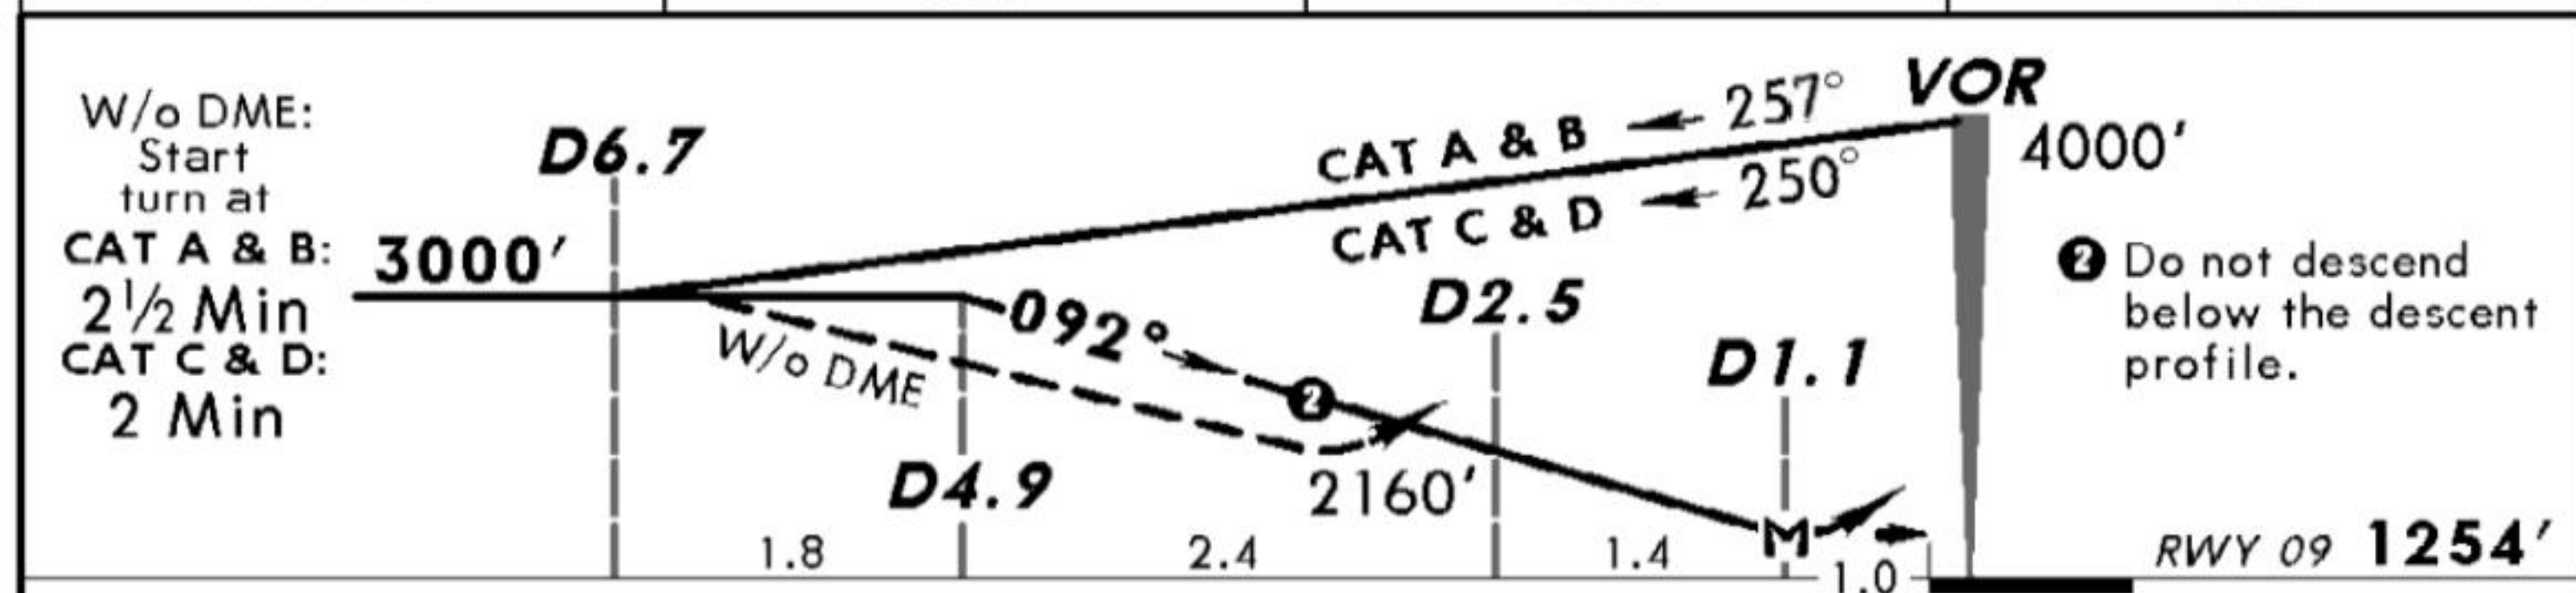

<i>Gnd speed-Kts</i>	70	90	100	120	140	160	185 KT MAX 4000'  RT ALE on 114.5 R-109
<i>VOR DME: Descent Gradient 5.7%</i>	404	520	577	693	808	924	
<i>VOR DME: MAP at D1.1</i>							

STRAIGHT-IN LANDING RWY 09

With DME


W/o DME



MDA(H) 1670' (394')

MDA(H) 2160' (884')

A			
B			
C	1800m	4400m	
D			

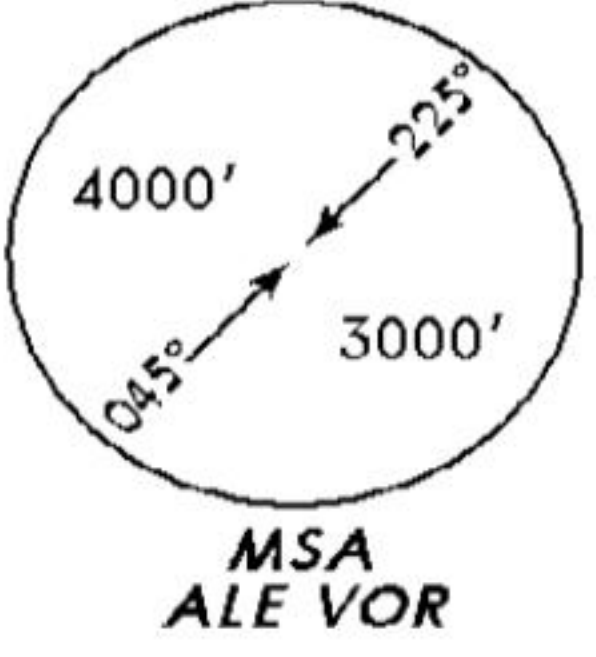

Approach Control through Tower ALEPPO Tower 119.1 250.85					 MSA ALE VOR
VOR 114.5 N36°10'46" E037°12'33"	ALE	Final Apch Crs 269°	Minimum Alt D6.4 2280' (1023')	MDA(H) 1800' (543')	
Apt Elev 1276' RWY 1254'					
MISSED APCH: Climb to 3500' and join VOR holding.					
Alt Set: MB		Rwy Elev: 45 MB	Trans level: FL 150		
Procedure based on MAX 230 KT.					Trans alt: 13000'

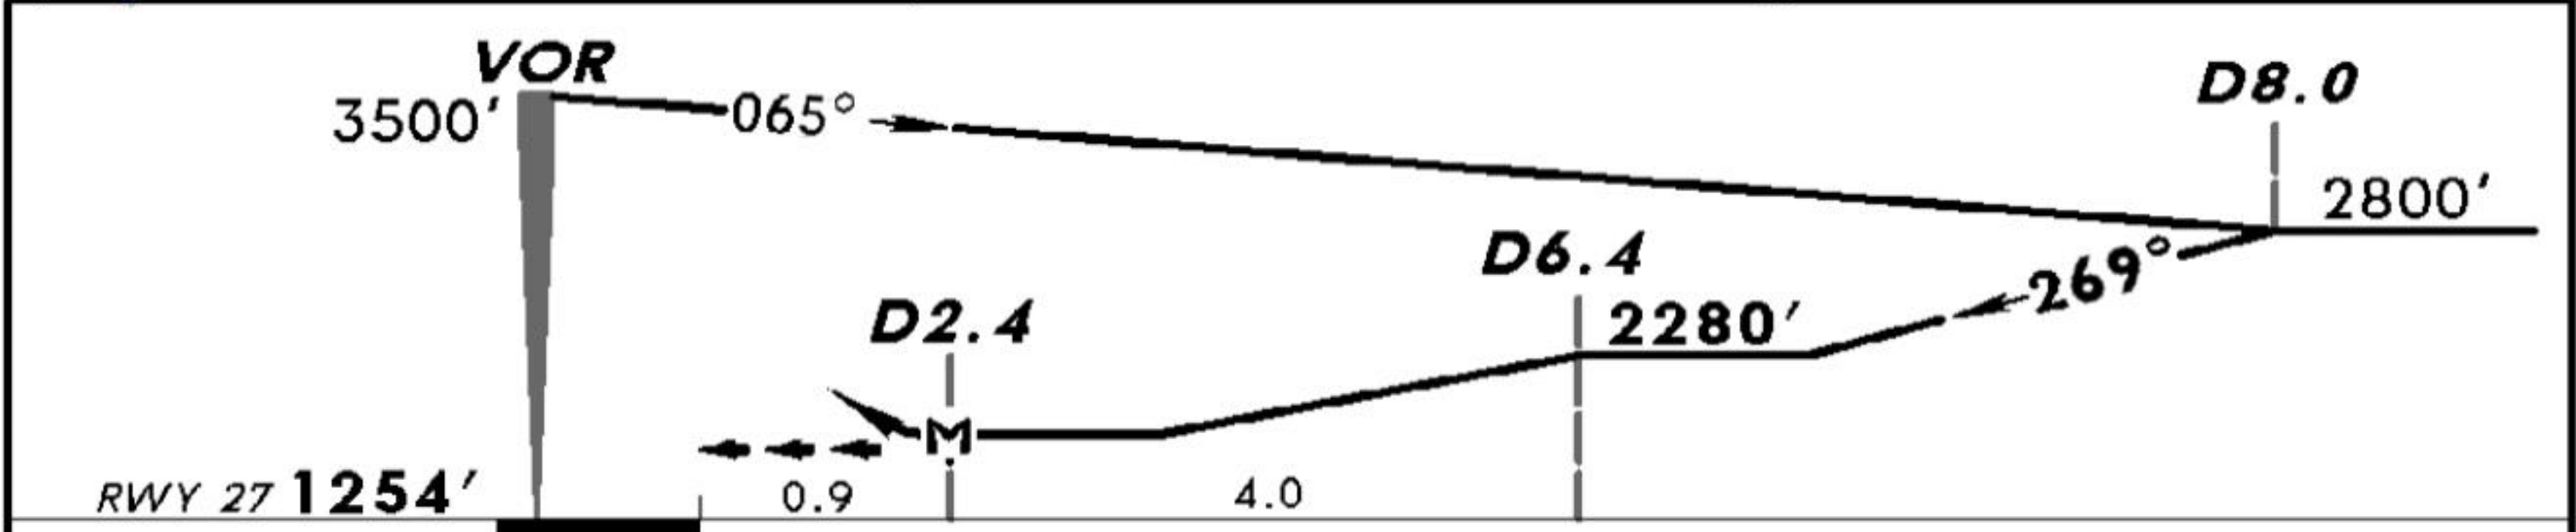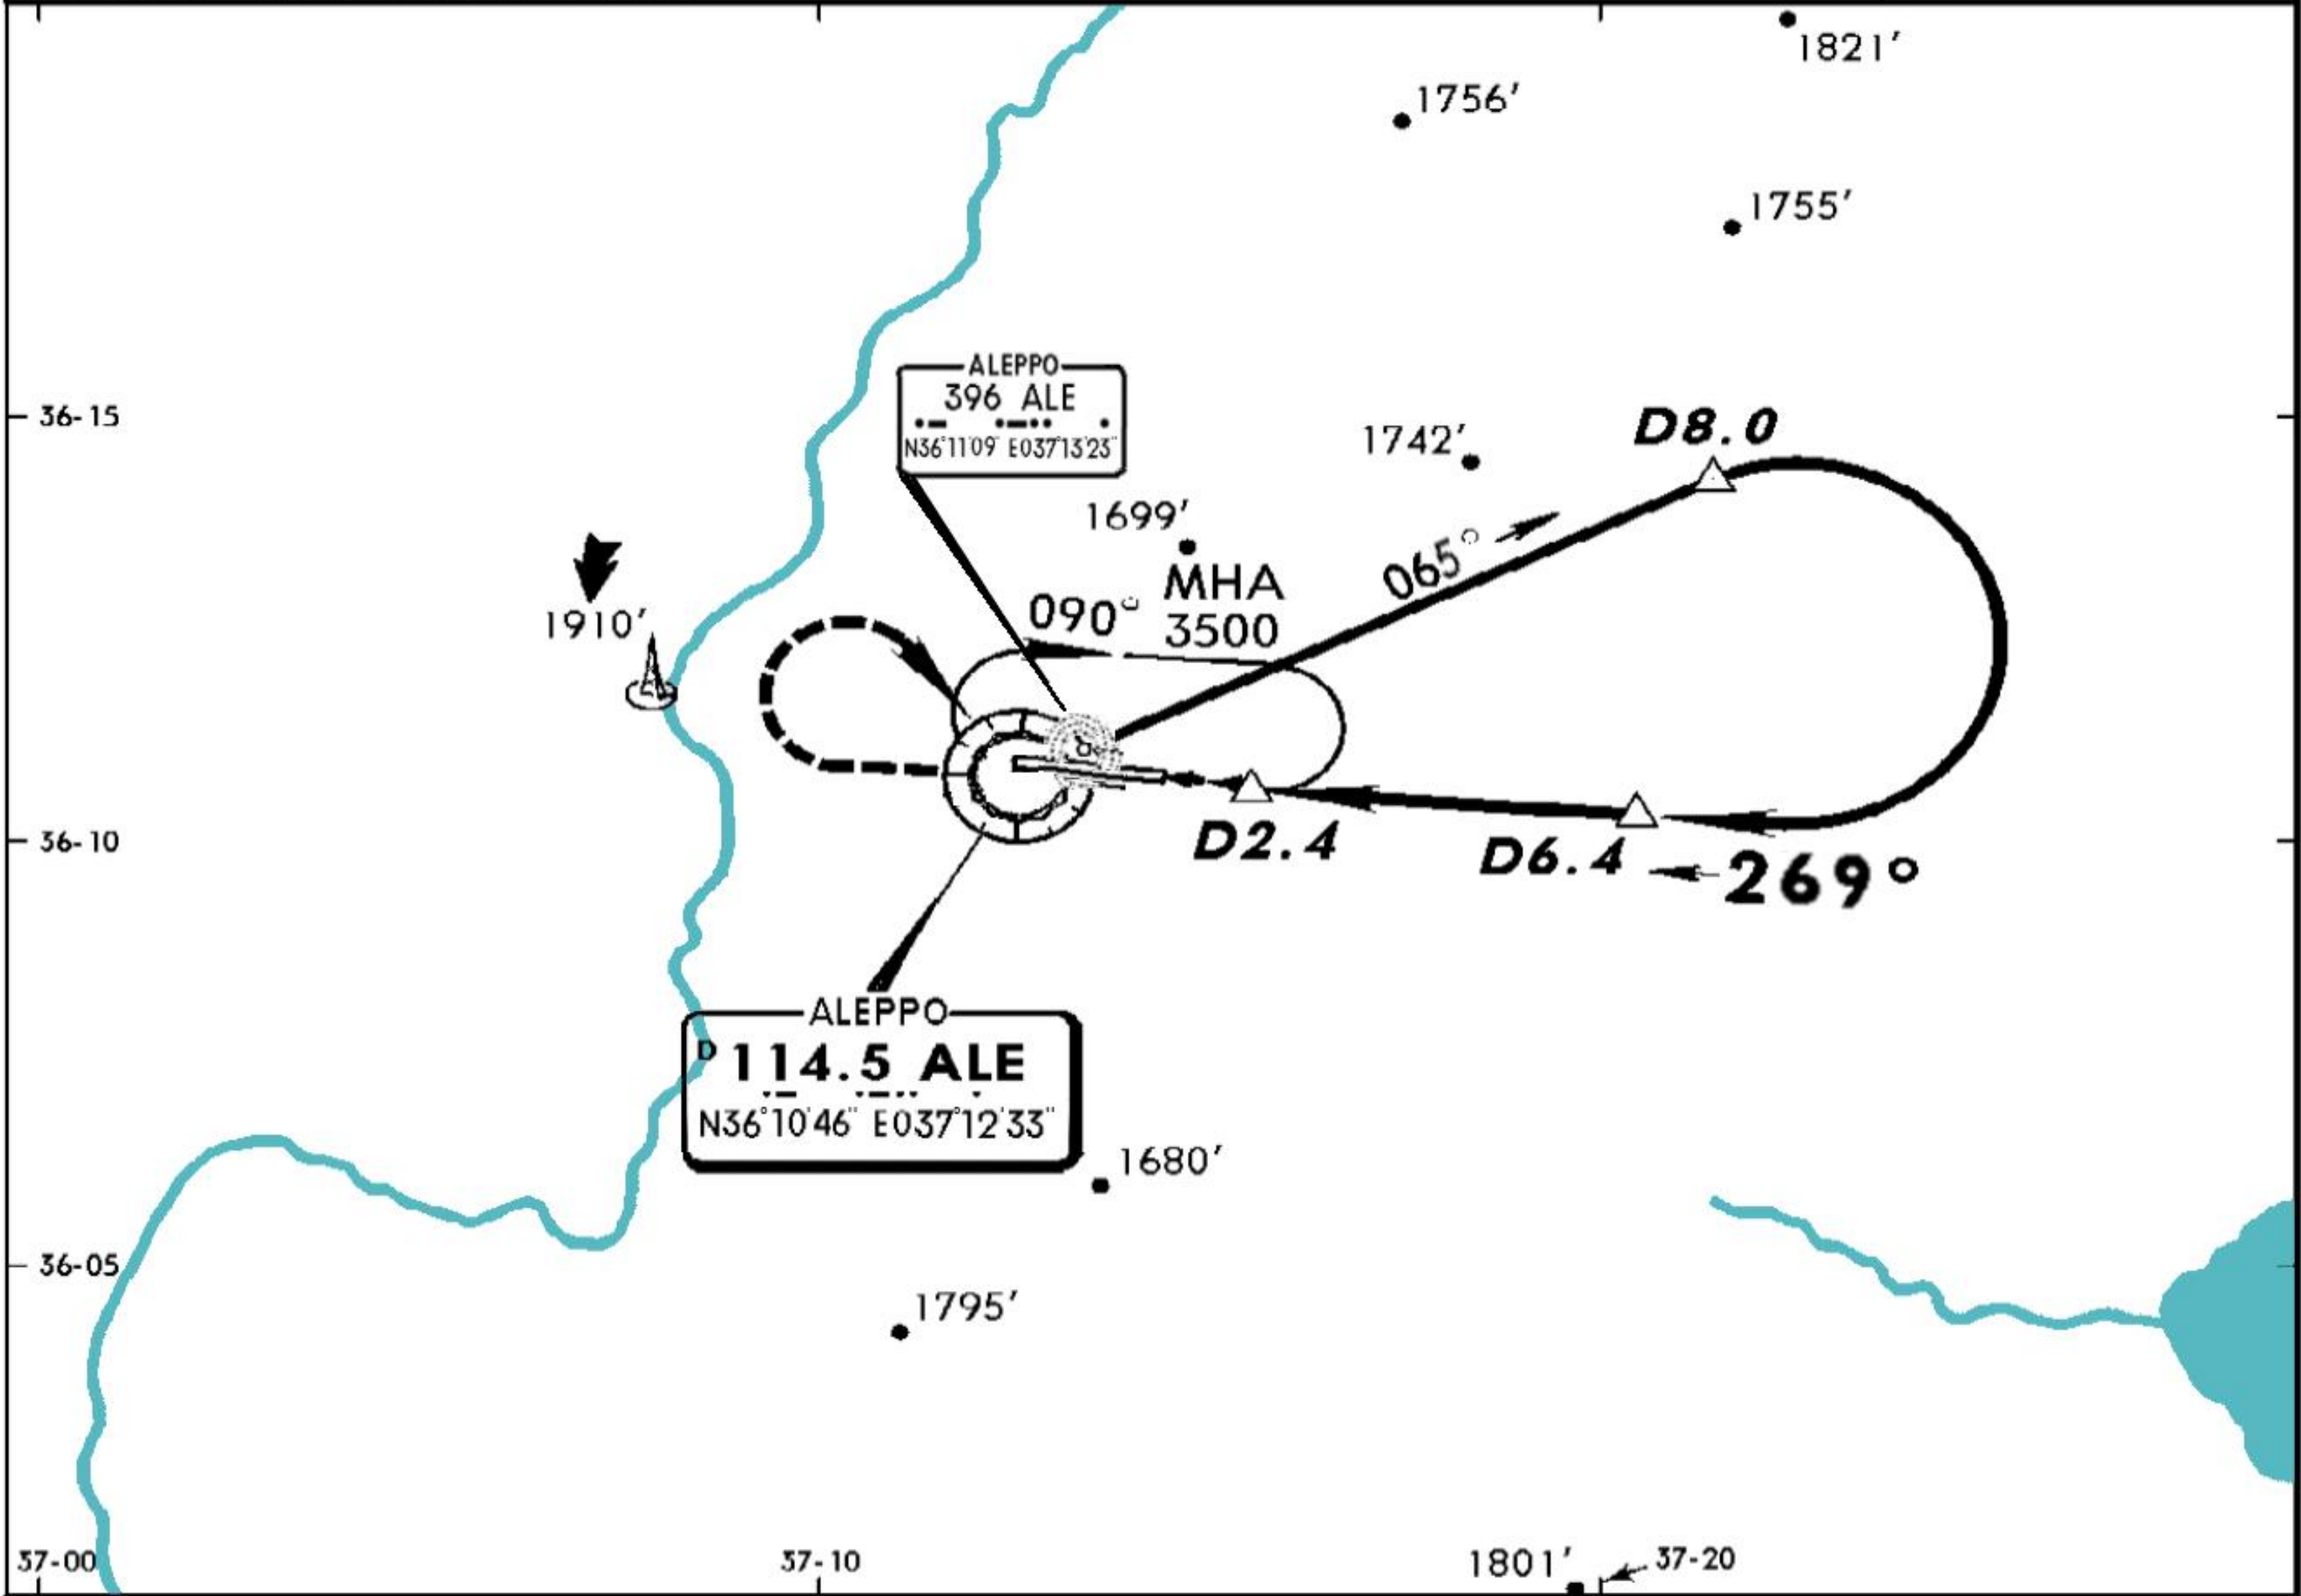

MAP at D2.4				HIALS-II PAPI PAPI		3500' ↑	ALE 114.5 HOLDING PATTERN
-------------	--	--	--	-----------------------	--	------------	---

STRAIGHT-IN LANDING RWY 27							
MDA(H) 1800' (543')							
ALS OUT							
A	800m		1600m				
B							
C	1600m		2400m				
D	2000m		2800m				

