





STAR

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

ATIS 127.0

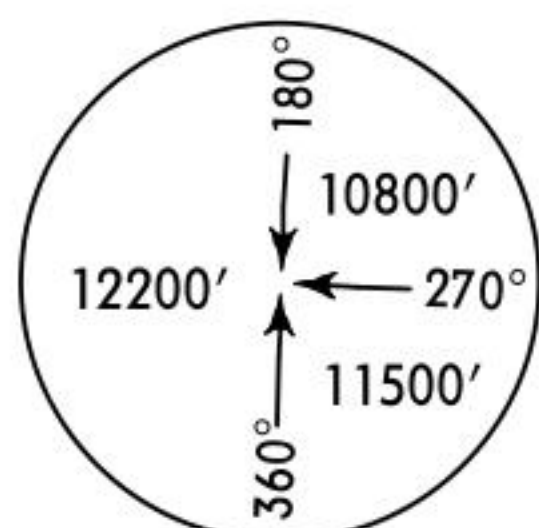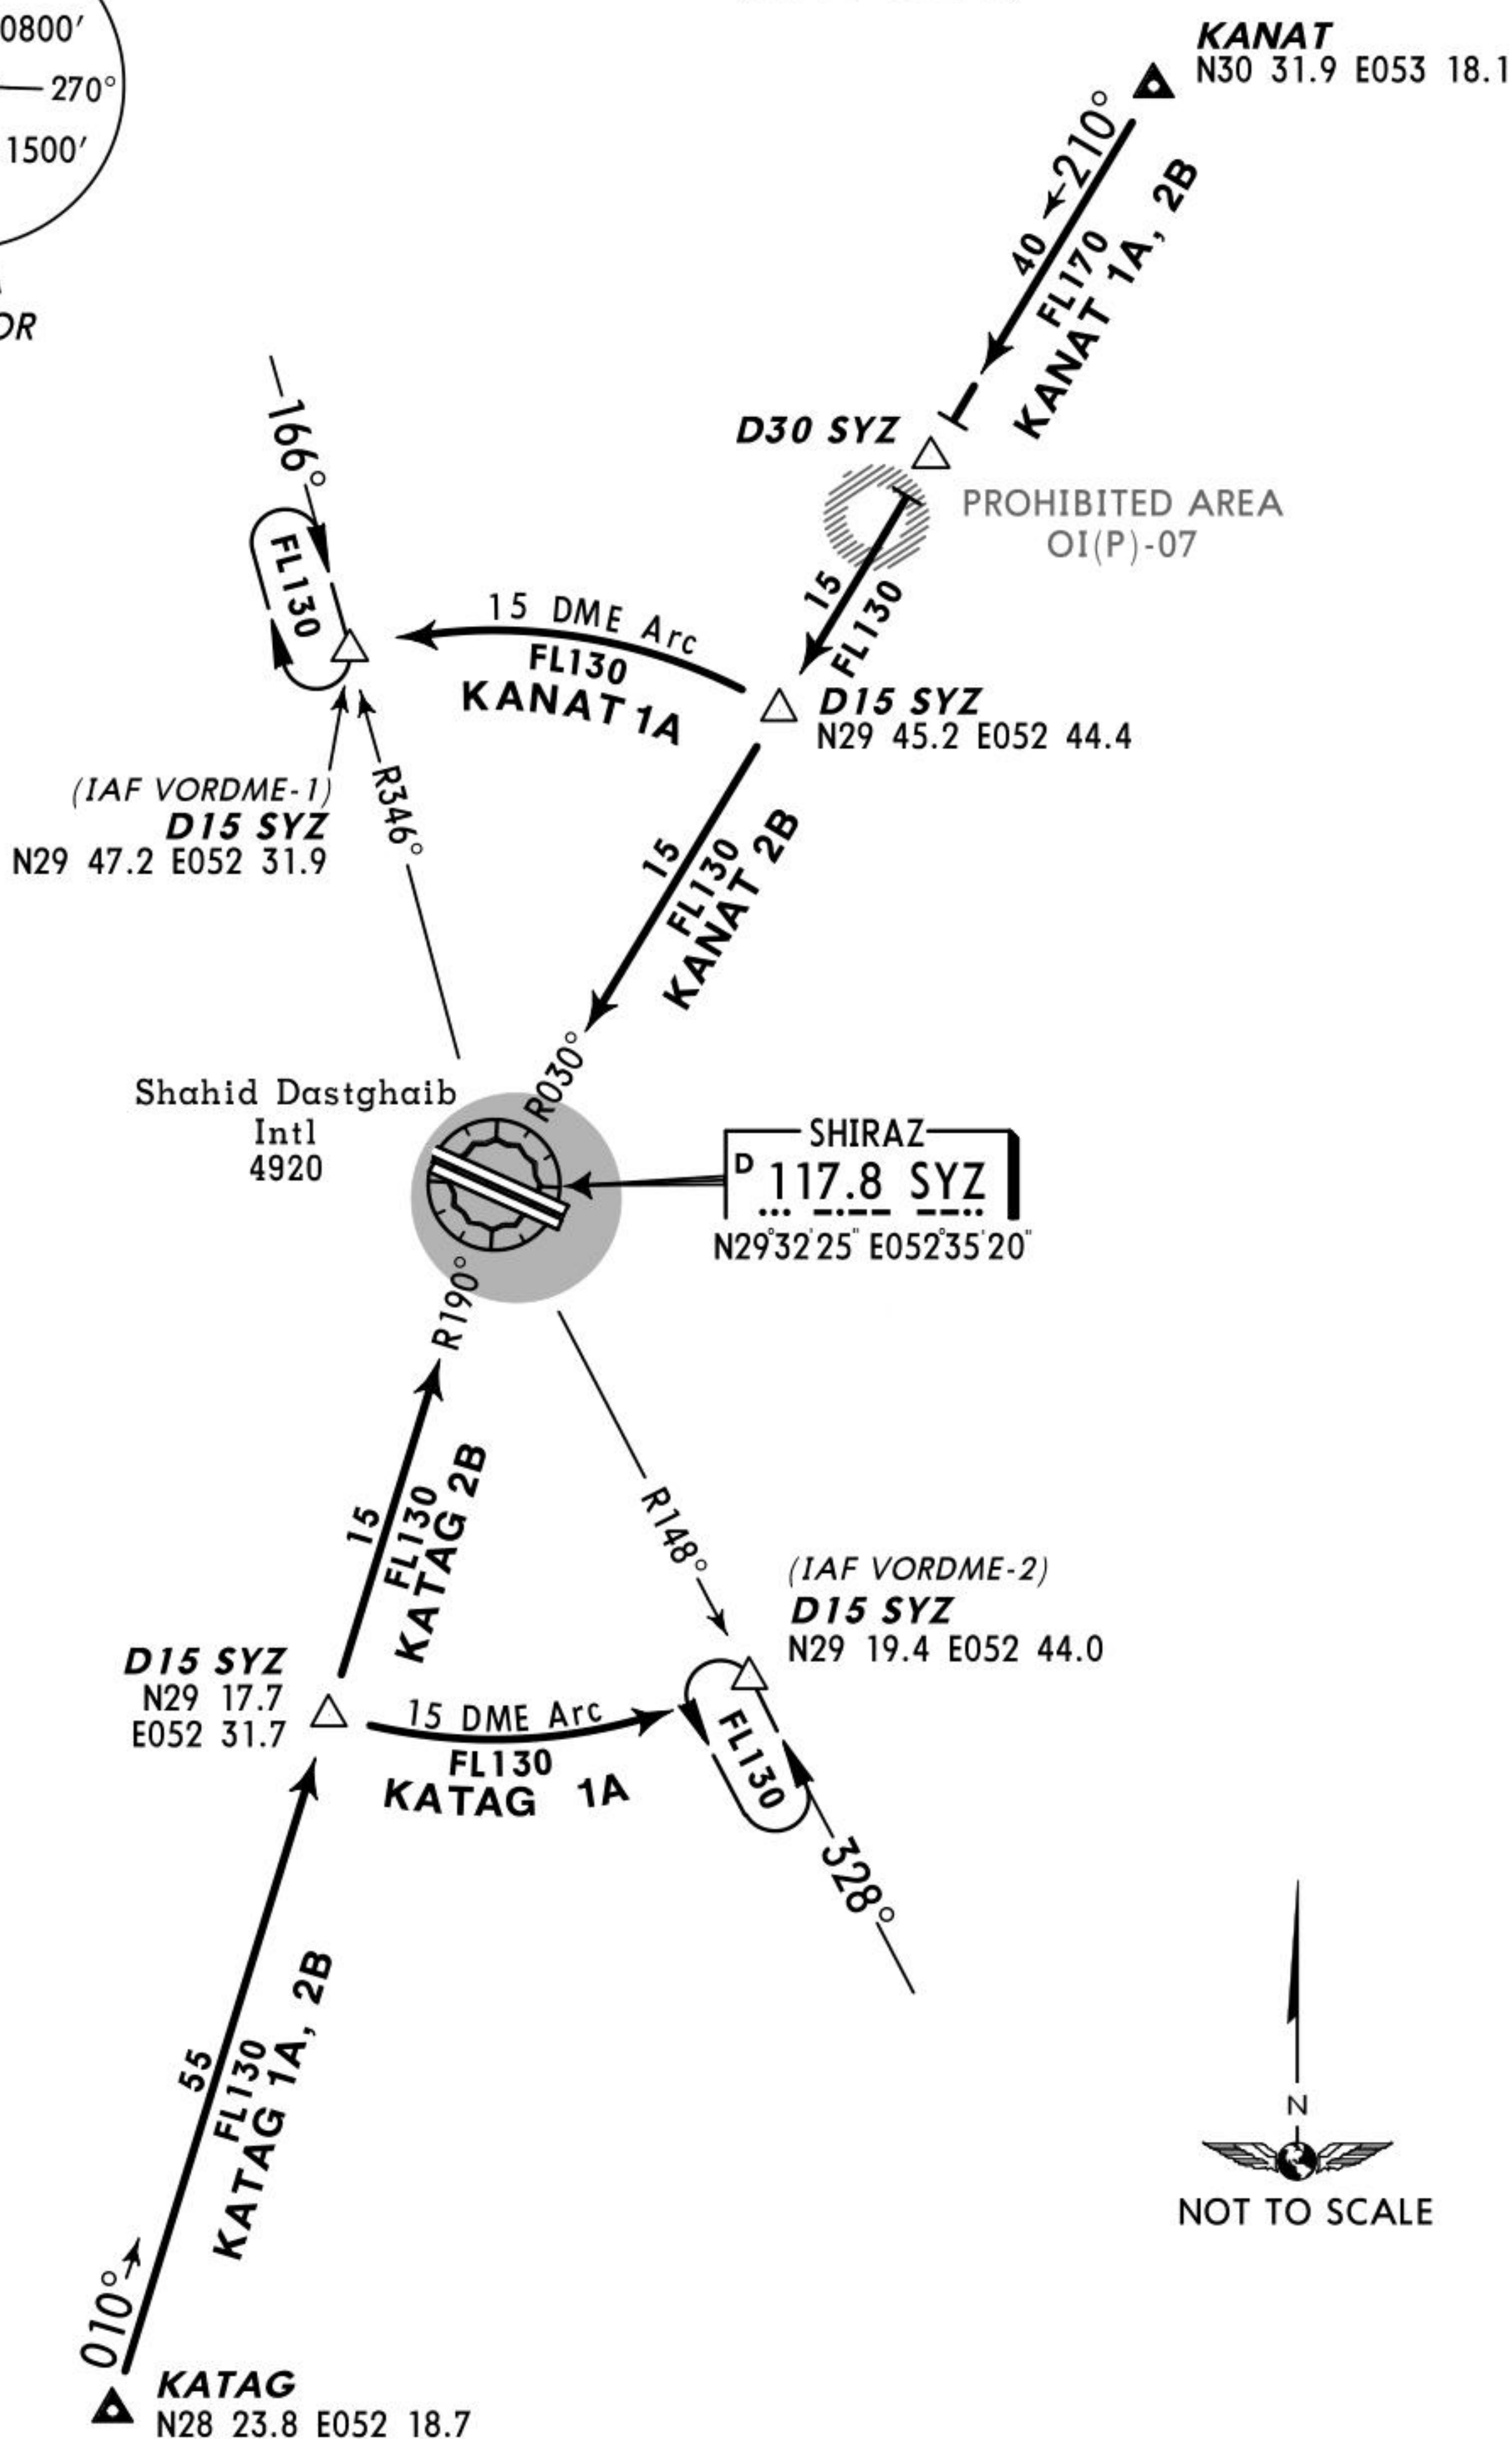TRANS LEVEL: BY ATC
TRANS ALT: 11500'KANAT 1A, KANAT 2B
KATAG 1A, KATAG 2B
ARRIVALS
(RWYS 29L/R)MSA
SYZ VOR

STAR	ROUTING
KANAT 1A	Intercept SYZ R-030 inbound to D15 SYZ, turn RIGHT, proceed along SYZ 15 DME arc to SYZ R-346/D15.
KANAT 2B	Intercept SYZ R-030 inbound to SYZ VORDME.
KATAG 1A	Intercept SYZ R-190 inbound to D15 SYZ, turn RIGHT, proceed along SYZ 15 DME arc to SYZ R-148/D15.
KATAG 2B	Intercept SYZ R-190 inbound to SYZ VORDME.



STAR


SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

ATIS 127.0

TRANS LEVEL: BY ATC
TRANS ALT: 11500'

KATIB 2A, KATIB 3B
KATOS 1A, KATOS 2B
ARRIVALS
(RWYS 29L/R)

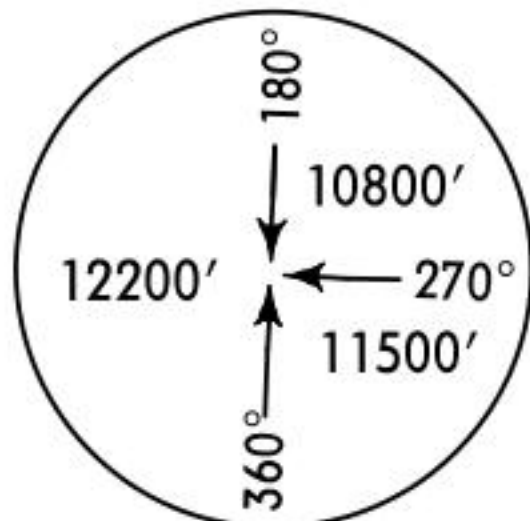

MSA
SYZ VOR

SHIRAZ
P 117.8 SYZ
N29°32'25" E052°35'20"

Shahid Dastghaib
Intl
4920

D15 SYZ
N29 24.8 E052 20.5

KATOS 2B
FL130

KATIB 3B
FL130

(IAF VORDME-2)
D15 SYZ
N29 19.4 E052 44.0

KATOS 1A

D15 SYZ
N29 19.9 E052 25.7

KATIB 2A
KATOS 1A

KATOS 1A, 2B
FL130

KATIB 2A, 3B
FL130

KATOS
N28 56.7 E051 26.5

KATIB
N28 34.2 E051 50.8



STAR	ROUTING
KATIB 2A	Intercept SYZ R-212 inbound to D15 SYZ, turn RIGHT, proceed along SYZ 15 DME arc to SYZ R-148/D15.
KATIB 3B	Intercept SYZ R-212 inbound to SYZ VORDME.
KATOS 1A	Intercept SYZ R-237 inbound to D15 SYZ, turn RIGHT, proceed along SYZ 15 DME arc to SYZ R-148/D15.
KATOS 2B	Intercept SYZ R-237 inbound to SYZ VORDME.





STAR

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

ATIS

127.0

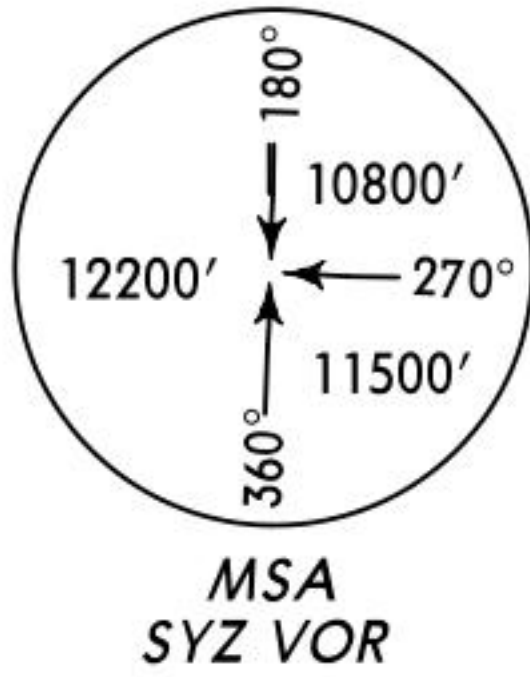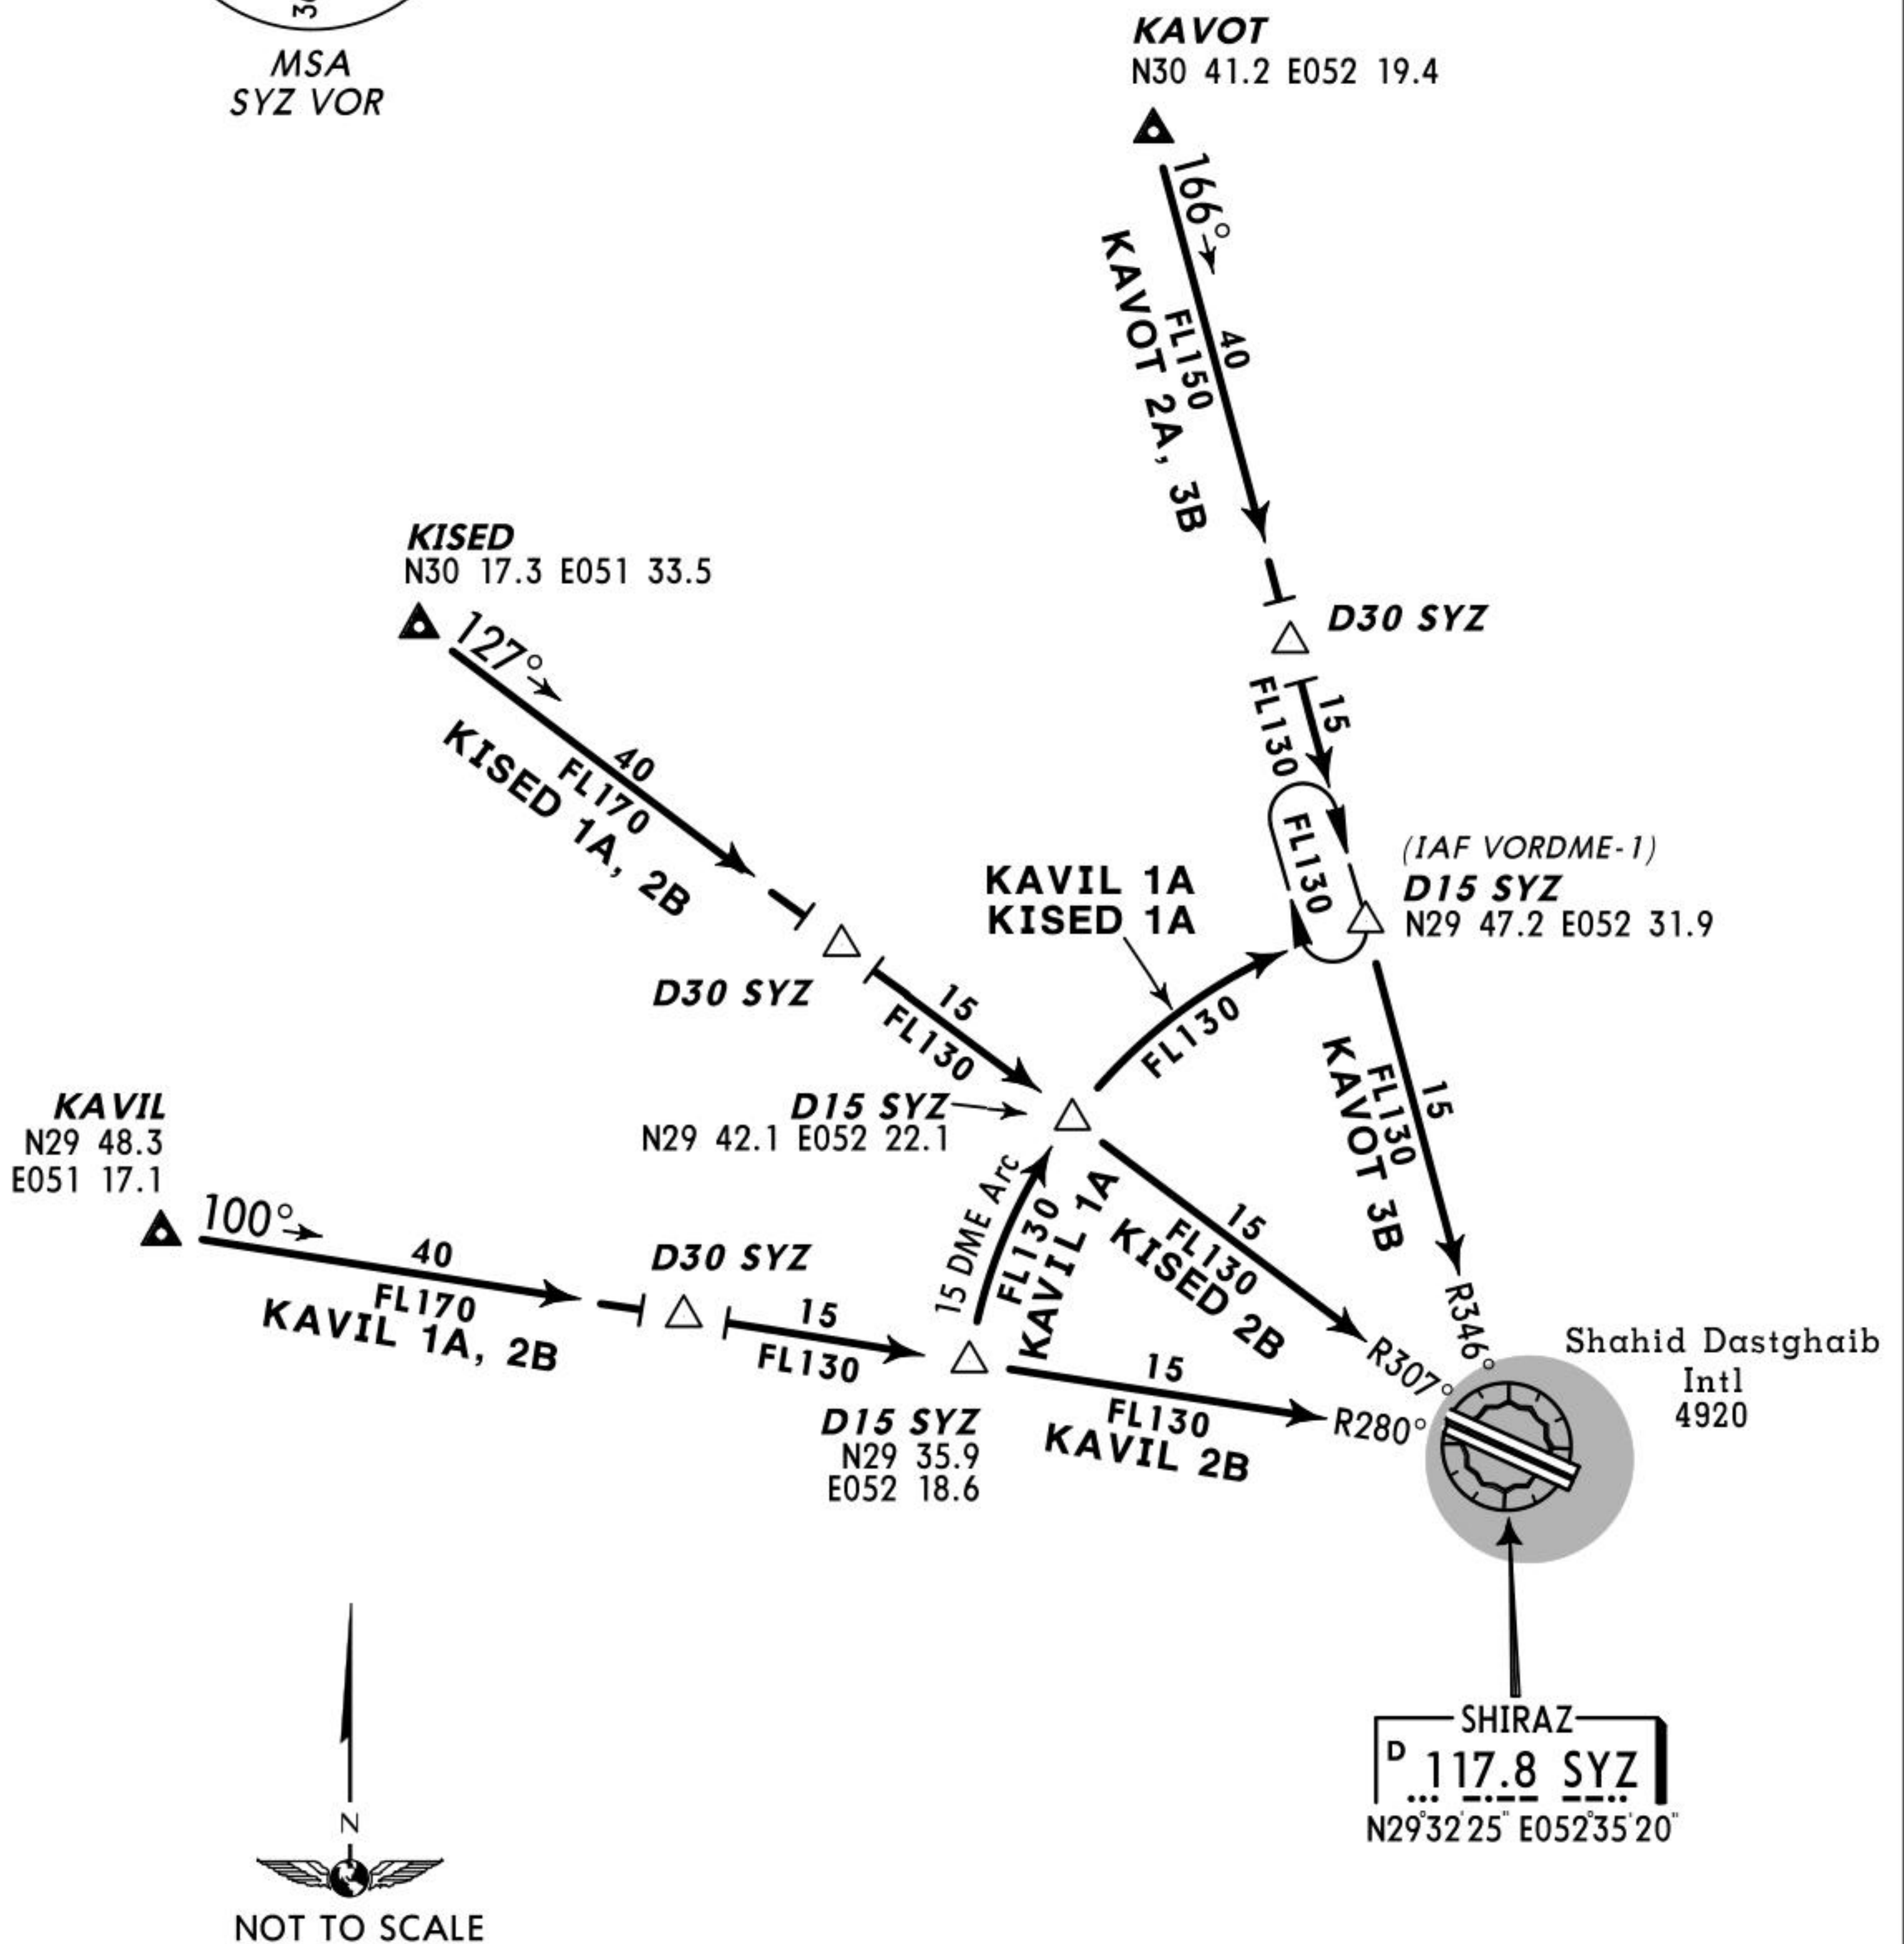TRANS LEVEL: BY ATC
TRANS ALT: 11500'KAVIL 1A, KAVIL 2B
KAVOT 2A, KAVOT 3B
KISED 1A, KISED 2B
ARRIVALS
(RWYS 29L/R)MSA
SYZ VOR

STAR	ROUTING
KAVIL 1A	Intercept SYZ R-280 inbound to D15 SYZ, turn LEFT, proceed along SYZ 15 DME arc to SYZ R-346/D15.
KAVIL 2B	Intercept SYZ R-280 inbound to SYZ VORDME.
KAVOT 2A	Intercept SYZ R-346 inbound to D15 SYZ.
KAVOT 3B	Intercept SYZ R-346 inbound to SYZ VORDME.
KISED 1A	Intercept SYZ R-307 inbound to D15 SYZ, turn LEFT, proceed along SYZ 15 DME arc to SYZ R-346/D15.
KISED 2B	Intercept SYZ R-307 inbound to SYZ VORDME.



STAR



SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

ATIS 127.0

TRANS LEVEL: BY ATC
TRANS ALT: 11500'

NALBI 2A, NALBI 2B
SITEN 2A, SITEN 3B
ARRIVALS
(RWYS 29L/R)

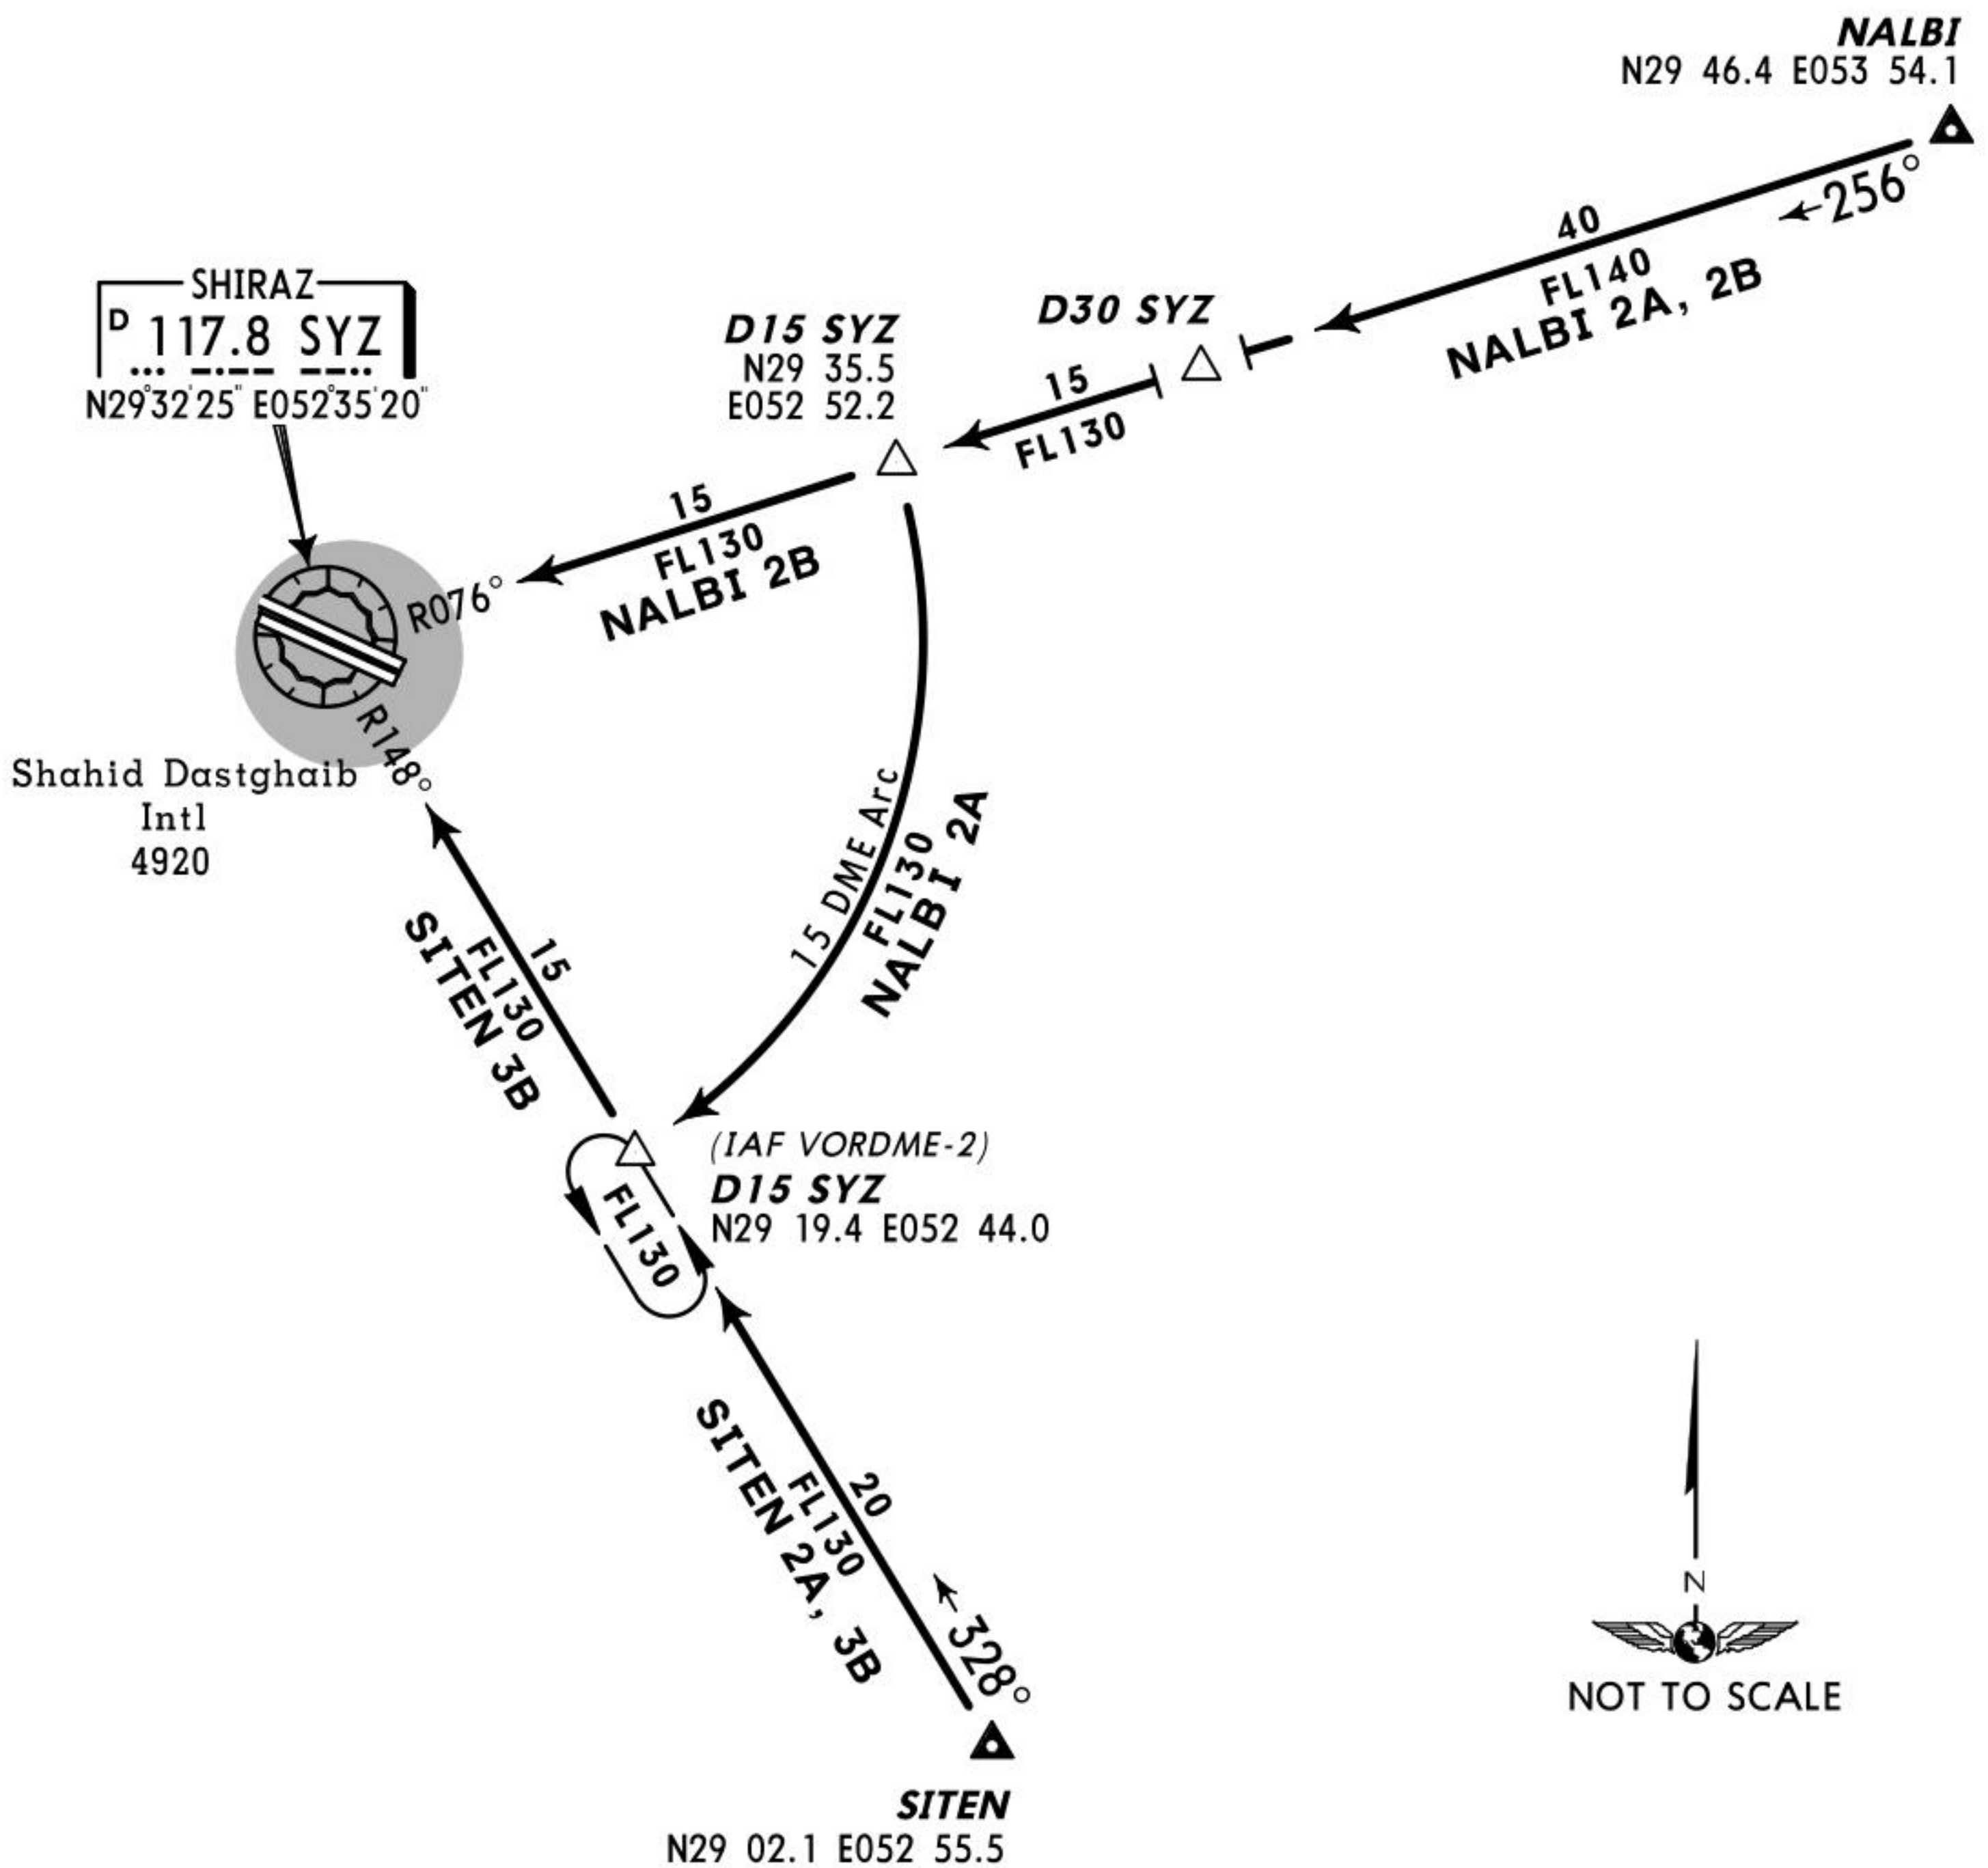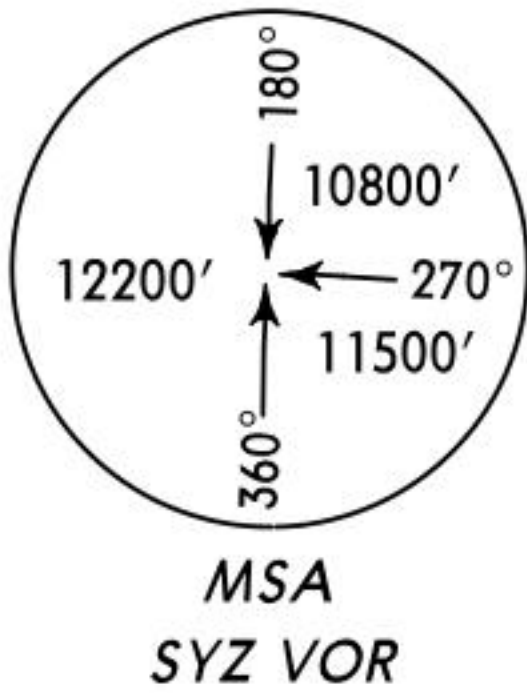


STAR	ROUTING
NALBI 2A	Intercept SYZ R-076 inbound to D15 SYZ, turn LEFT, proceed along SYZ 15 DME arc to SYZ R-148/D15.
NALBI 2B	Intercept SYZ R-076 inbound to SYZ VORDME.
SITEN 2A	Intercept SYZ R-148 inbound to D15 SYZ.
SITEN 3B	Intercept SYZ R-148 inbound to SYZ VORDME.



SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

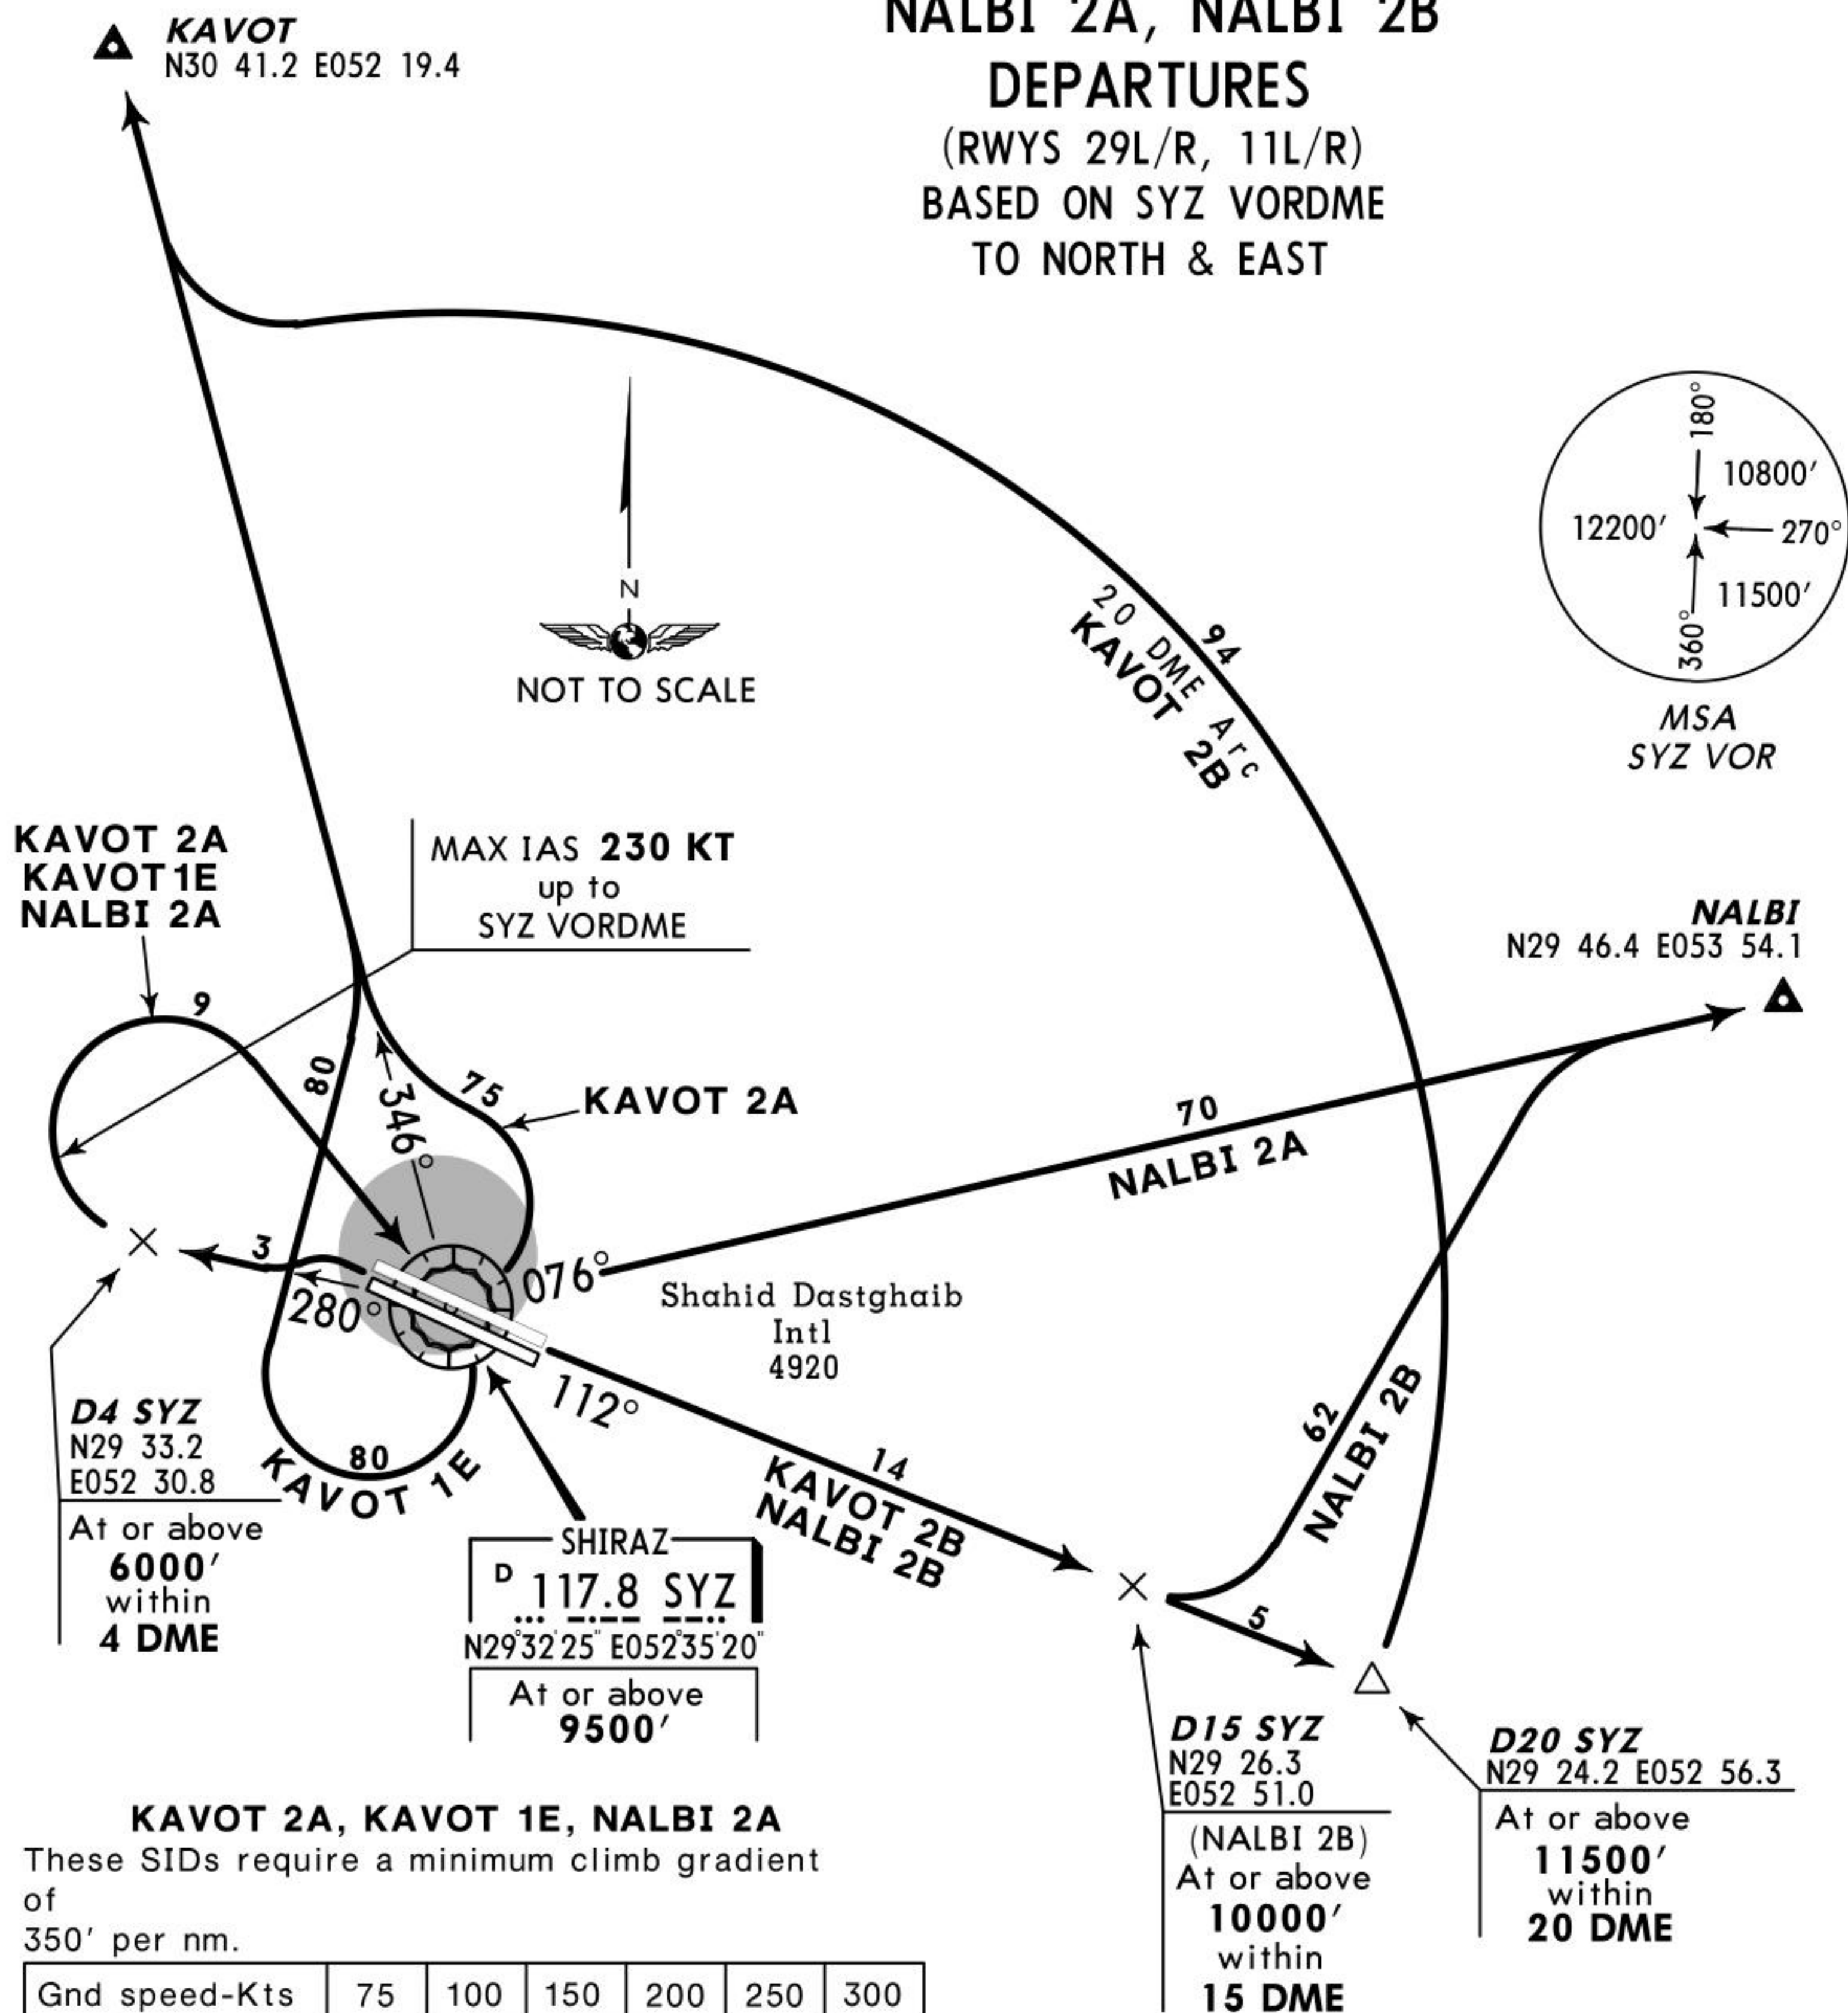TRANS LEVEL: BY ATC
TRANS ALT: 11500'KAVOT 2A, KAVOT 2B, KAVOT 1E
NALBI 2A, NALBI 2B
DEPARTURES(RWYS 29L/R, 11L/R)
BASED ON SYZ VORDME
TO NORTH & EAST

KAVOT 2A, KAVOT 1E, NALBI 2A
These SIDs require a minimum climb gradient
of
350' per nm.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750


SID	RWY	TAKE-OFF/ROUTING	ALTITUDE
KAVOT 2A	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn LEFT, intercept SYZ R-346 to Kavot Int, climb to cleared FL.	Cross SYZ VORDME at or above 9500' .
KAVOT 2B	11L/R	Intercept SYZ R-112 to 11500' or above within SYZ 20 DME, at D20 SYZ turn LEFT, proceed along SYZ 20 DME arc, intercept SYZ R-346 to Kavot Int, climb to cleared FL.	
KAVOT 1E	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn RIGHT, intercept SYZ R-346 to Kavot Int, climb to cleared FL.	Cross SYZ VORDME at or above 9500' .
NALBI 2A		Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn LEFT, intercept SYZ R-076 to Nalbi Int, climb to cleared FL.	
NALBI 2B	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME, at D15 SYZ turn LEFT, intercept SYZ R-076 to Nalbi Int, climb to cleared FL.	



SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

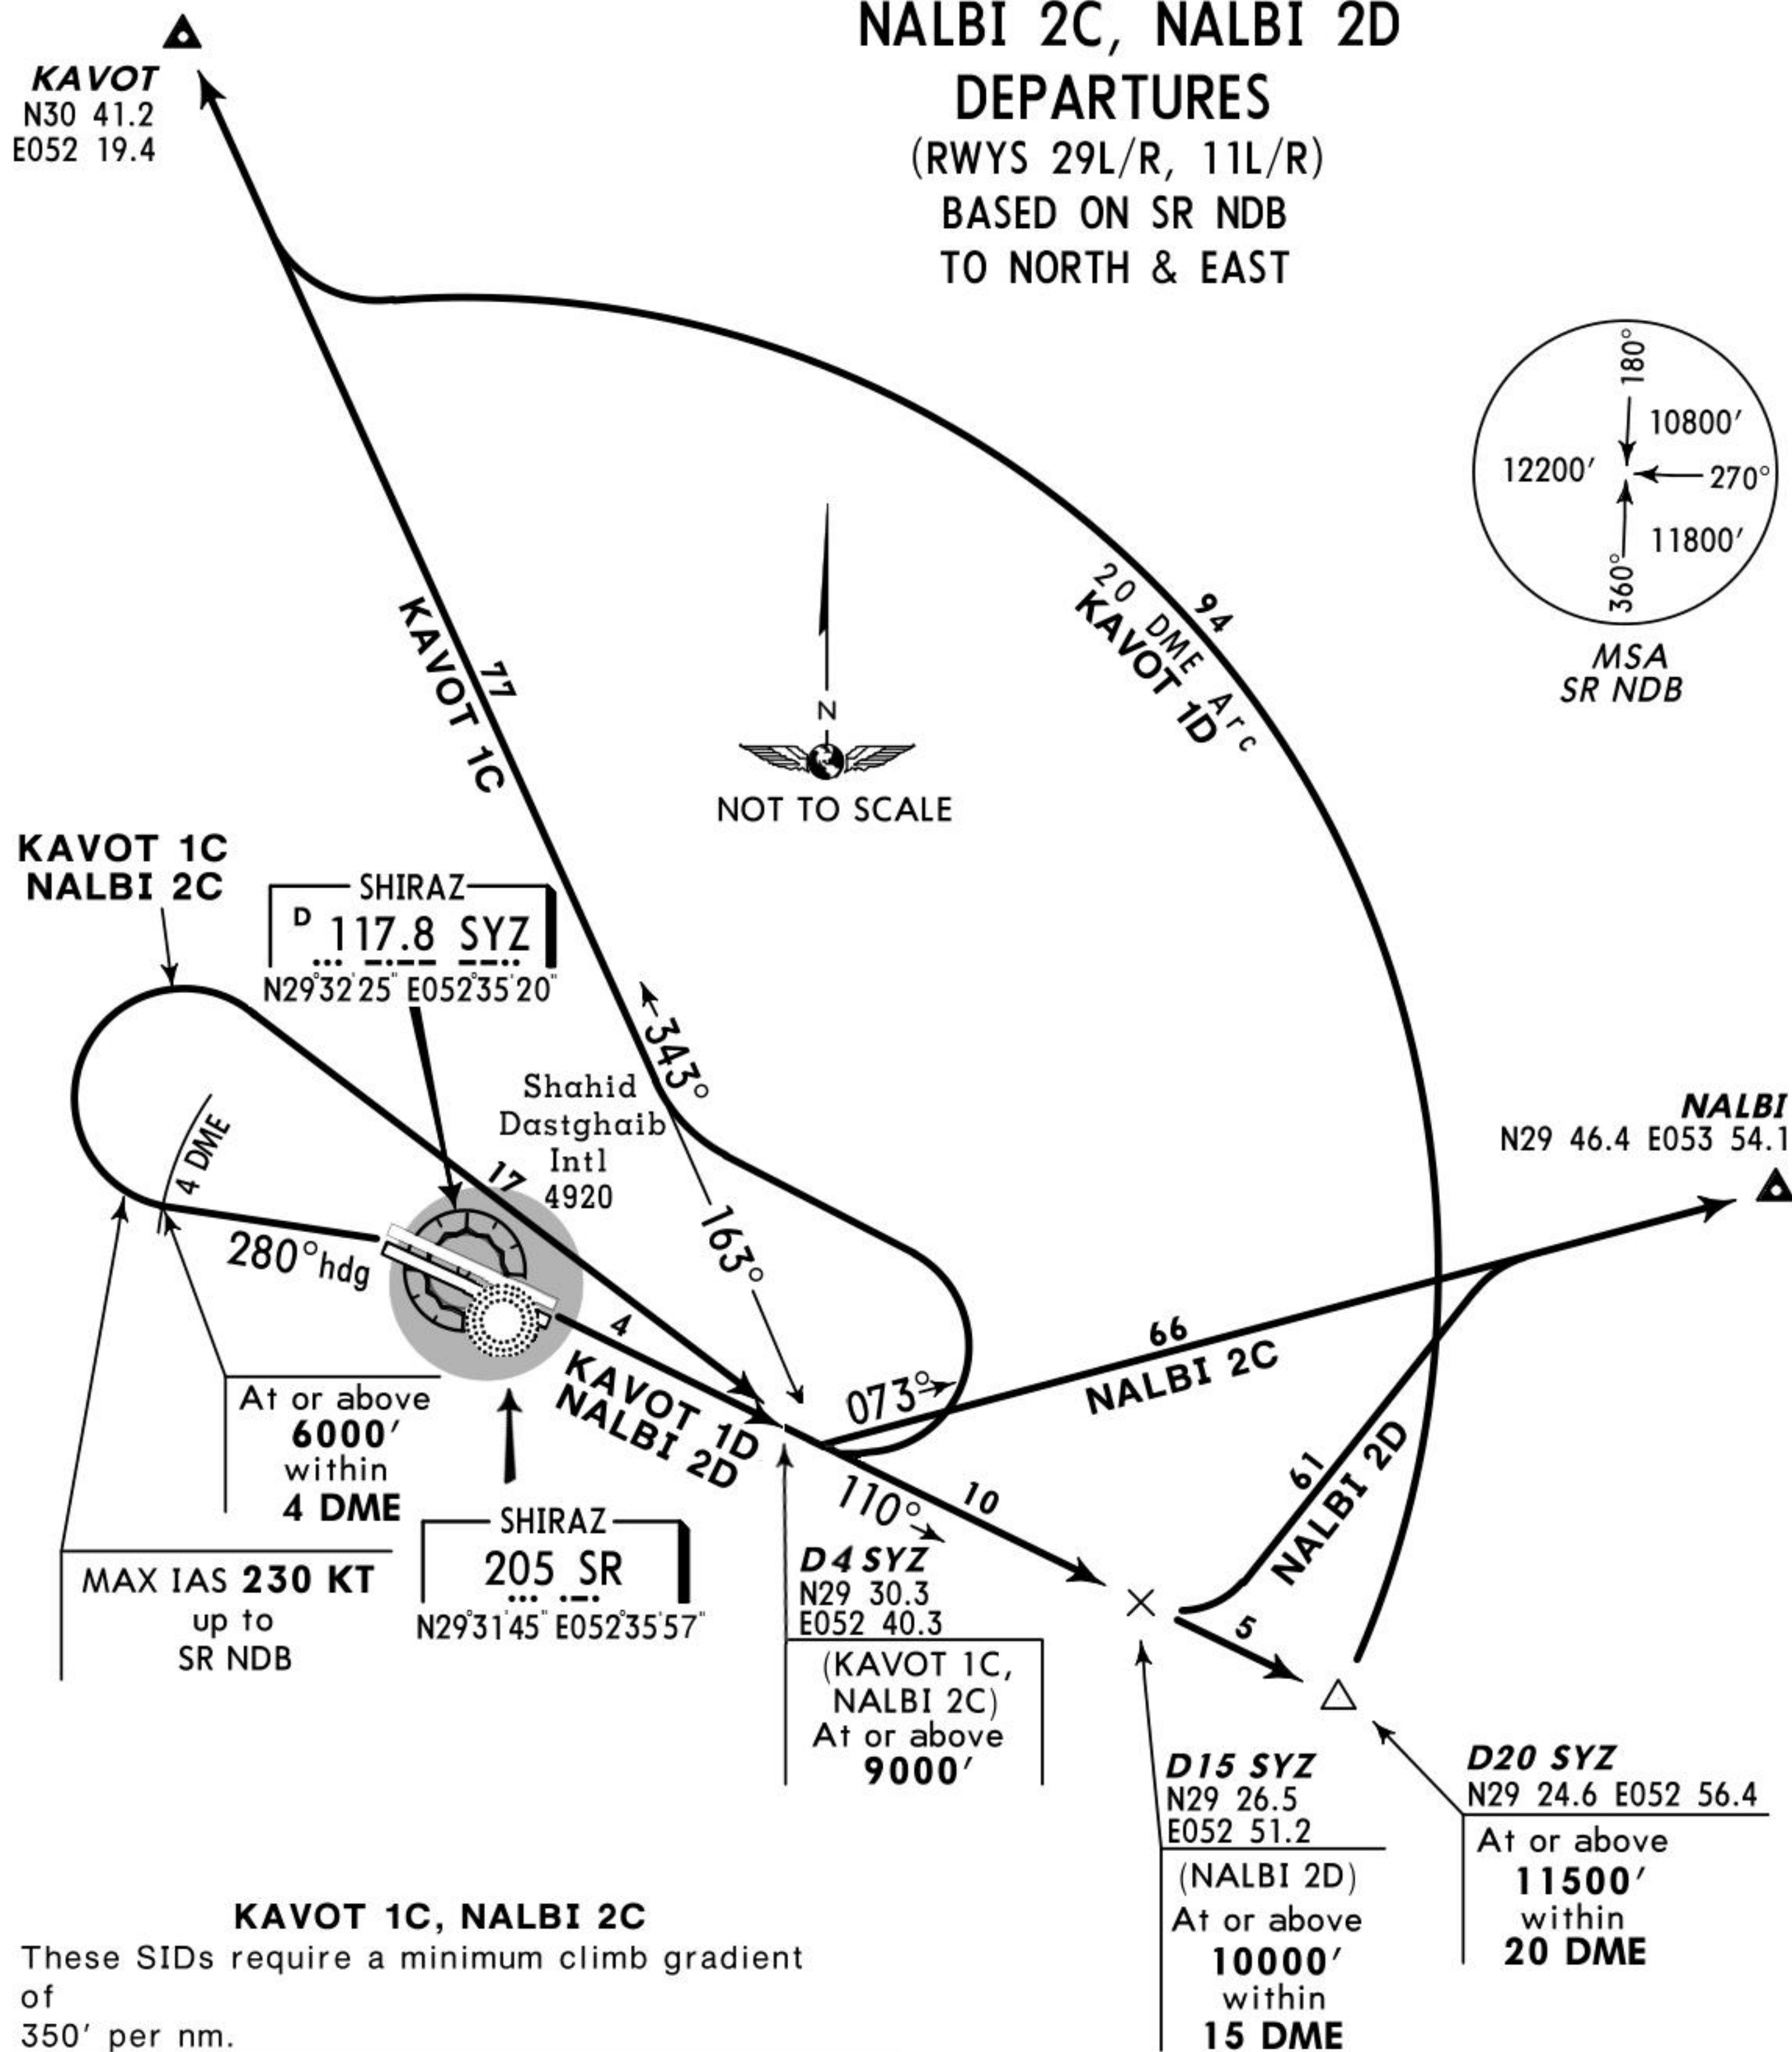TRANS LEVEL: BY ATC
TRANS ALT: 11500'KAVOT 1C, KAVOT 1D
NALBI 2C, NALBI 2D
DEPARTURES(RWYS 29L/R, 11L/R)
BASED ON SR NDB
TO NORTH & EAST

KAVOT 1C, NALBI 2C

These SIDs require a minimum climb gradient of 350' per nm.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750


SID	RWY	TAKE-OFF/ROUTING	ALTITUDE
KAVOT 1C	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn LEFT, 343° bearing to Kavot Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
KAVOT 1D	11L/R	To SR NDB, 110° bearing to 11500' or above within SYZ 20 DME, at D20 SYZ turn LEFT, proceed along SYZ 20 DME arc, intercept 343° bearing from SR NDB to Kavot Int, climb to cleared FL.	
NALBI 2C	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn LEFT, 073° bearing to Nalbi Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
NALBI 2D	11L/R	To SR NDB, 110° bearing to 10000' or above within SYZ 15 DME, at D15 SYZ turn LEFT, intercept 073° bearing from SR NDB to Nalbi Int, climb to cleared FL.	



SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

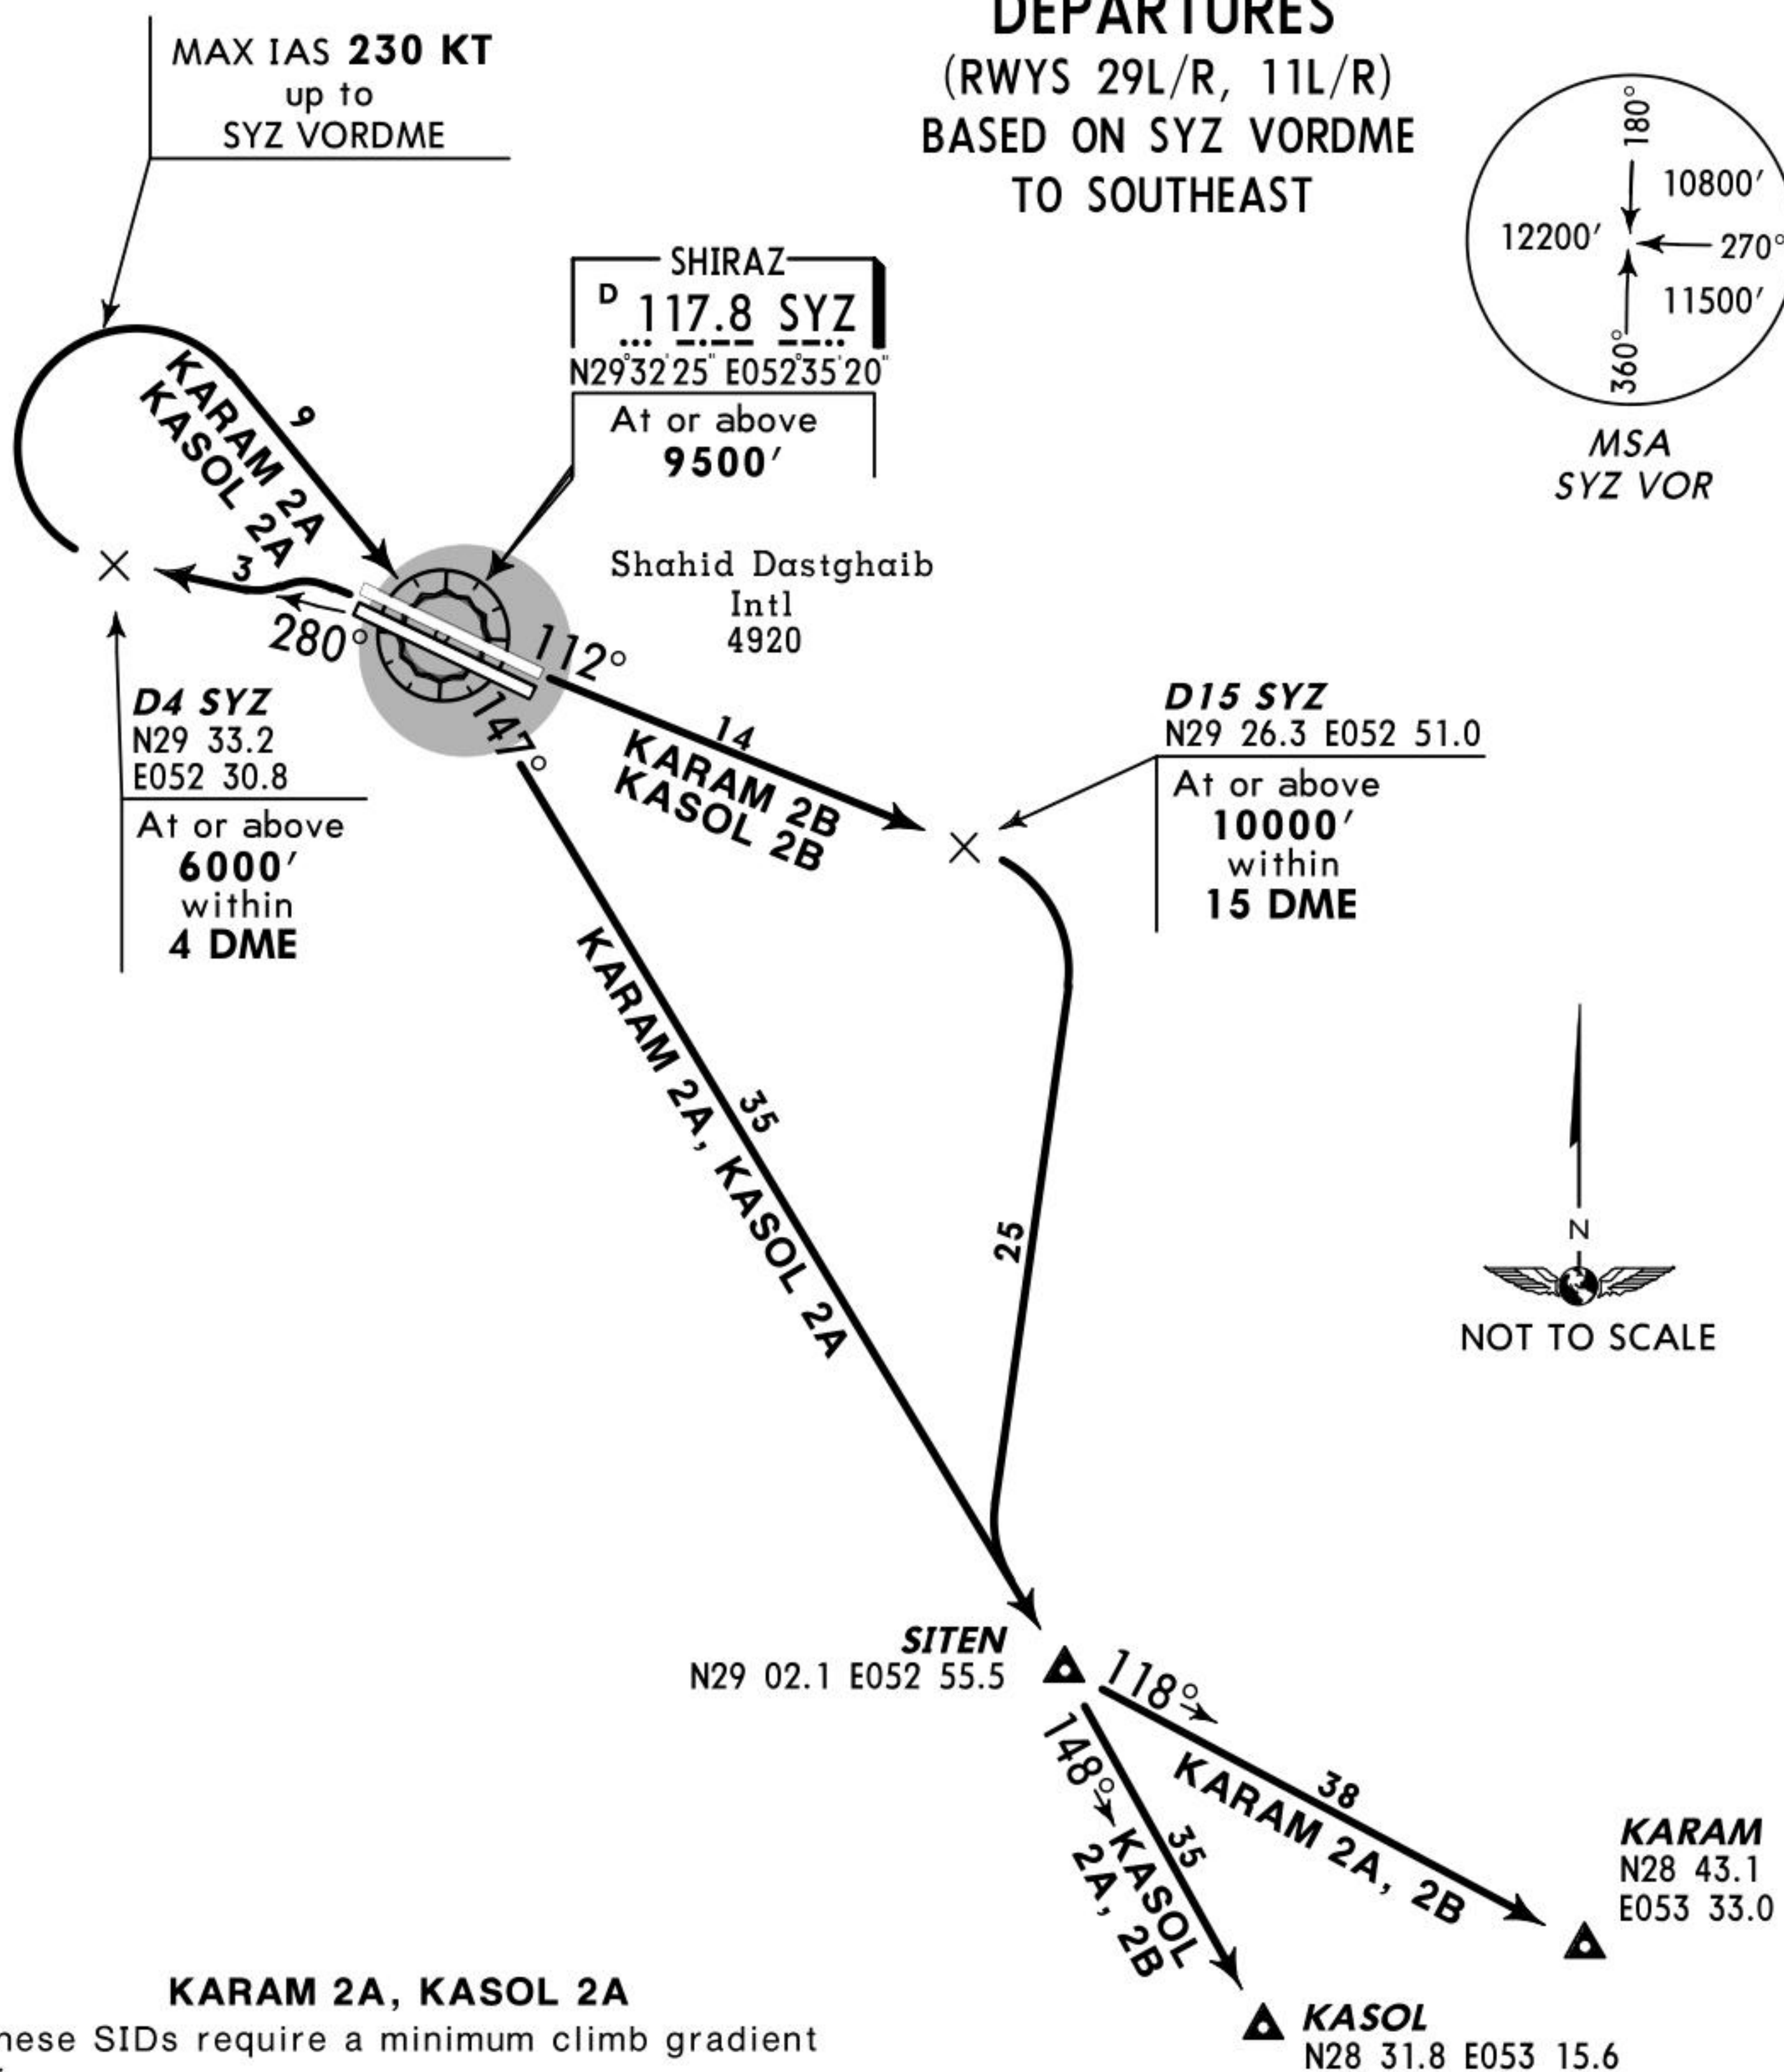TRANS LEVEL: BY ATC
TRANS ALT: 11500'KARAM 2A, KARAM 2B
KASOL 2A, KASOL 2B
DEPARTURES(RWYS 29L/R, 11L/R)
BASED ON SYZ VORDME
TO SOUTHEAST

KARAM 2A, KASOL 2A

These SIDs require a minimum climb gradient
of
350' per nm.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750


SID	RWY	TAKE-OFF/ROUTING	ALTITUDE
KARAM 2A	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), intercept SYZ R-147 to Siten Int, turn LEFT, 118° track to Karam Int, climb to cleared FL .	Cross SYZ VORDME at or above 9500' .
KARAM 2B	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME, at D15 SYZ, turn RIGHT, intercept SYZ R-147 to Siten Int, turn LEFT, 118° track to Karam Int, climb to cleared FL .	
KASOL 2A	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), intercept SYZ R-147 to Siten Int, 148° track to Kasol Int, climb to cleared FL .	Cross SYZ VORDME at or above 9500' .
KASOL 2B	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept SYZ R-147 to Siten Int, 148° track to Kasol Int, climb to cleared FL .	



SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

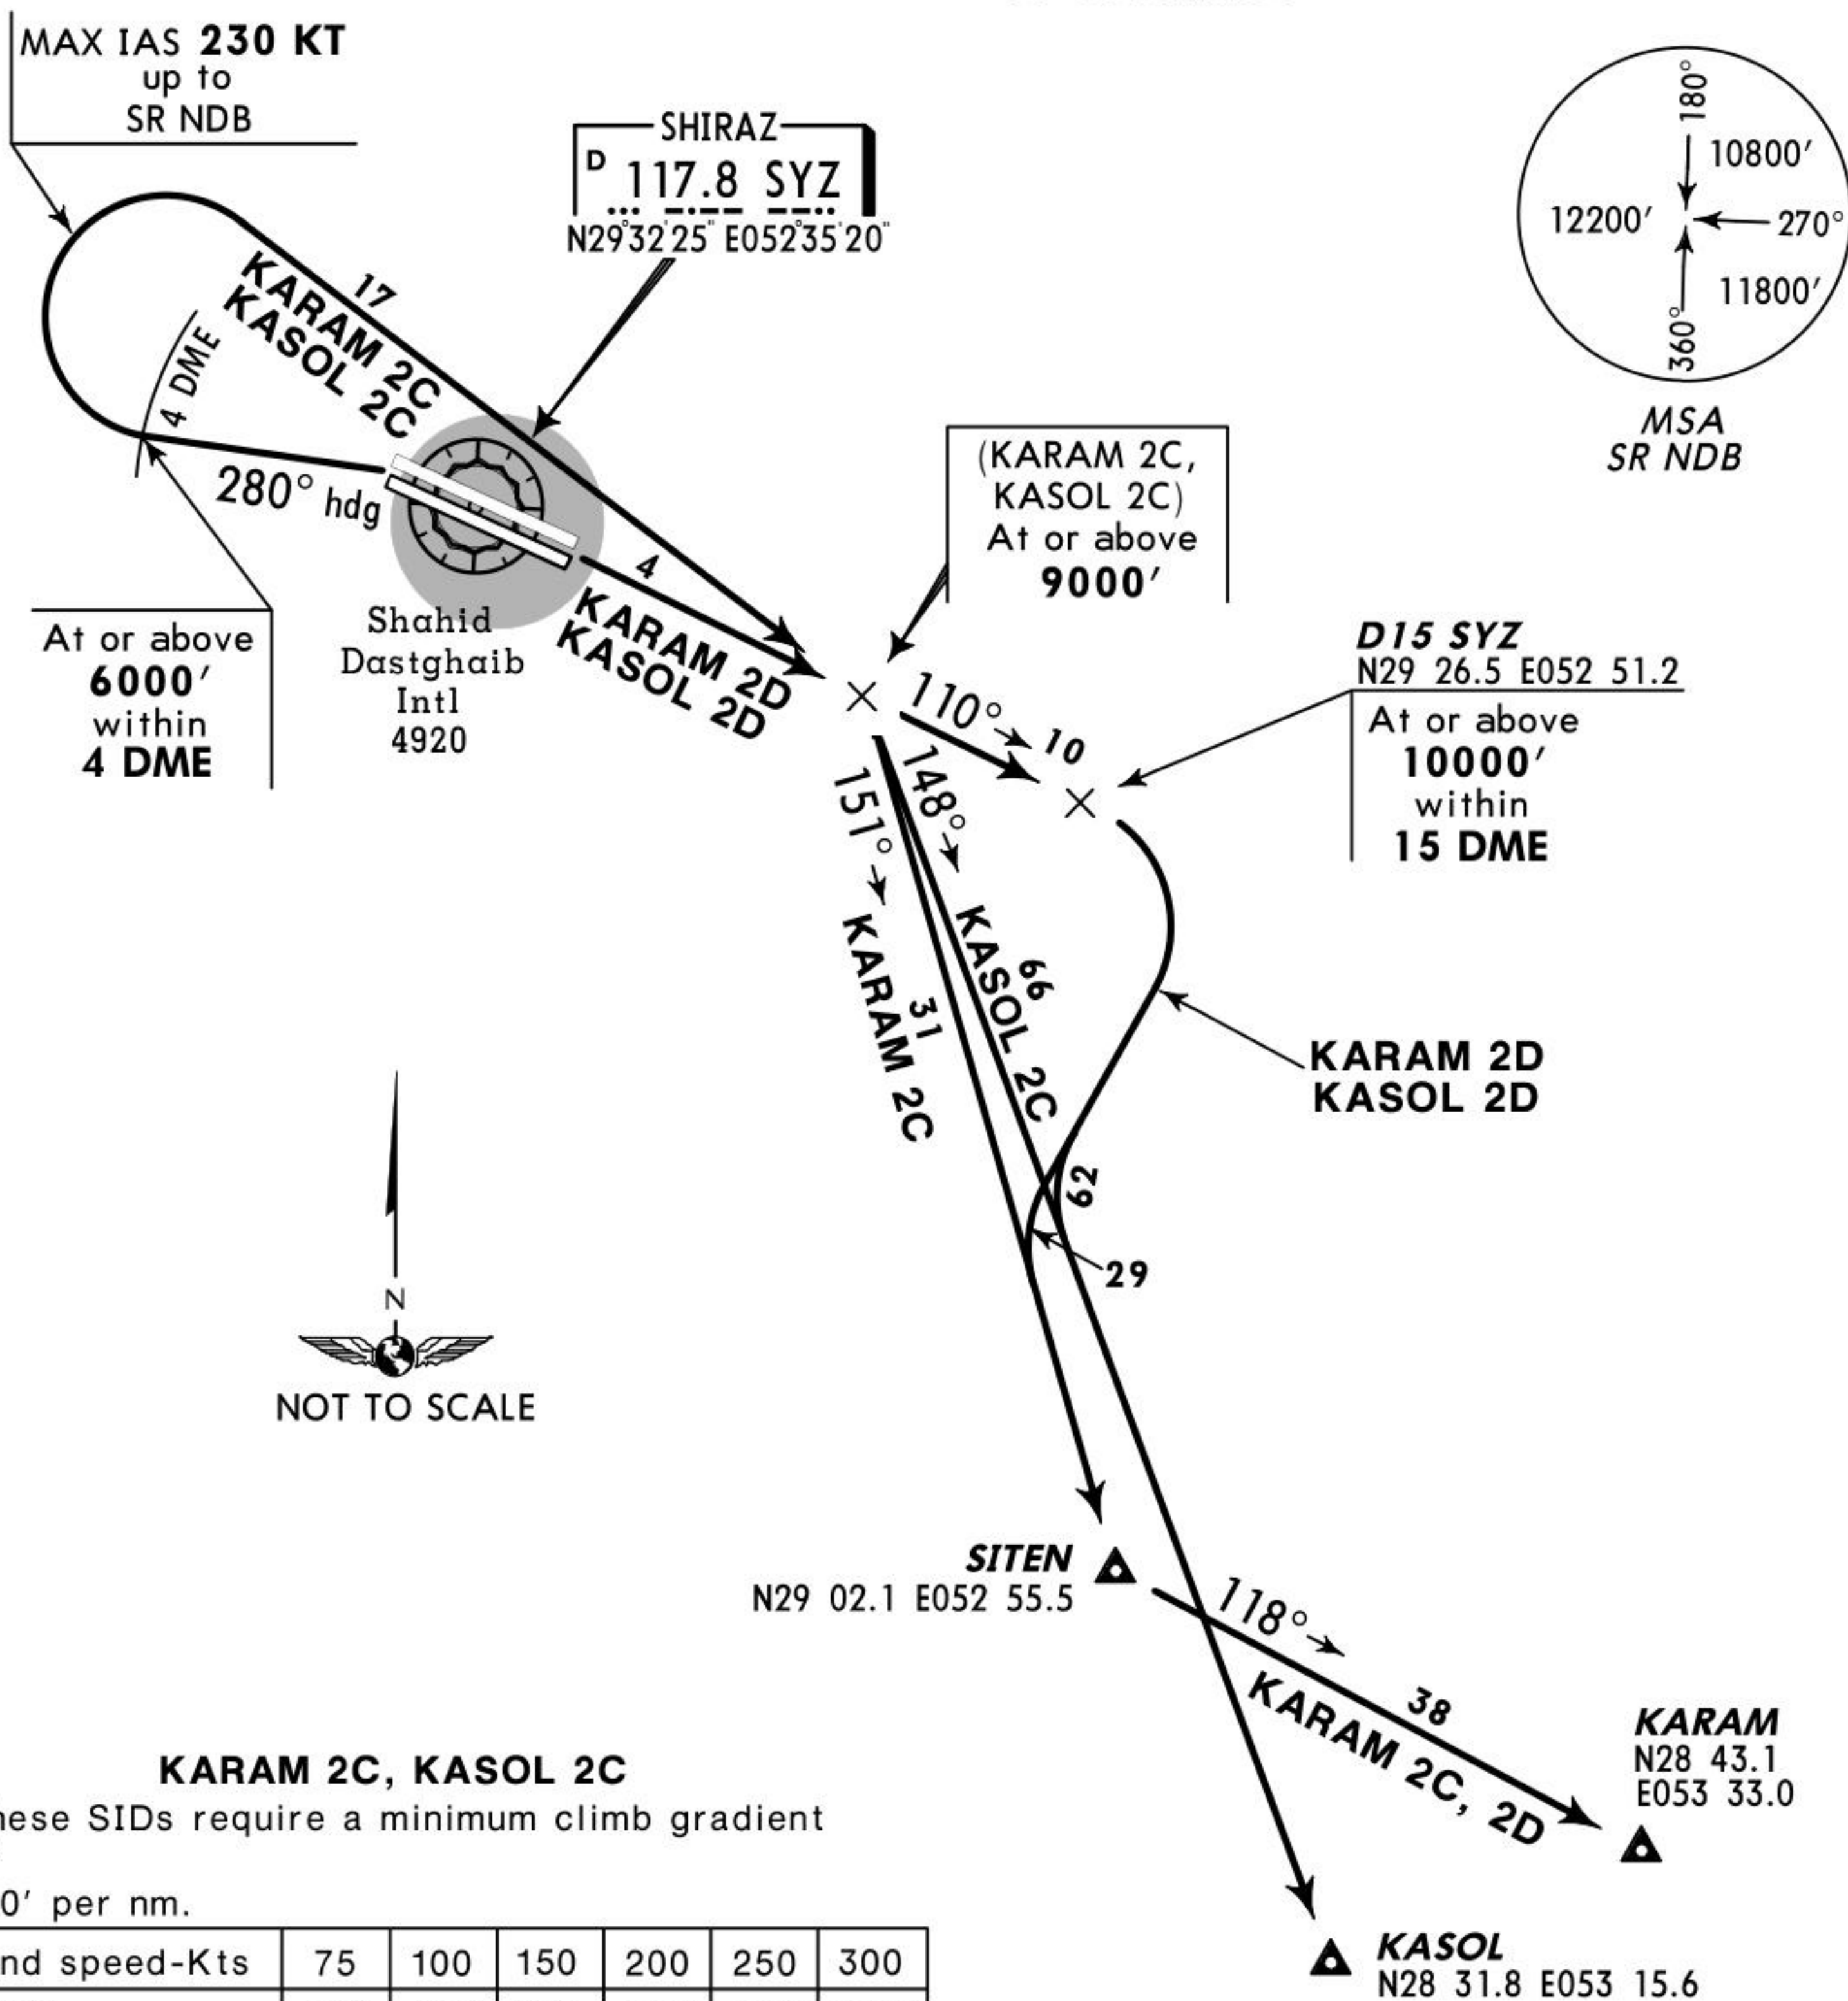TRANS LEVEL: BY ATC
TRANS ALT: 11500'KARAM 2C, KARAM 2D
KASOL 2C, KASOL 2D
DEPARTURES(RWYS 29L/R, 11L/R)
BASED ON SR NDB
TO SOUTHEAST

KARAM 2C, KASOL 2C

These SIDs require a minimum climb gradient
of
350' per nm.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750


SID	RWY	TAKE-OFF/ROUTING	ALTITUDE
KARAM 2C	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn RIGHT, 151° bearing to Siten Int, turn LEFT, 118° track to Karam Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
KARAM 2D	11L/R	To SR NDB, 110° bearing to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept 151° bearing from SR NDB to Siten Int, turn LEFT, 118° track to Karam Int, climb to cleared FL.	
KASOL 2C	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn RIGHT, 148° bearing to Kasol Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
KASOL 2D	11L/R	To SR NDB, 110° bearing to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept 148° bearing from SR NDB to Kasol Int, climb to cleared FL.	



SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

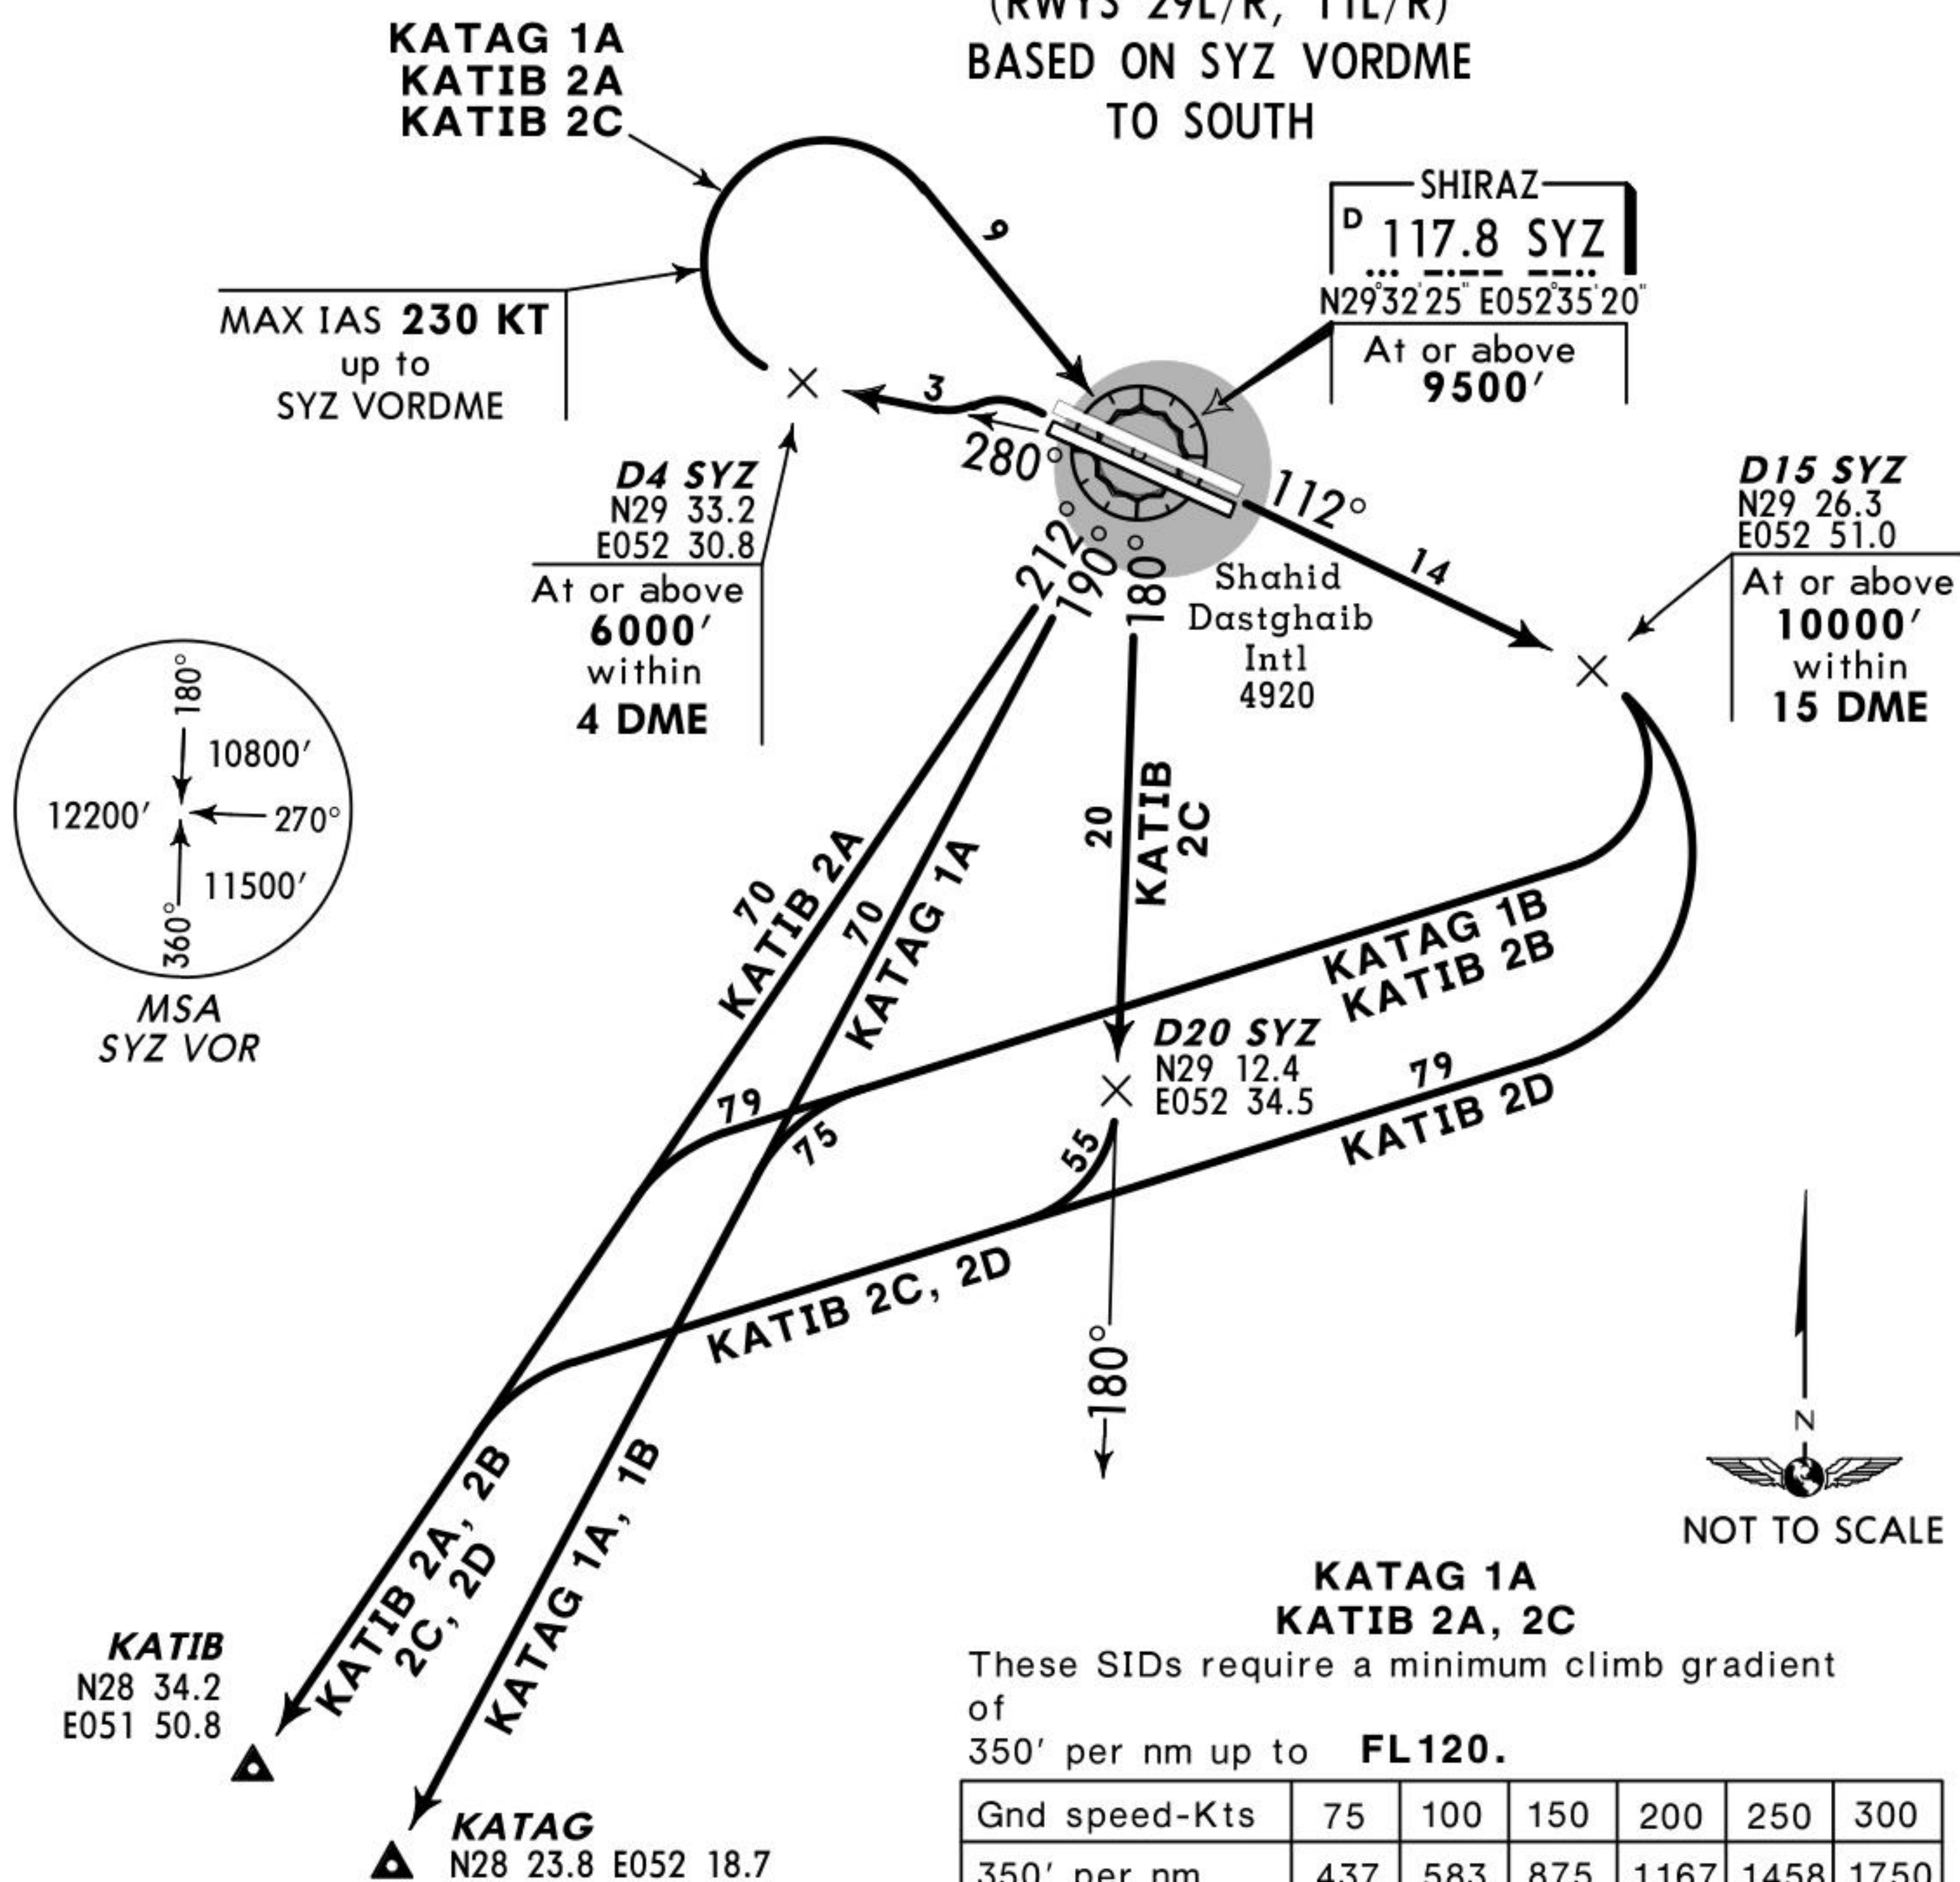TRANS LEVEL: BY ATC
TRANS ALT: 11500'KATAG 1A, KATAG 1B
KATIB 2A, KATIB 2B, KATIB 2C, KATIB 2D
DEPARTURES(RWYS 29L/R, 11L/R)
BASED ON SYZ VORDME
TO SOUTH

NOT TO SCALE

SID	RWY	TAKE-OFF/ROUTING	ALTITUDE
KATAG 1A	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn RIGHT, intercept SYZ R-190 to Katag Int, climb to cleared FL.	Cross SYZ VORDME at or above 9500'.
KATAG 1B	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept SYZ R-190 to Katag Int, climb to cleared FL.	
KATIB 2A	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn RIGHT, intercept SYZ R-212 to Katib Int, climb to cleared FL.	Cross SYZ VORDME at or above 9500'.
KATIB 2B	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept SYZ R-212 to Katib Int, climb to cleared FL.	
KATIB 2C	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn RIGHT, intercept SYZ R-180 to D20 SYZ, turn RIGHT, intercept SYZ R-212 to Katib Int, climb to cleared FL.	Cross SYZ VORDME at or above 9500'.
KATIB 2D	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept SYZ R-212 to Katib Int, cross SYZ R-180 beyond D20 SYZ, climb to cleared FL.	



SID


SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

TRANS LEVEL: BY ATC
TRANS ALT: 11500'

KATAG 1C, KATAG 1D
KATIB 2E, KATIB 2F
DEPARTURES

(RWYS 29L/R, 11L/R)
BASED ON SR NDB
TO SOUTH

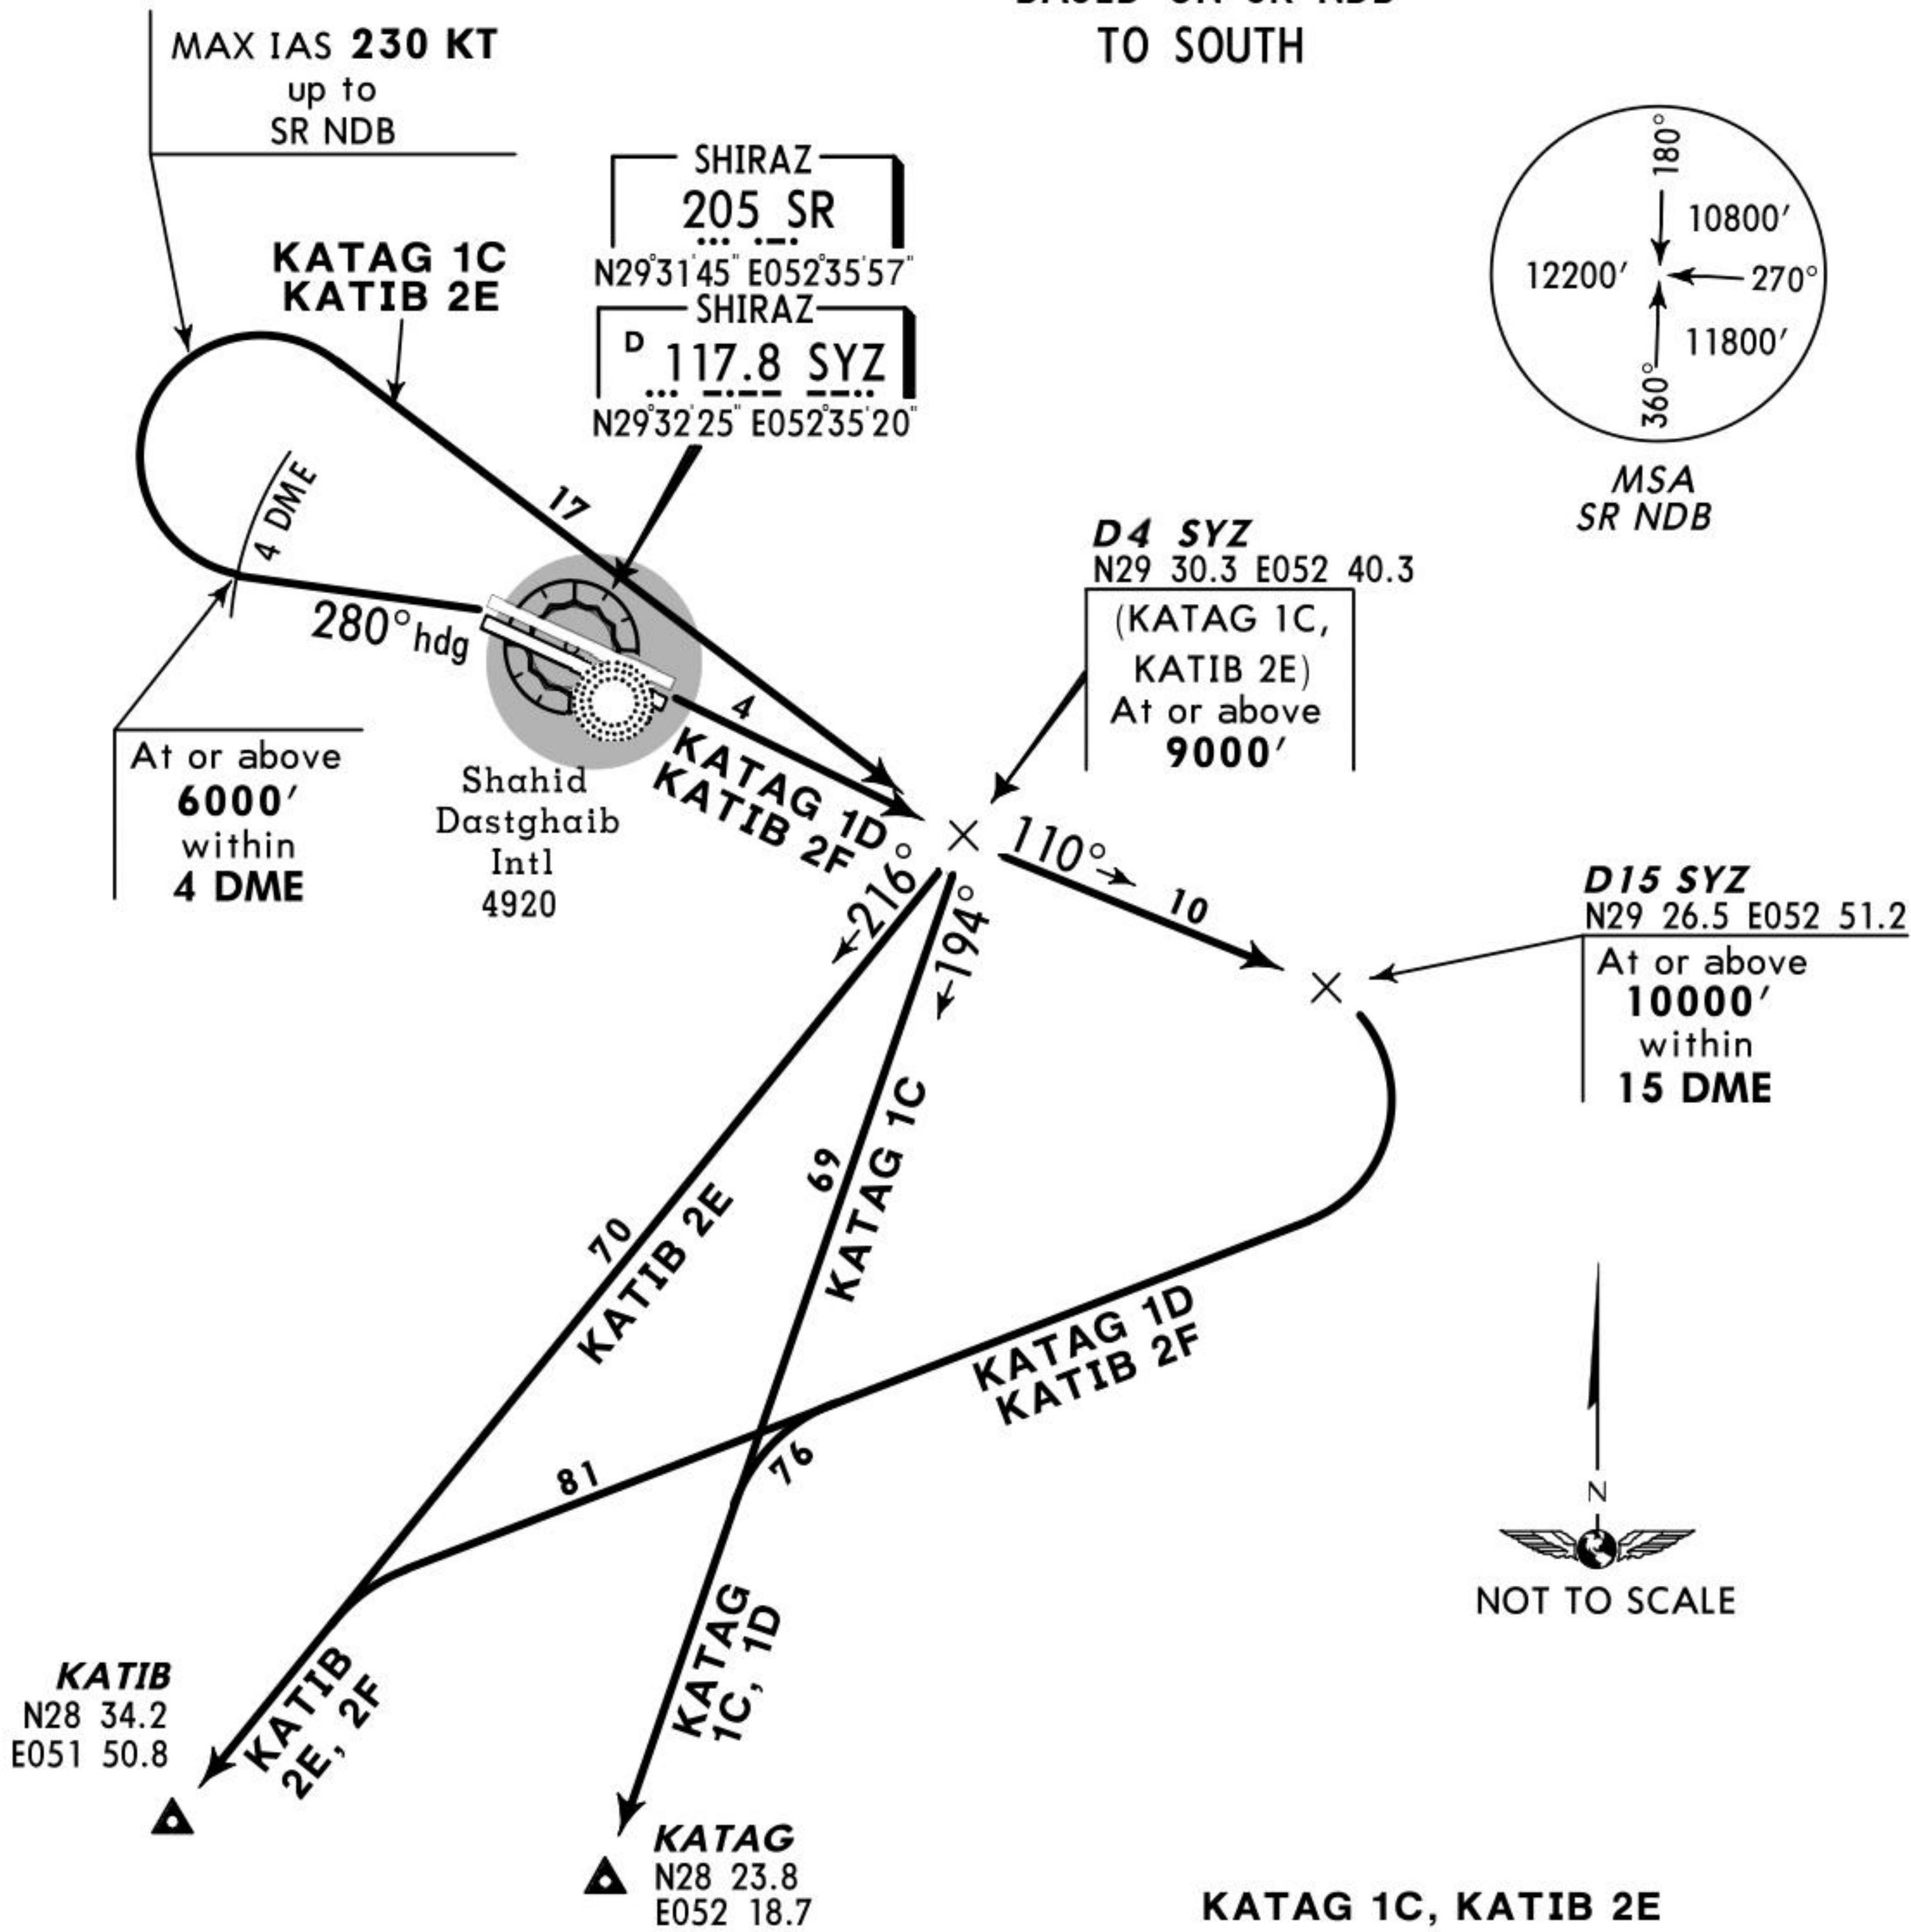

KATAG 1C, KATIB 2E
These SIDs require a minimum climb gradient of 350' per nm.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750


SID	RWY	TAKE-OFF/ROUTING	ALTITUDE
KATAG 1C	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn RIGHT, 194° bearing to Katag Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
KATAG 1D	11L/R	To SR NDB, 110° bearing to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept 194° bearing from SR NDB to Katag Int, climb to cleared FL.	
KATIB 2E	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn RIGHT, 216° bearing to Katib Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
KATIB 2F	11L/R	To SR NDB, 110° bearing to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept 216° bearing from SR NDB to Katib Int, climb to cleared FL.	



SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

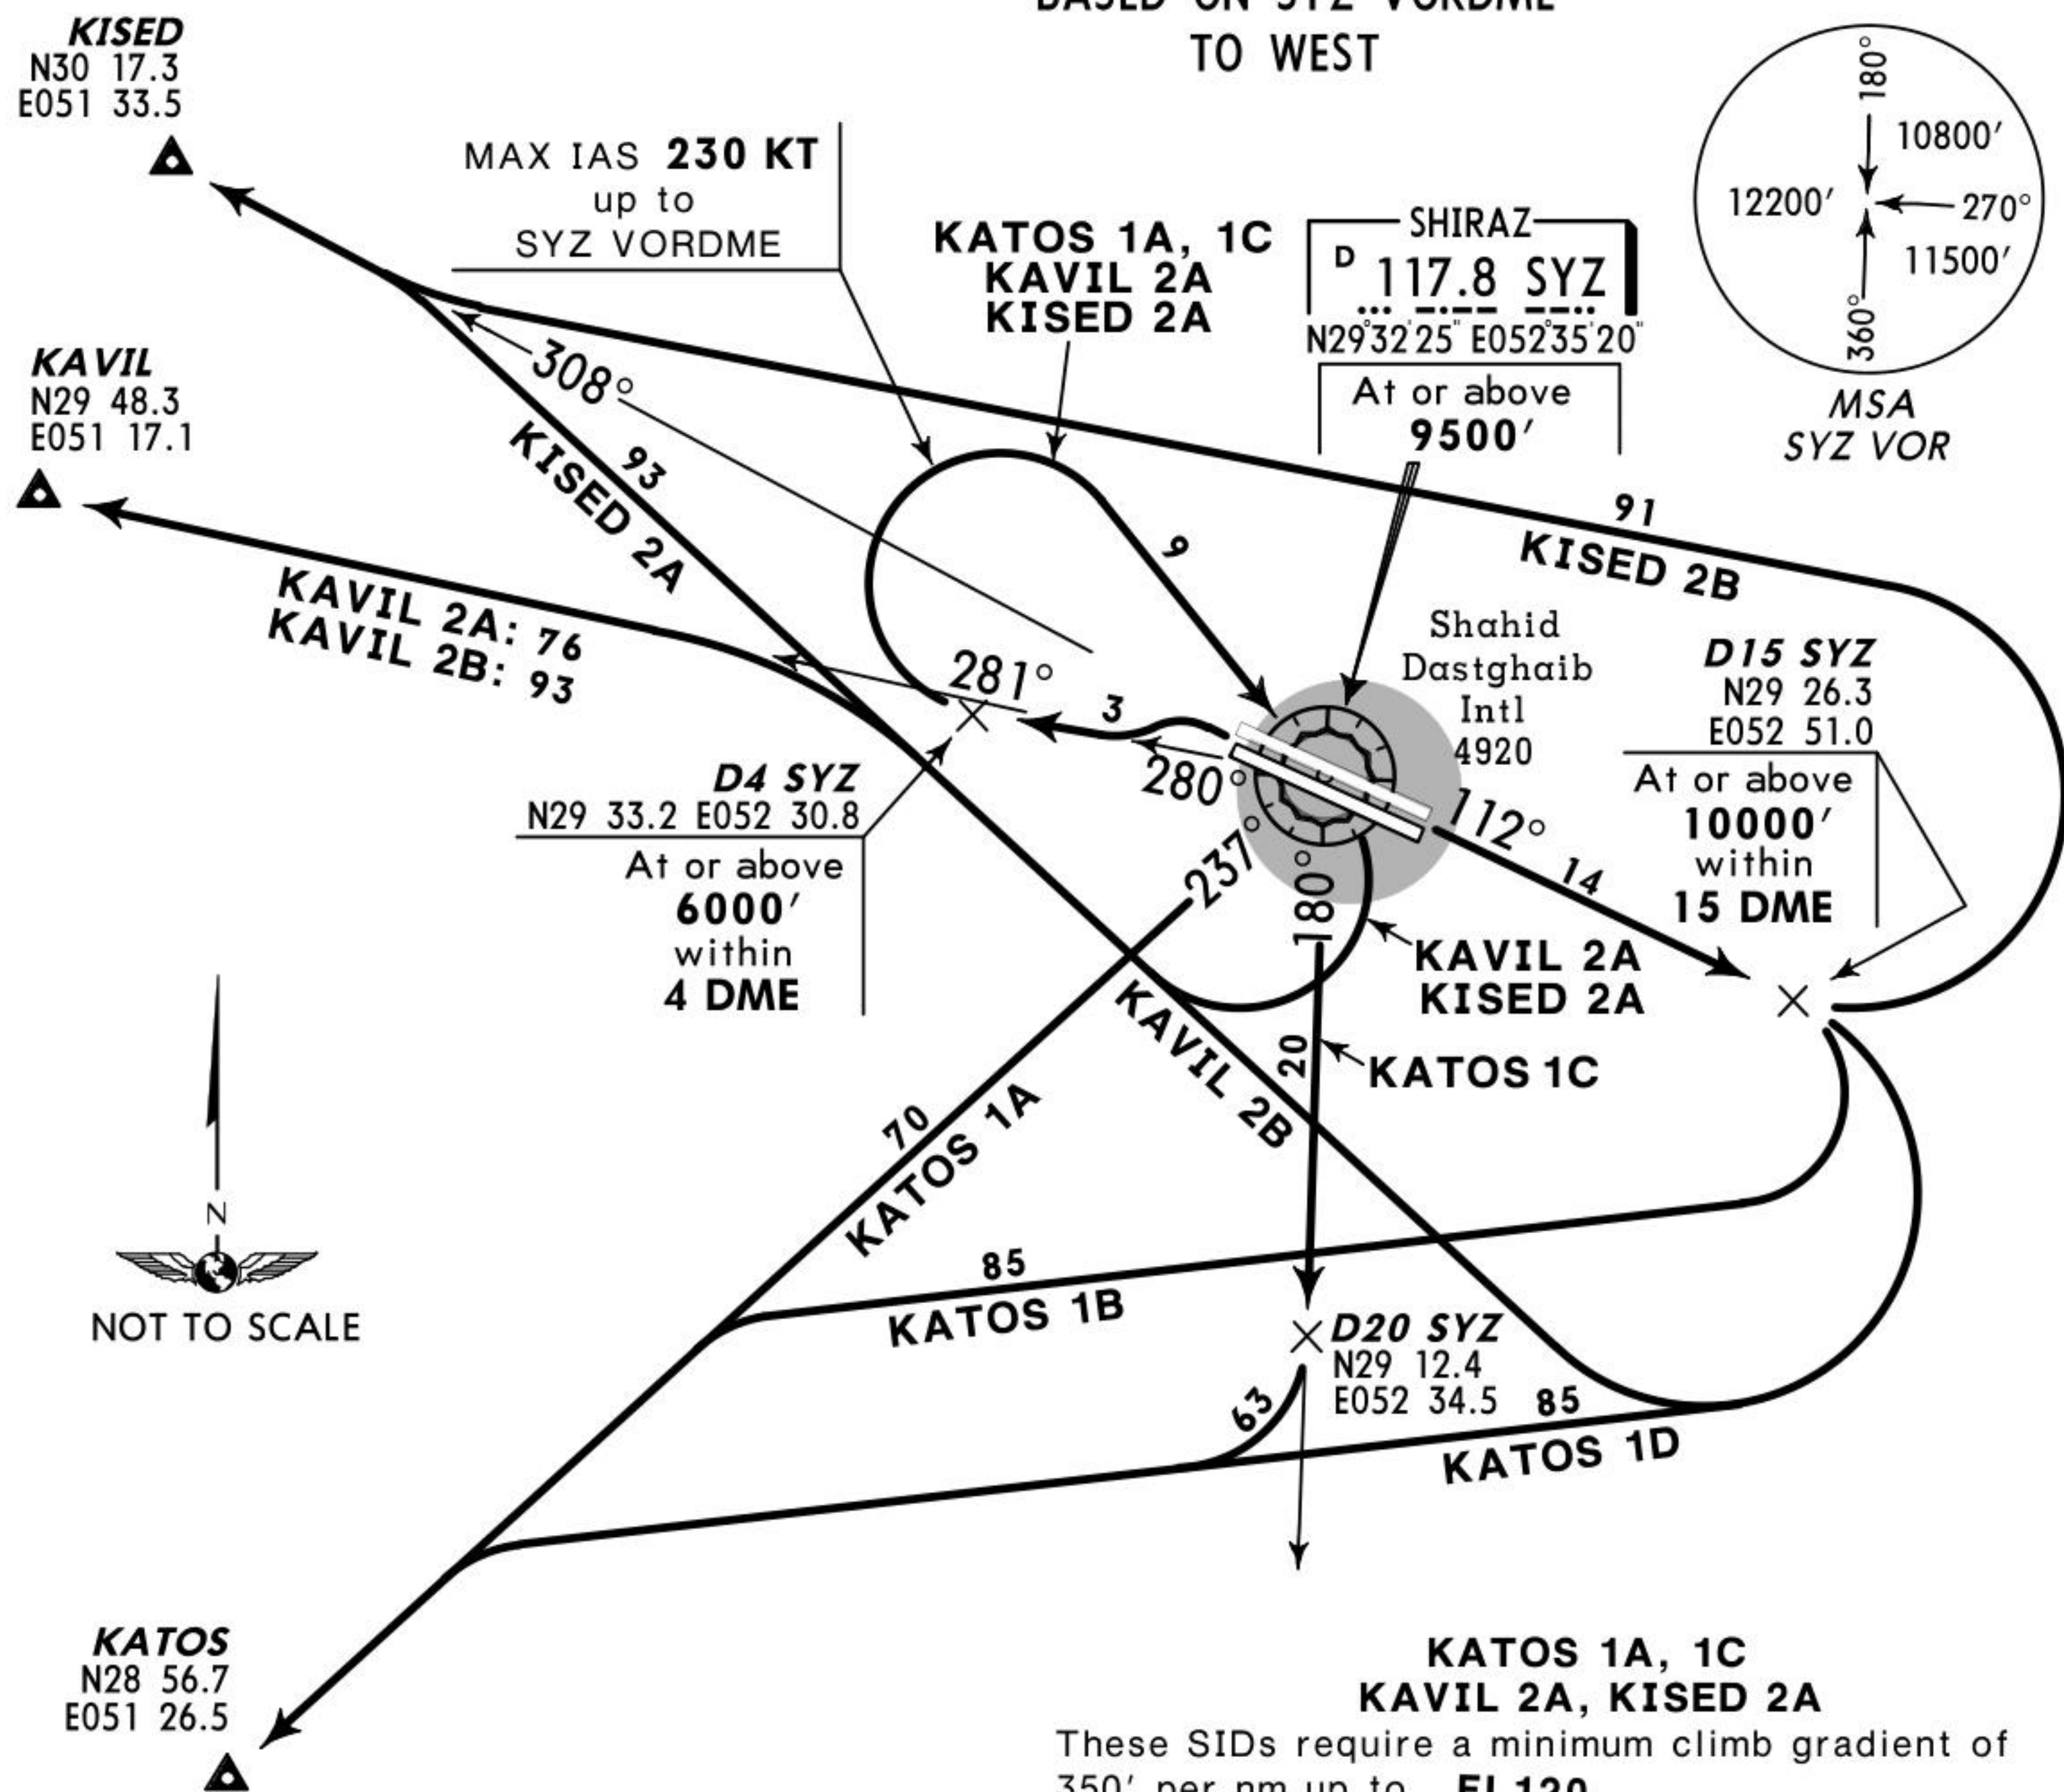TRANS LEVEL: BY ATC
TRANS ALT: 11500'KATOS 1A, KATOS 1B, KATOS 1C, KATOS 1D
KAVIL 2A, KAVIL 2B, KISED 2A, KISED 2B
DEPARTURES(RWYS 29L/R, 11L/R)
BASED ON SYZ VORDME
TO WESTKATOS 1A, 1C
KAVIL 2A, KISED 2AThese SIDs require a minimum climb gradient of
350' per nm up to **FL120**.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750

SID	RWY	TAKE-OFF	ALTITUDE
KATOS 1A KATOS 1C KAVIL 2A KISED 2A	29L/R	Turn LEFT, intercept SYZ R-280 to 6000' or above within SYZ 4 DME, at D4 SYZ turn RIGHT to SYZ VORDME (MAX IAS 230 KT up to SYZ VORDME), turn RIGHT.	Cross SYZ VORDME at or above 9500' .
KATOS 1B KATOS 1D KAVIL 2B KISED 2B	11L/R	Intercept SYZ R-112 to 10000' or above within SYZ 15 DME.	
SID	ROUTING		
KATOS 1A	Intercept SYZ R-237 to Katos Int, climb to cleared FL .		
KATOS 1B	At D15 SYZ turn RIGHT, intercept SYZ R-237 to Katos Int, climb to cleared FL .		
KATOS 1C	Intercept SYZ R-180 to D20 SYZ, turn RIGHT, intercept SYZ R-237 to Katos Int, climb to cleared FL .		
KATOS 1D	At D15 SYZ turn RIGHT, intercept SYZ R-237 to Katos Int, cross SYZ R-180 beyond D20 SYZ, climb to cleared FL .		
KAVIL 2A	Intercept SYZ R-281 to Kavil Int, climb to cleared FL .		
KAVIL 2B	At D15 SYZ turn RIGHT, intercept SYZ R-281 to Kavil Int, climb to cleared FL .		
KISED 2A	Intercept SYZ R-308 to Kised Int, climb to cleared FL .		
KISED 2B	At D15 SYZ turn LEFT, intercept SYZ R-308 to Kised Int, climb to cleared FL .		





SID

SHIRAZ, IRAN

SHAHID DASTGHAIB INTL

TRANS LEVEL: BY ATC
TRANS ALT: 11500'

KATOS 1E, KATOS 1F DEPARTURES (RWYS 29L/R, 11L/R) BASED ON SR NDB TO WEST

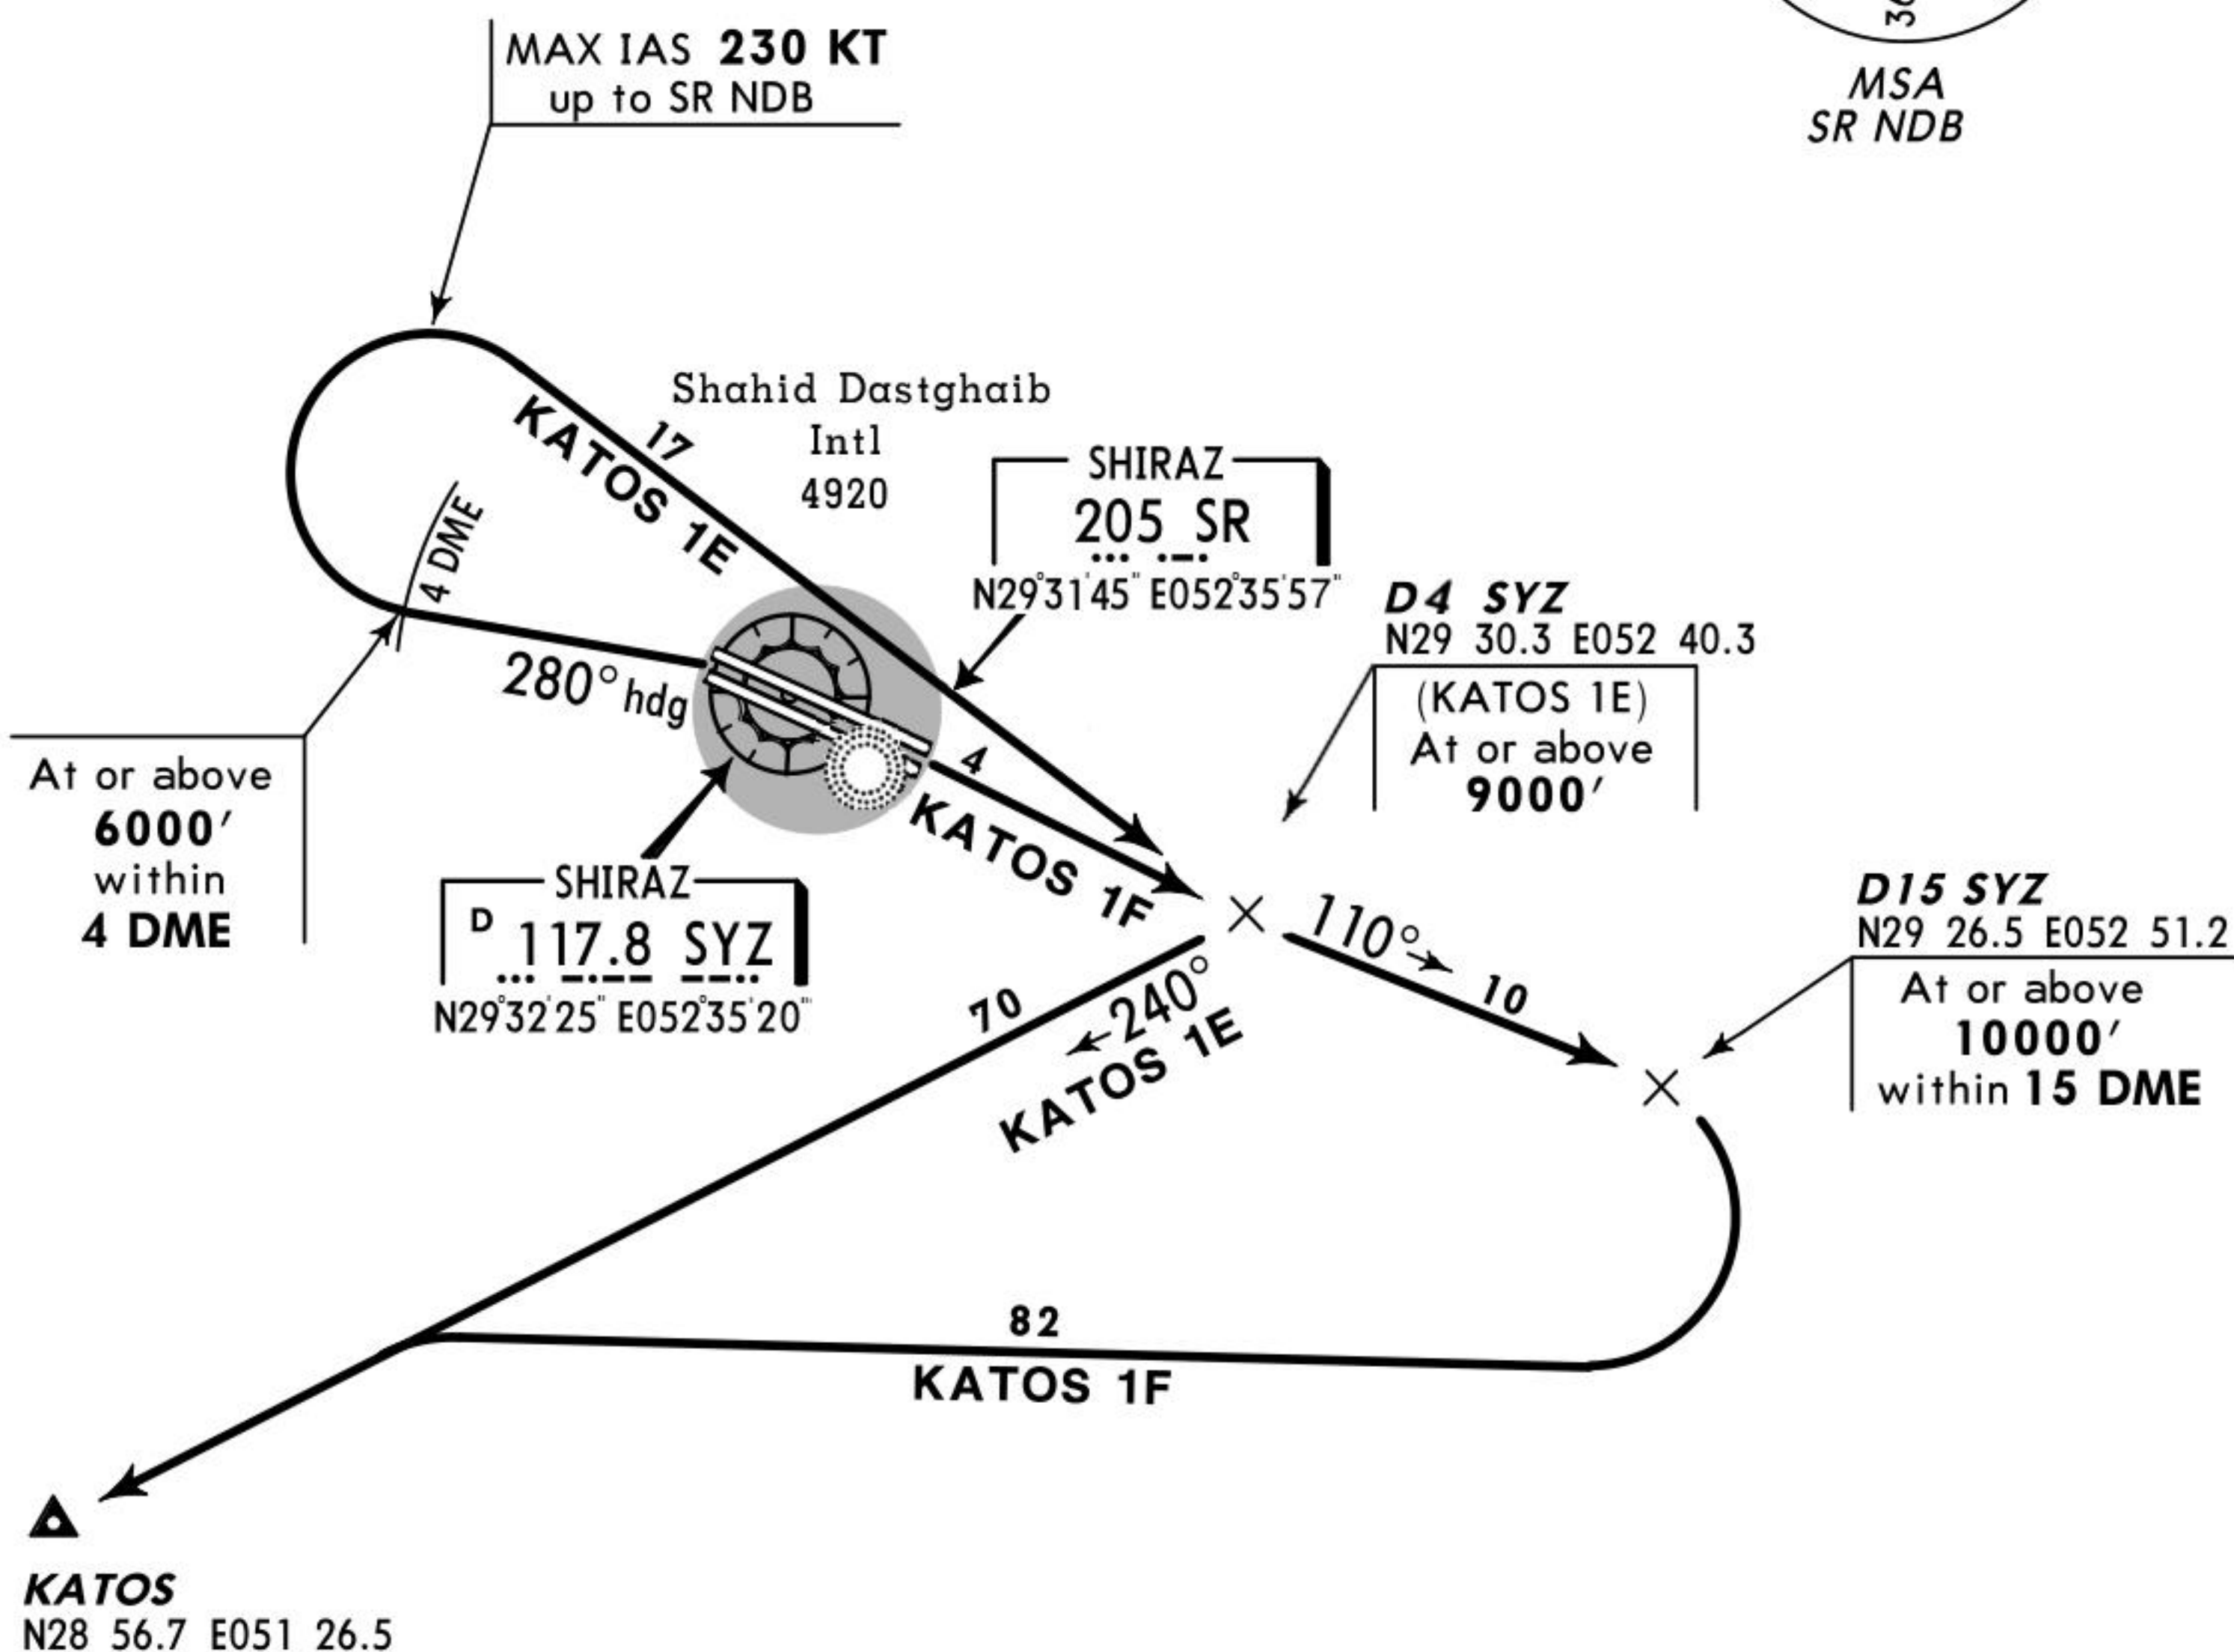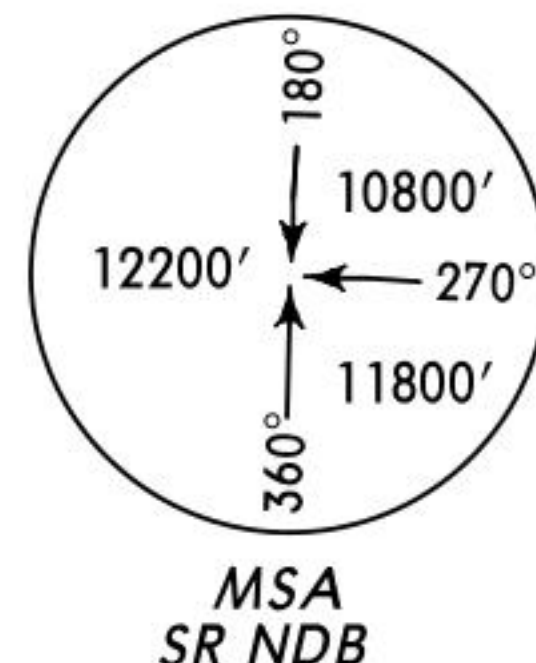

KATOS 1E

This SID requires a minimum climb gradient of 350' per nm.

Gnd speed-Kts	75	100	150	200	250	300
350' per nm	437	583	875	1167	1458	1750

SID	RWY	ROUTING	ALTITUDE
KATOS 1E	29L/R	Turn LEFT, 280° heading to 6000' or above within SYZ 4 DME, at SYZ 4 DME turn RIGHT to SR NDB (MAX IAS 230 KT up to SR NDB), turn RIGHT, 240° bearing to Katos Int, climb to cleared FL.	Cross SR NDB at or above 9000'.
KATOS 1F	11L/R	To SR NDB, 110° bearing to 10000' or above within SYZ 15 DME, at D15 SYZ turn RIGHT, intercept 240° bearing from SR NDB to Katos Int, climb to cleared FL.	



STRAIGHT-IN RWY		A	B	C	D
29L	ILS ❶	5110' (246')	5110' (246')	5110' (246')	5110' (246')
		V800m	V800m	V800m	V800m
	ALS out	V1200m	V1200m	V1200m	V1200m
	LOC	NOT APPLICABLE			
	VOR DME ❷	5520' (656')	5520' (656')	5520' (656')	5520' (656')
		V2800m	V2800m	V2800m	V3200m
	NDB DME	5520' (656')	5520' (656')	5520' (656')	5520' (656')
		V2000m	V2000m	V2800m	V3200m
29R	VOR DME ❷	5520' (658')	5520' (658')	5520' (658')	5520' (658')
		V2800m	V2800m	V2800m	V3200m
	NDB DME	5520' (658')	5520' (658')	5520' (658')	5520' (658')
		V2000m	V2000m	V2800m	V3200m


❶ Missed apch climb gradient mim 6.0%. ❷ Missed apch climb gradient mim 5.0%.



CIRCLE-TO-LAND ❸	100 KT	135 KT	180 KT	205 KT
	5780' (894')	5780' (894')	6390' (1504')	6390' (1504')
	V1600m	V2000m	V4800m	V4800m


❸ Not authorized North of airport.

Take-off RWY 11L/R, 29L/R

RL		NIL (Day only)
A	400m	500m
B		
C		
D		

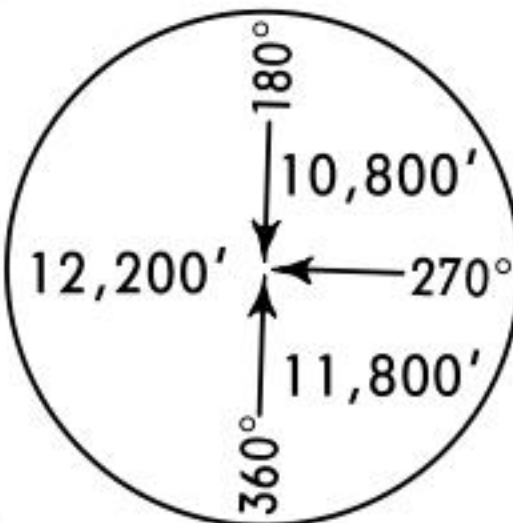
ATIS		SHIRAZ Approach			SHIRAZ Tower	
127.0		119.0 131.4 134.1			121.90 250.35 (Military)	
LOC ISYZ 108.5	Final Apch Crs 293°	GS D3.8 ISYZ 6074' (1210')	ILS DA(H) 5097' (233')	Apt Elev 4920' RWY 4879'		
MISSED APCH: Climb on 293° from NDB to 7000' within D3.0 SYZ, then climbing turn RIGHT onto 140° to NDB. After passing NDB establish on 113° from NDB climbing to 10500' and rejoin holding.						
Alt Set: hPa	Rwy Elev: 166 hPa	Trans level: By ATC	Trans alt: 11500' (6636')			
					MSA SYZ VOR	

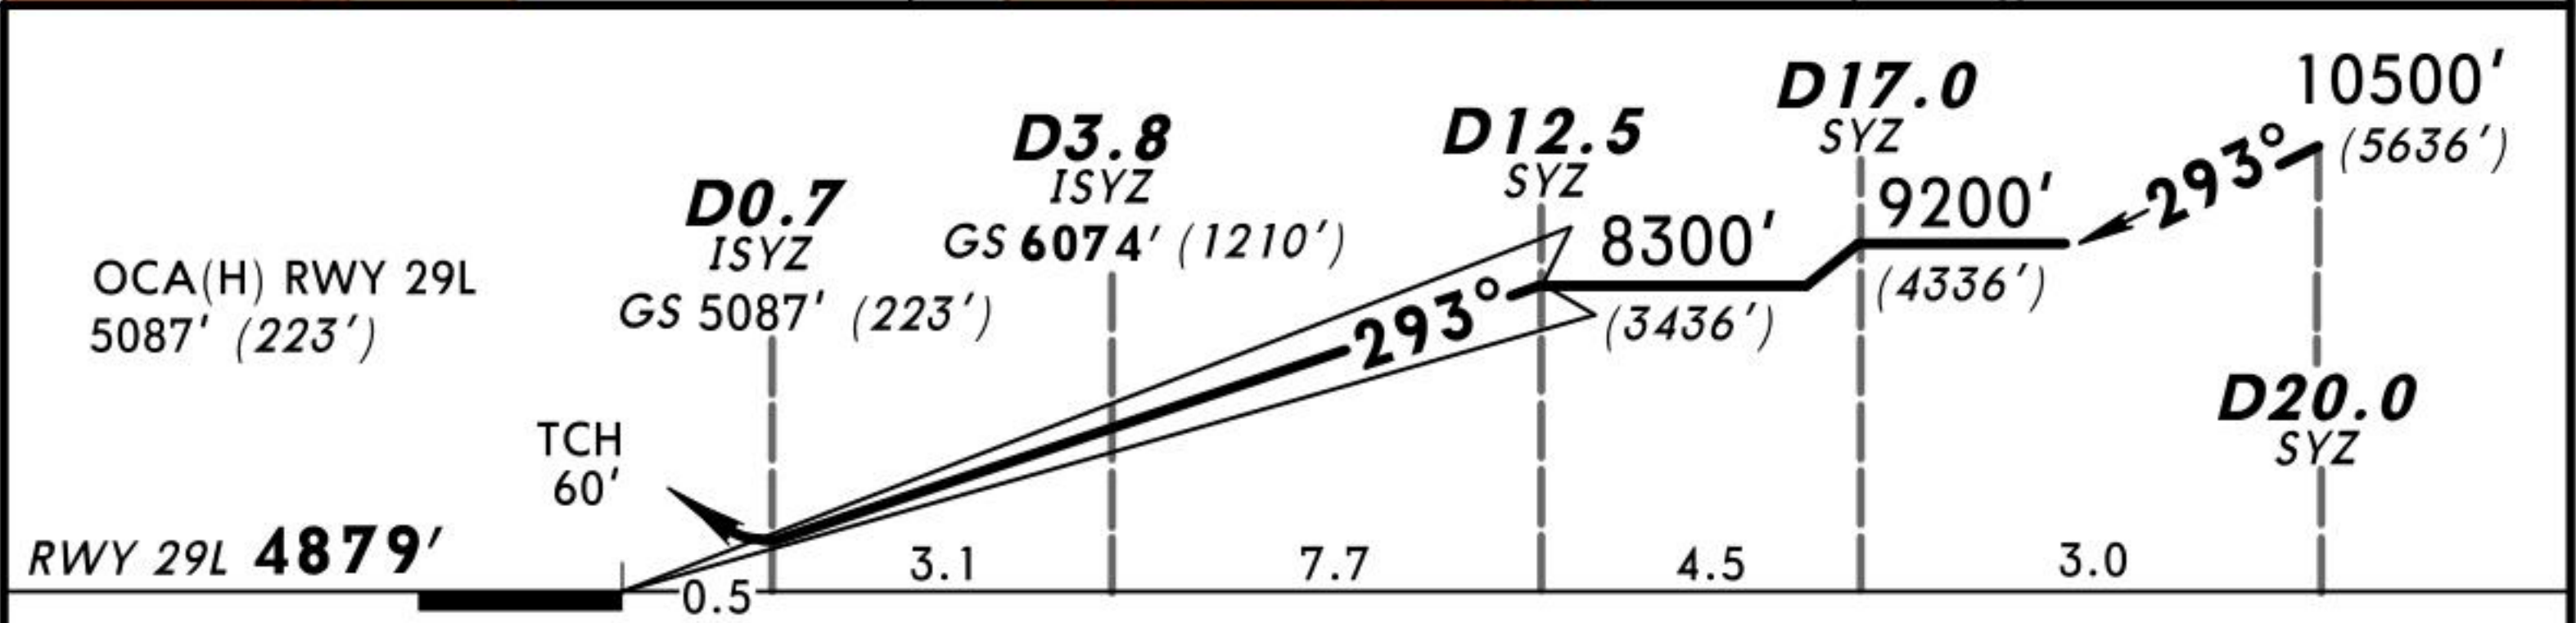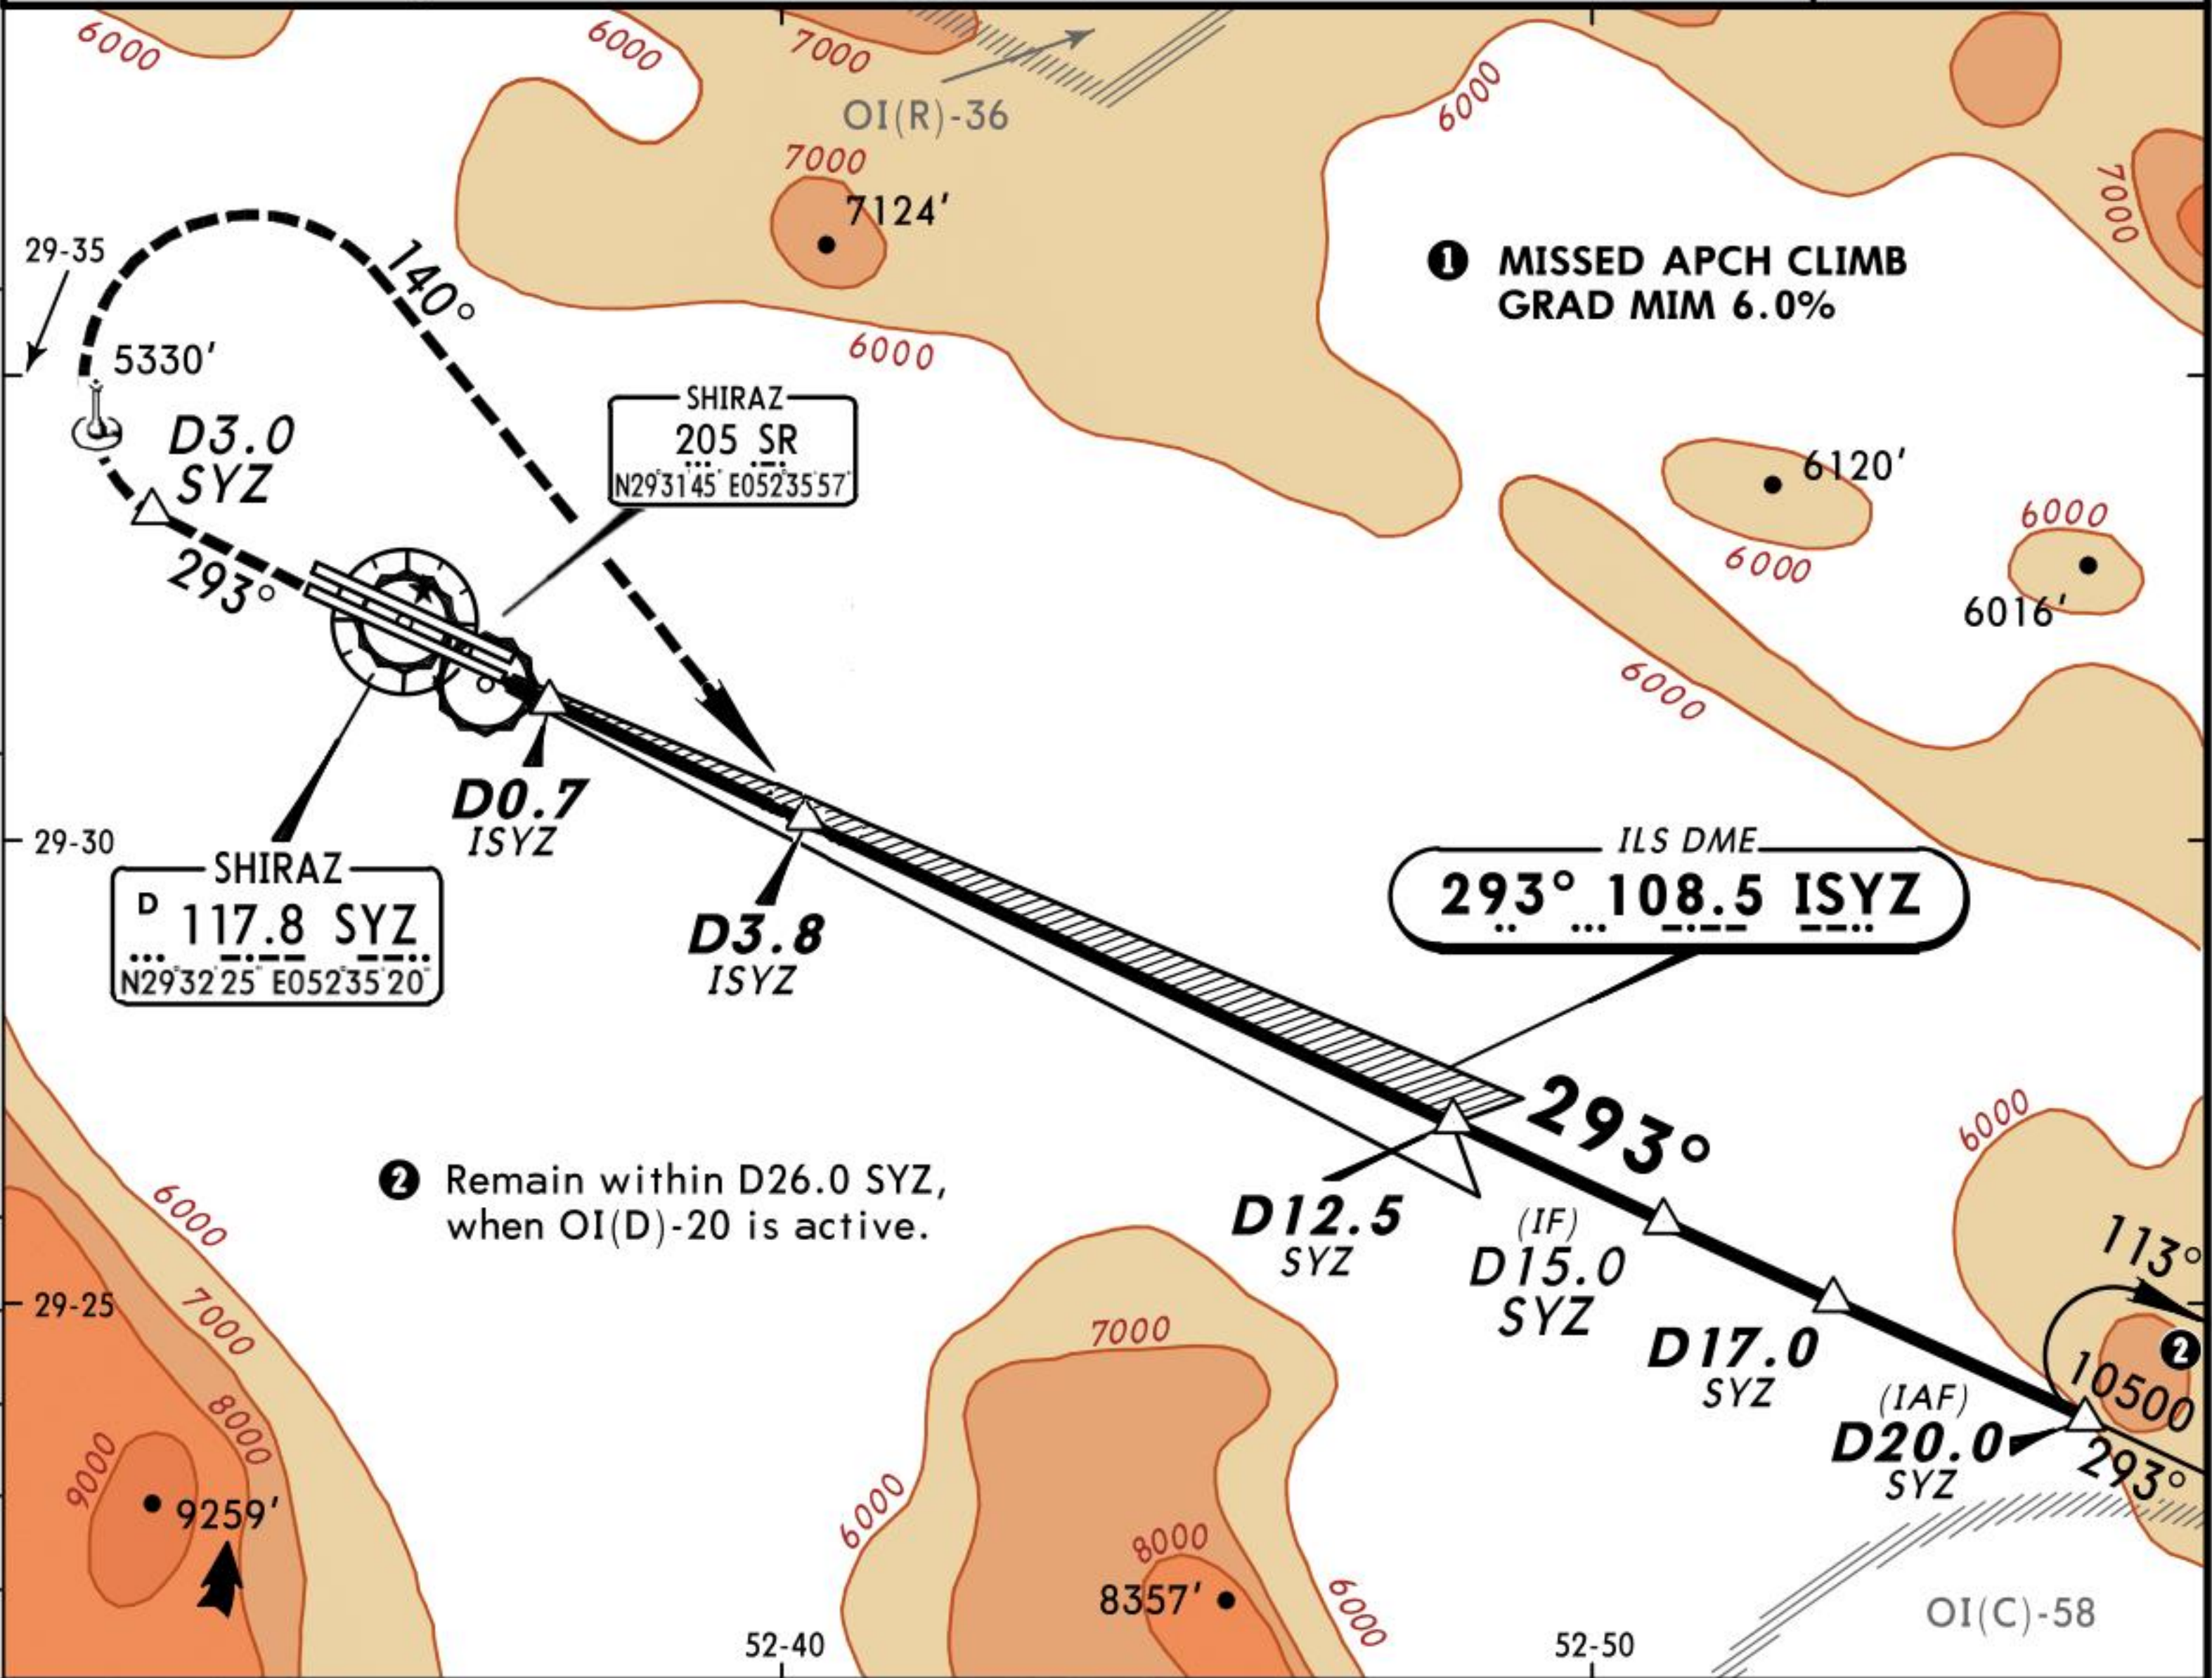

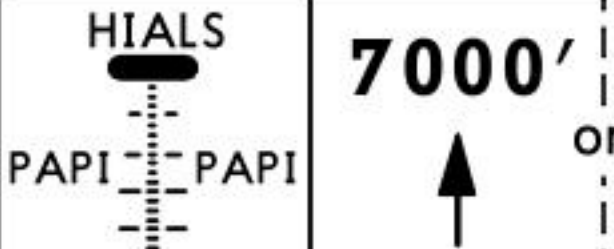Gnd speed-Kts	70	90	100	120	140	160		
GS	3.00°	377	484	538	646	753		


STRAIGHT-IN LANDING RWY 29L				CIRCLE-TO-LAND			
Missed apch climb gradient mim 6.0%				Not authorized North of airport			
ILS		LOC (GS out)					
DA(H) 5097' (233')							
FULL		ALS out		Max Kts	MDA(H)		
A				100	5780' (860')		
B				135	5780' (860')		
C	800m	1200m	NOT APPLICABLE	180	6390' (1470')		
D				205			



A circular traverse diagram showing four points connected by lines. The interior angles are labeled as follows: 10,800' at the top point, 11,800' at the bottom point, and 12,200' at the left point. The bearings are labeled as follows: 180° at the top point, 270° at the right point, and 360° at the bottom point.




Gnd speed-Kts		70	90	100	120	140	160			HIALS	
---------------	--	----	----	-----	-----	-----	-----	--	--	---	--

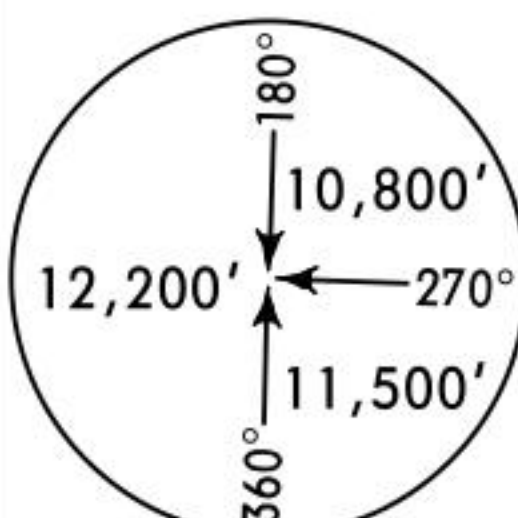



ATIS		SHIRAZ Approach			SHIRAZ Tower	
127.0		119.0 131.4 134.1			121.90 250.35 (Military)	
VOR 117.8 N29°32'25" E052°35'20"	SYZ Final Apch Crs RWY 29L 296° RWY 29R 292°	Minimum Alt D7.0 7100' (2236')	MDA(H) Refer to Minimums	Apt Elev 4920' RWY 29L 4879' RWY 29R 4879'		
MISSED APCH: Climb STRAIGHT AHEAD to VOR, follow R-292 climbing to 7000' within D3.0, then climbing turn RIGHT onto 140° SR NDB to intercept and follow R-110. At 10000' turn LEFT, follow 15 DME Arc and rejoin holding at FL 130.					 MSA SYZ VOR	
Alt Set: hPa Rwy Elev: 166 hPa		Trans level: By ATC Trans alt: 11500' (6636')				

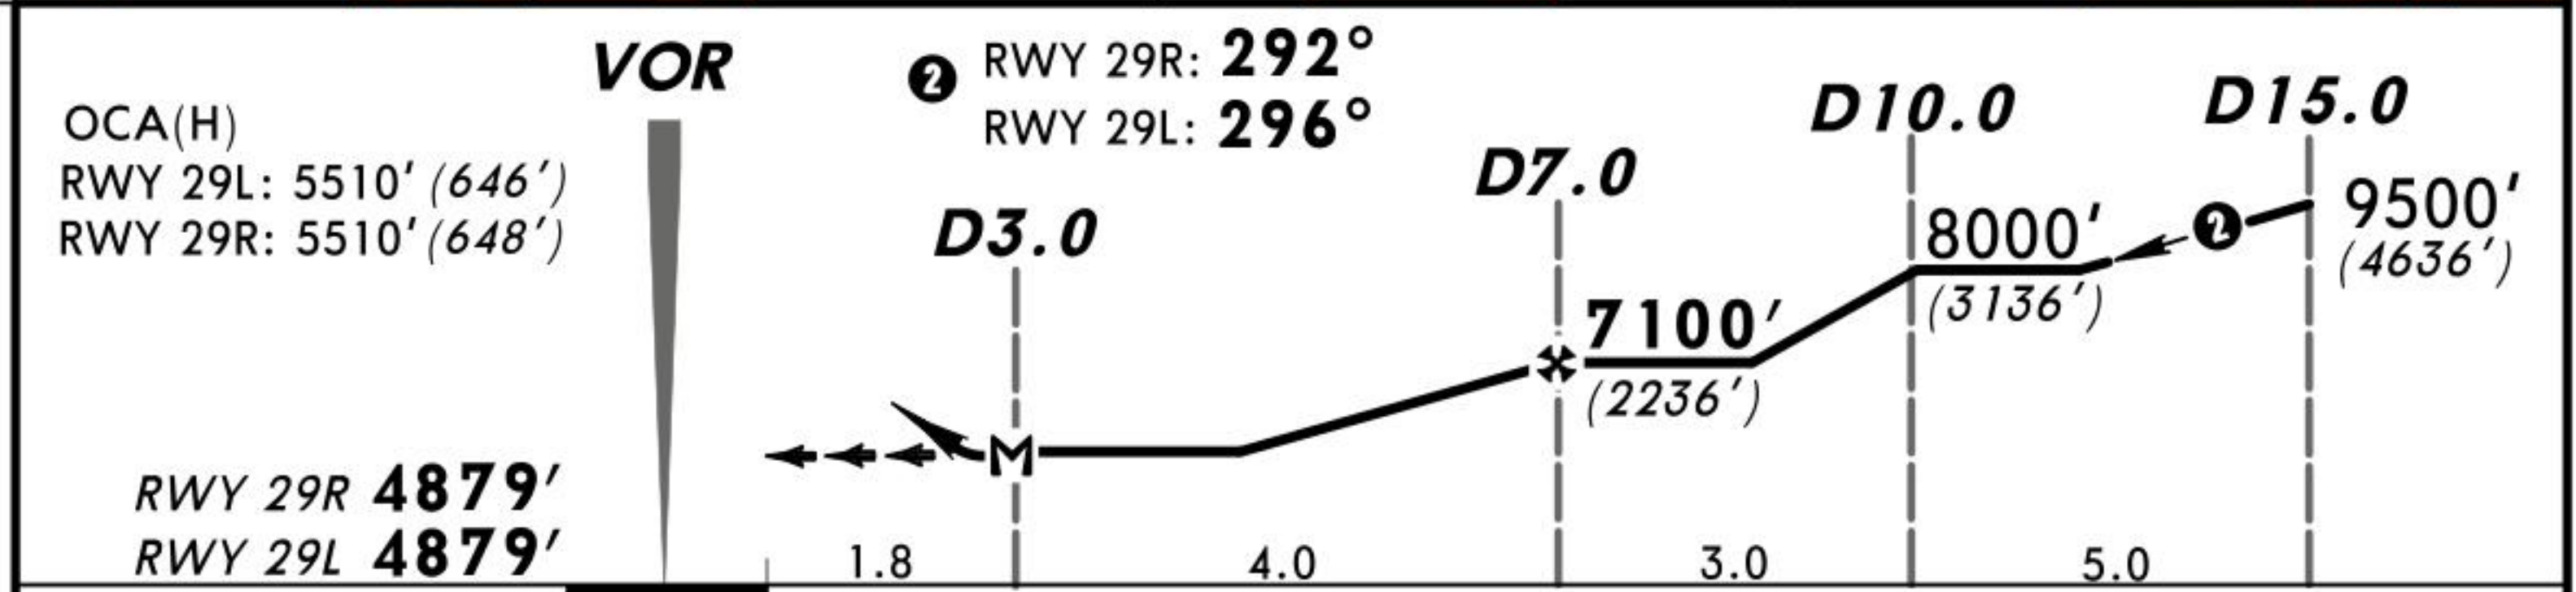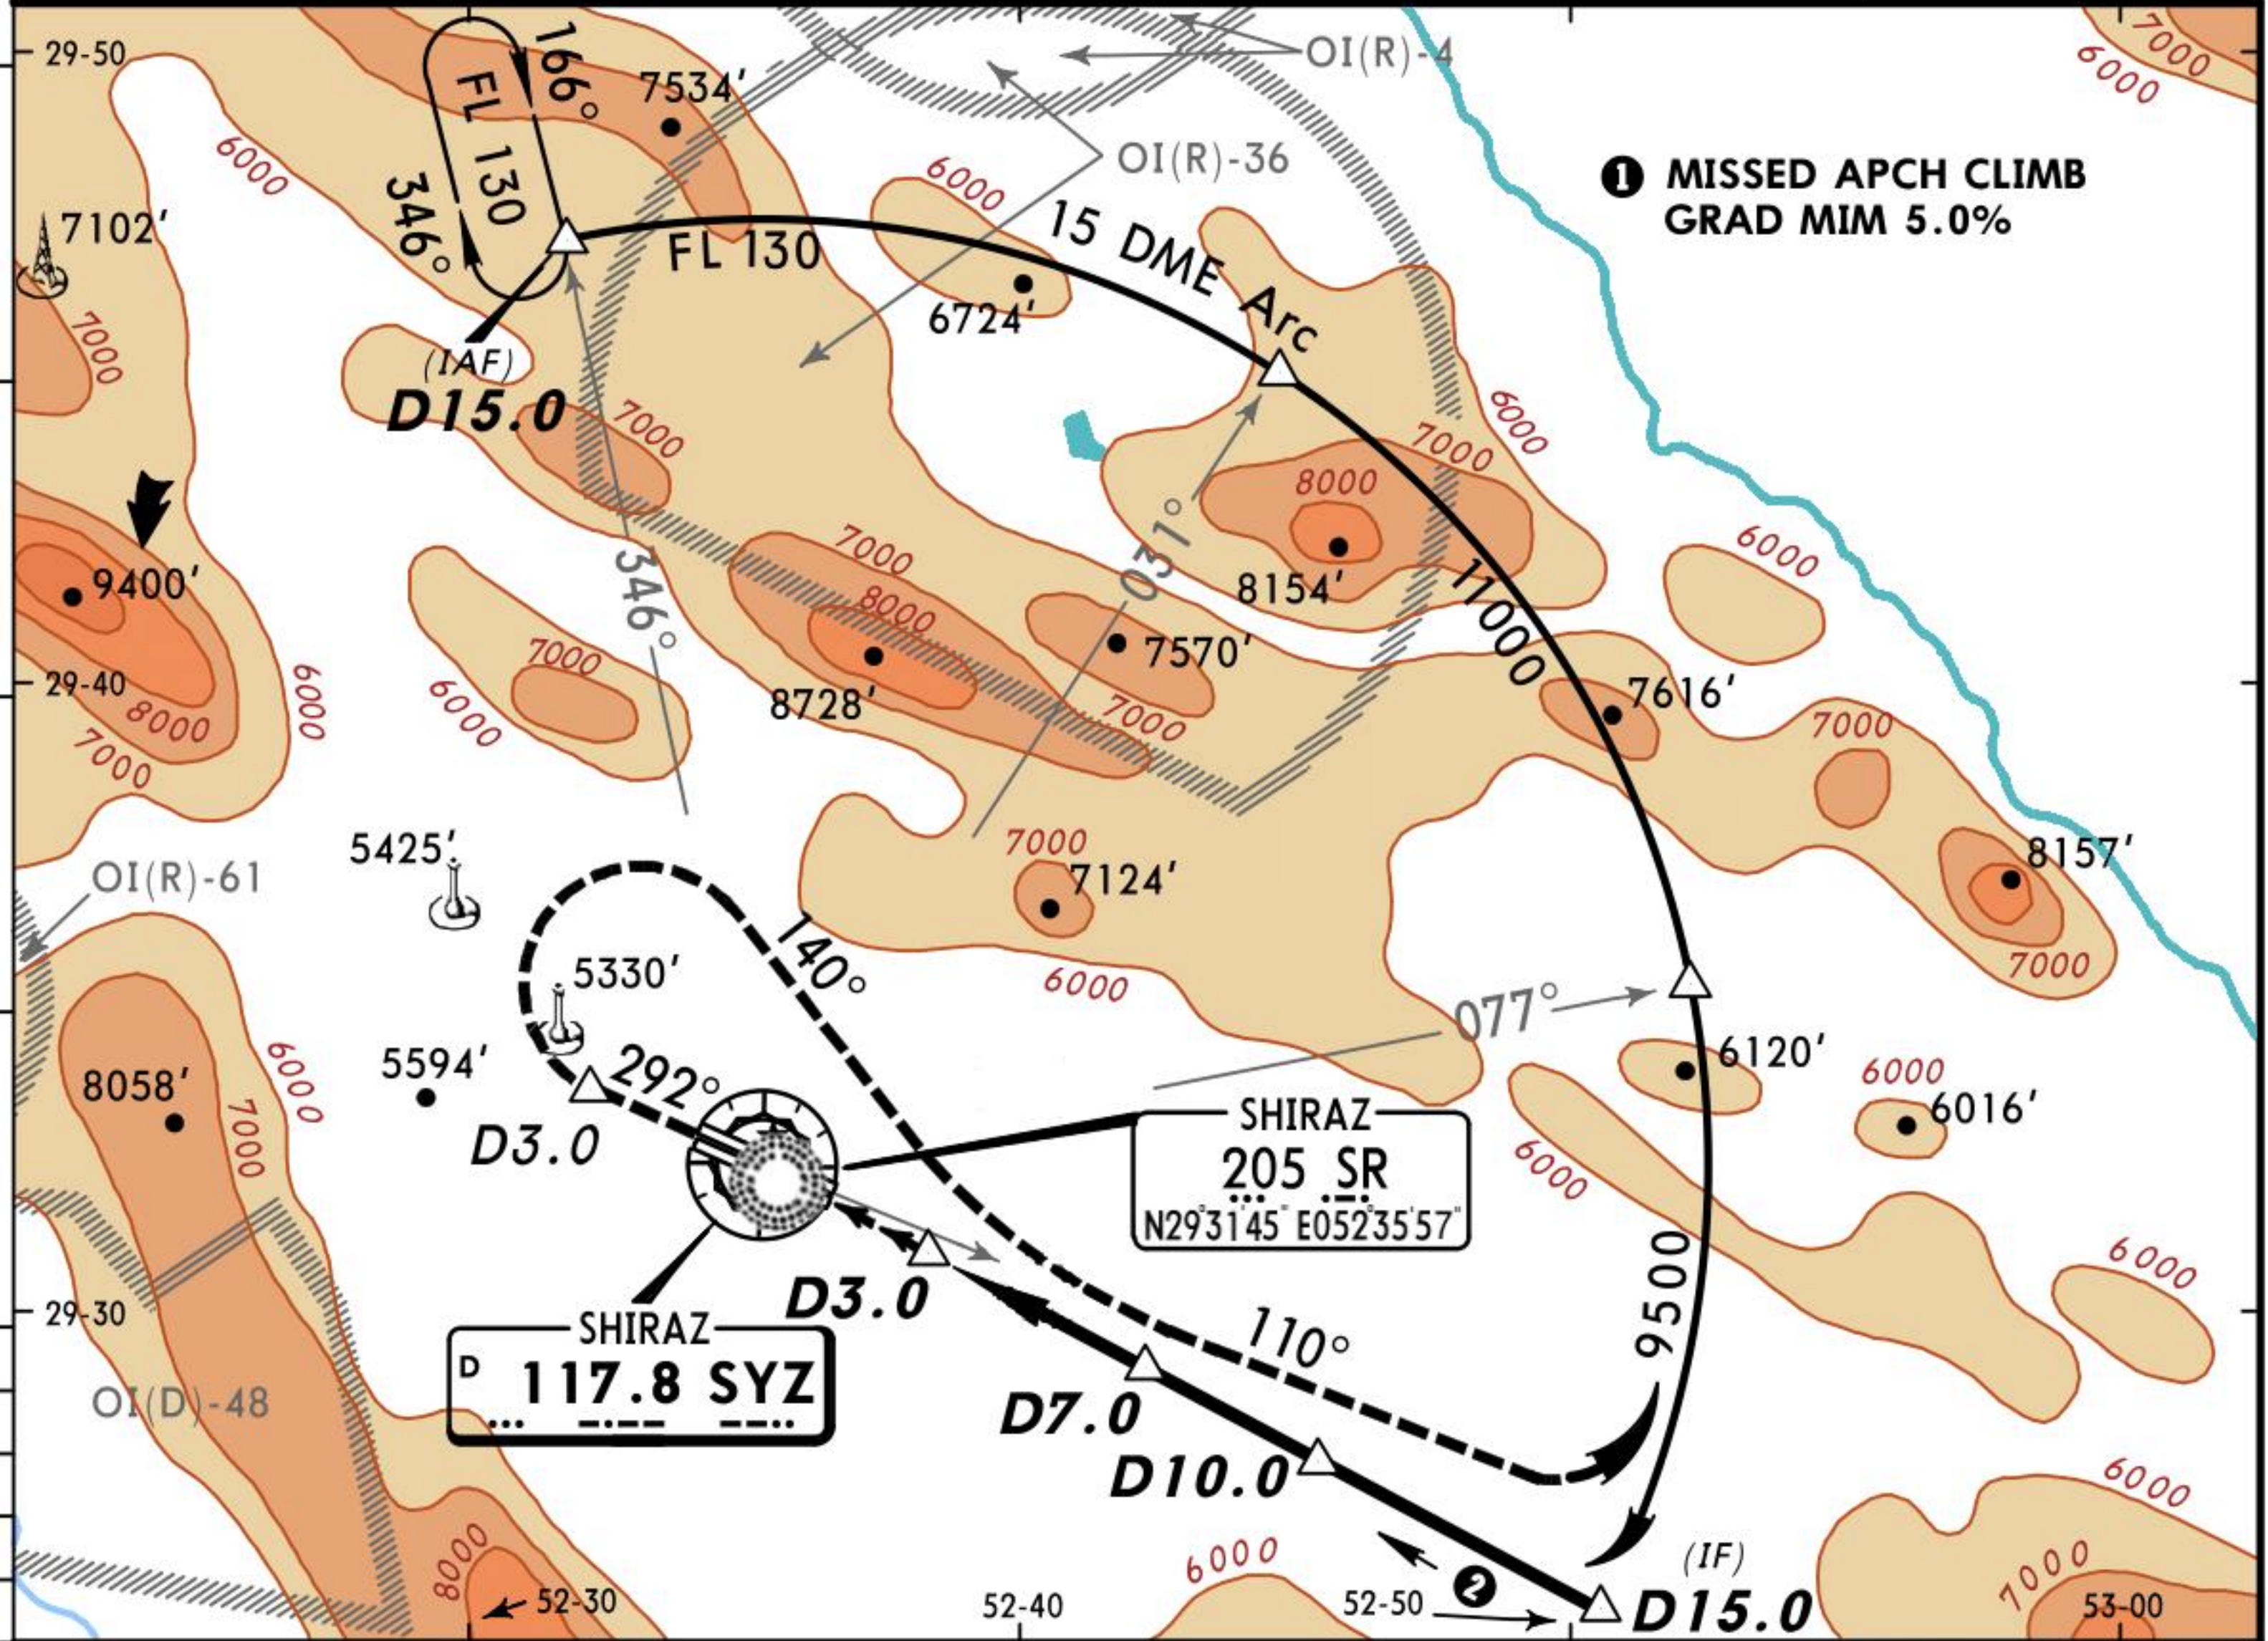

VOR OCA(H) RWY 29L: 5510' (646') RWY 29R: 5510' (648') RWY 29R 4879' RWY 29L 4879'				② RWY 29R: 292° RWY 29L: 296°		D10.0 D15.0		7000' SYZ on 117.8 R-292	
D3.0 D7.0 D10.0 D15.0				7100' (2236') 8000' (3136') 9500' (4636')		1.8 4.0 3.0 5.0			
MAP at D3.0									




STRAIGHT-IN LANDING RWY 29L/R				CIRCLE-TO-LAND			
Missed apch climb gradient mim 5.0%				Not authorized North of airport			
MDA(H)		RWY 29L: 5520' (656')		Max Kts		MDA(H)	
		RWY 29R: 5520' (658')		100		5780' (860')	
		ALS out		135		2800m	
				180		6390' (1470')	
				205		4800m	

ATIS 127.0		SHIRAZ Approach 119.0 131.4 134.1			SHIRAZ Tower 121.90 250.35 (Military)	
VOR 117.8 N29°32'25" E052°35'20"	SYZ	Final Apch Crs RWY 29L 296° RWY 29R 292°	Minimum Alt D7.0 7100' (2236')	MDA(H) Refer to Minimums	Apt Elev 4920' RWY 29L 4879' RWY 29R 4879'	
MISSED APCH: Climb STRAIGHT AHEAD to VOR, follow R-292 climbing to 7000' within D3.0, then climbing turn RIGHT onto 140° SR NDB to intercept and follow R-110. At 10000' turn RIGHT, follow 15 DME Arc and rejoin holding at FL 130.						
Alt Set: hPa	Rwy Elev: 166 hPa	Trans level: By ATC	Trans alt: 11500' (6636')	MSA SYZ VOR		

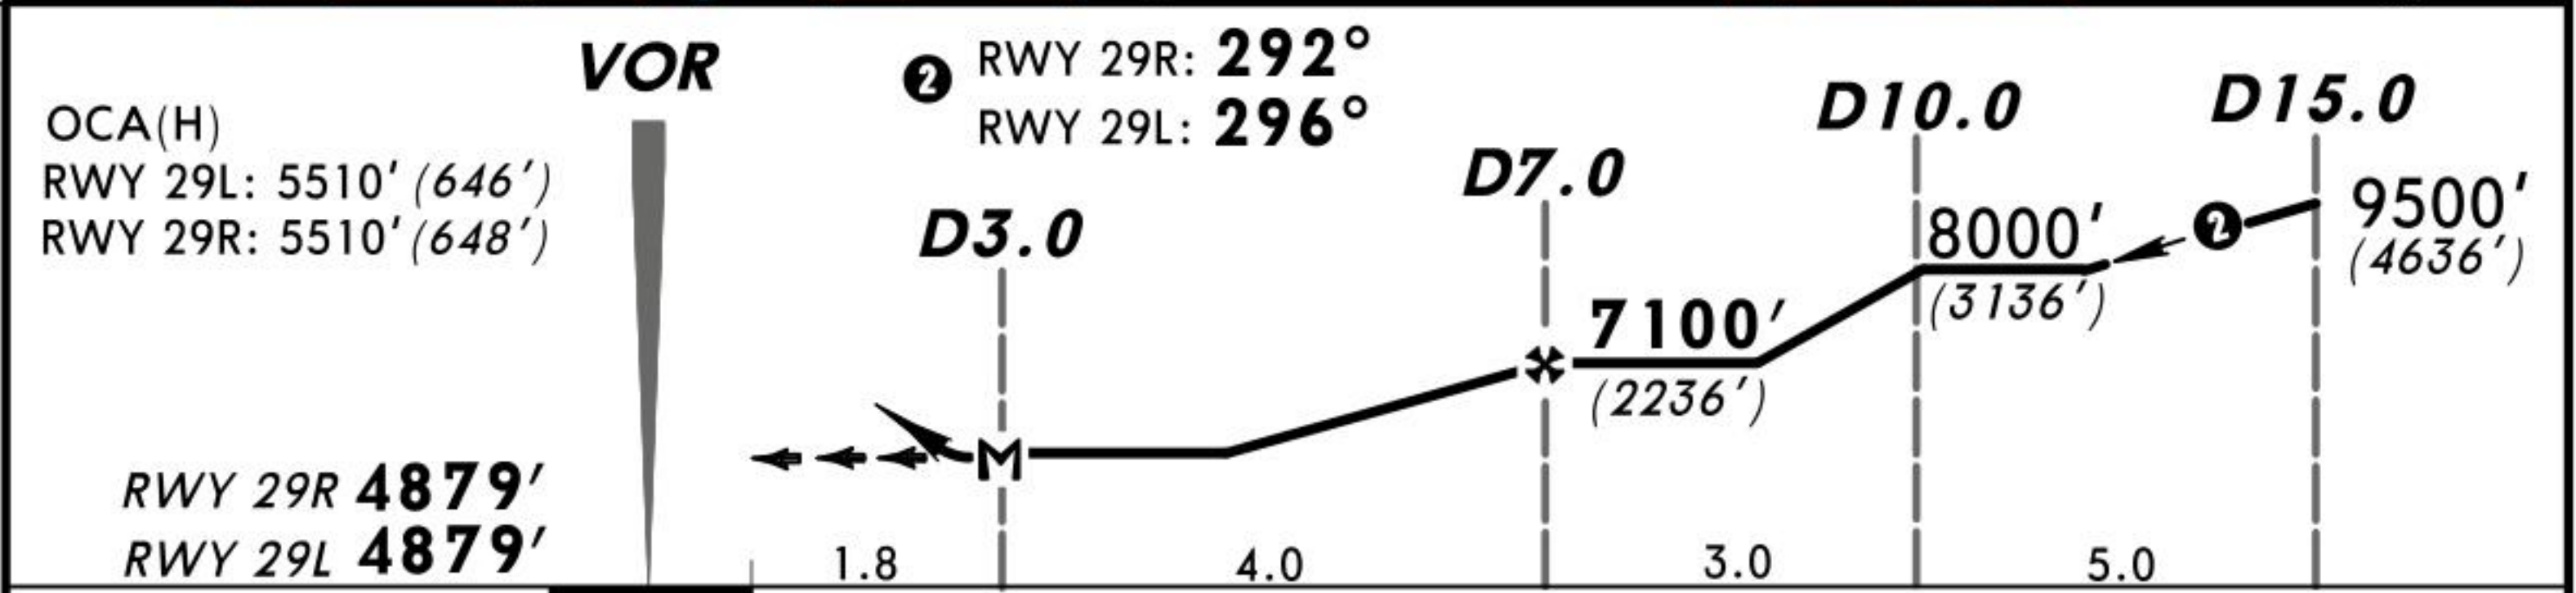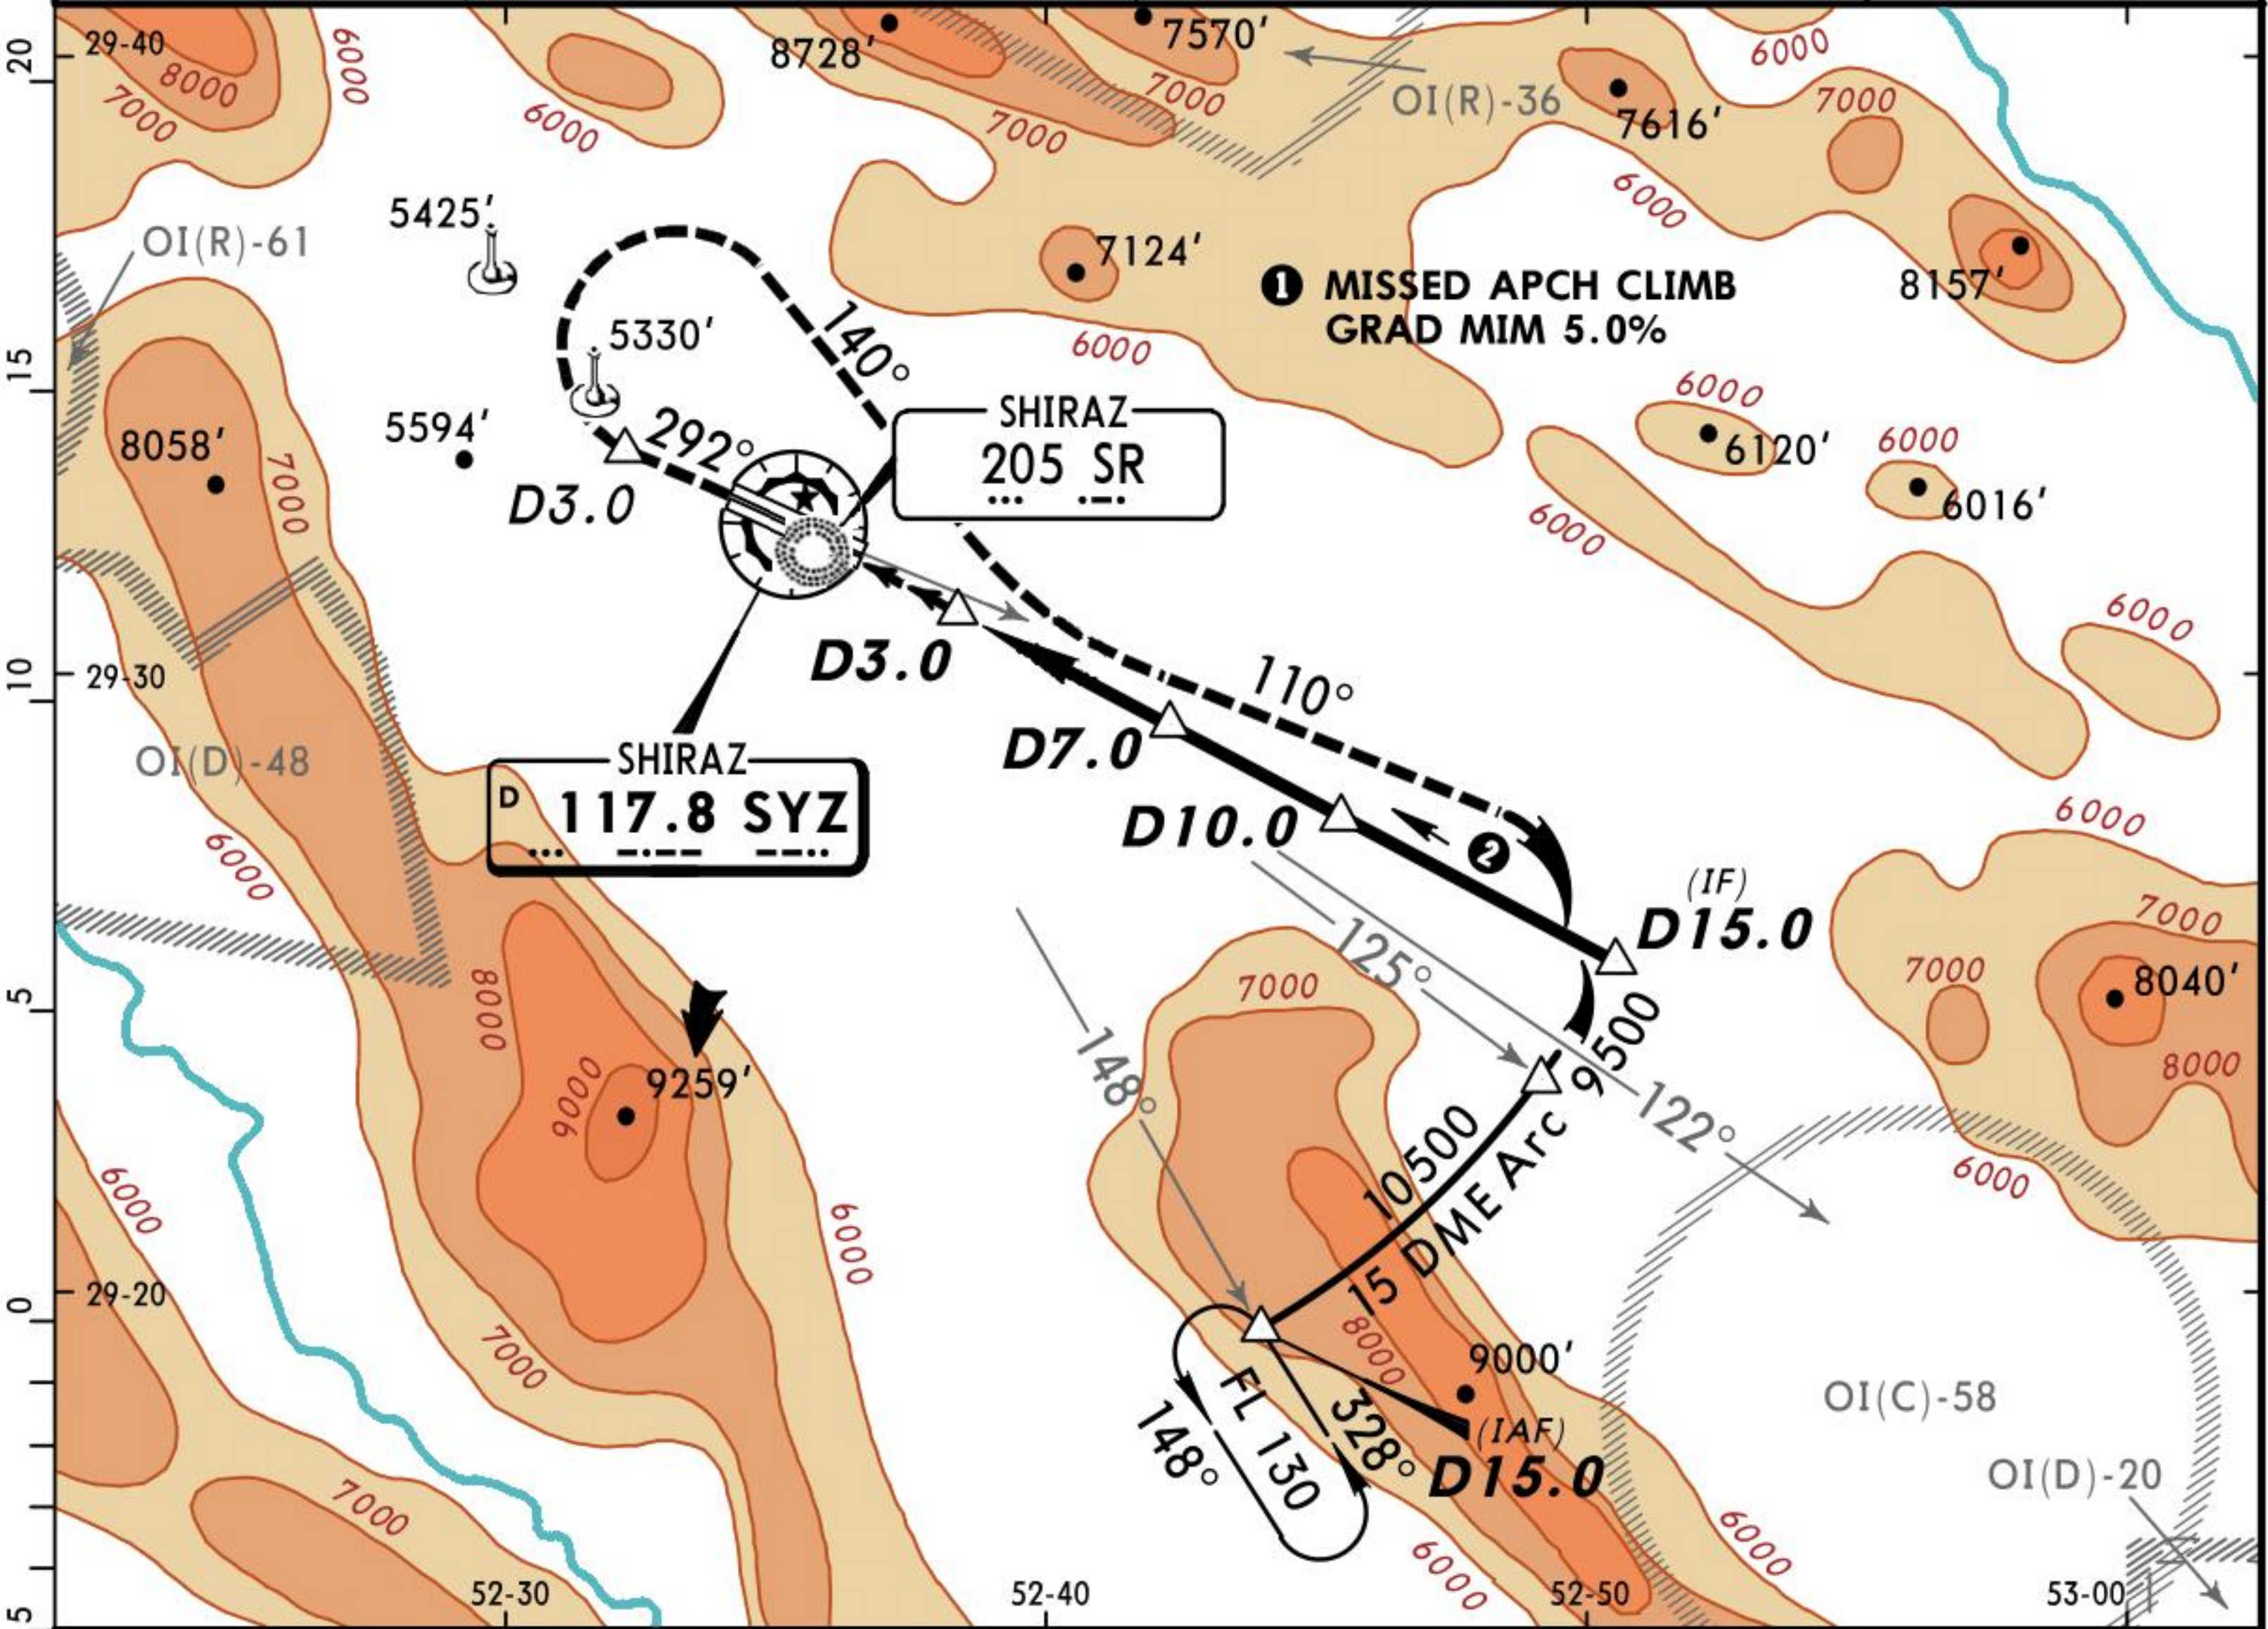

MAP at D3.0						HIALS PAPI PAPI	7000' on 117.8 R-292

STRAIGHT-IN LANDING RWY 29L/R Missed apch climb gradient mim 5.0%			CIRCLE-TO-LAND Not authorized North of airport		
MDA(H) RWY 29L: 5520' (656') RWY 29R: 5520' (658')			MDA(H)		
ALS out			Max Kts		
A			100	5780' (860')	2800m
B	2800m		135		
C			180		
D	3200m		205	6390' (1470')	4800m

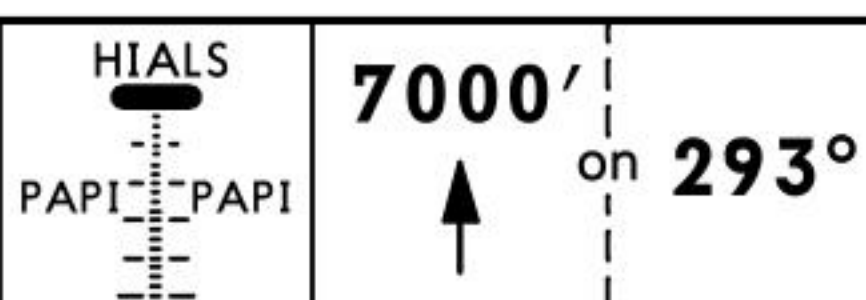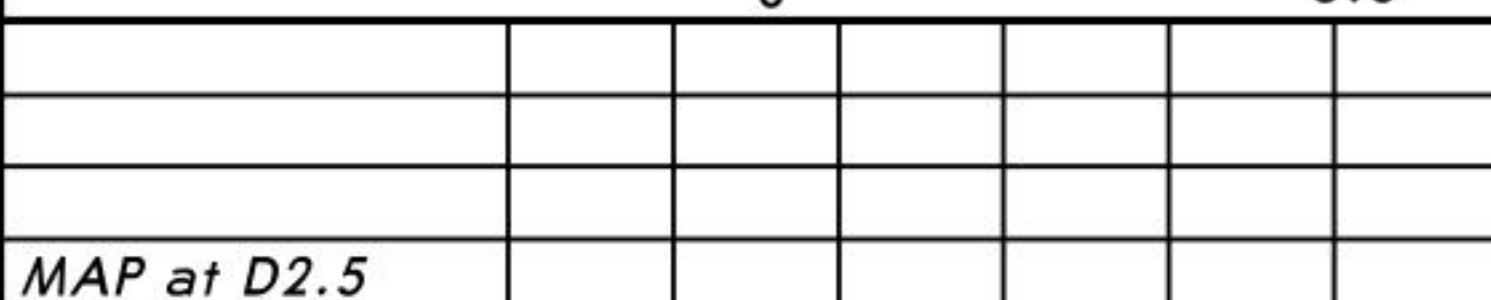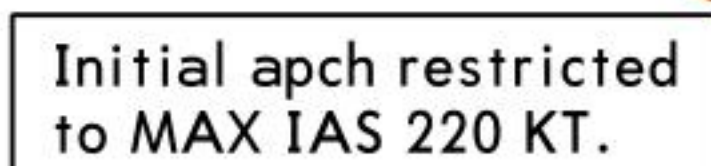

STRAIGHT-IN LANDING RWY 29L/R			CIRCLE-TO-LAND	
<i>MDA(H)</i> RWY 29L: 5520' (656') RWY 29R: 5520' (658')			Not authorized North of airport	
		ALS out	Max Kts.	<i>MDA(H)</i>
A	2000m		100	5780' (860') 2000m
B			135	
C	2800m		180	6390' (1470') 4800m
D	3200m		205	