



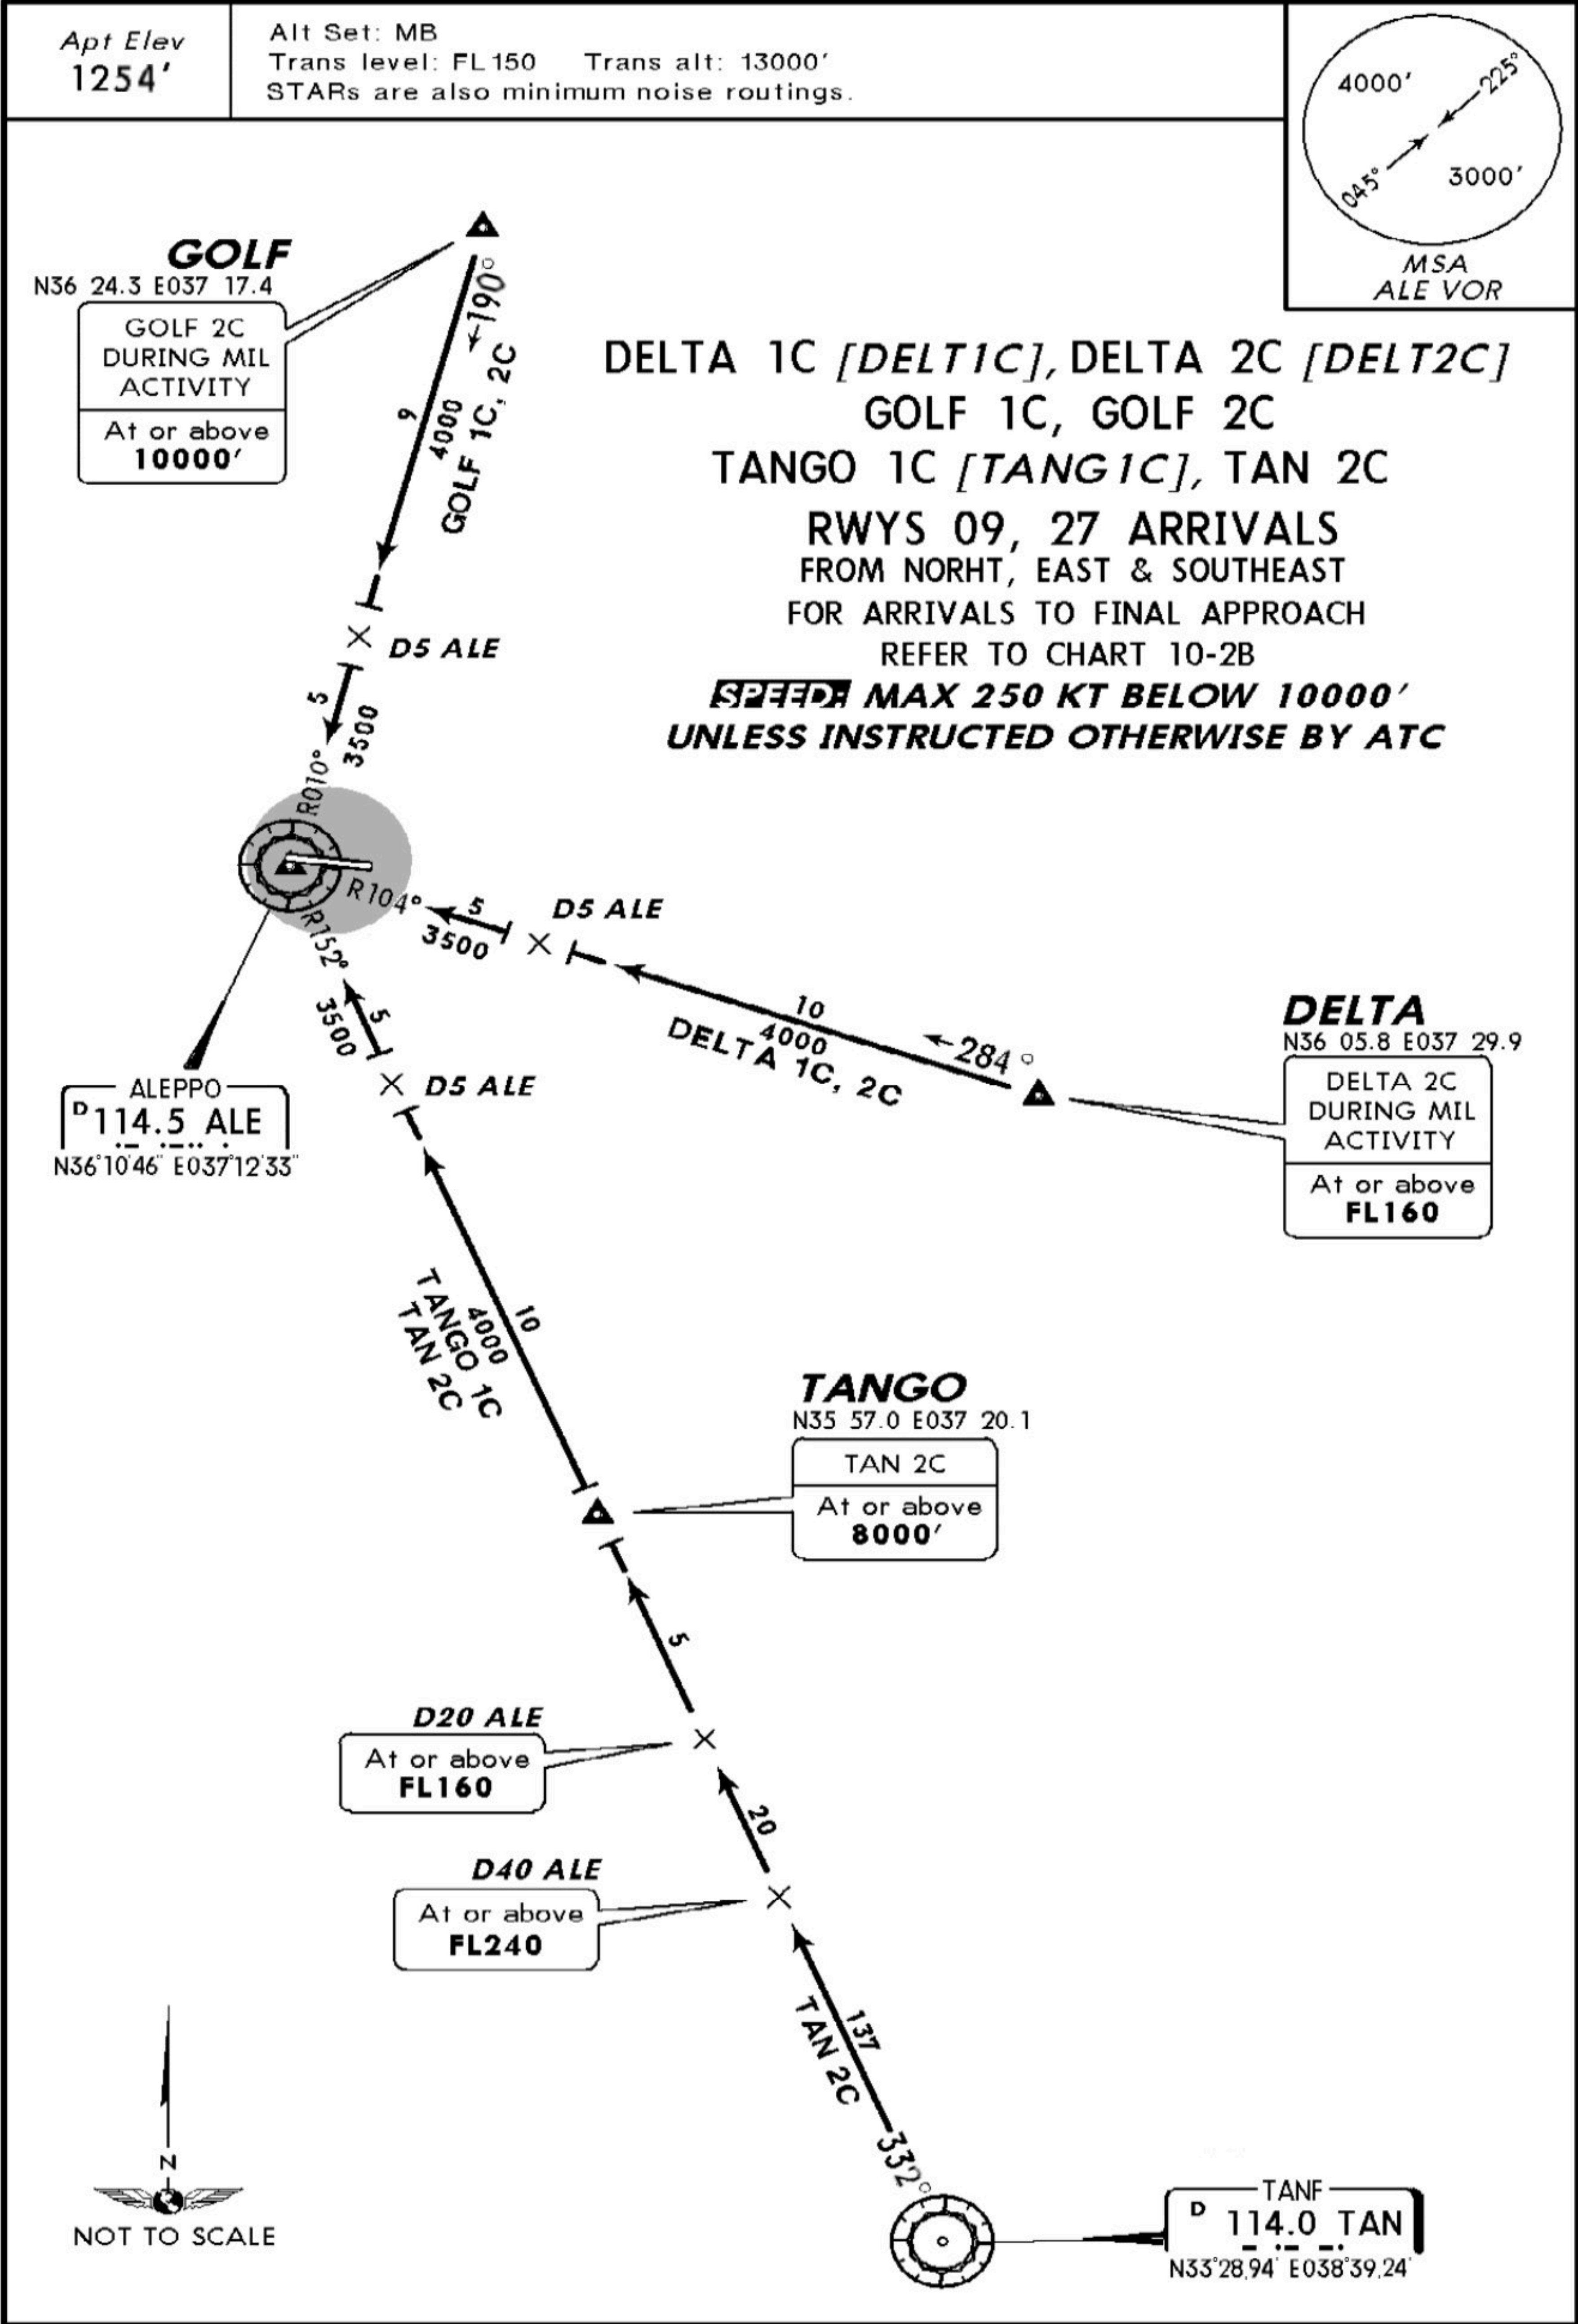


**STAR**

Alt Set: MB
Trans level: FL150 Trans alt: 13000'
STARs are also minimum noise routings.

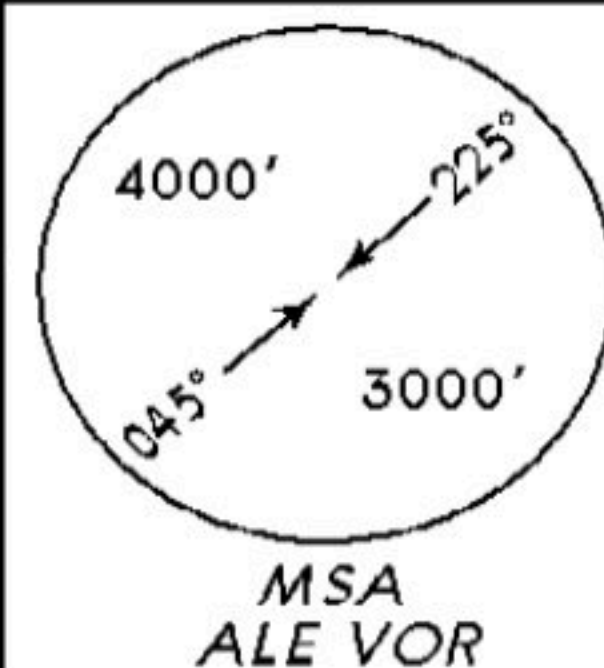


KILO 1C, KTN 2C
 LIMA 1C, LUBAM 2C [LUBA2C]
 RWYS 09, 27 ARRIVALS
 FROM SOUTH & SOUTHWEST
 FOR ARRIVALS TO FINAL APPROACH
 REFER TO CHART 10-2B
~~SPEED~~ MAX 250 KT BELOW 10000'
UNLESS INSTRUCTED OTHERWISE BY ATC

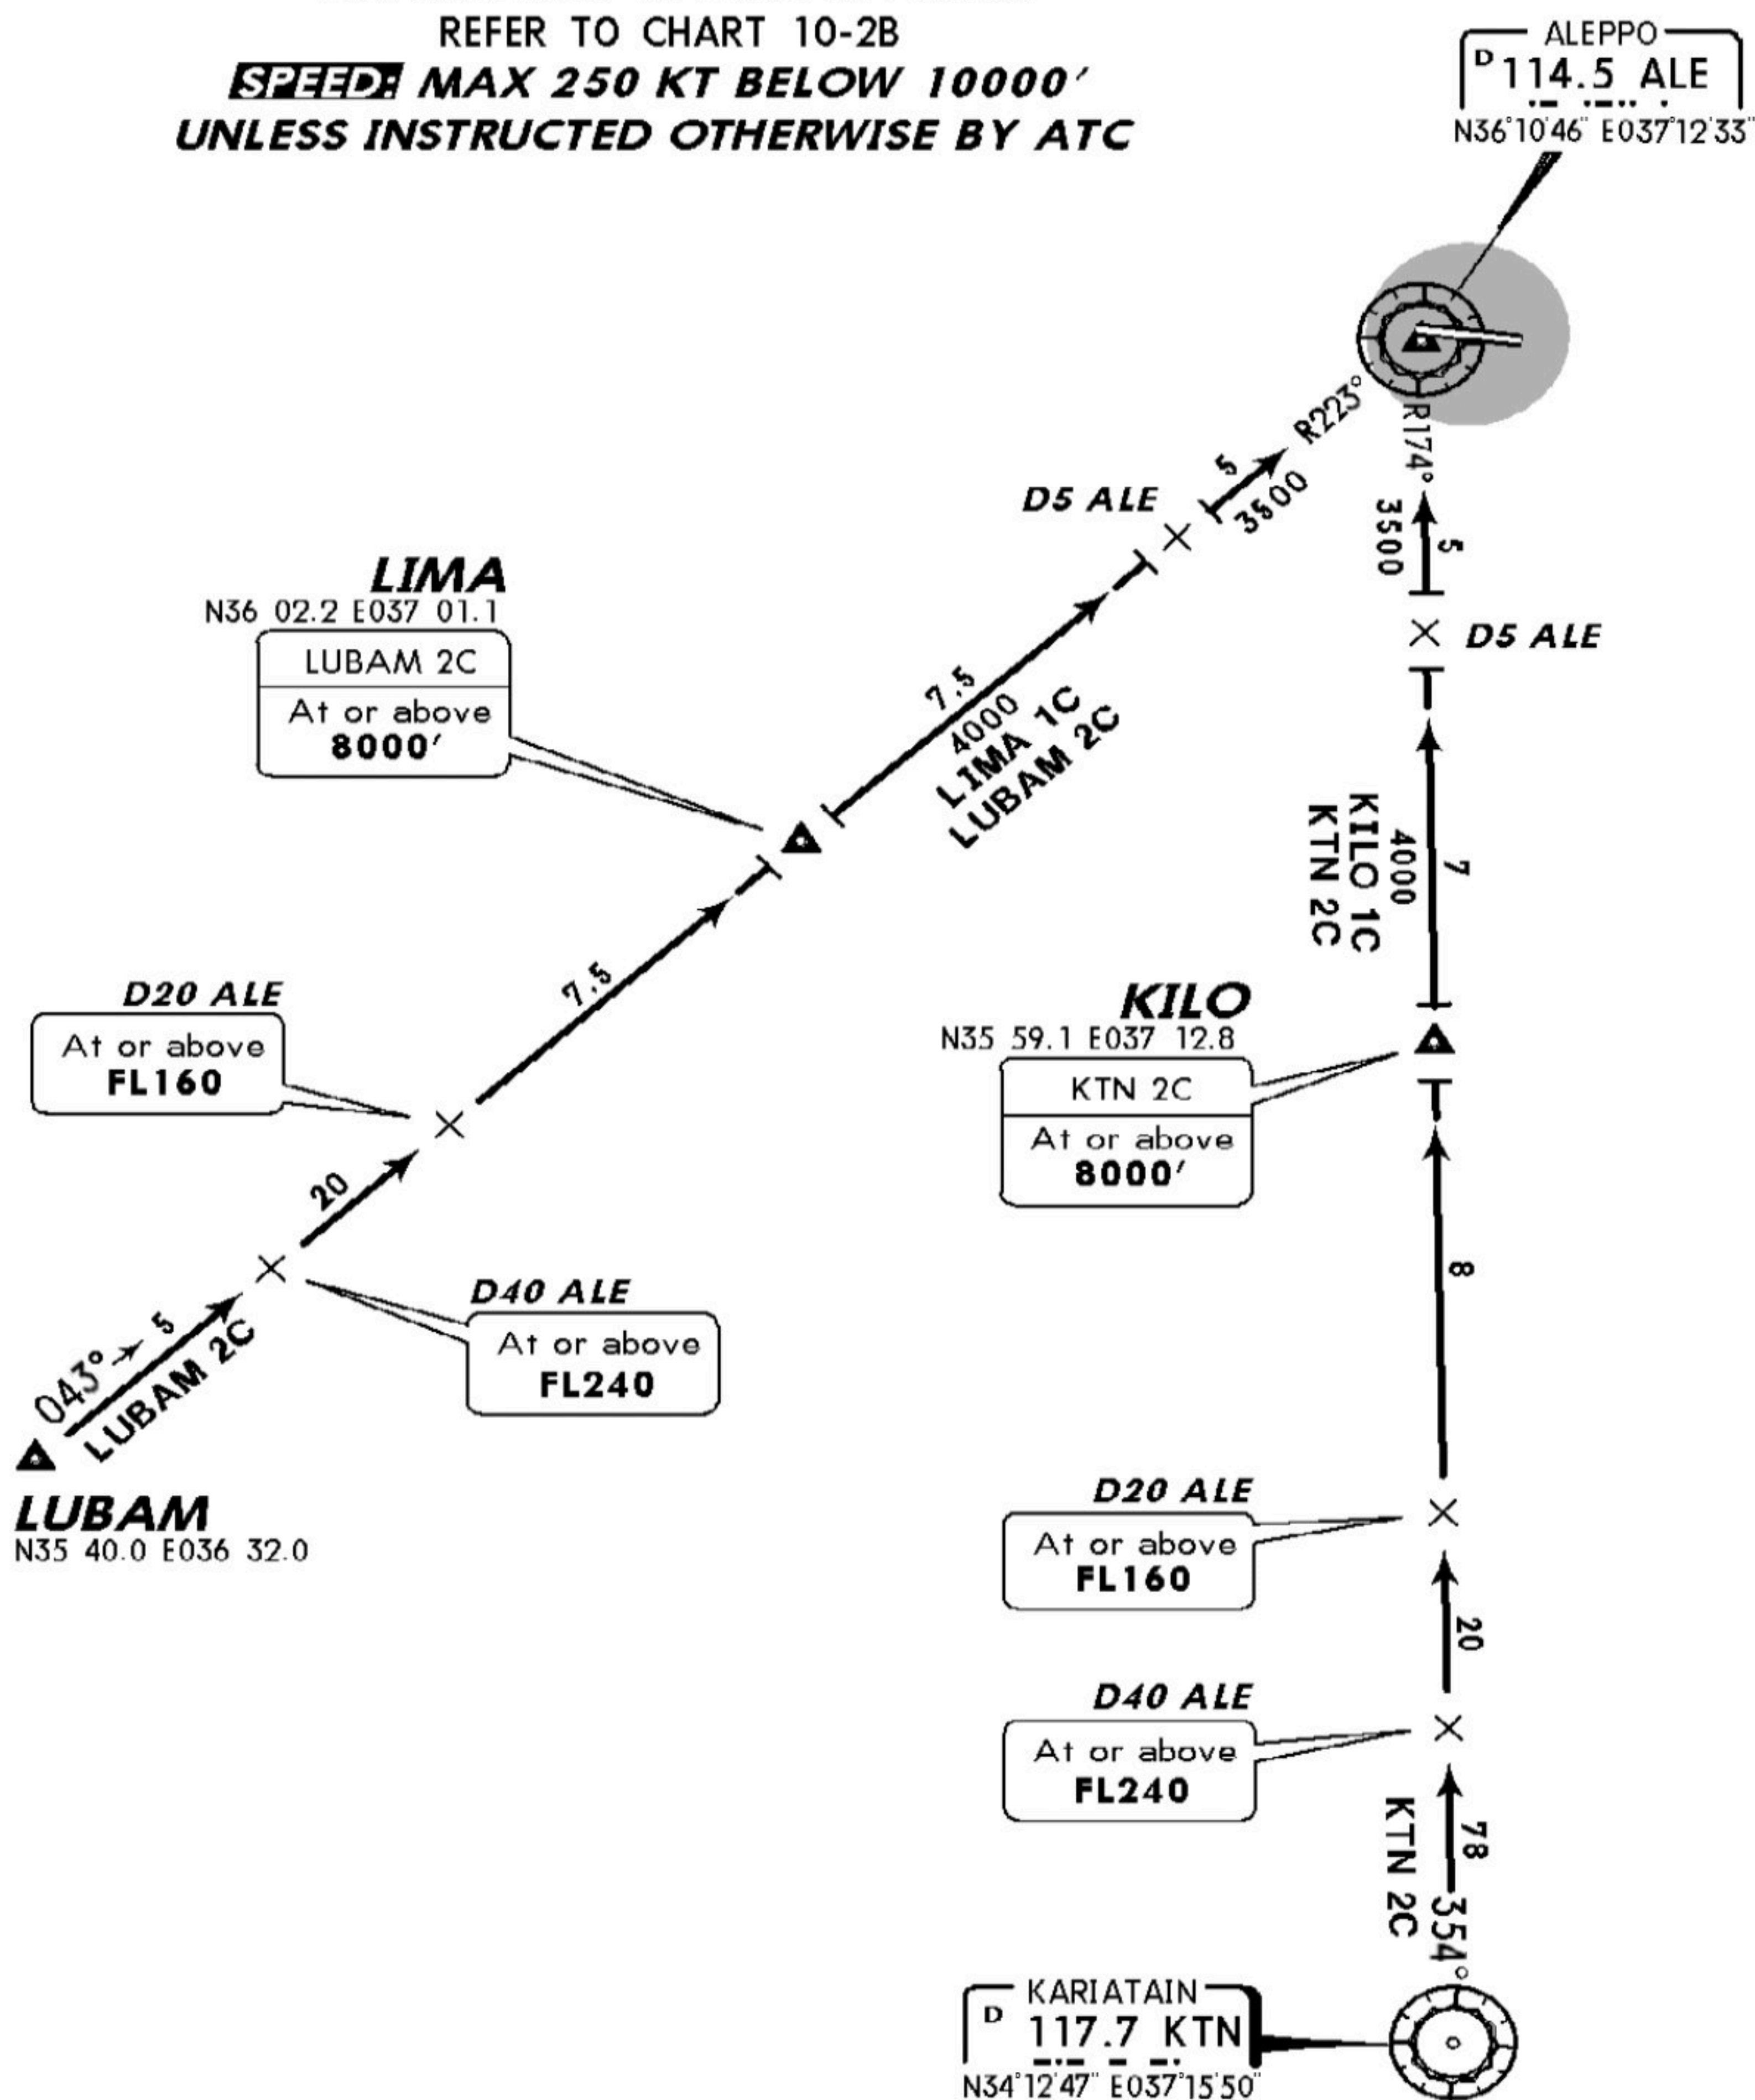




Apt Elev
1254'


Alt Set: MB
Trans level: FL150 Trans alt: 13000'

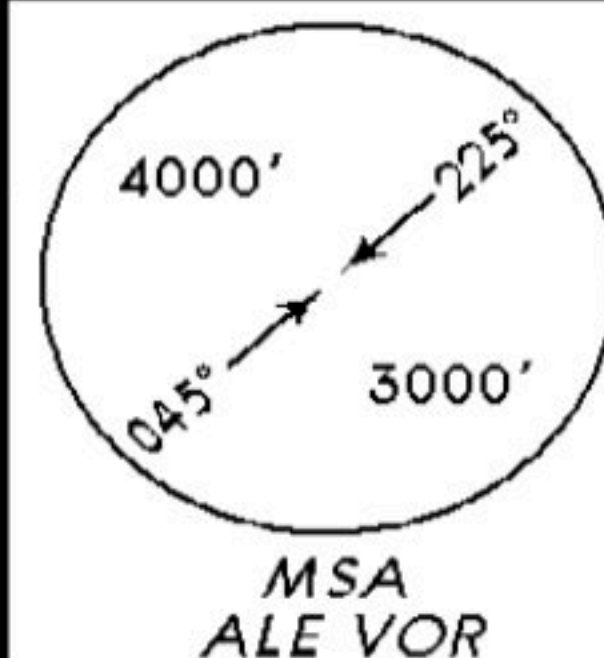


RWY 27 ARRIVALS
TO FINAL APPROACH
AVAILABLE ON PILOT'S REQUEST
AND WHEN MILITARY TRAFFIC PERMITS

- ① R-106 initial course for arrivals from DELTA, lead-in radial for ILS approach from KILO, LIMA & TANGO
R-108 lead-in radial for VOR/DME approach from KILO, LIMA & TANGO.
- ② R-082 for ILS approach.
R-080 vor VOR/DME approach.

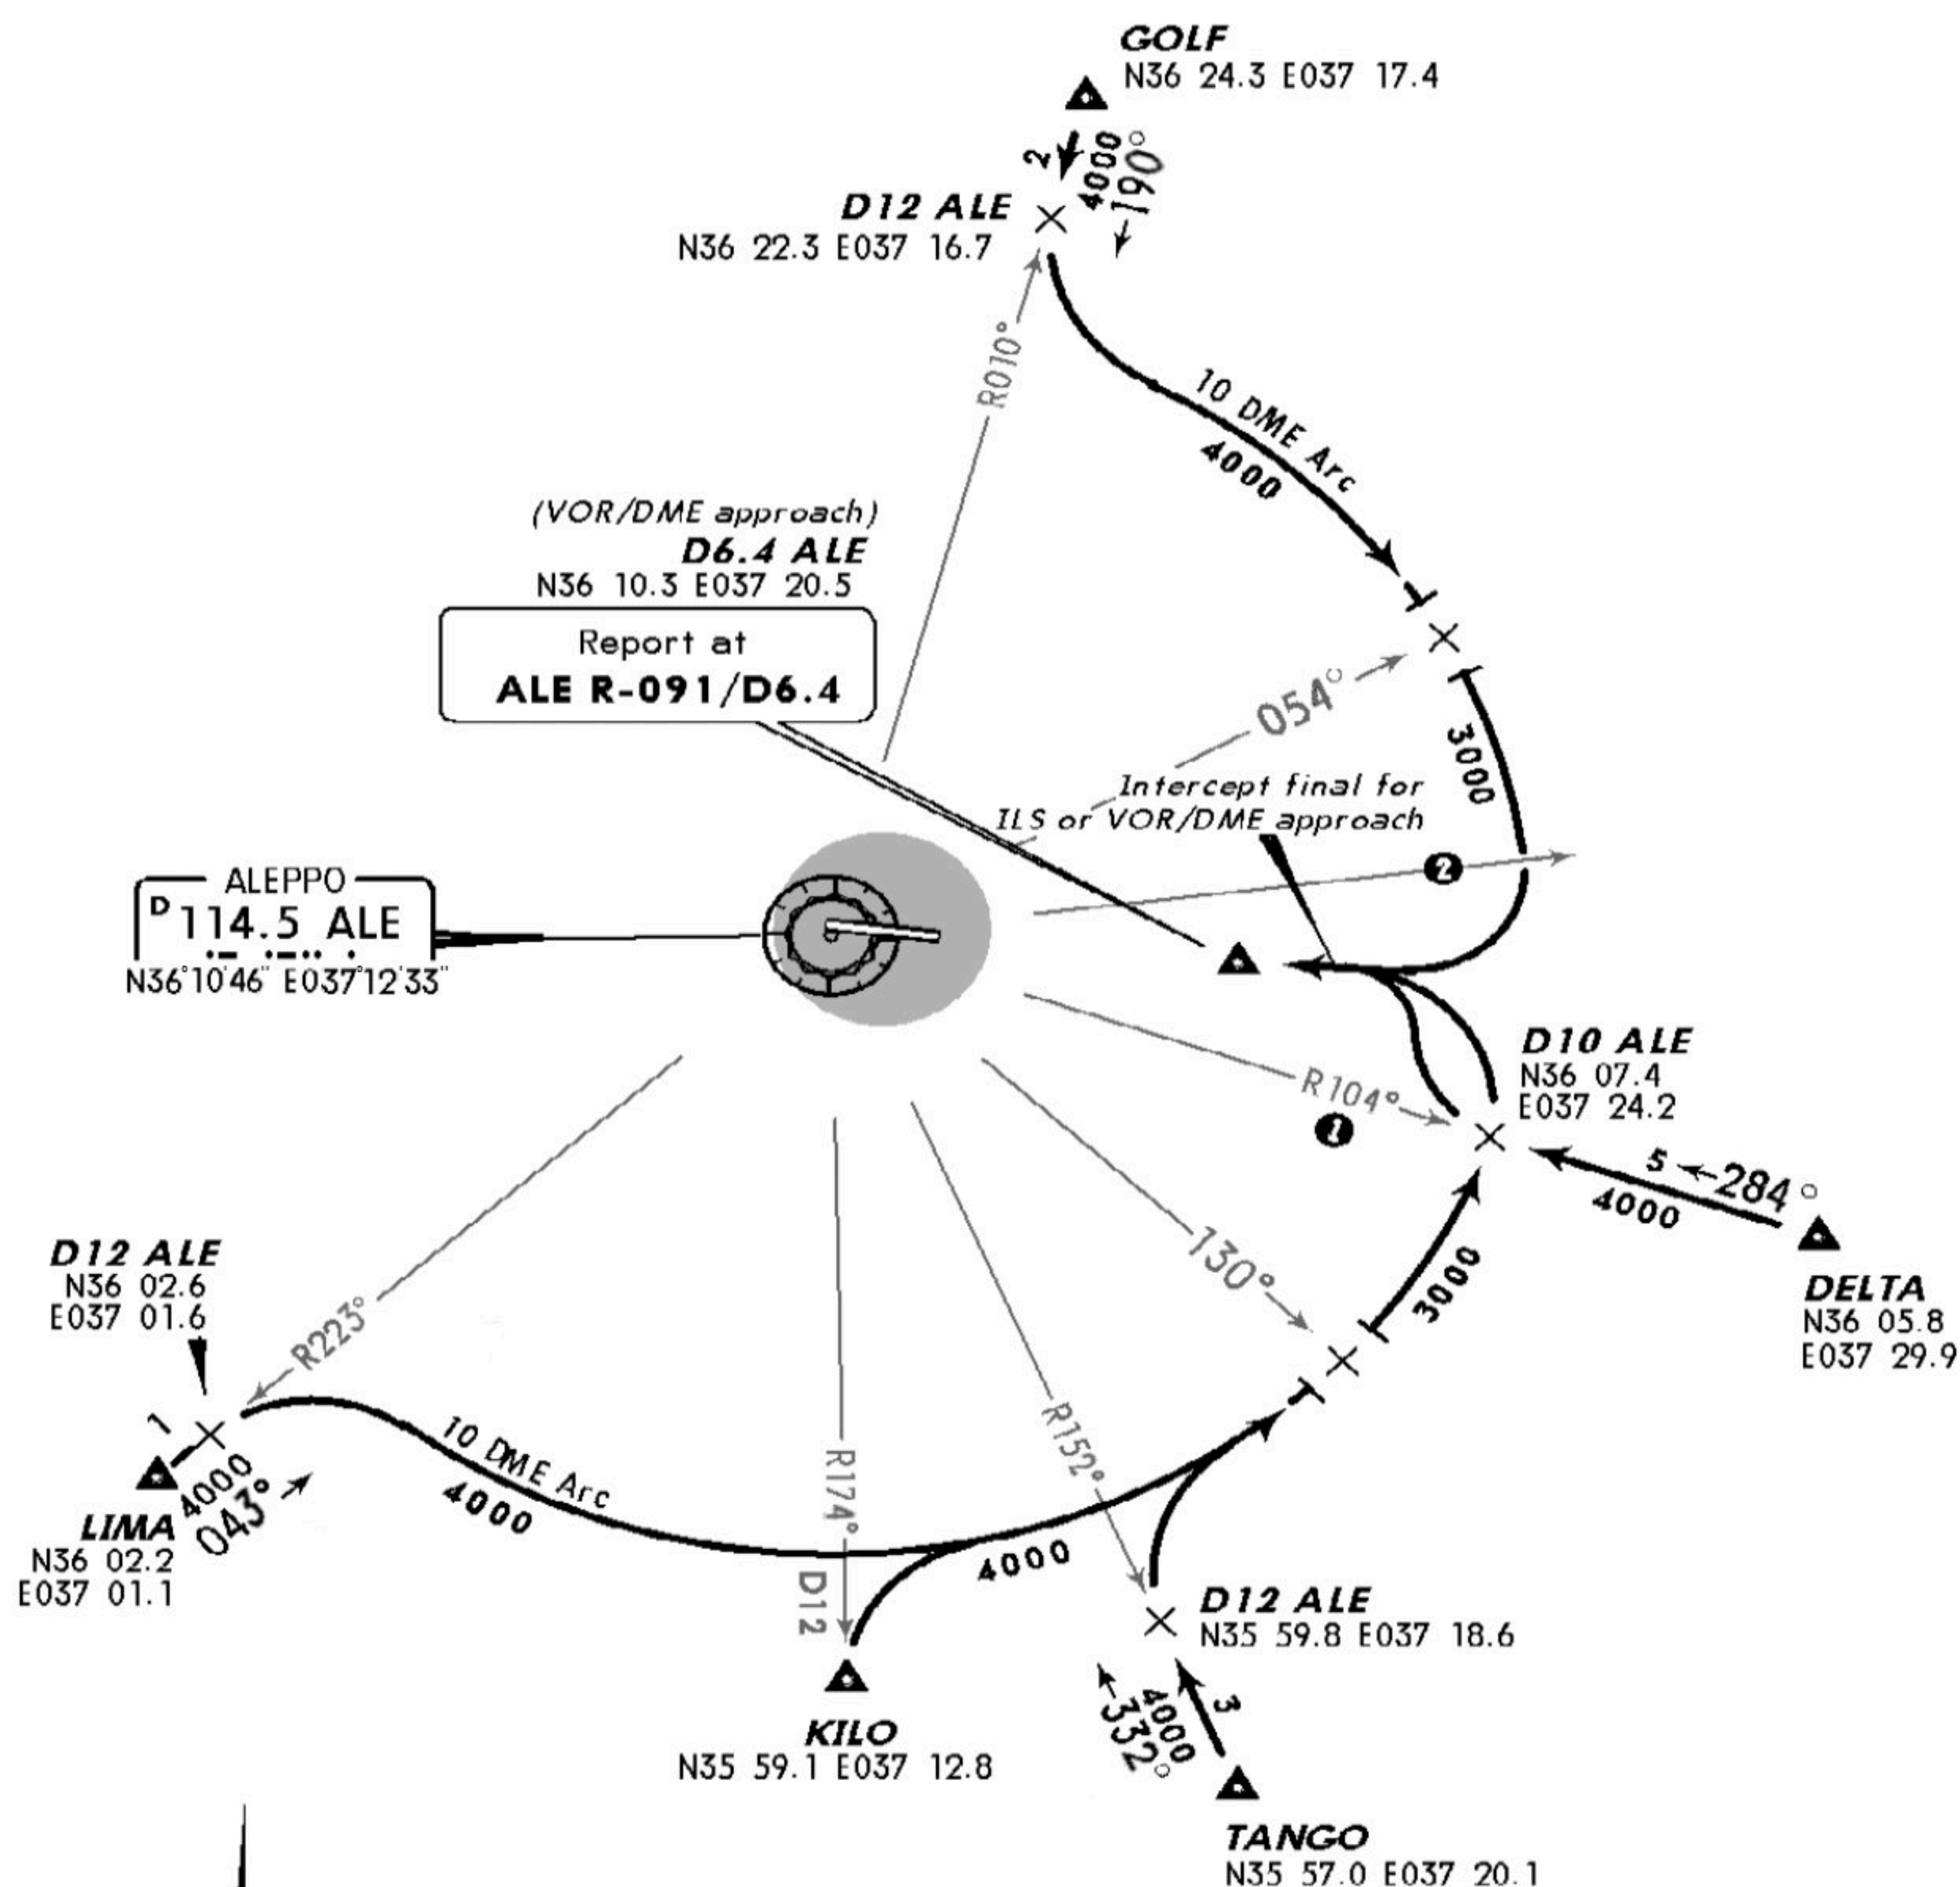

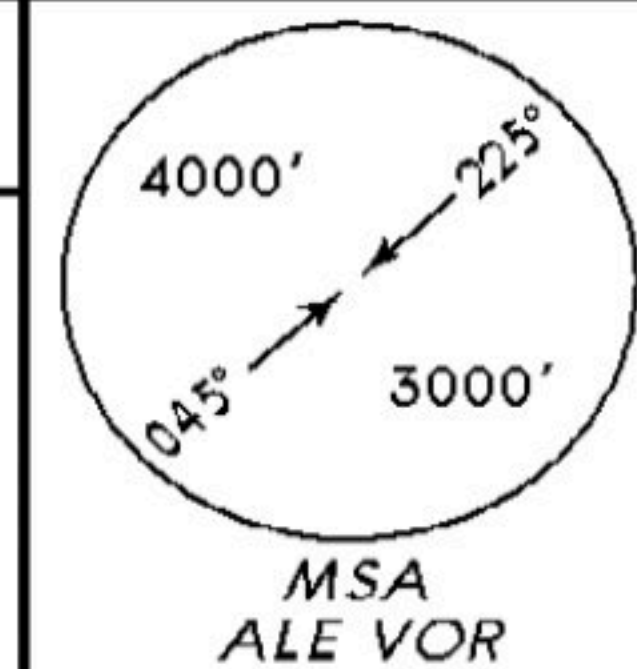Apt Elev
1254'Trans level: FL 150 Trans alt: 13000'
SIDs are also minimum noise routings.DELTA 1J [DELT1J], GOLF 1J, KILO 1J
LIMA 1J, TANGO 1J [TANG1J]

RWY 09 DEPARTURES

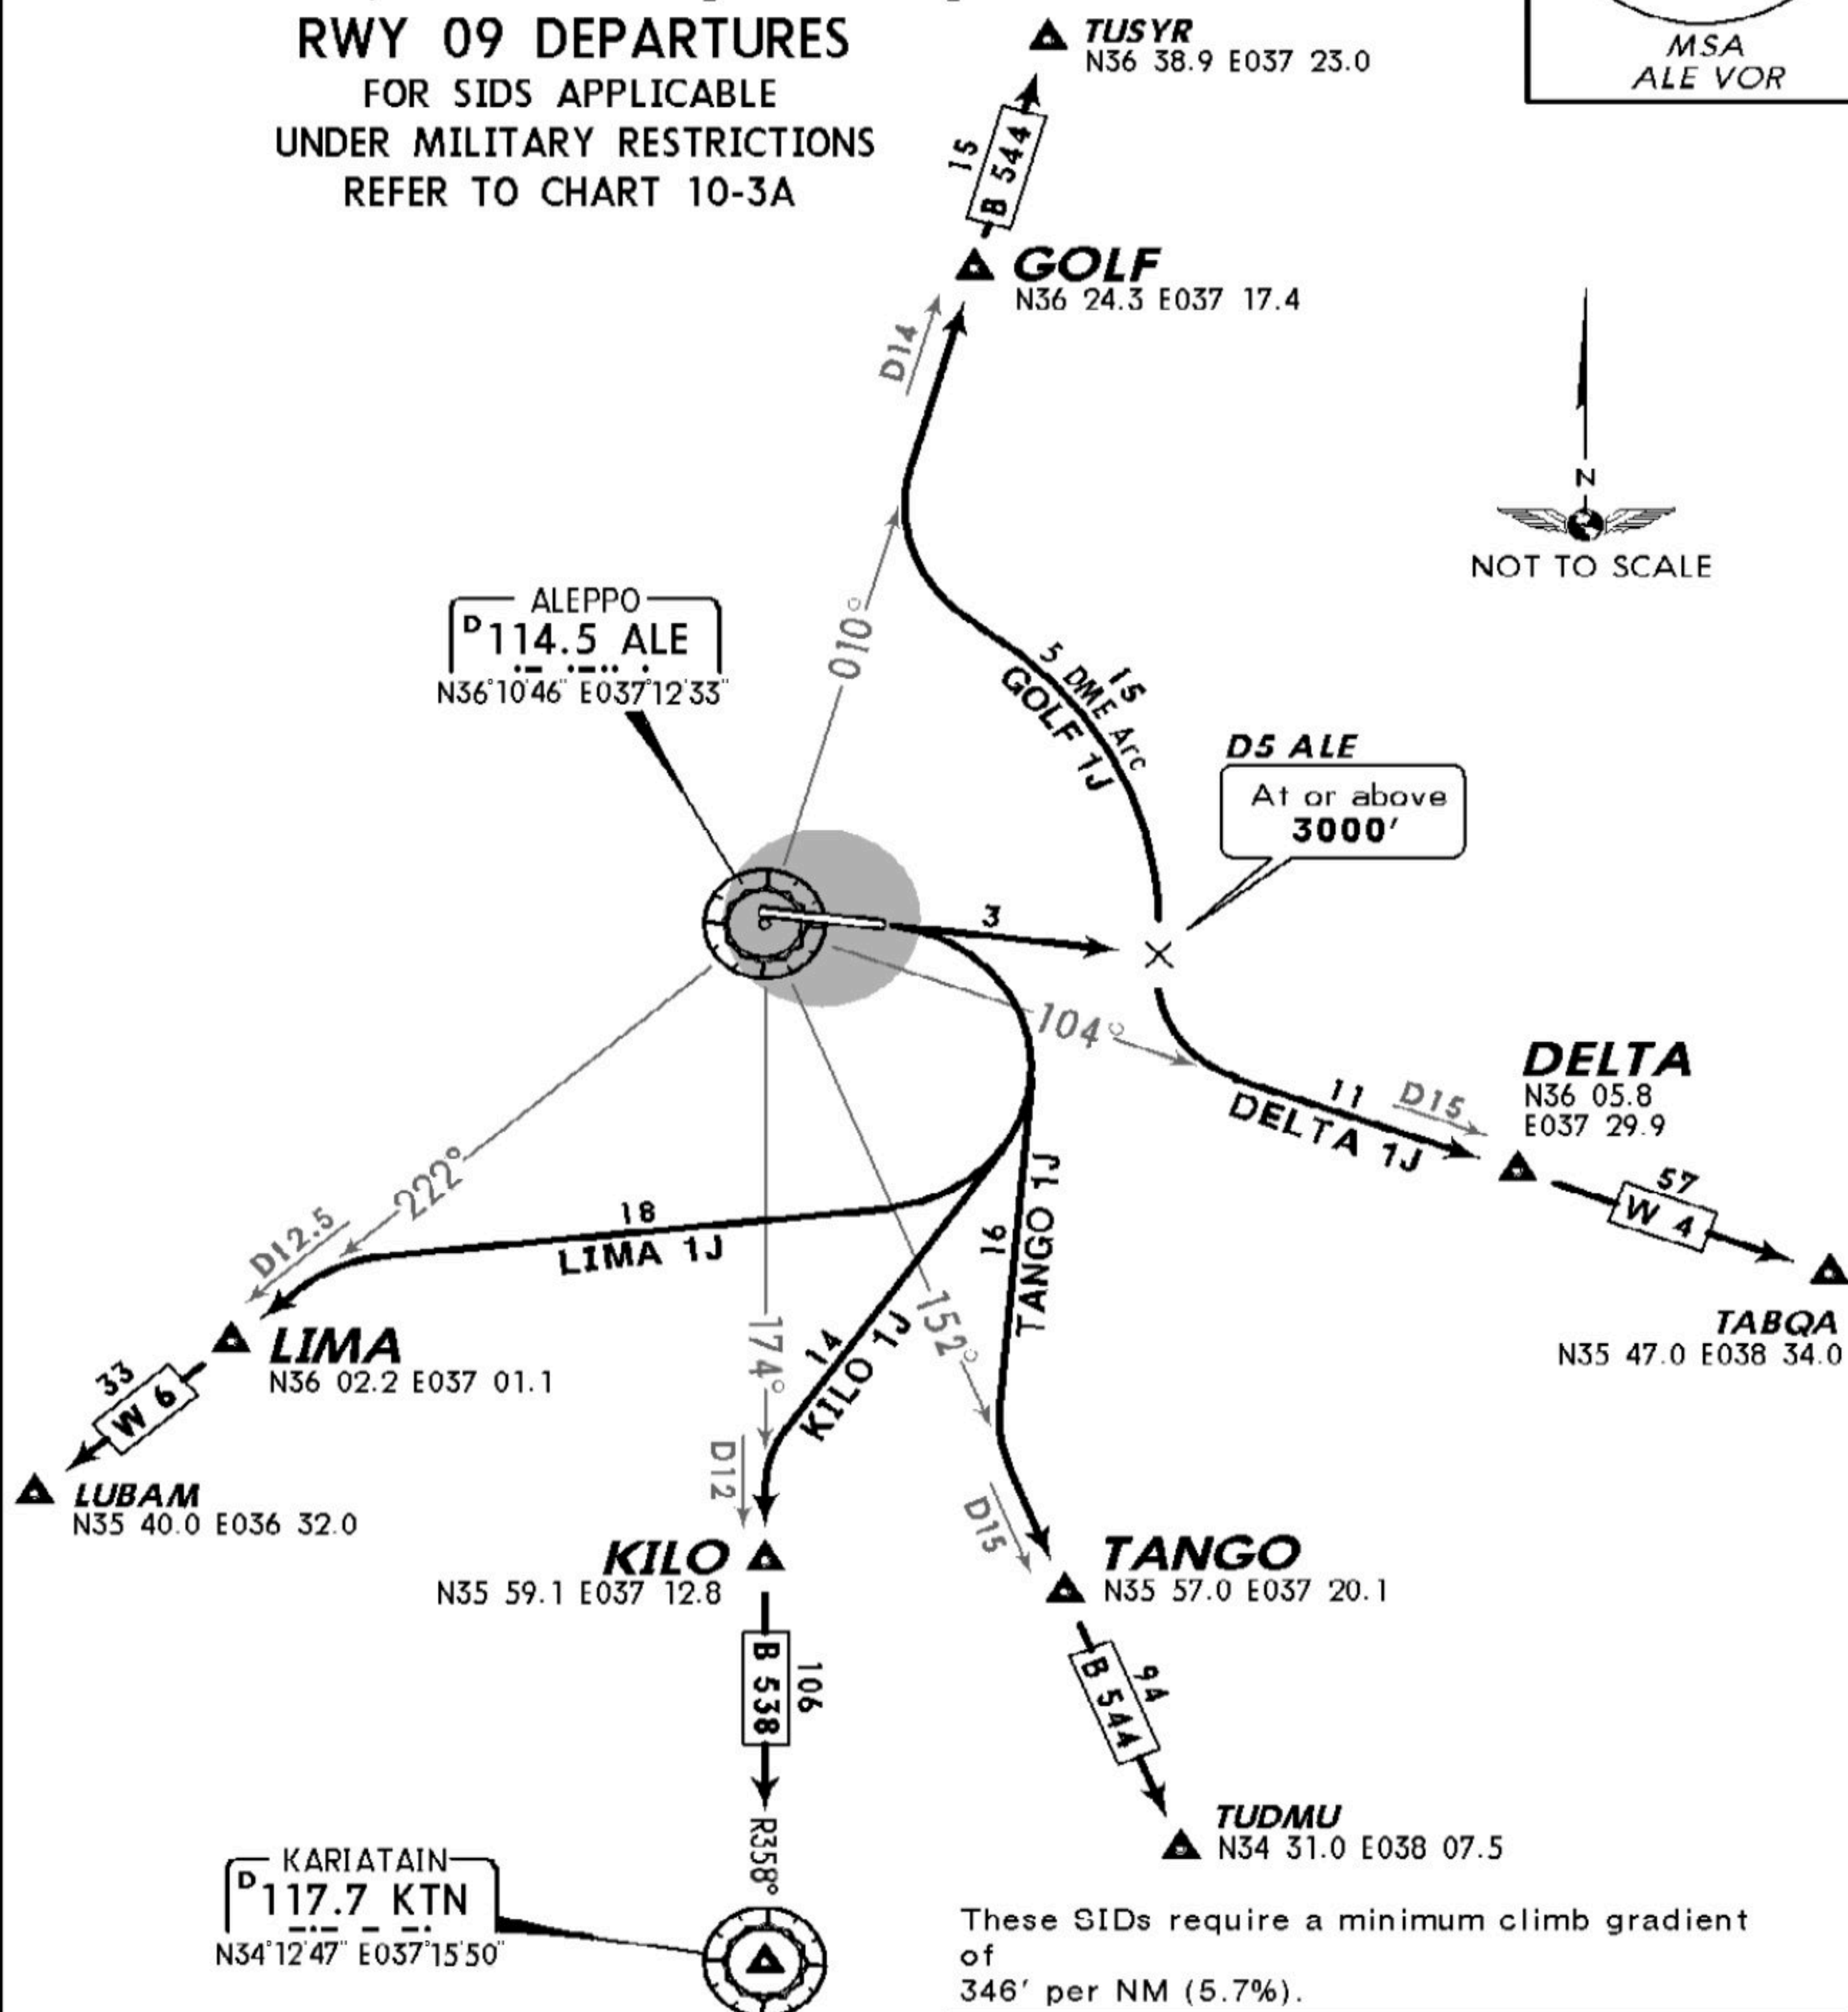
FOR SIDS APPLICABLE
UNDER MILITARY RESTRICTIONS
REFER TO CHART 10-3AThese SIDs require a minimum climb gradient
of
346' per NM (5.7%).

Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732


If unable to comply advise ATC.

SID	ROUTING
DELTA 1J	On runway heading to D5 ALE, turn RIGHT, intercept ALE R-106 to DELTA, join airway W 4.
GOLF 1J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544.
KILO 1J	Turn RIGHT, intercept ALE R-176 to KILO, join airway B 538.
LIMA 1J	Turn RIGHT, intercept ALE R-225 to LIMA, join airway W 6.
TANGO 1J	Turn RIGHT, intercept ALE R-154 to TANGO, join airway B 544.

Trans level: FL150 Trans alt: 13000'
SIDs are also minimum noise routings.

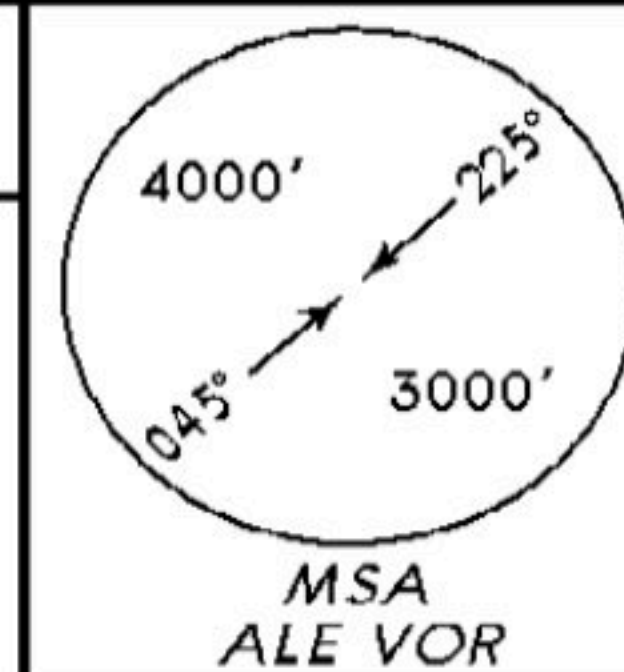

NOT TO SCALE

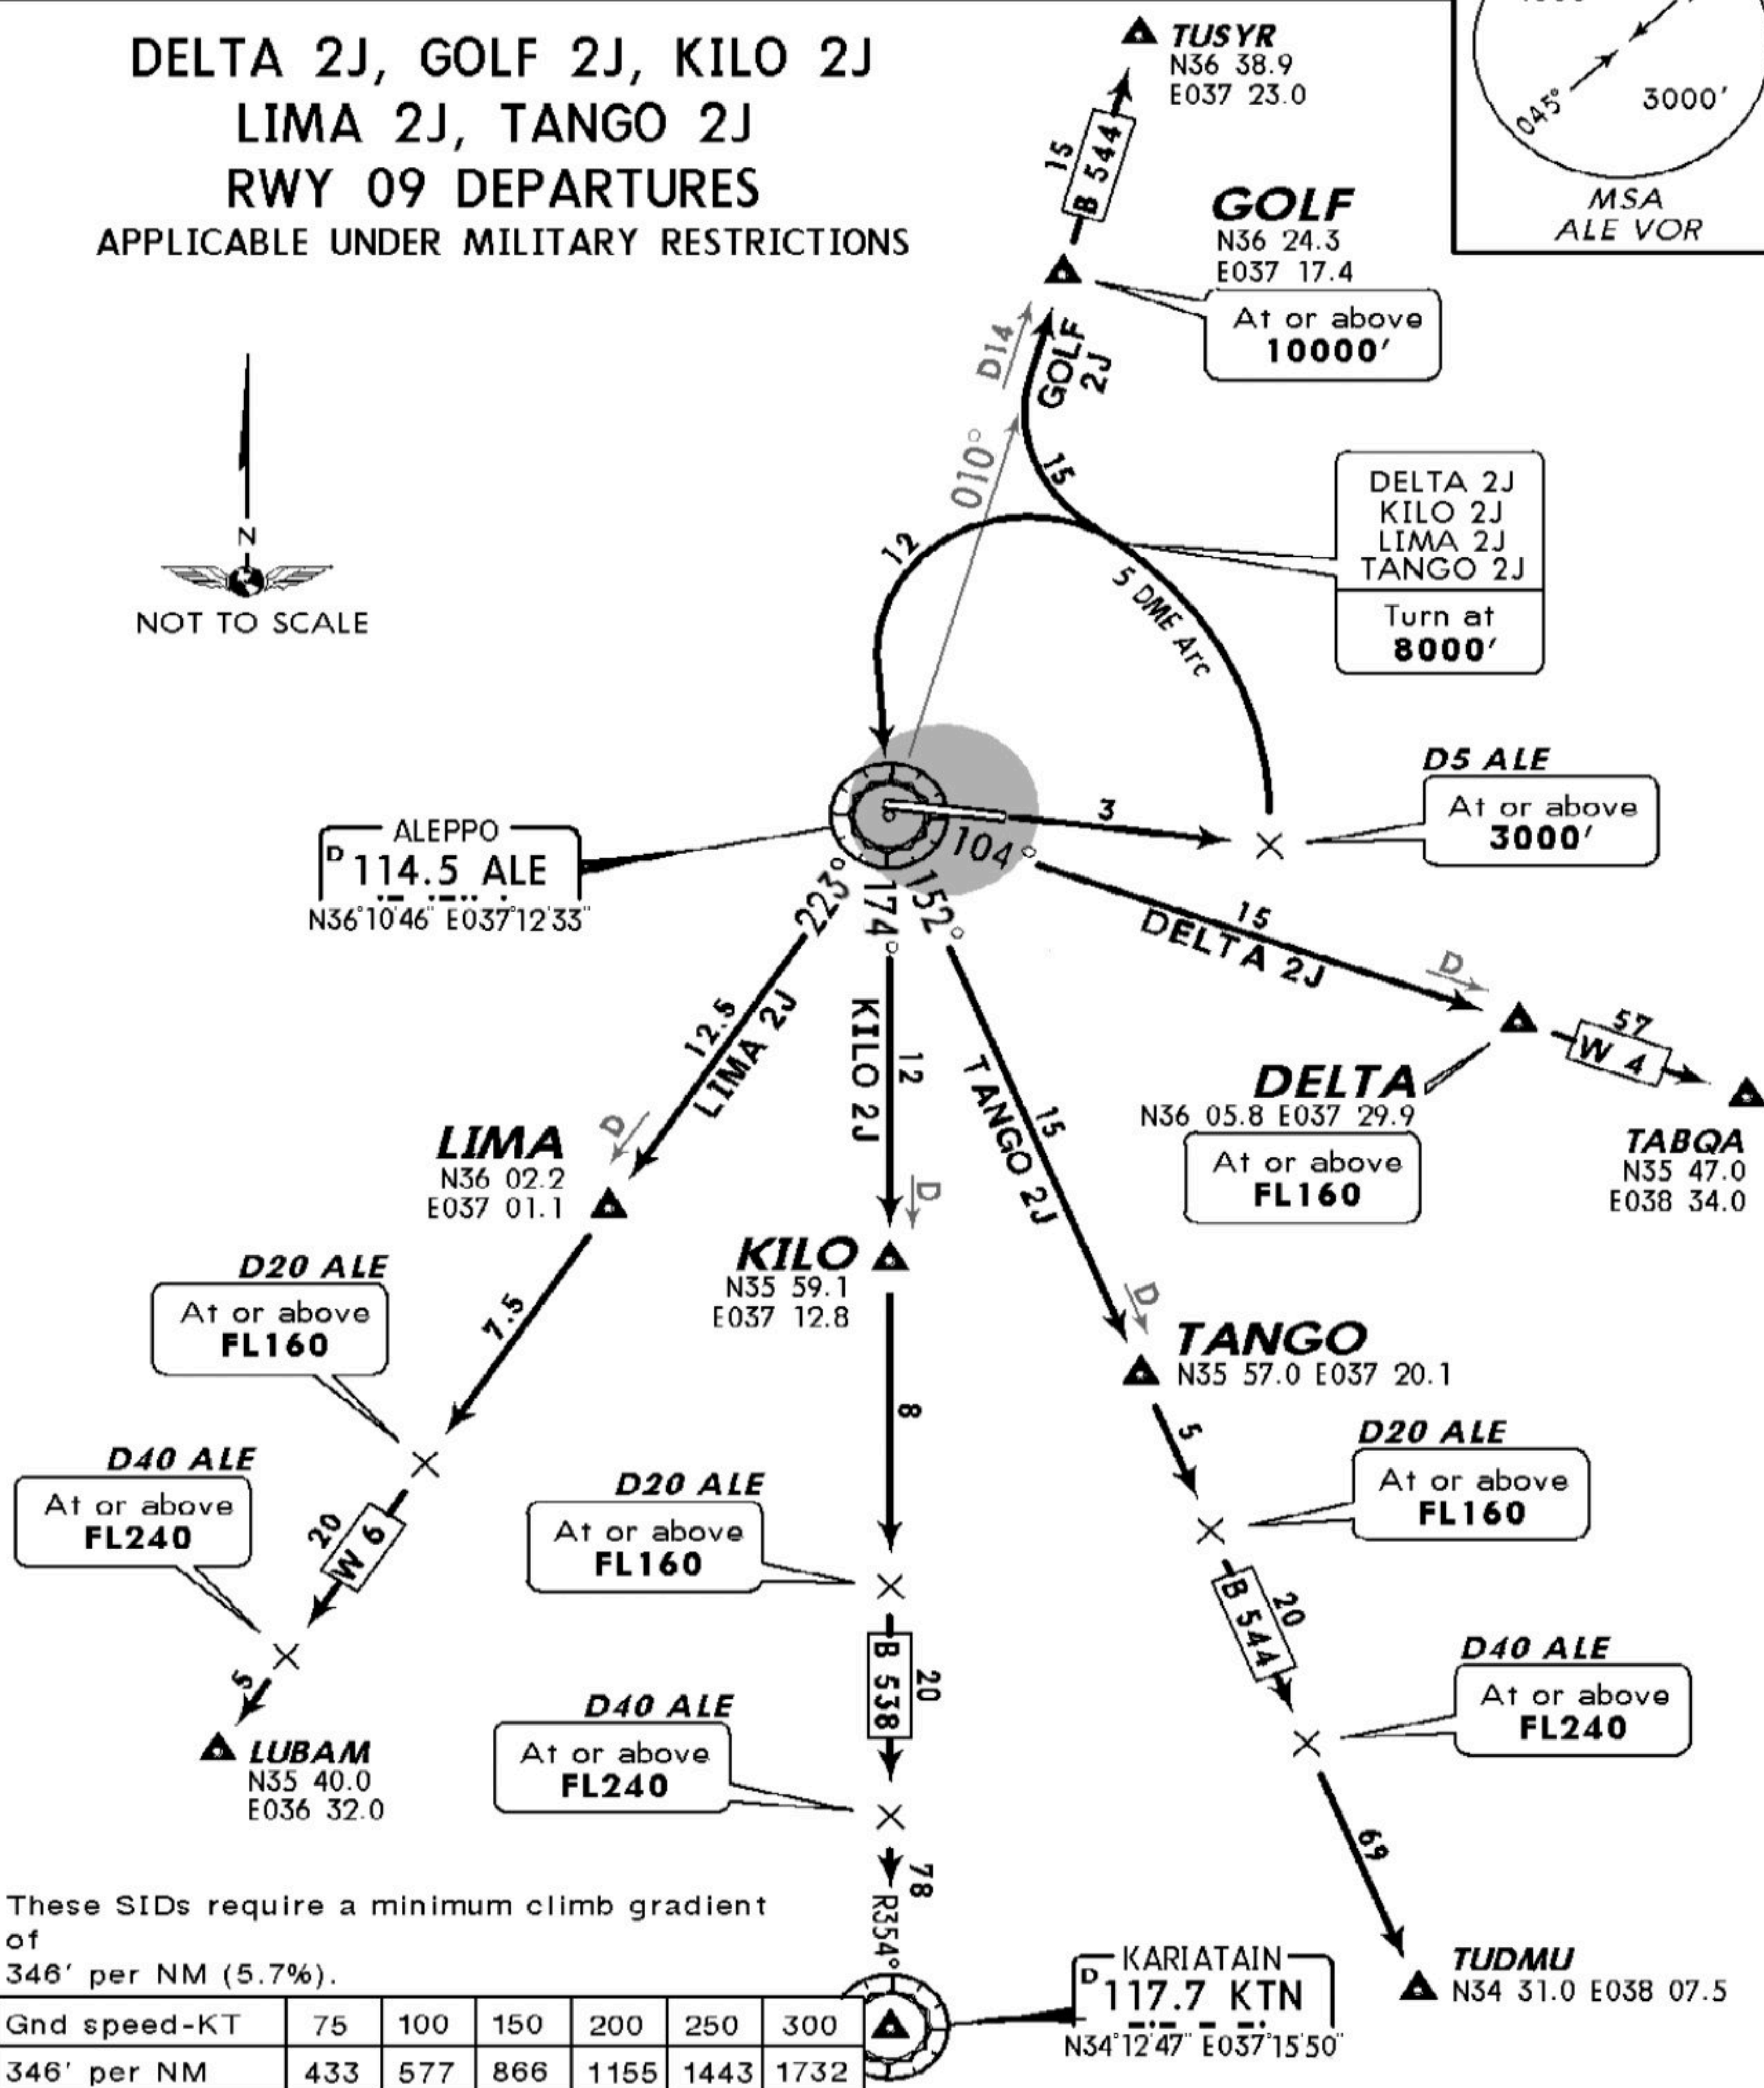

These SIDs require a minimum climb gradient of 346' per NM (5.7%).

Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732

If unable to comply advise ATC.

SID	ROUTING
DELTA 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-106 to DELTA, join airway W 4.
GOLF 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544.
KILO 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-176 to KILO, join airway B 538.
LIMA 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-225 to LIMA, join airway W 6.
TANGO 2J	On runway heading to D5 ALE, turn LEFT, along ALE 5 DME arc, at 8000' turn to ALE, ALE R-154 to TANGO, join airway B 544.



Apt Elev
1254'

Trans level: FL150 Trans alt: 13000'

1. SIDs are also minimum noise routings.

2. Obstacle at ALE 3.7 DME, approximately 1 NM RIGHT of extended RCL.

DELTA 1R [DELT1R], GOLF 1R, KILO 1R



LIMA 1R, TANGO 1R [TANG1R]

RWY 27 DEPARTURES

FOR SID APPLICABLE UNDER

MILITARY RESTRICTIONS

REFER TO CHART 10-3C

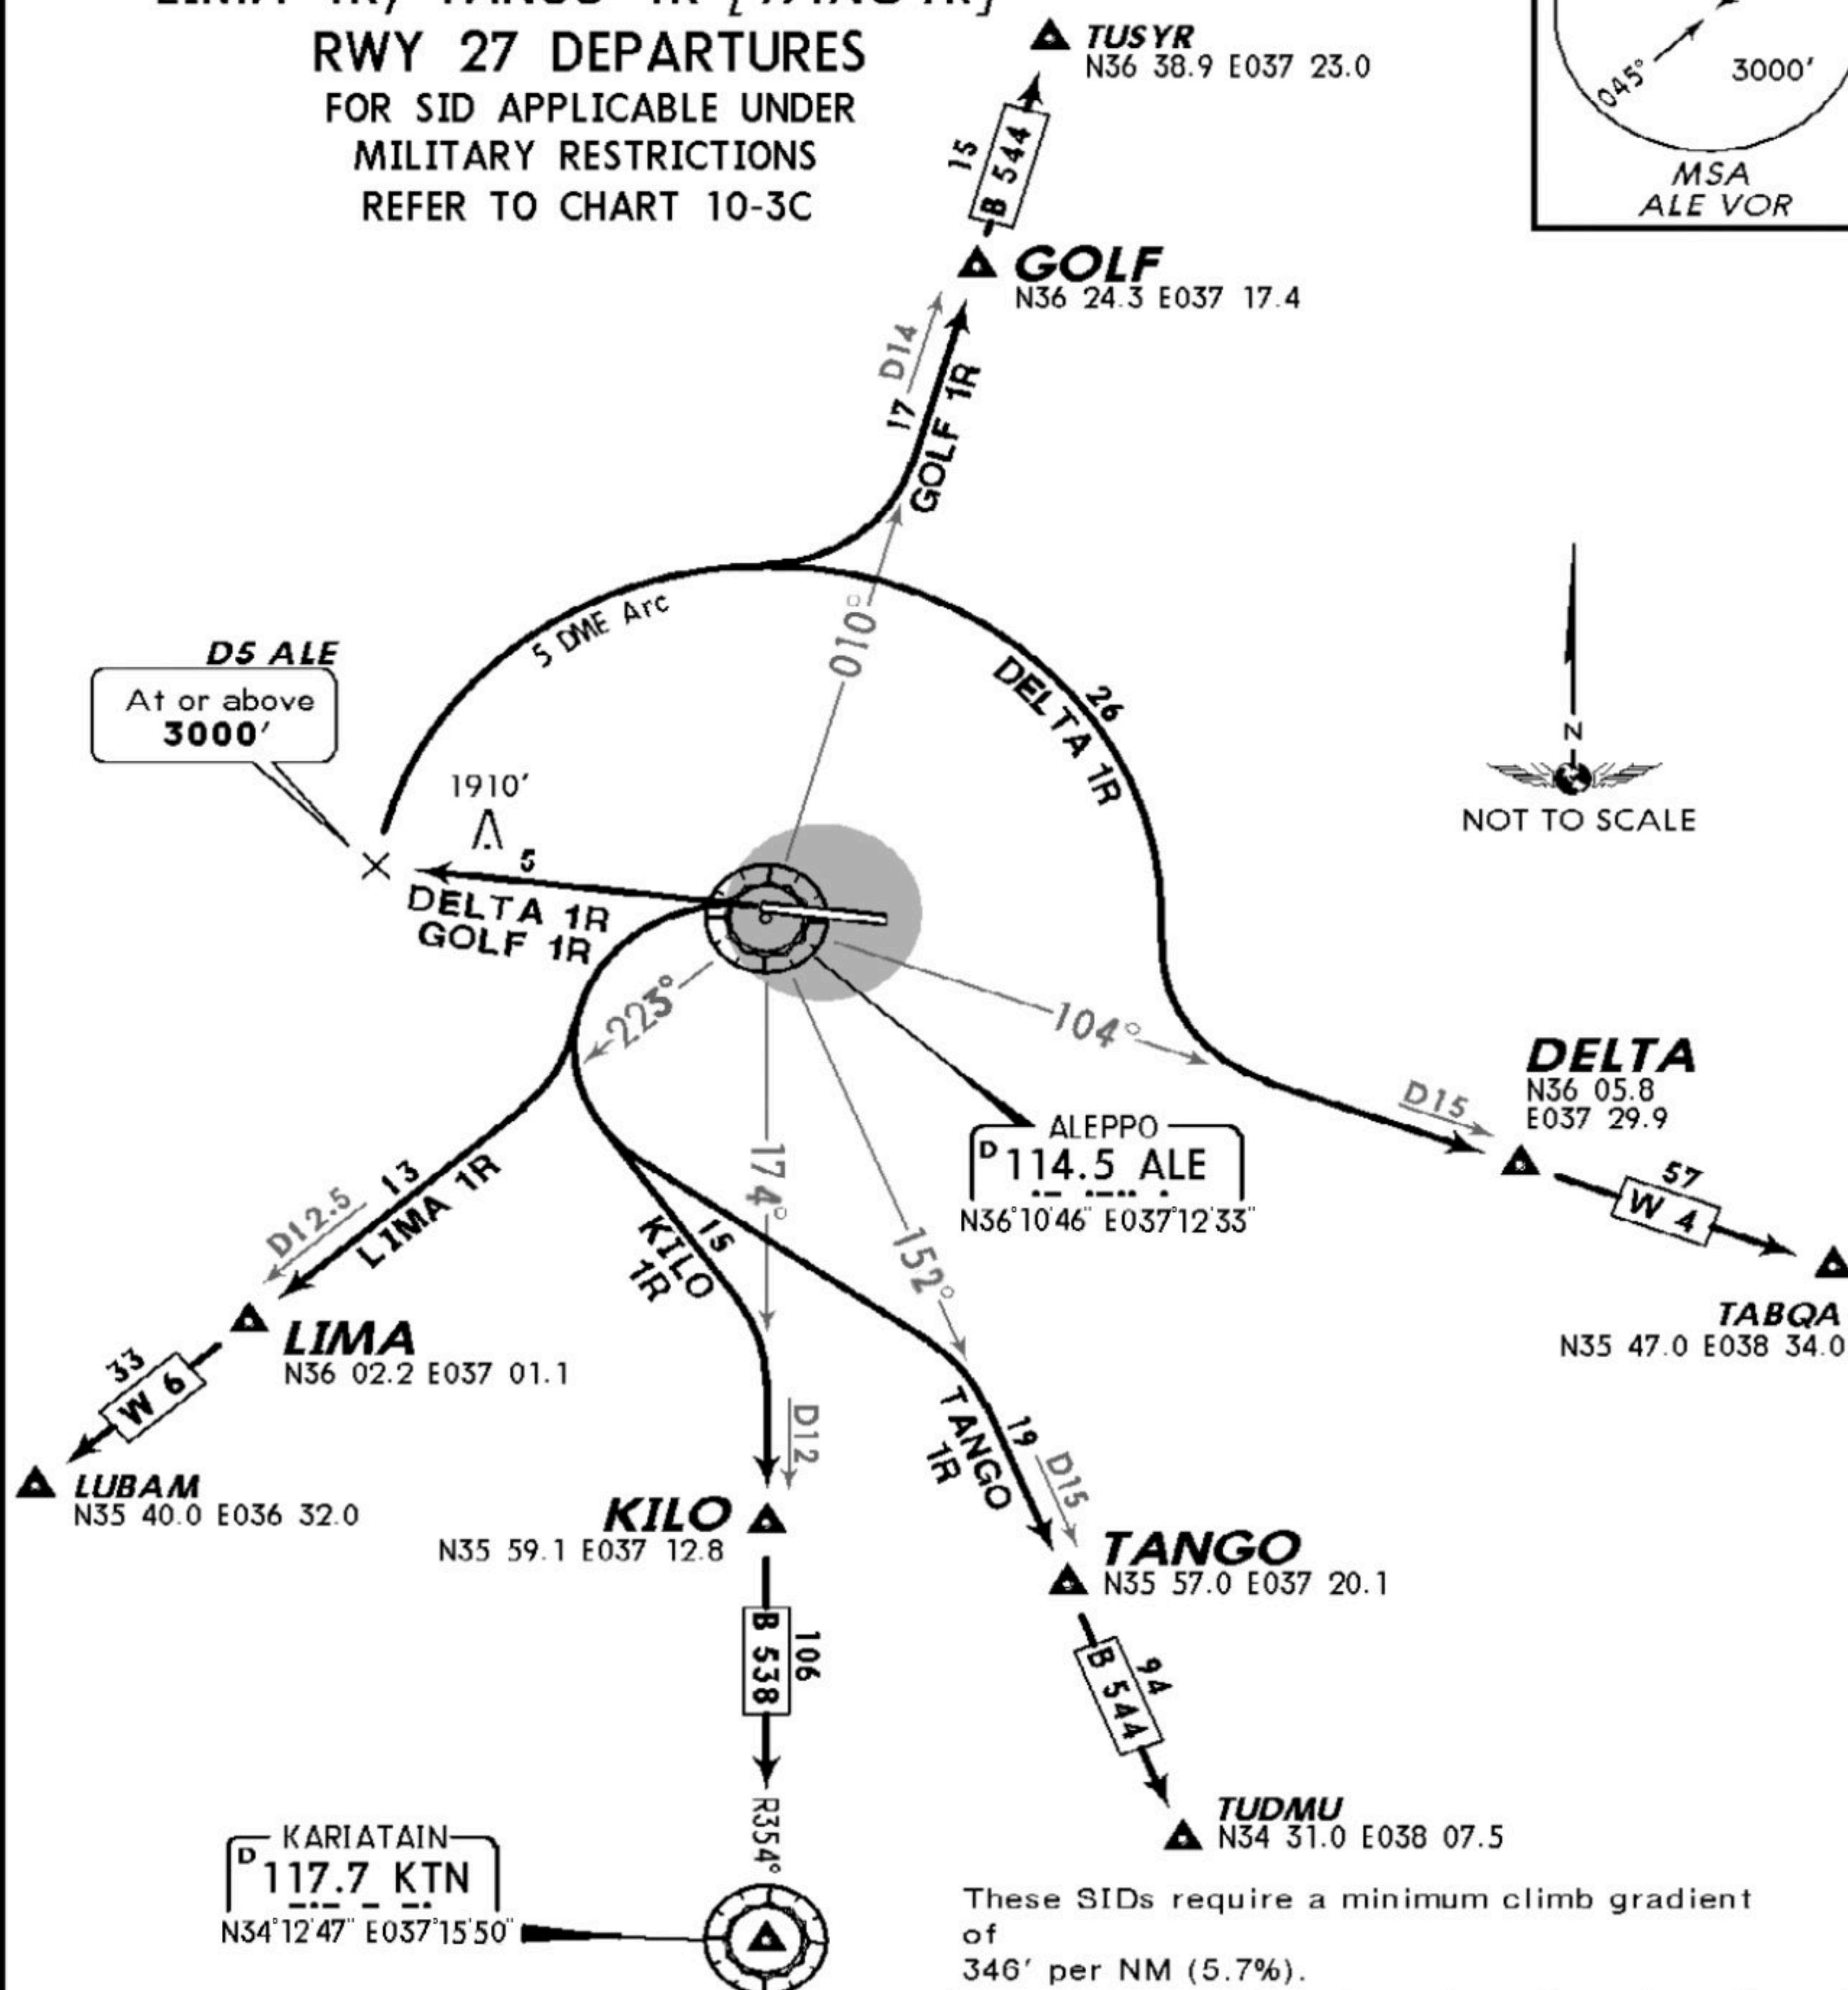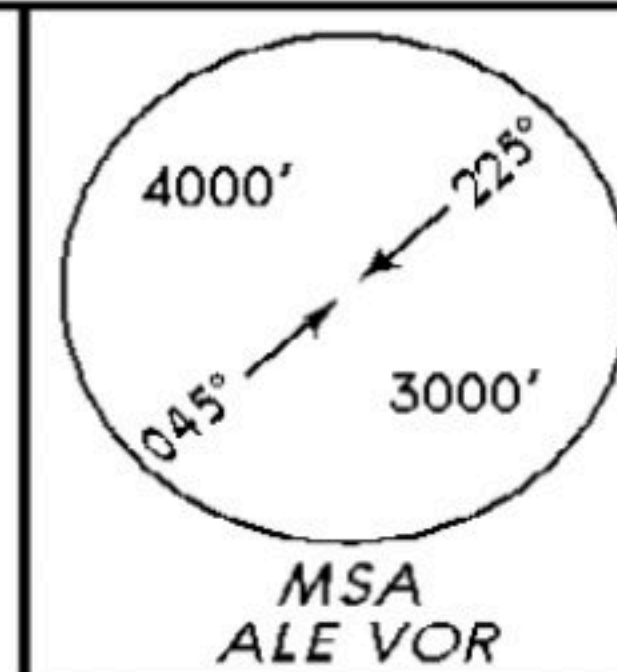

These SIDs require a minimum climb gradient of 346' per NM (5.7%).


Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732

If unable to comply advise ATC.

SID	ROUTING
DELTA 1R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, intercept ALE R-106 to DELTA, join airway W 4 .
GOLF 1R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544 .
KILO 1R	Turn LEFT, intercept ALE R-176 to KILO, join airway B 538 .
LIMA 1R	Turn LEFT, intercept ALE R-225 to LIMA, join airway W 6 .
TANGO 1R	Turn LEFT, intercept ALE R-154 to TANGO, join airway B 544 .

Apt Elev
1254'

Trans level: FL150 Trans alt: 13000'

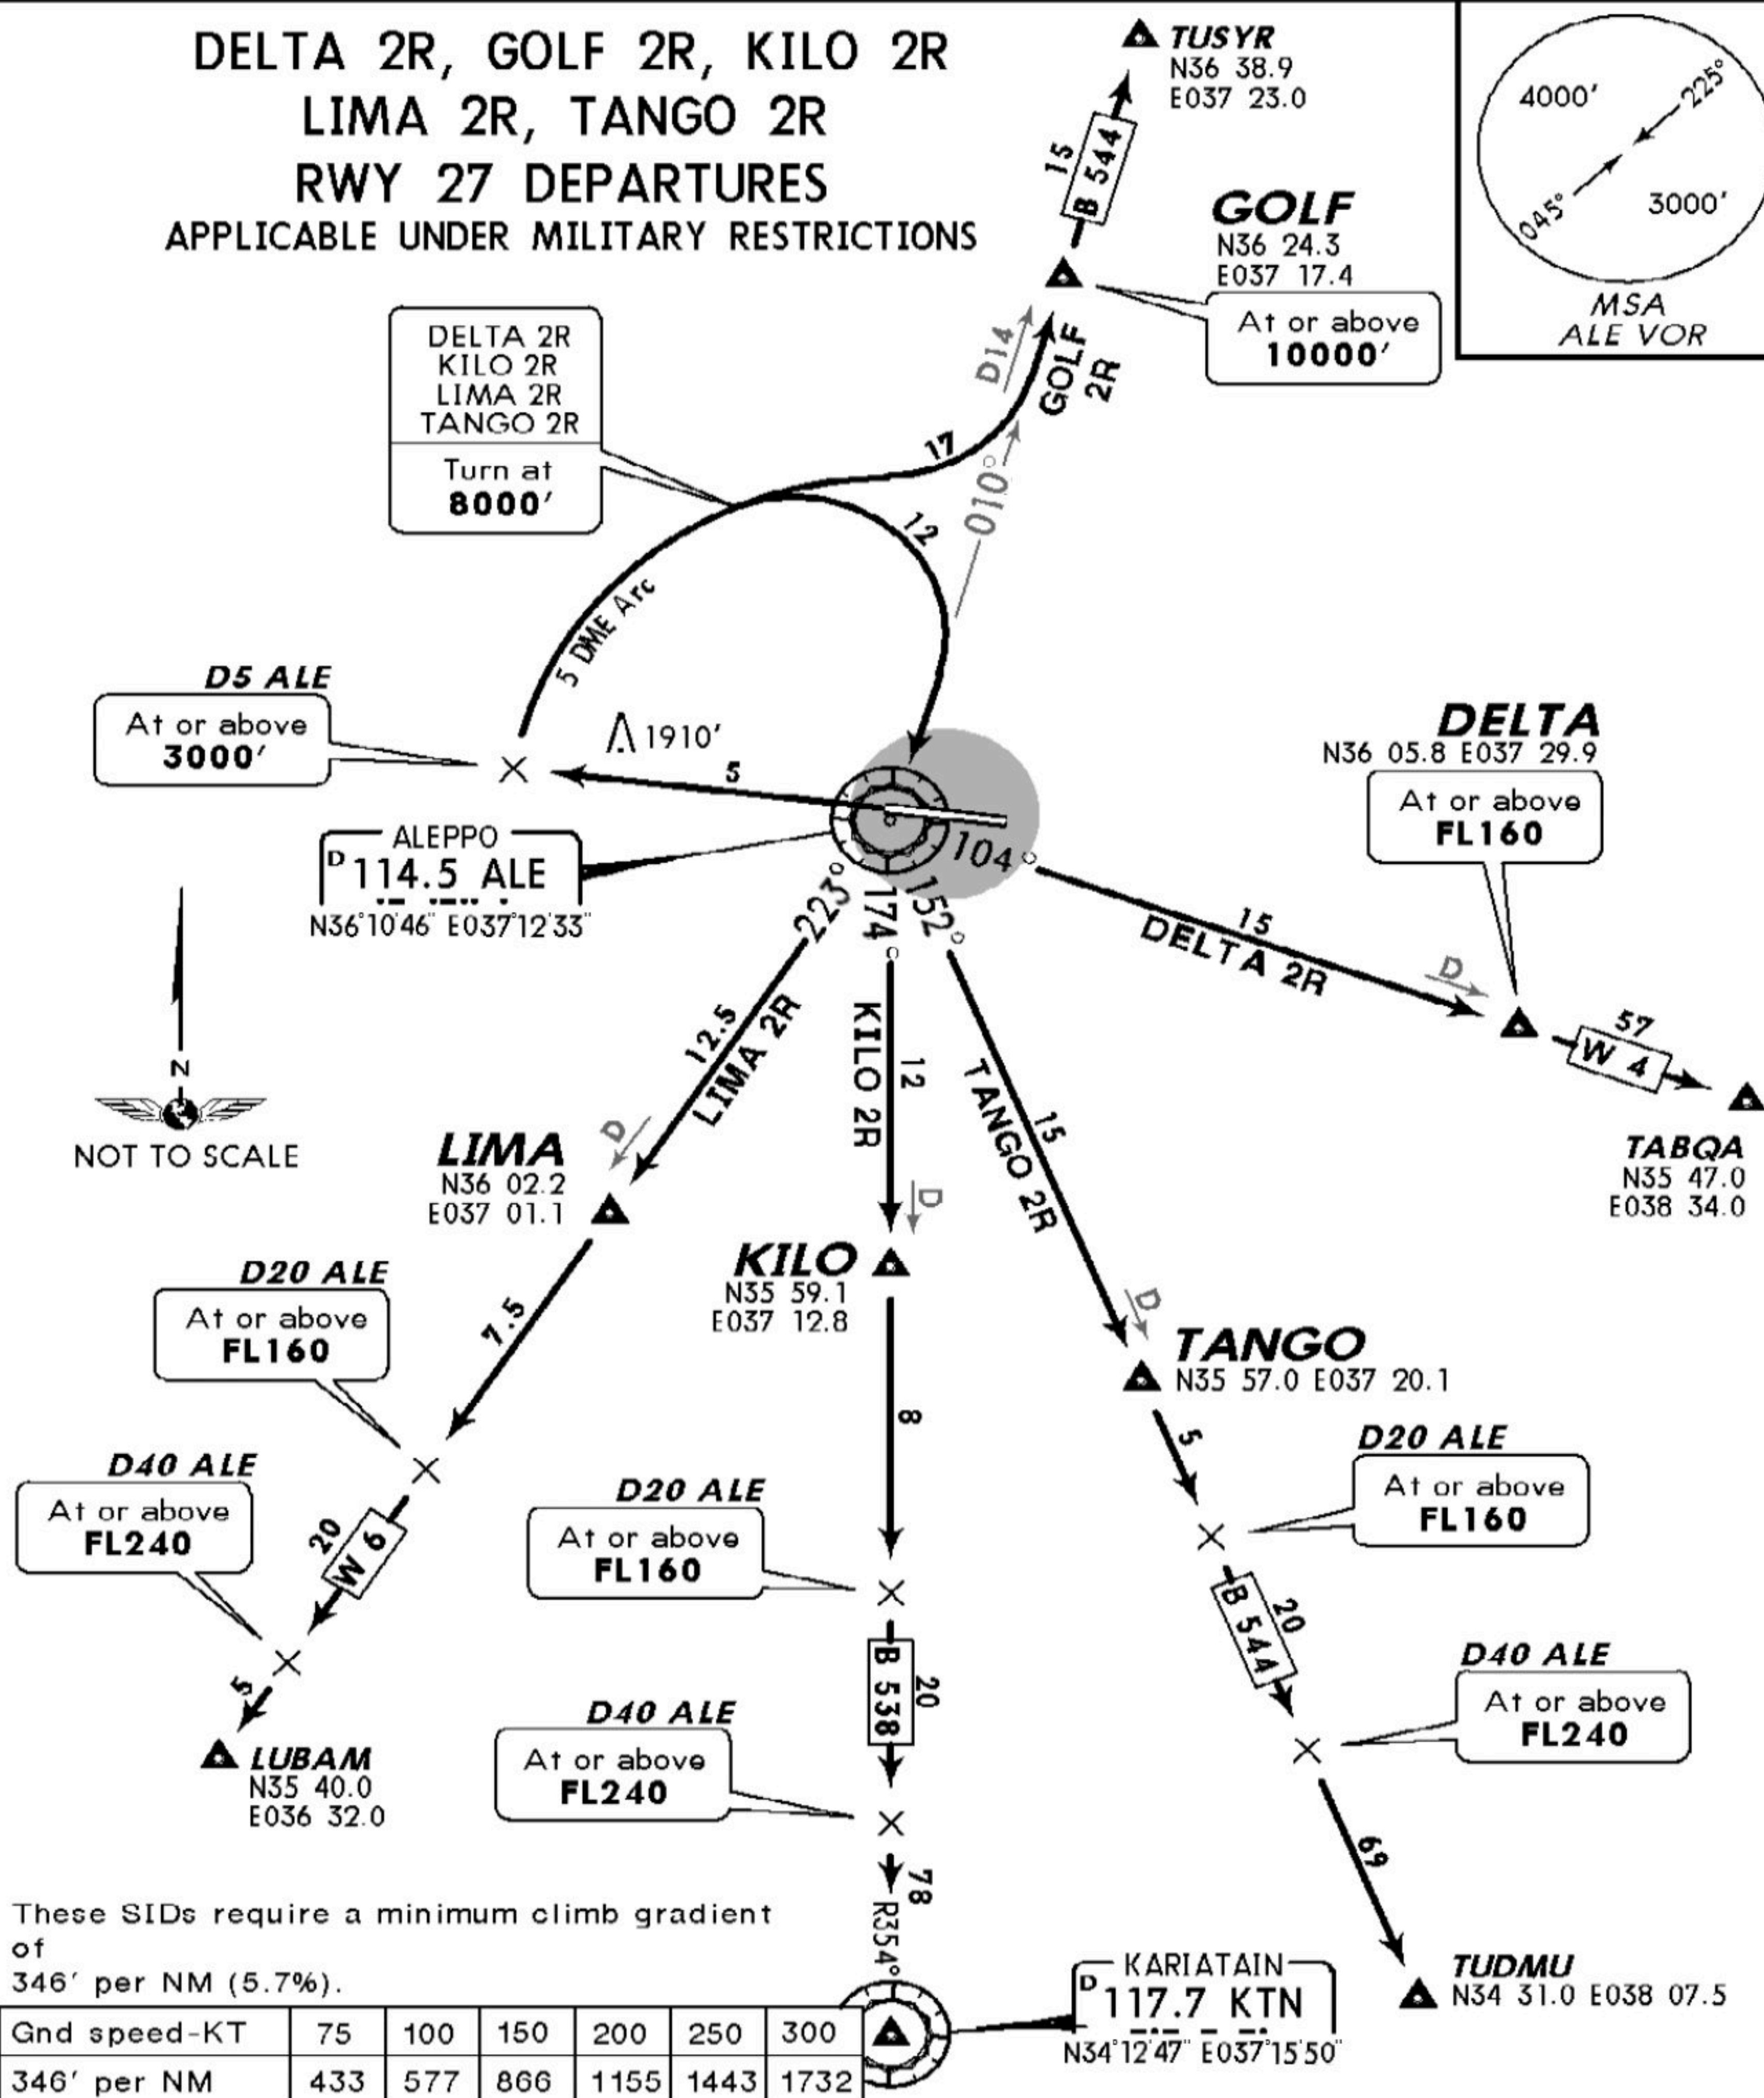1. SIDs are also minimum noise routings.
2. Obstacle at ALE 3.7 DME, approximately 1 NM RIGHT of extended RCL.**DELTA 2R, GOLF 2R, KILO 2R
LIMA 2R, TANGO 2R
RWY 27 DEPARTURES**
APPLICABLE UNDER MILITARY RESTRICTIONS

These SIDs require a minimum climb gradient of 346' per NM (5.7%).

Gnd speed-KT	75	100	150	200	250	300
346' per NM	433	577	866	1155	1443	1732


If unable to comply advise ATC.

SID	ROUTING
DELTA 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at turn to ALE, ALE R-106 to DELTA, join airway W 4 . 8000'
GOLF 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, intercept ALE R-012 to GOLF, join airway B 544 .
KILO 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at turn to ALE, ALE R-176 to KILO, join airway B 538 . 8000'
LIMA 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at turn to ALE, ALE R-225 to LIMA, join airway W 6 . 8000'
TANGO 2R	On runway heading to D5 ALE, turn RIGHT, along ALE 5 DME arc, at turn to ALE, ALE R-154 to TANGO, join airway B 544 . 8000'

OSAP/ALP
Apt Elev 1254'
N36 10.8 E037 13.6



ALEPPO, SYRIA
ALEPPO INTL

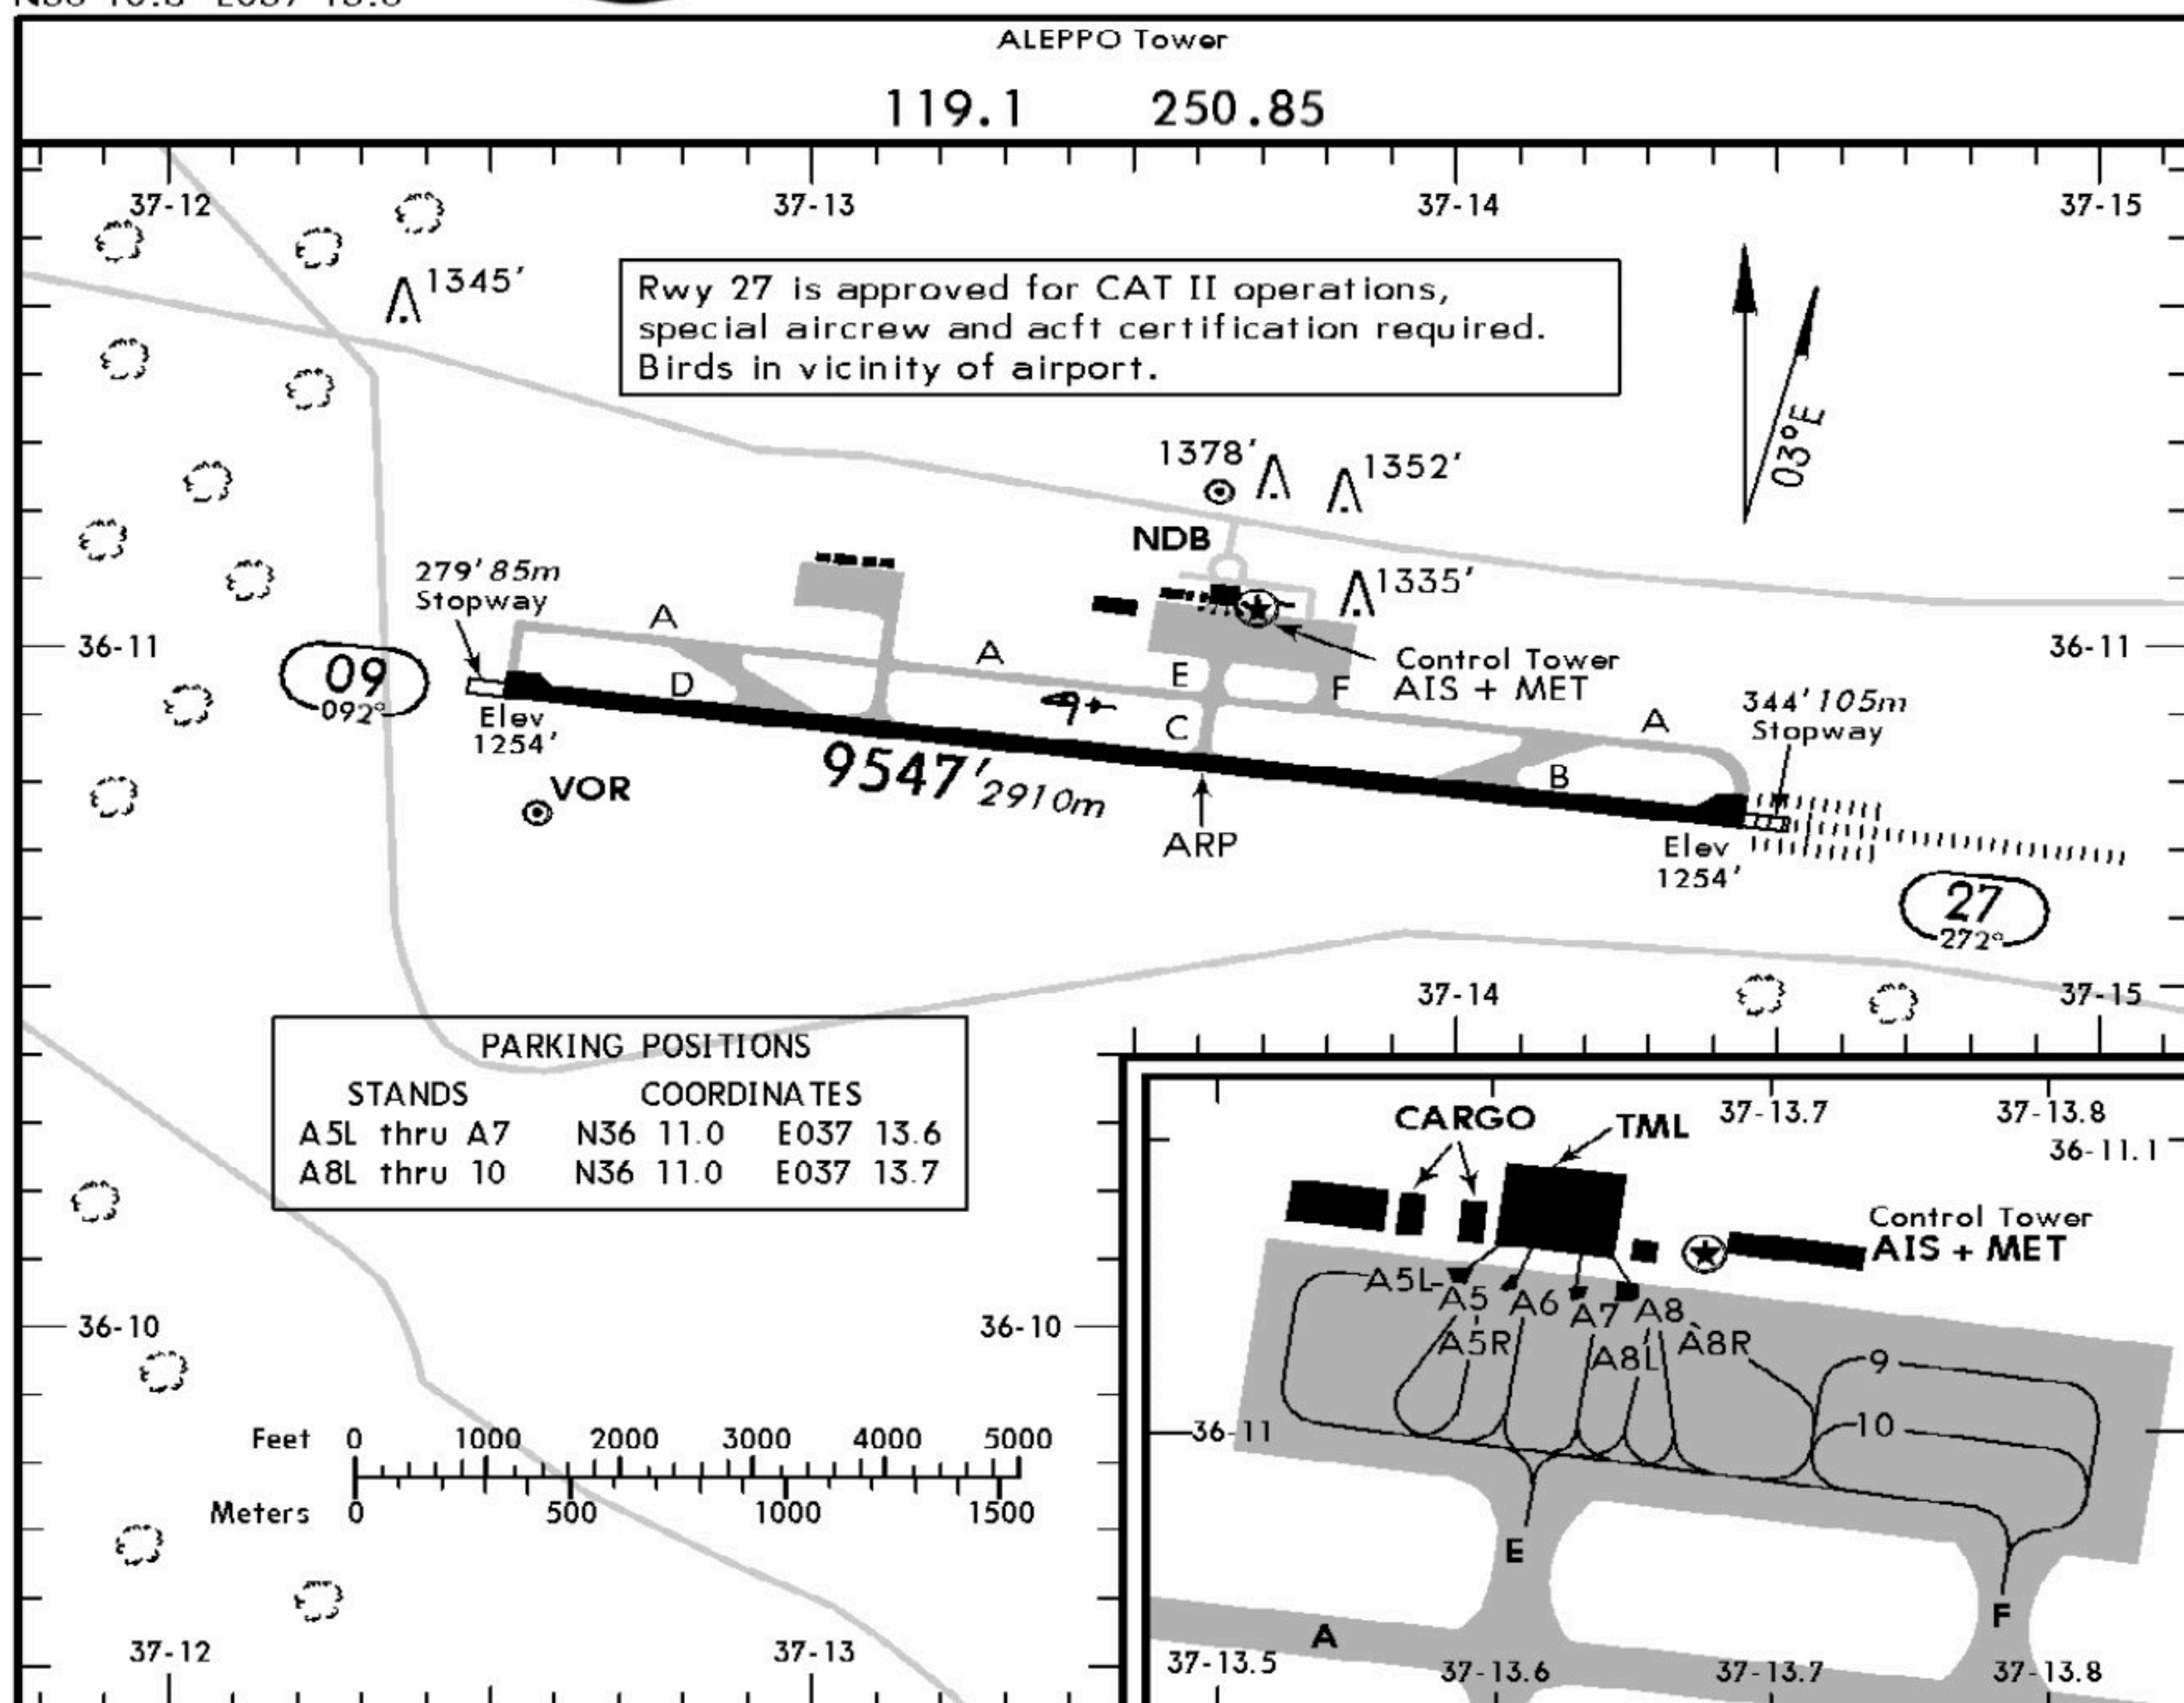

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS			
		LANDING BEYOND		TAKE-OFF	WIDTH
		Threshold	Glide Slope		
09	HIRL (60m) CL HST-B				148'
27	HIRL (60m) CL HIALS-II TDZ PAPI (3.0°) HST-D		8514' 2595m		45m

TAKE-OFF

AIR CARRIER (JAA)
All Rwys

LVP must be in force

	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A			
B	200m	250m	400m
C			
D	250m	300m	



STRAIGHT-IN RWY		A	B	C	D
09	VOR DME	1670' (394')	1670' (394')	1670' (394')	1670' (394')
		1800m	1800m	1800m	2000m
	VOR	2160' (884')	2160' (884')	2160' (884')	2160' (884')
		4400m	4400m	4400m	4400m
27	CAT 2 ILS	1395' (138')	1412' (155')	1424' (167')	1438' (181')
		RA138' R400m	RA155' R450m	RA167' R450m	RA181' R450m
	ILS DME	1483' (226')	1495' (238')	1503' (246')	1513' (256')
		R600m	R600m	R600m	R650m
	ALS out	R1000m	R1000m	R1000m	R1200m
	LOC	1600' (343')	1600' (343')	1600' (343')	1600' (343')
		R900m	R1000m	R1000m	R1400m
	ALS out	R1500m	R1500m	R1800m	R2000m
	VOR DME	1800' (543')	1800' (543')	1800' (543')	1800' (543')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m
	NDB	1850' (574')	1850' (574')	1850' (574')	1850' (574')
		R1000m	R1200m	R1200m	R1600m
	ALS out	R1500m	R1500m	R2000m	R2000m

TAKE-OFF RWY 09, 27			
LVP must be in force			
RL & CL		RCLM (DAY only) or RL	NIL (DAY only)
A	200m	250m	400m
B			
C			
D	250m	300m	500m




Approach Control through Tower


ALEPPO Tower

119.1 250.85


LOC IALE	Final Apch Crs	GS LOM	ILS DA(H) Refer to Minimums	Apt Elev 1276'	
110.1	272°	2298' (1041')		RWY 1254'	
MISSED APCH: MAX IAS 200 KT. As soon as practicable turn LEFT onto R-230 climb to 3000', then as directed.					
Alt Set: MB	Rwy Elev: 45 MB	Trans level: FL 150	Trans alt: 13000'	MSA ALE VOR	

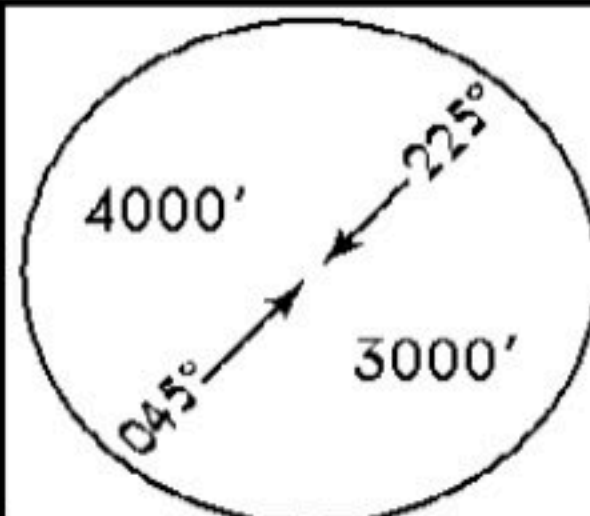

Pas d'ILS dans DCS

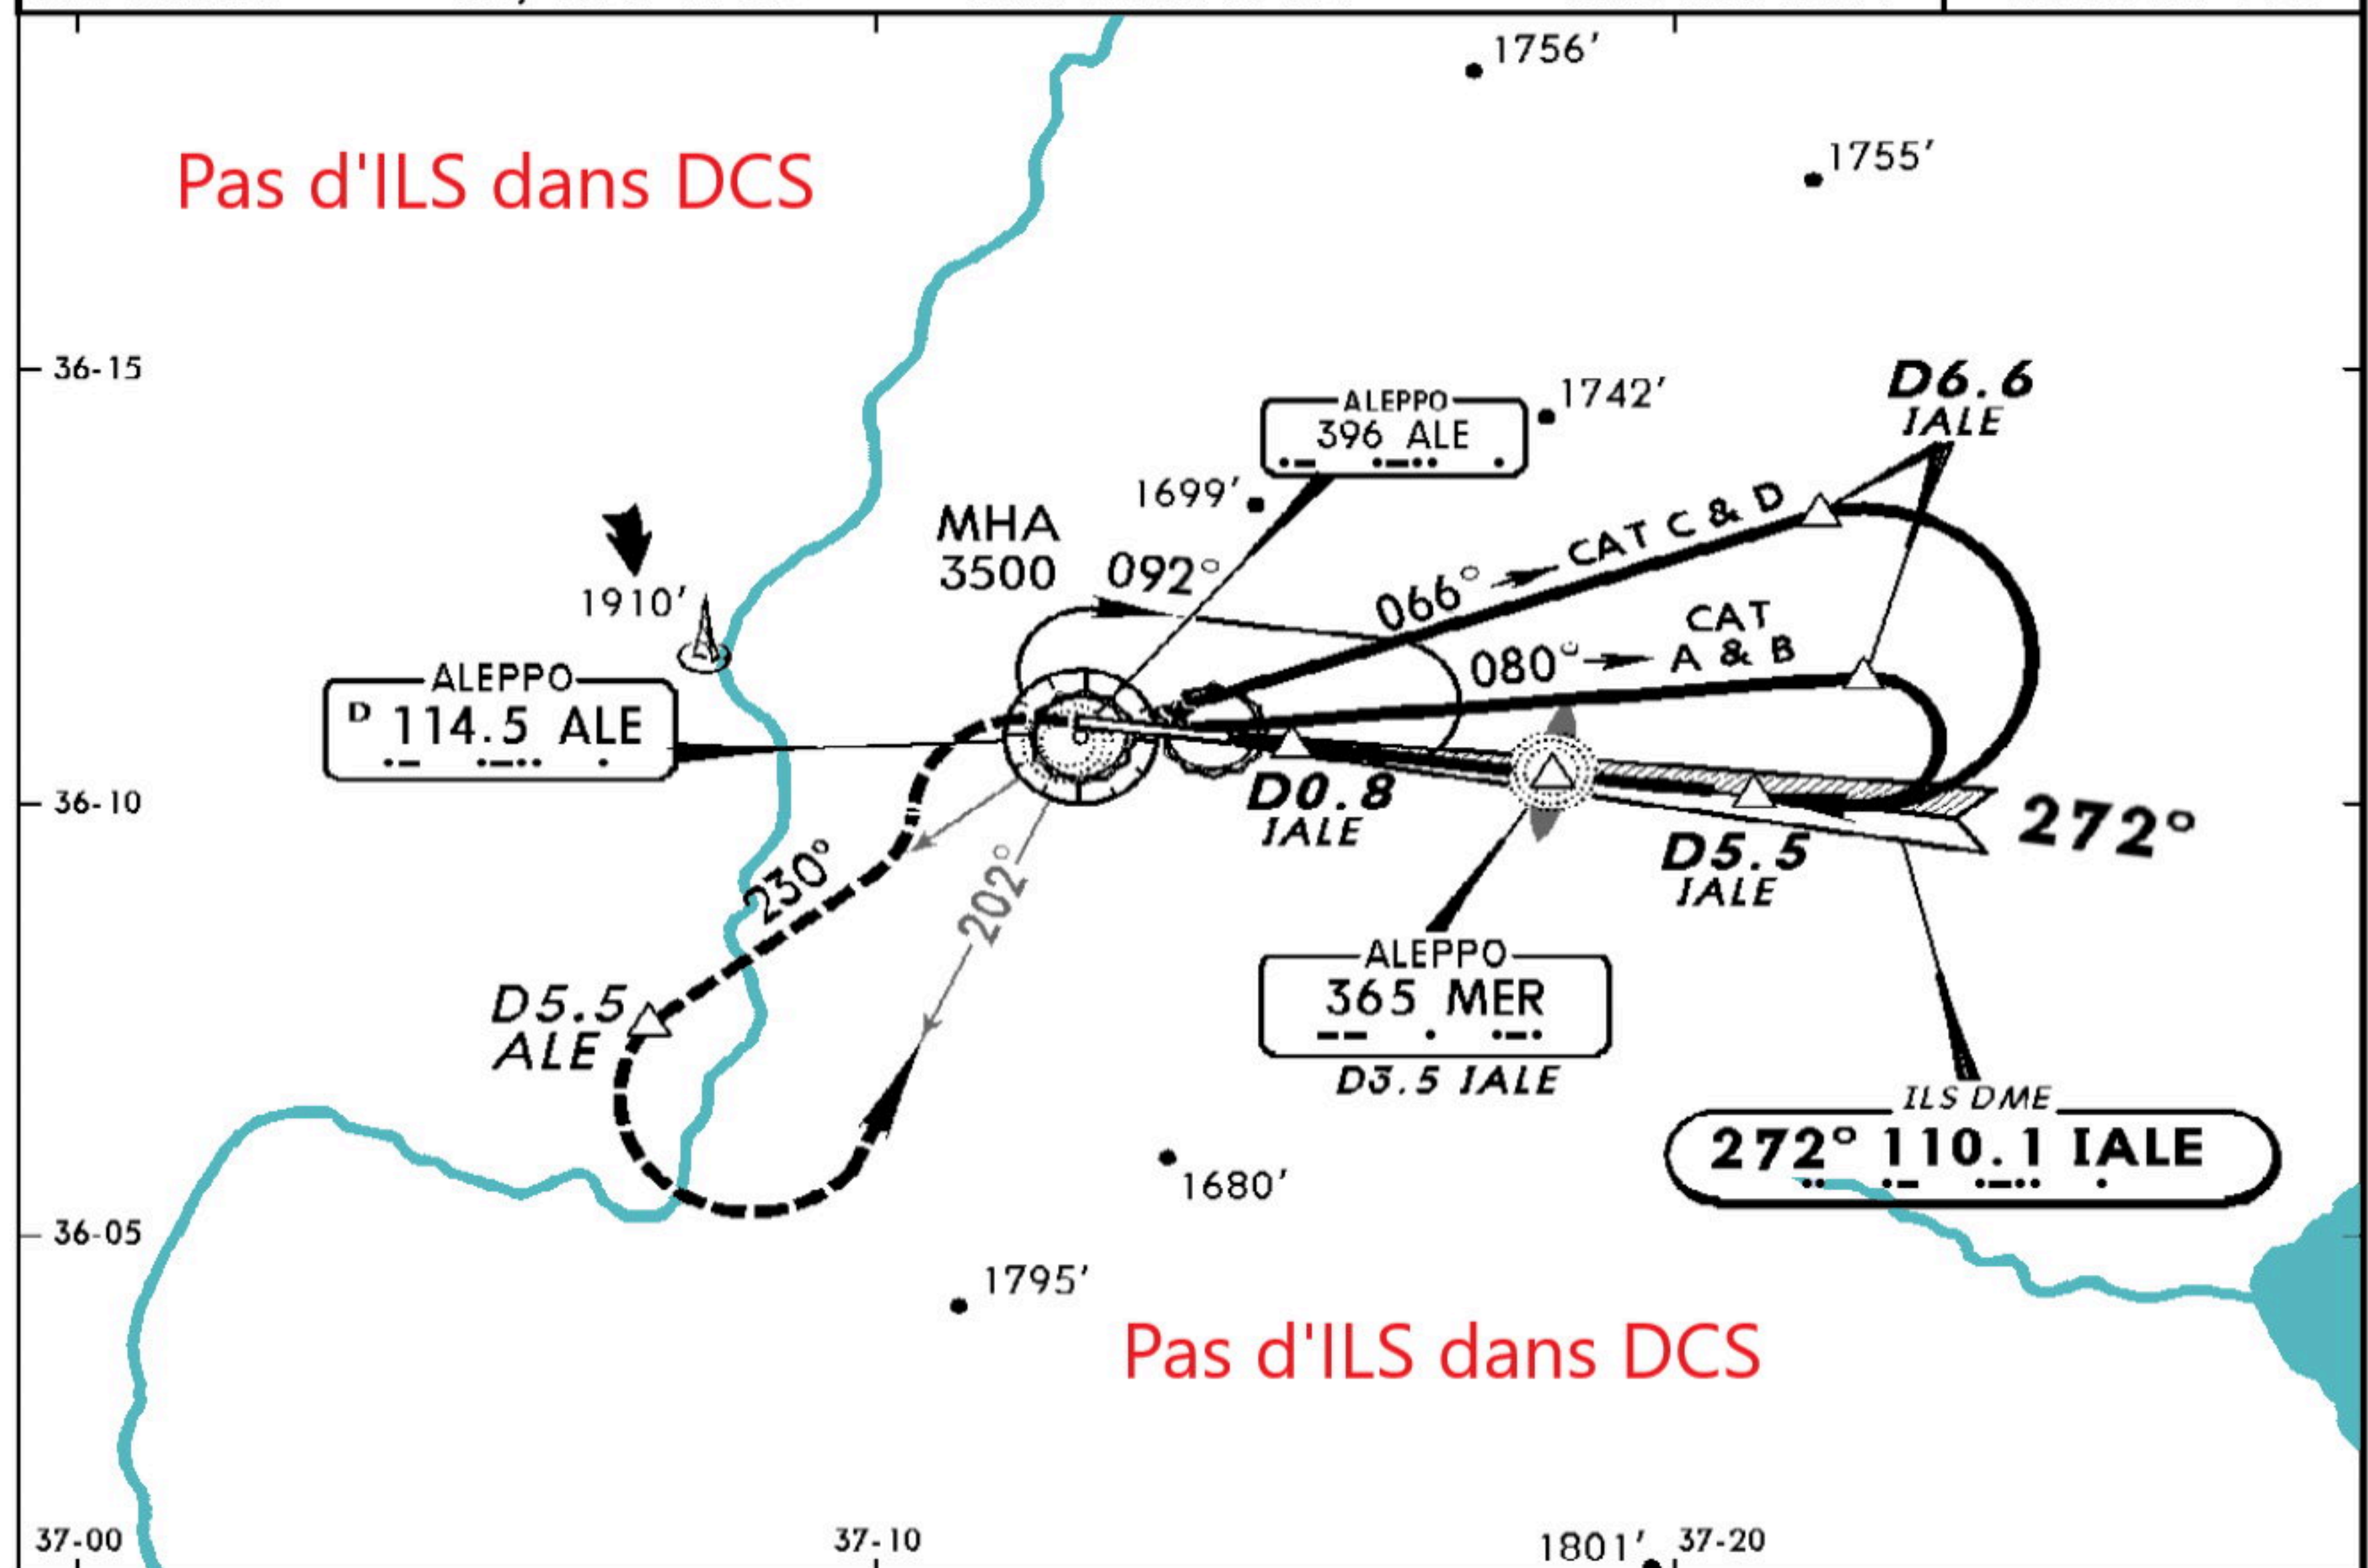

Pas d'ILS dans DCS

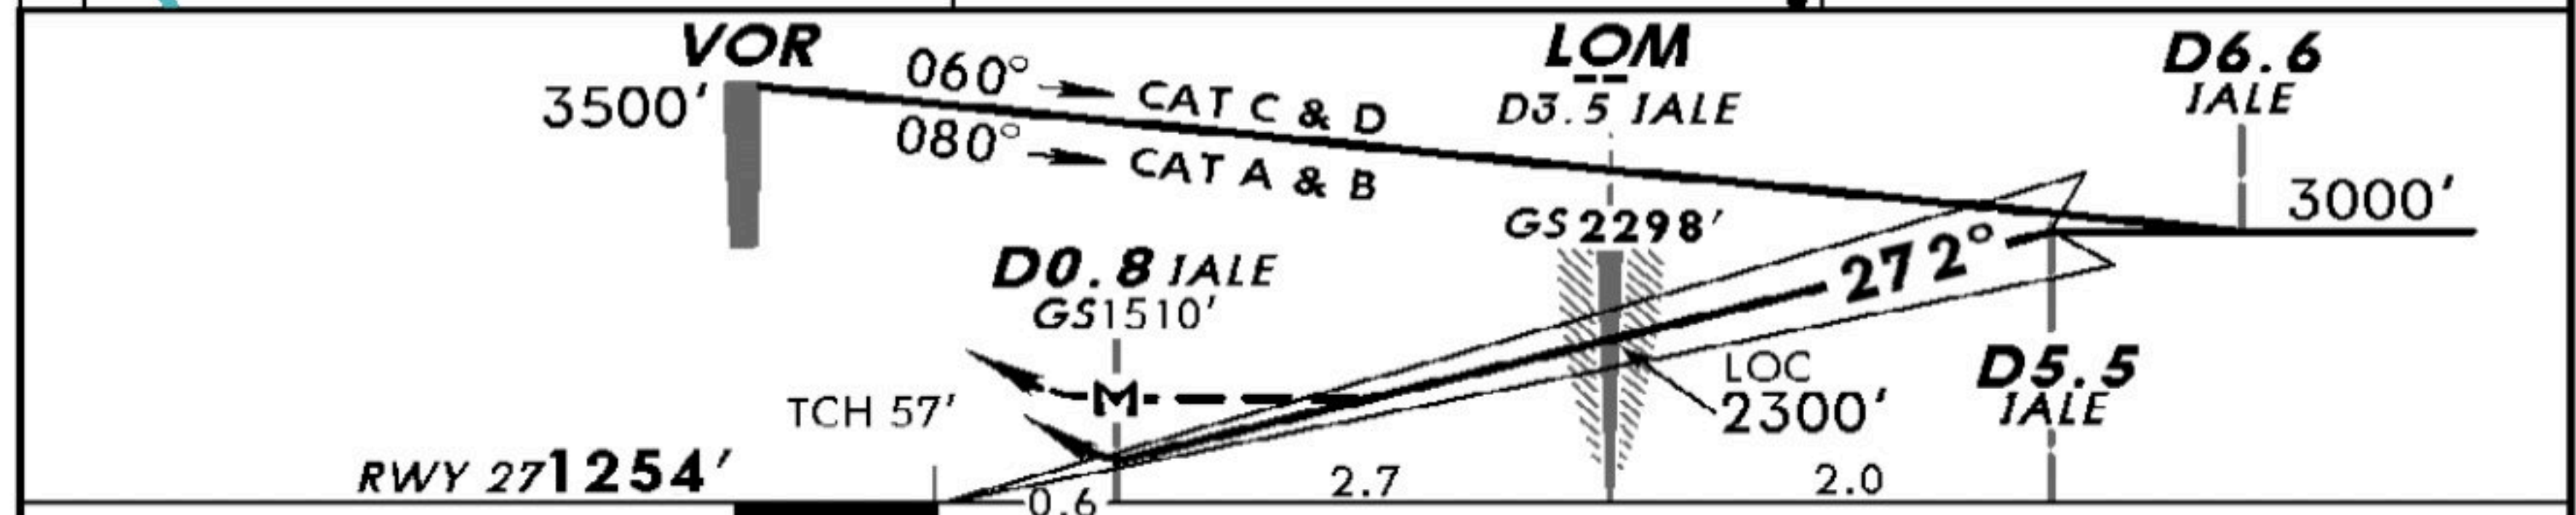

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	200 KT MAX	As soon as practicable	3000'	onto 114.5 R-230
ILS GS 3.00° or LOC Desc Grad 5.2%	377	484	538	646	753	861					
MAP at D0.8 IALE											

STRAIGHT-IN LANDING RWY 27					CIRCLE-TO-LAND	
ILS DA(H)			LOC (GS out)			
A: 1483' (226')	C: 1503' (246')		MDA(H) 1600' (343')			
B: 1495' (238')	D: 1513' (256')					
FULL	TDZ or CL out	ALS out	ALS out			
A						A
B			800m	1600m		B
C	800m	1200m				C
D			1200m	2000m		D
					NOT AUTHORIZED	



Approach Control through Tower

ALEPPO Tower

119.1 250.85

GPS RWY 27

Position threshold
N 36°10.747'
E 037°14.409'

Final
Apch Crs
272°

GS
LOM
2298' (1041')

CAT II ILS
DA(H)
Refer to
Minimums

Apt Elev 1276'
RWY 1254'

MISSED APCH: MAX IAS 200 KT. As soon as practicable turn LEFT onto R-230 climb to 3000', then as directed.


Alt Set: MB

Rwy Elev: 45 MB



Trans level: FL 150

Trans alt: 13000'


Special Aircrew & Acft Certification Required.

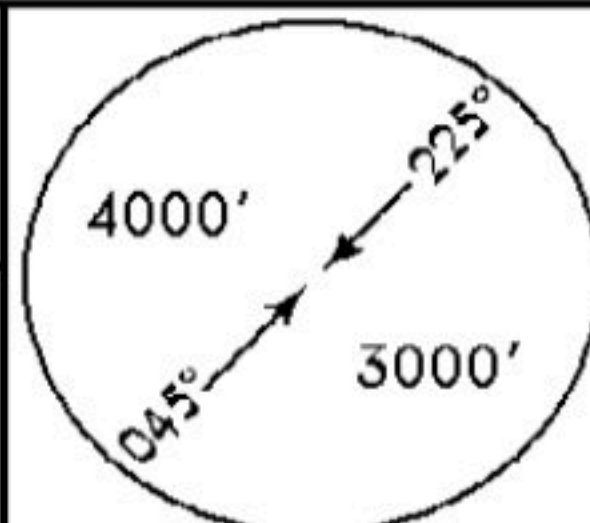

MSA
ALE VOR

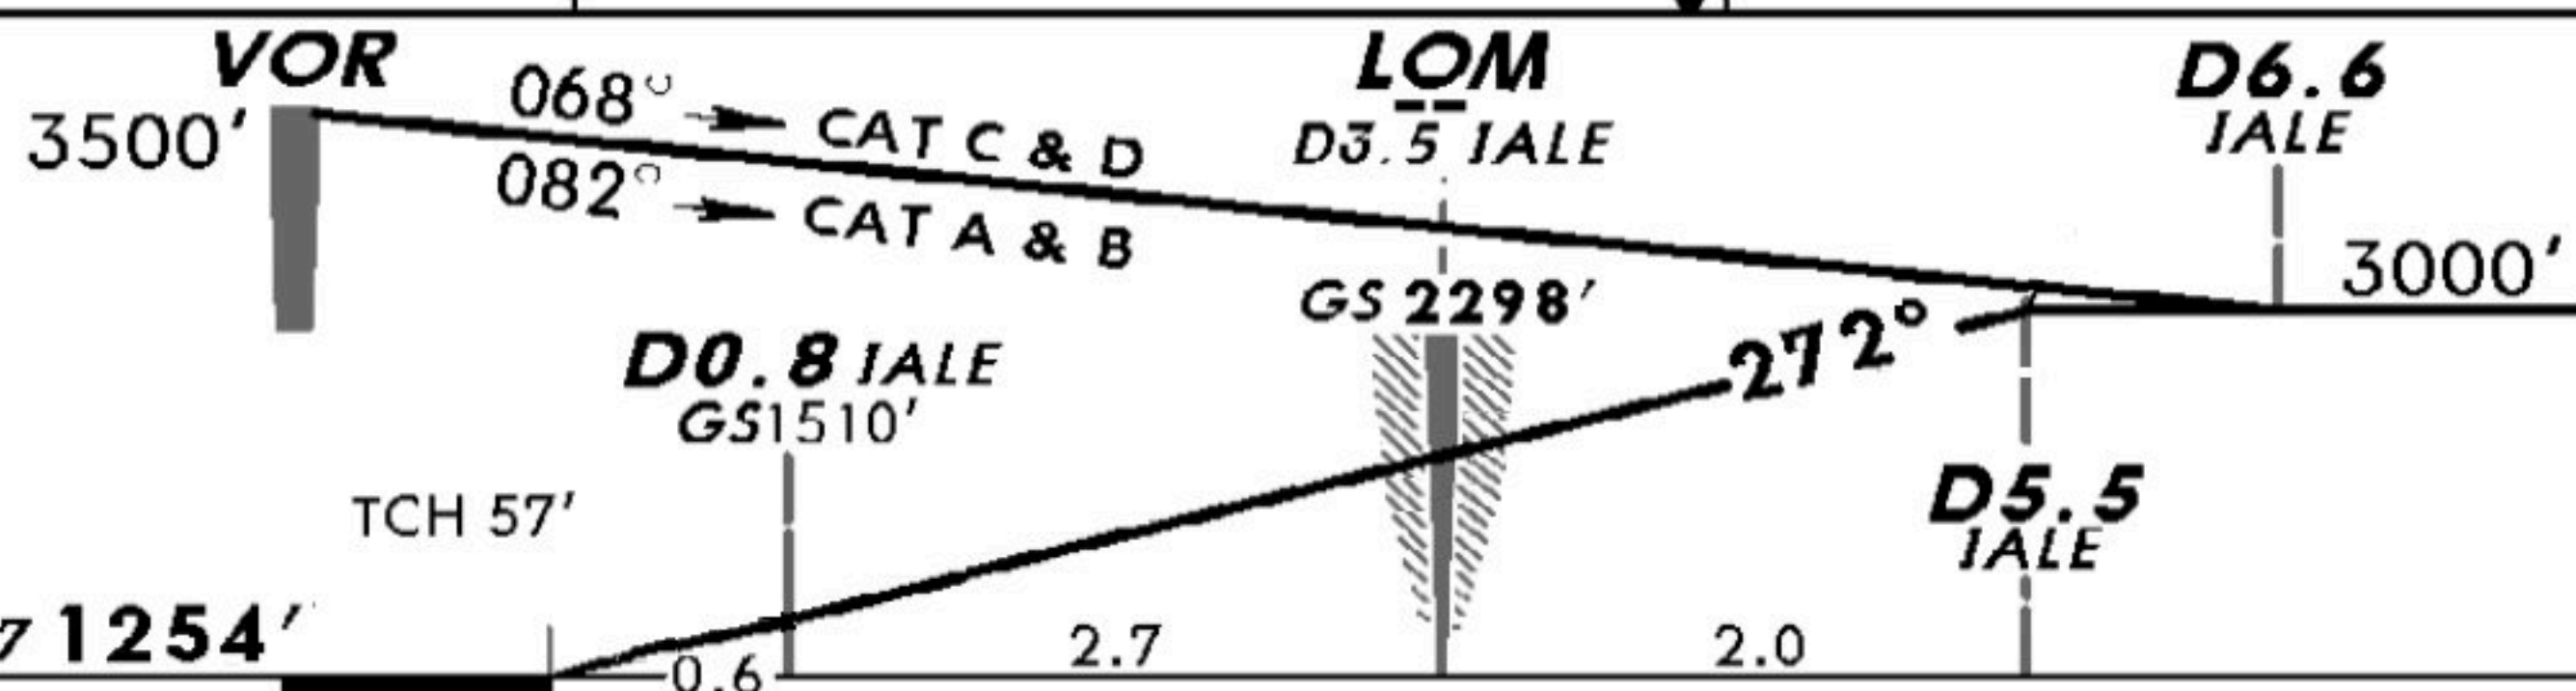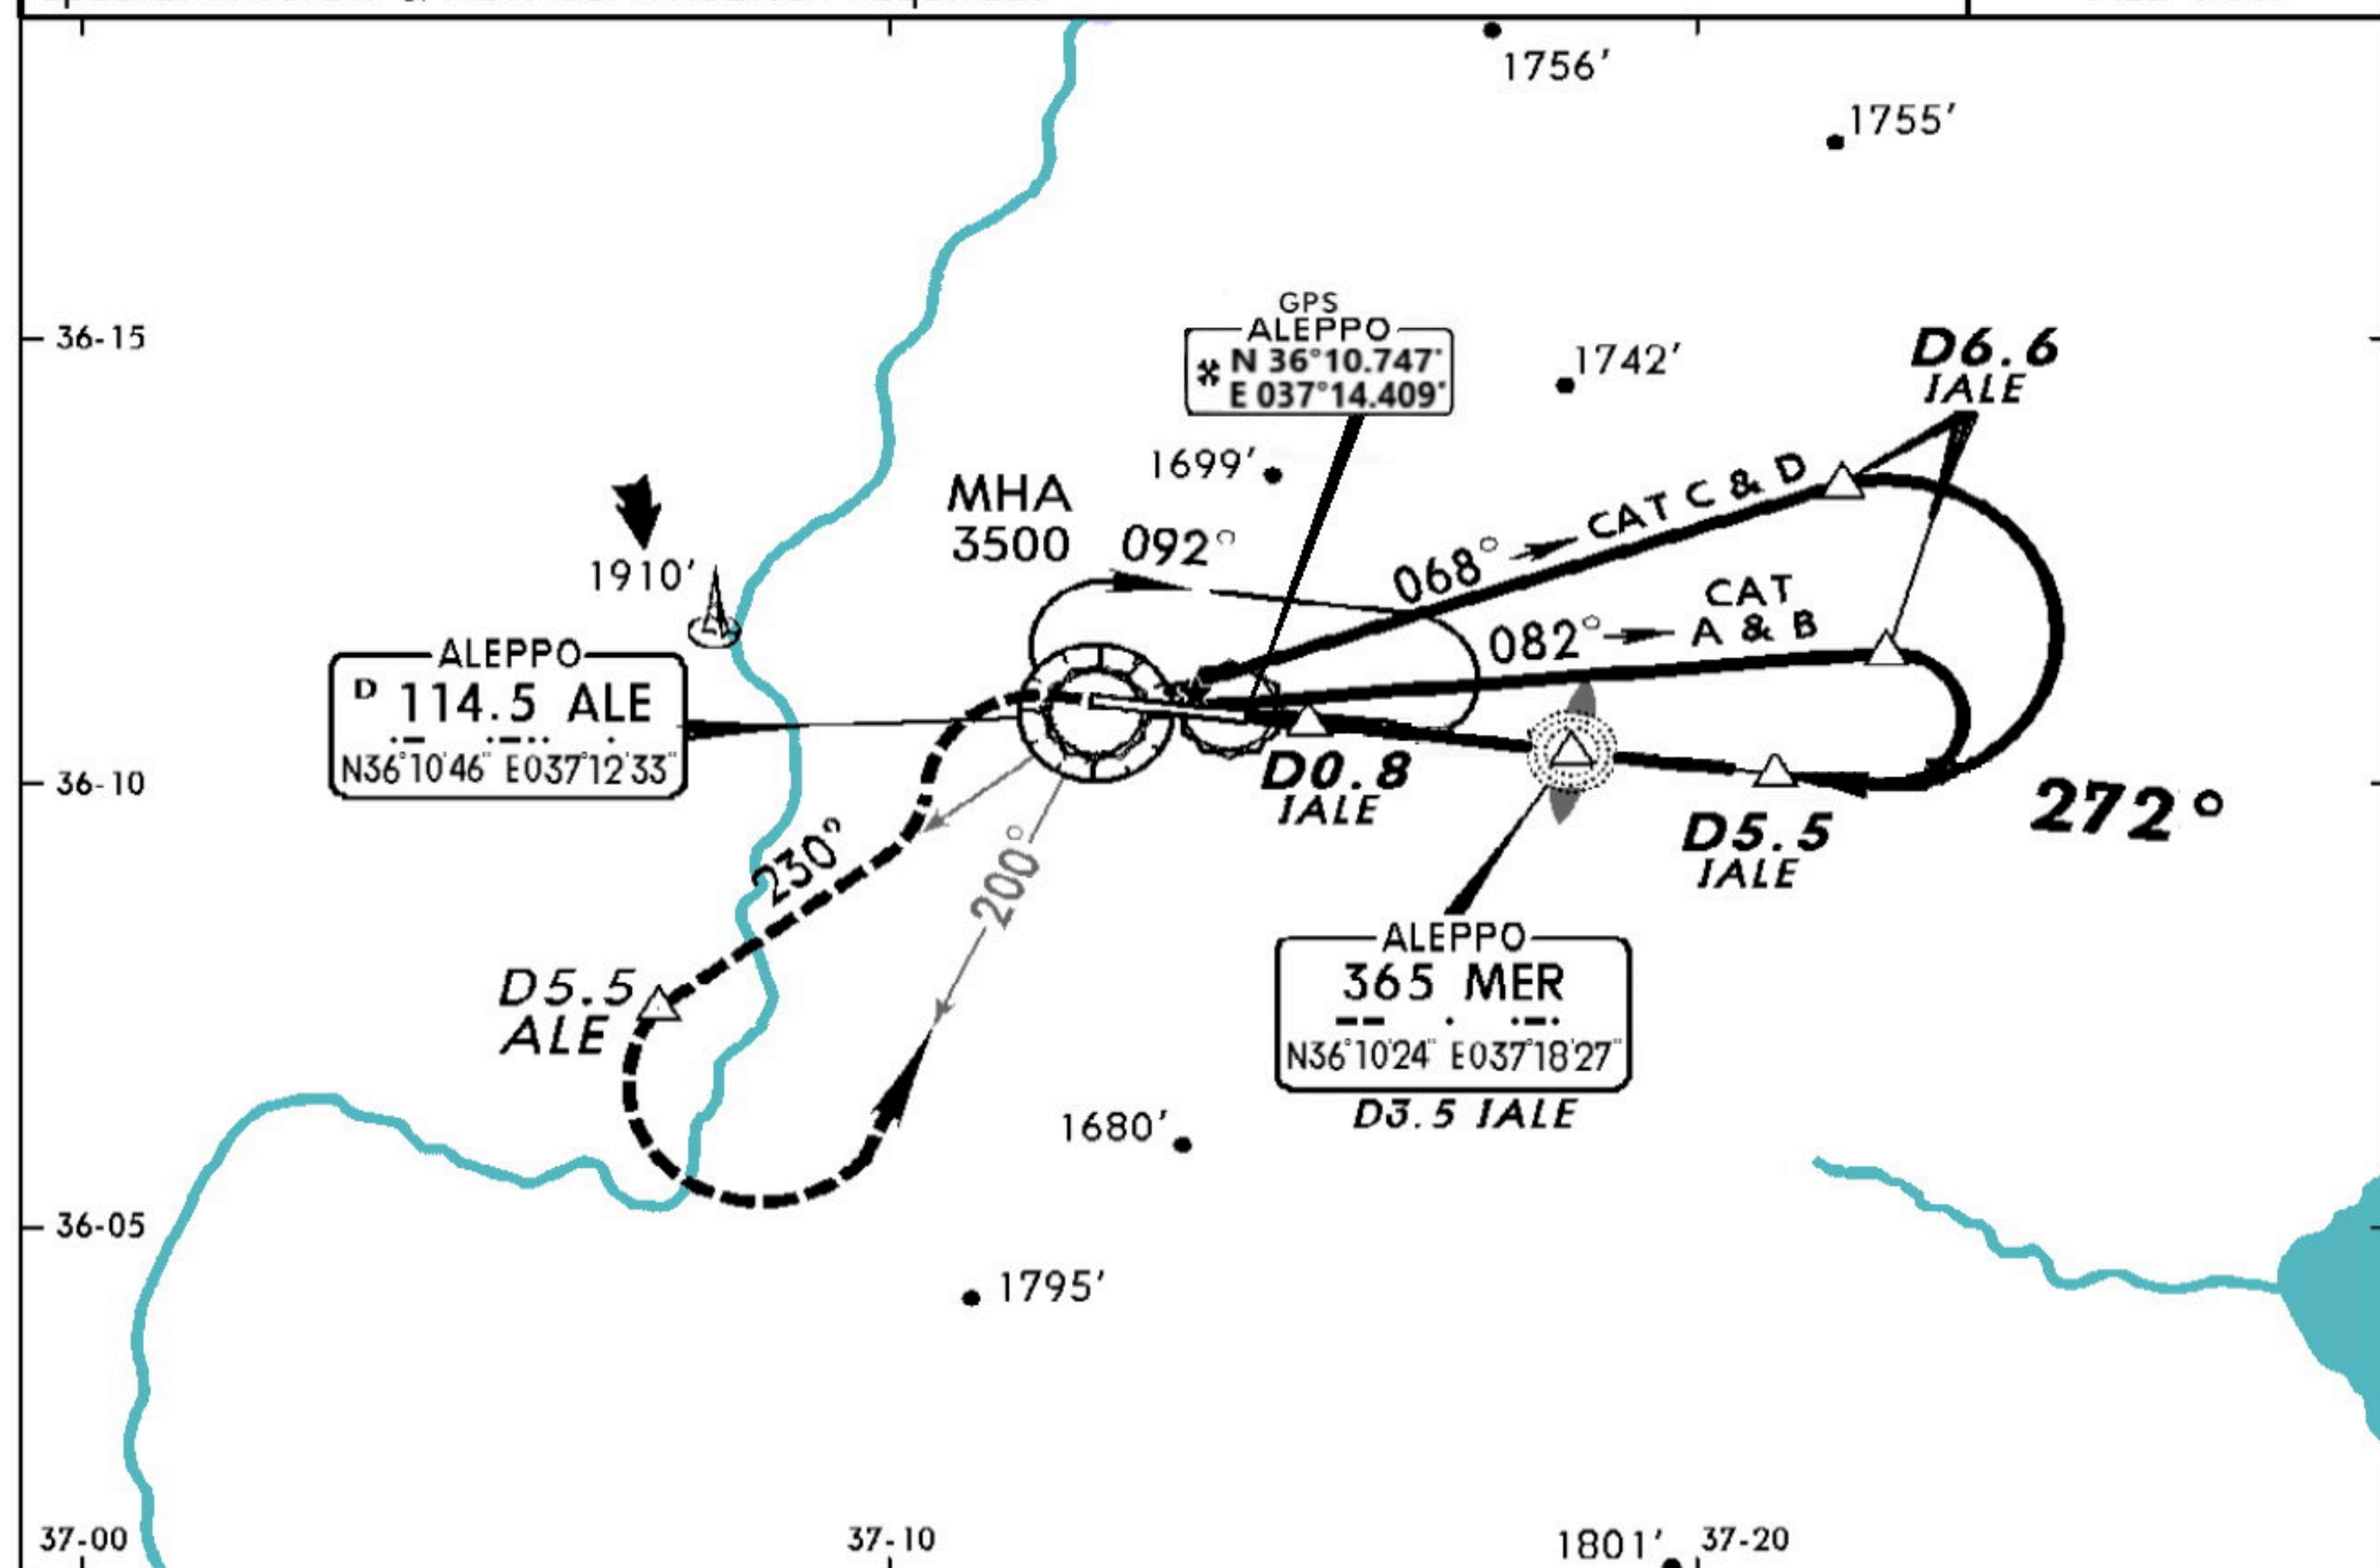

Gnd speed-Kts	70	90	100	120	140	160
GS 3.00°	377	484	538	646	753	861



**200 KT
MAX**

As soon as practicable


3000' onto **114.5**
LT **R-230**


STRAIGHT-IN LANDING RWY 27

CAT II ILS


A	B	C	D
RA 138' DA(H) 1395' (138')	RA 155' DA(H) 1412' (155')	RA 167' DA(H) 1424' (167')	RA 181' DA(H) 1438' (181')
RVR 350m	RVR 500m	RVR 550m	

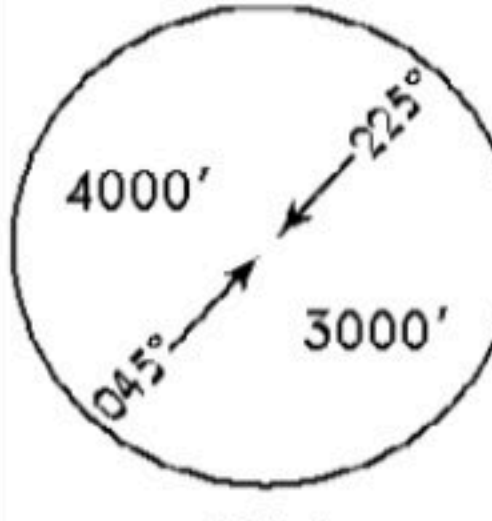

Approach Control through Tower ALEPPO Tower 119.1 250.85					
VOR ALE 114.5 N36°10'46" E037°12'33"	Final Apch Crs 092°	With DME Minimum Alt D4.9 3000' (1724')	With DME MDA(H) 1670' (394')	Apt Elev 1276' RWY 1254'	 MSA ALE VOR
		W/o DME Minimum Alt No FAF	W/o DME MDA(H) 2160' (884')		
MISSED APCH: Turn RIGHT (MAX 185 KT) on R-109 climbing to 4000' to VOR.					
Alt Set: MB		Rwy Elev: 46 MB		Trans level: FL 150	
Procedure based on MAX 185 KT.				Trans alt: 13000'	

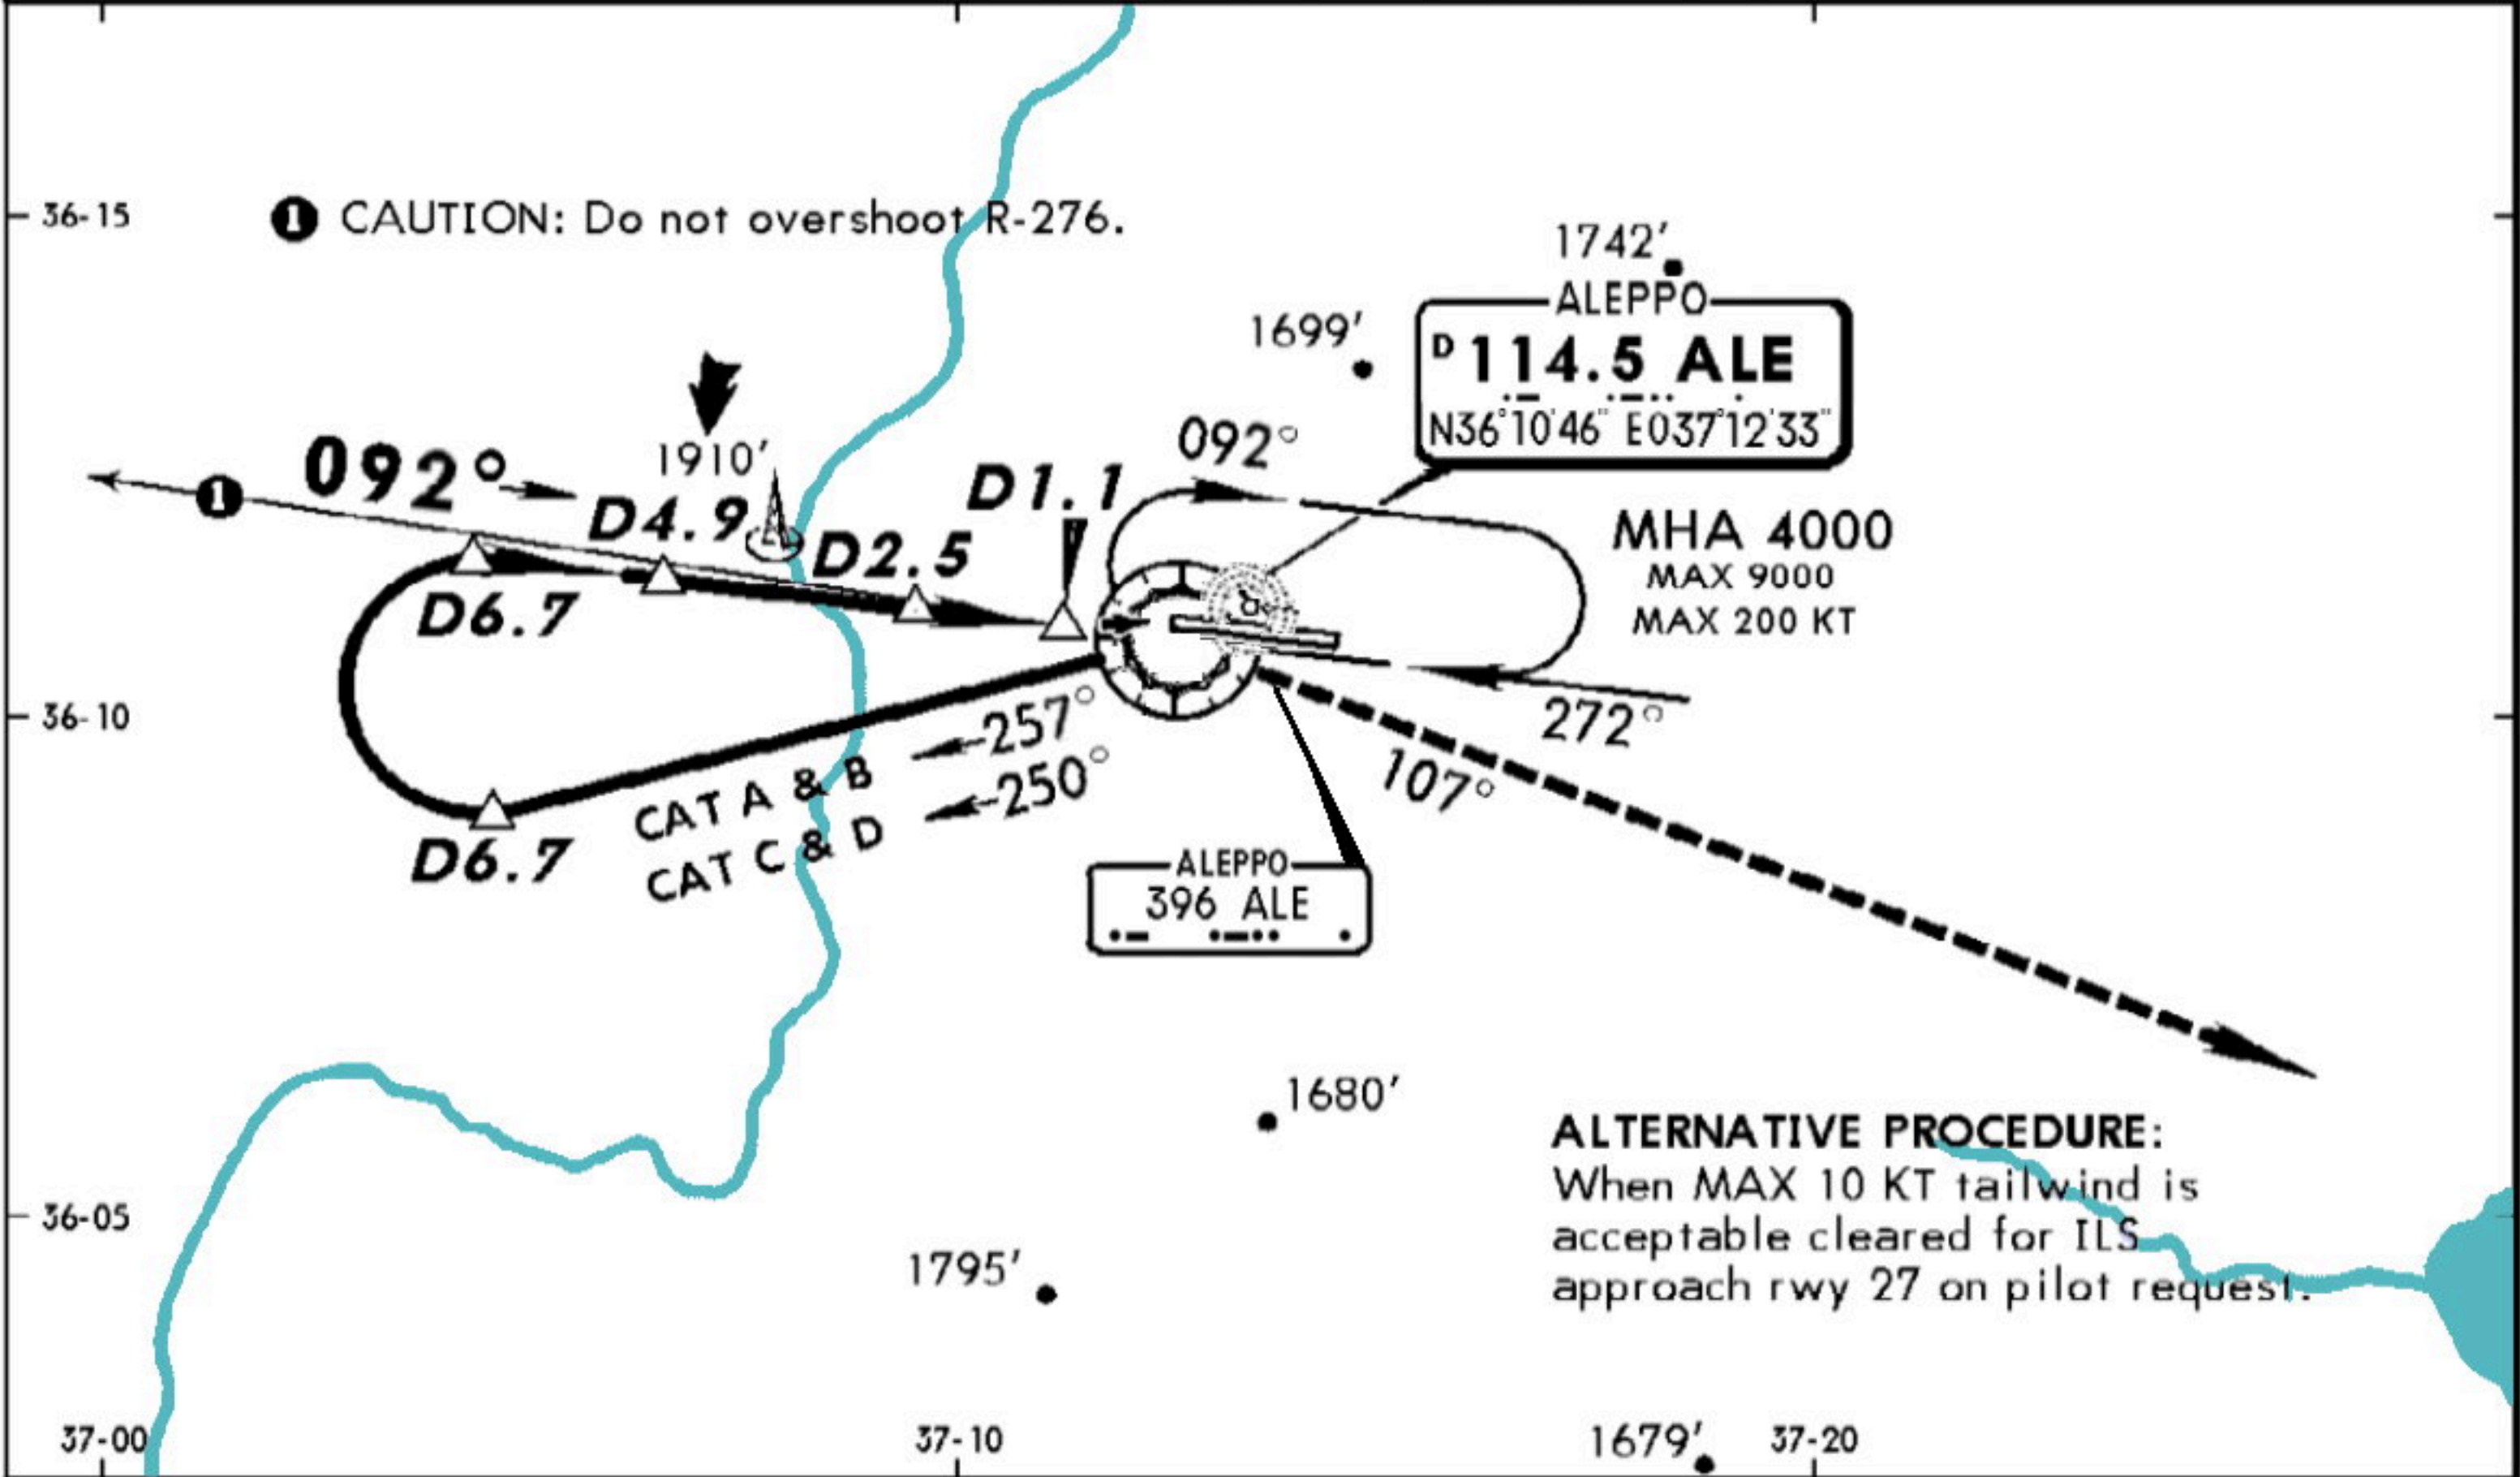


② ALE DME	4.0	3.0	2.0
ALTITUDE	2680'	2340'	1990'


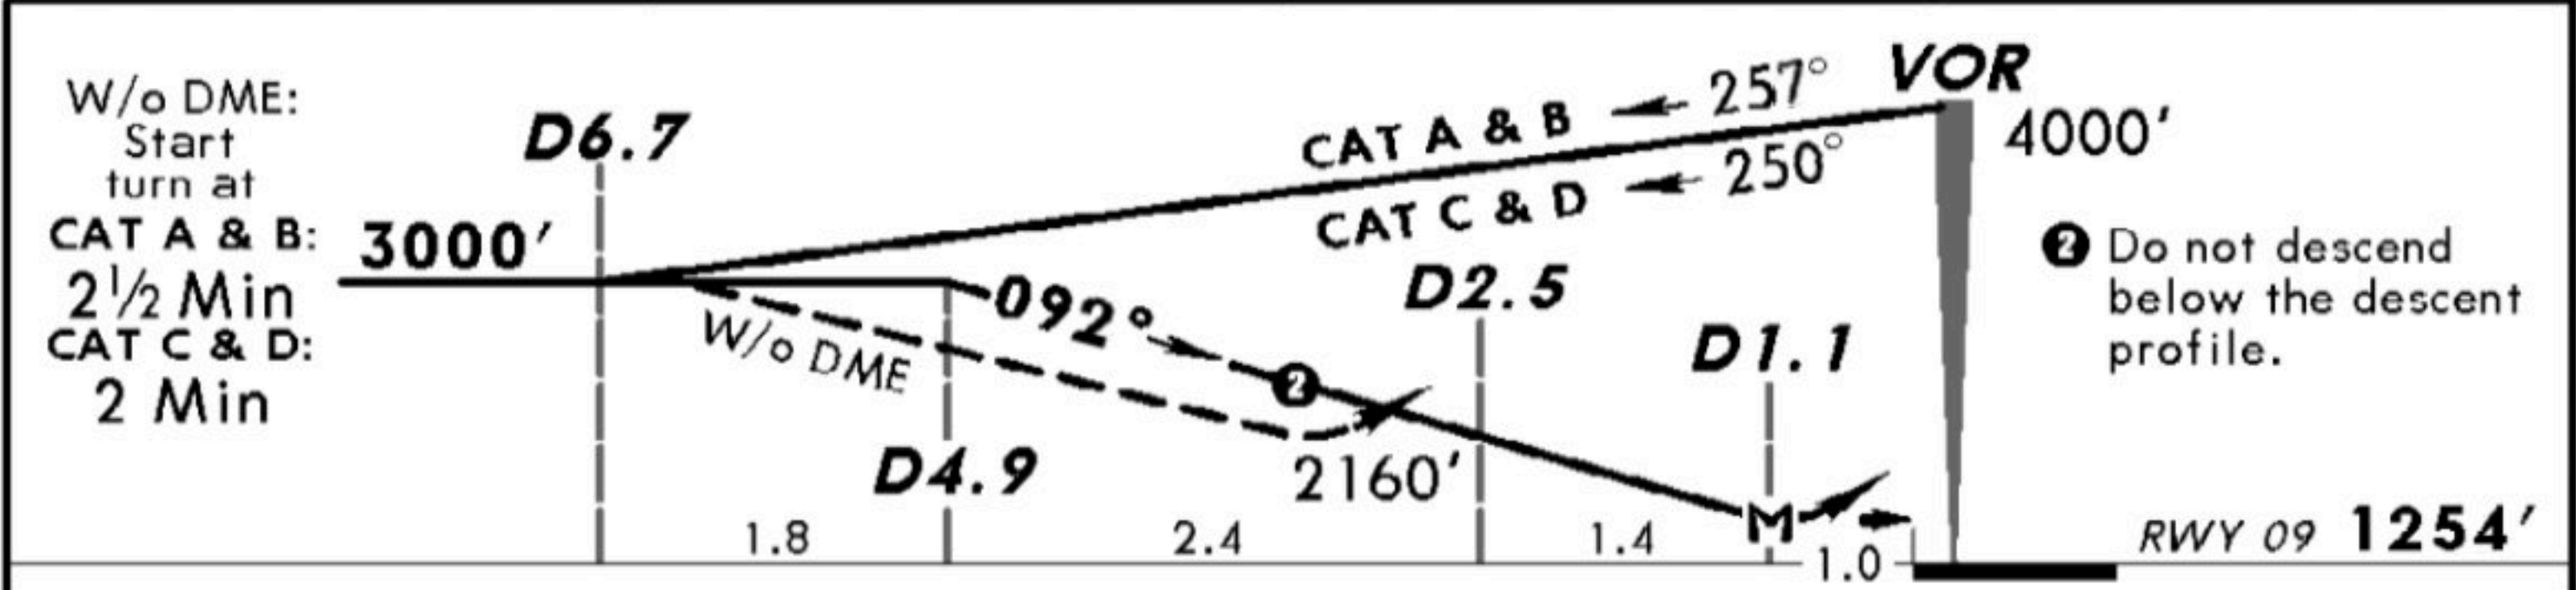


Gnd speed-Kts	70	90	100	120	140	160	185 KT MAX	4000' RT	ALE on 114.5 R-109
VOR DME: Descent Gradient 5.7%	404	520	577	693	808	924			
VOR DME: MAP at D1.1									

STRAIGHT-IN LANDING RWY 09					
With DME		W/o DME			
MDA(H) 1670' (394')		MDA(H) 2160' (884')			
A	1800m	4400m			
B					
C					
D					

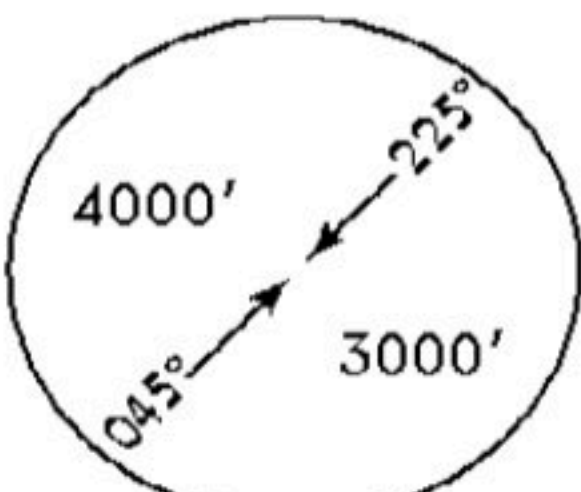

Approach Control through Tower ALEPPO Tower 119.1 250.85					 MSA ALE VOR
VOR 114.5	ALE Final Apch Crs 269°	Minimum Alt D6.4 2280' (1023')	MDA(H) 1800' (543')	Apt Elev 1276' RWY 1254'	
MISSED APCH: Climb to 3500' and join VOR holding.					
Alt Set: MB Rwy Elev: 45 MB Trans level: FL 150 Trans alt: 13000'					
Procedure based on MAX 230 KT.					

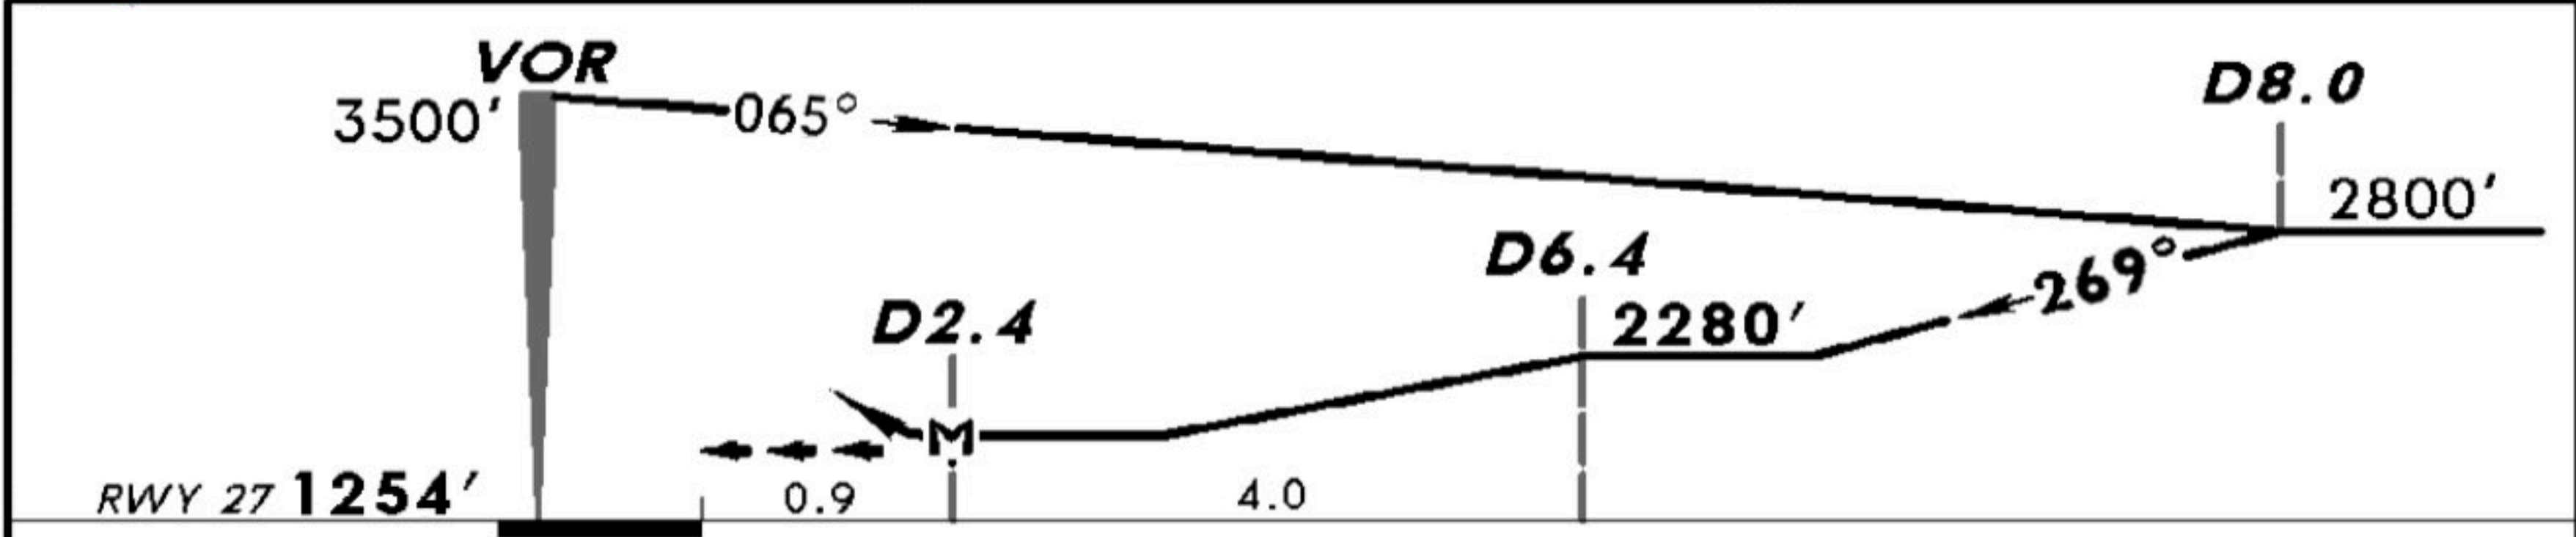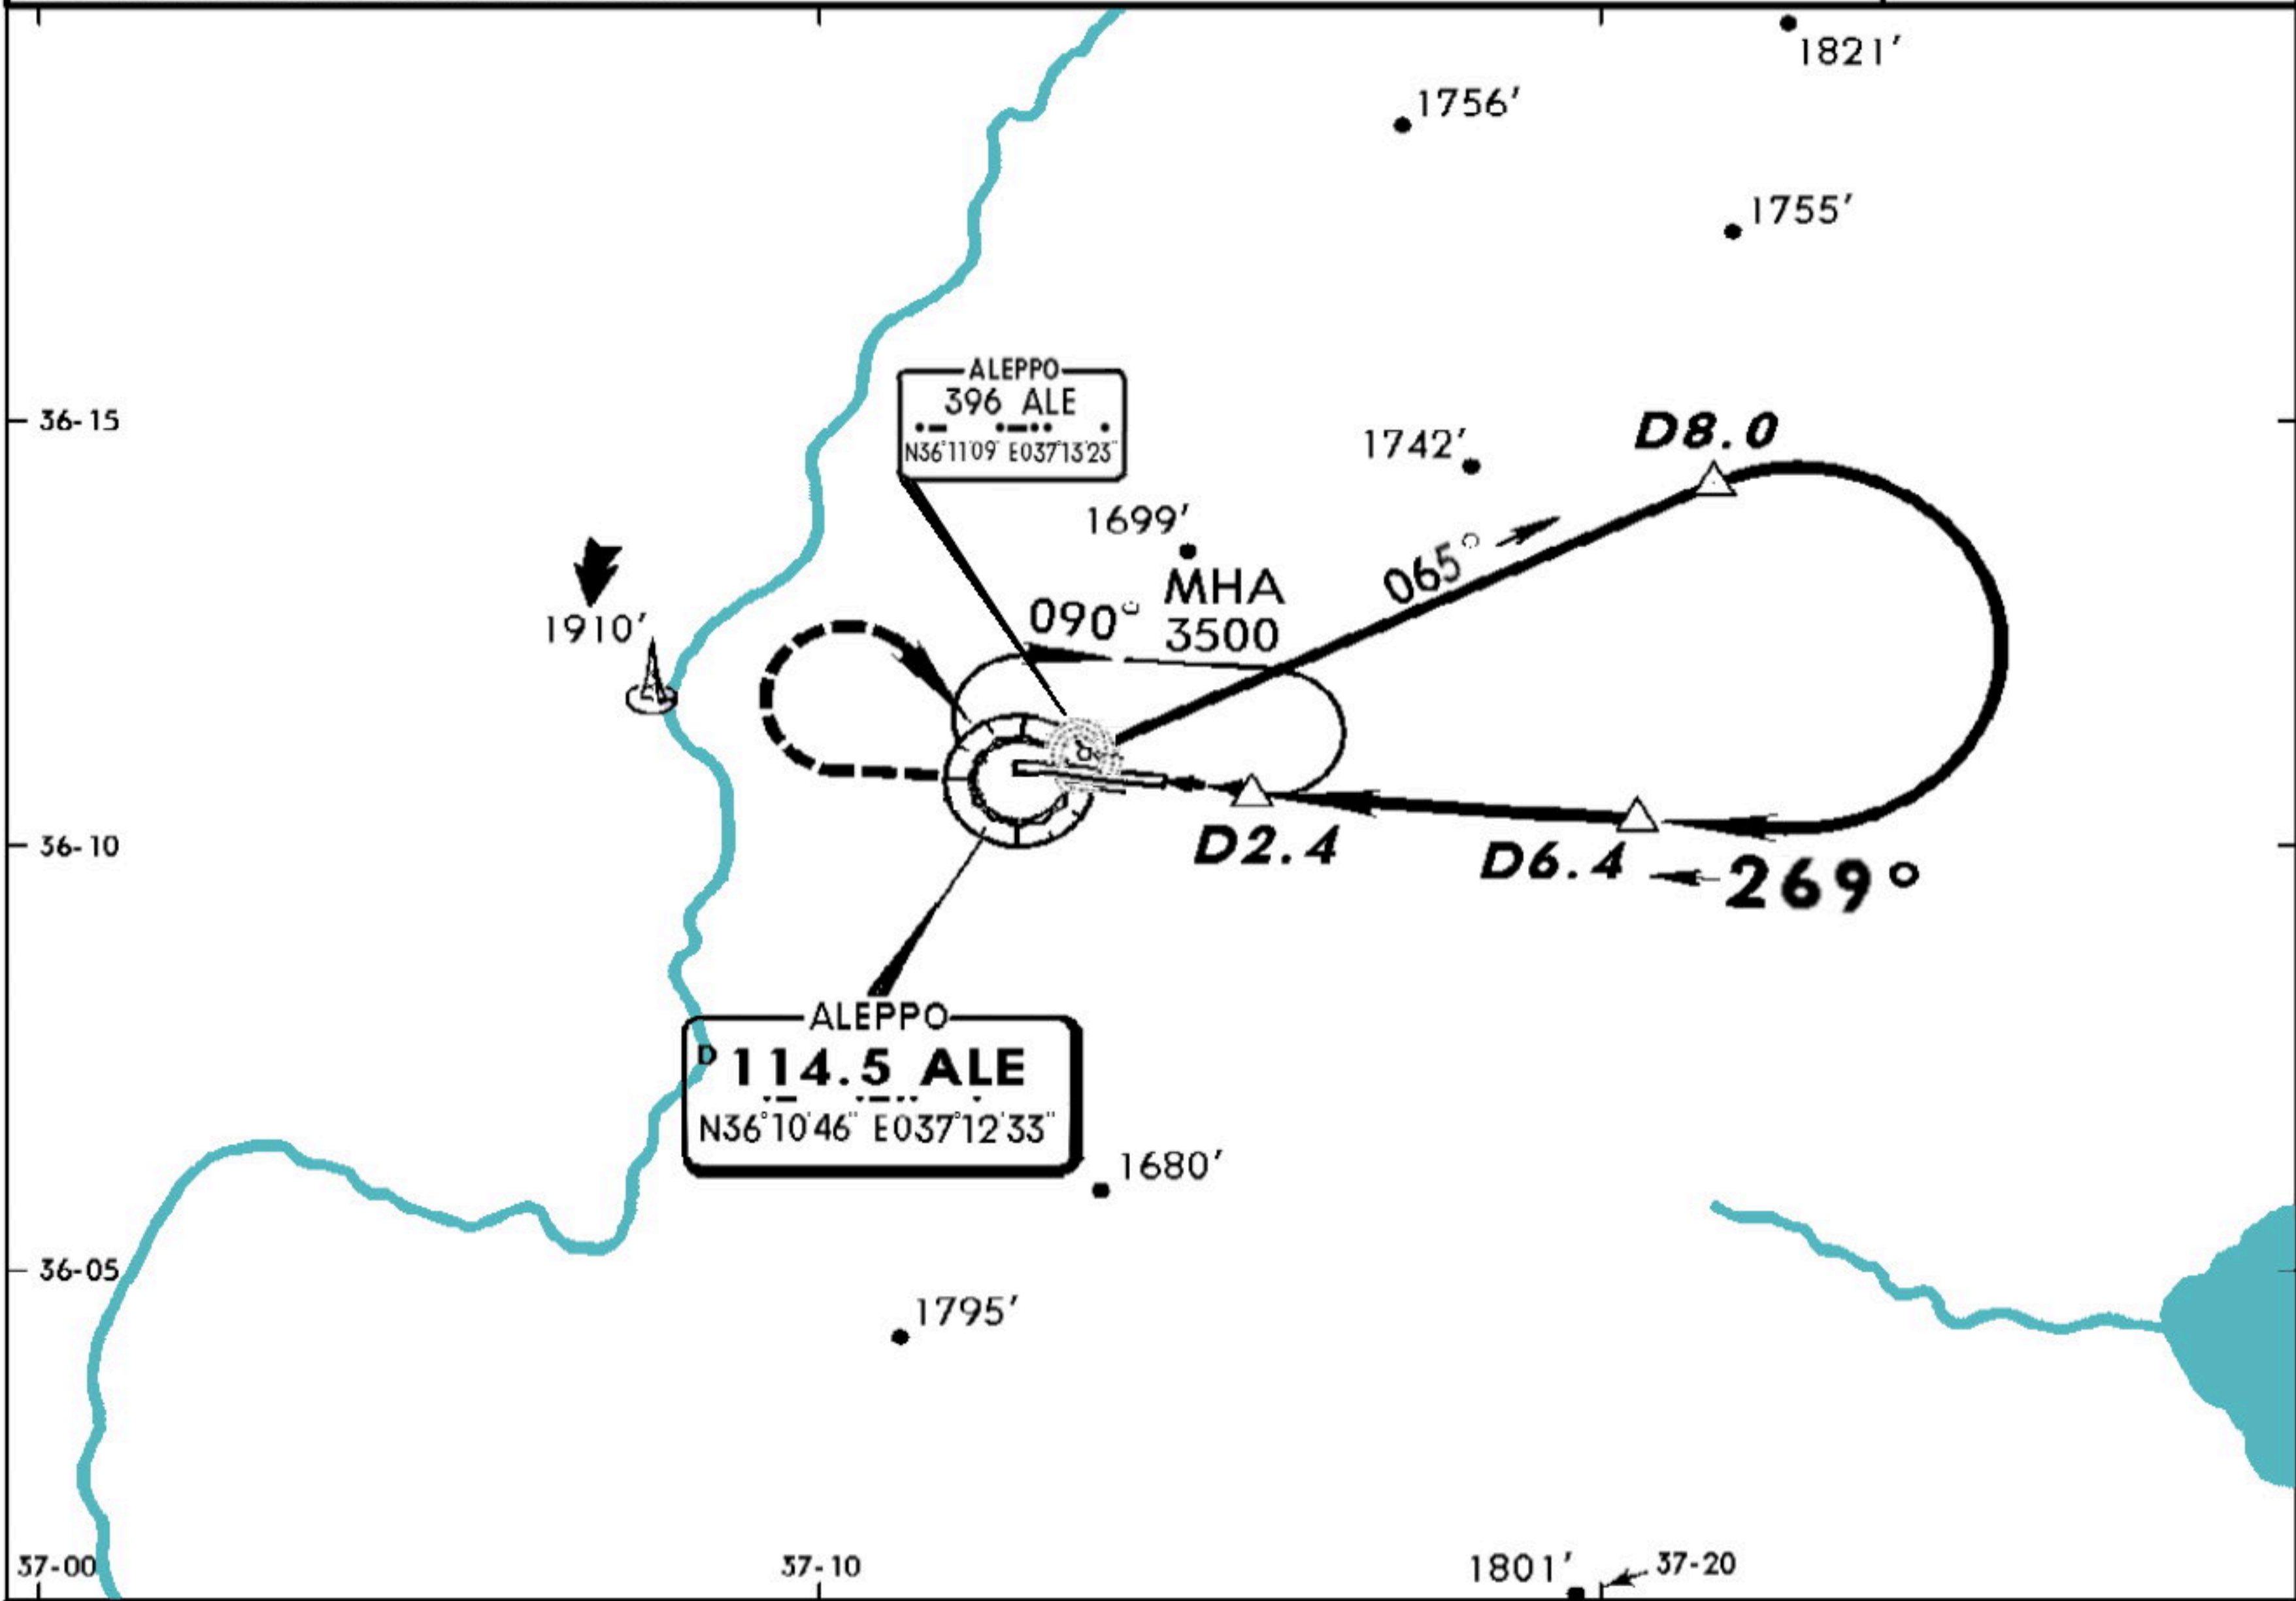

MAP at D2.4				HIALS-II PAPI PAPI		3500'	ALE 114.5 HOLDING PATTERN
						↑	

STRAIGHT-IN LANDING RWY 27							
MDA(H) 1800' (543')							
ALS OUT							
A	800m		1600m				
B							
C	1600m		2400m				
D	2000m		2800m				

