

# LP\_Practice\_NonRepeatedDigitsCount

Sasi | 09 Feb 2023



Finish State: Normal

Test Taken on: February 09, 2023 08:58:43 AM IST



Sasi

sasidevi.s.2020.cse@ritchennai.edu.in


Overall Summary

40 Marks Scored  
out of 40

100 % 100 percentile  
out of 42707 Test Takers

5m 10s Time taken  
of 1hr 5mins

Marks Scored

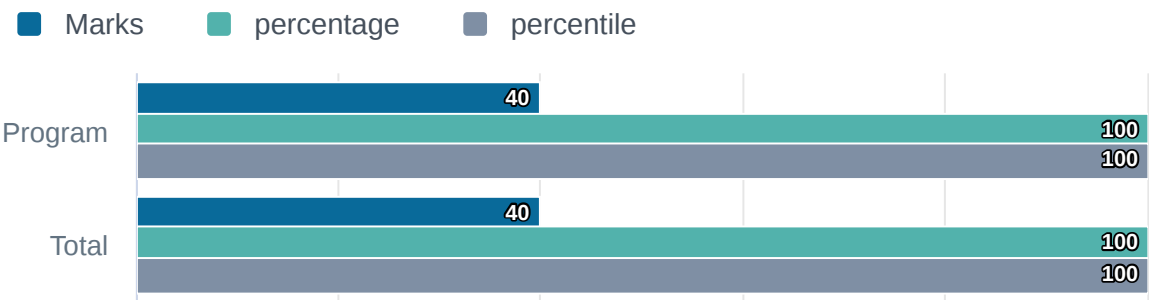

Attempt Summary

Distribution of questions attempted in a total of 1 question(s).



This shows the correctness of questions attempted by the test taker

Correct	1 Ques	40/40 Marks
Incorrect	0 Ques	0/0 Marks
Partially Correct	0 Ques	0/0 Marks
Not Attempted	0 Ques	0/0 Marks

Section-Wise Details

▼ Section 1 Program	question(s) 1 Q.	Time taken 5m 10s (Untimed)	Marks Scored 40 / 40
---------------------------	---------------------	--------------------------------	-------------------------

Marks Scored



Attempt Summary

Distribution of questions attempted in a total of 1 question(s).




■ Correct	1 Ques	40/40 Marks
-----------	--------	-------------

This shows the correctness of questions attempted by the test taker


Test Log

9th Feb 2023

- 08:53 AM



Started the test with Program
- 08:58 AM



Finished the test

## About the Report

This Report is generated electronically on the basis of the inputs received from the assessment takers. This Report including the AI flags that are generated in case of availing of proctoring services, should not be solely used/relied on for making any business, selection, entrance, or employment-related decisions. Mettl accepts no liability from the use of or any action taken or refrained from or for any and all business decisions taken as a result of or reliance upon anything, including, without limitation, information, advice, or AI flags contained in this Report or sources of information used or referred to in this Report.



1. Program

## Question 1

🔖 Revisit Later

## How to Attempt?

## Non-Repeated Digits Count

Write a function to find the count of non-repeated digits in a given number N. The number will be passed to the function as an input parameter of type int.

**Assumption:** The input number will be a positive integer number  $\geq 1$  and  $\leq 25000$ .

Some examples are as below -

If the given number is 292, the function should return 1 because there is only 1 non-repeated digit '9' in this number

If the given number is 1015, the function should return 2 because there are 2 non-repeated digits in this number, '0', and '5'.

If the given number is 108, the function should return 3 because there are 3 non-repeated digits in this number, '1', '0', and '8'.

If the given number is 22, the function should return 0 because there are NO non-repeated digits in this number.

JAVA7

Compiler: Java - 1.7

```
1 import java.io.*;
2 import java.util.*;
3
4 // Read only region start
5 class UserMainCode
6 {
7
8     public int nonRepeatDigitsCount(int input1){
9         // Read only region end
10        String str=Integer.toString(input1);
11        int len=str.length();
12        int count=0,pcount=0;
13        for(int i=0;i<len;i++)
14        {
15            count=0;
16            for(int j=0;j<len;j++)
17            {
18                if(i!=j)
19                {
20                    if(str.charAt(i)==str.charAt(j))
21                    {
22                        count++;
23                        break;
24                    }
25                }
26            }
27            if(count==0)
28                pcount++;
29        }
30        return pcount;
31    }
32 }
```

☐ Use Custom Input

📘

Compile and Test

Submit Code