

ProductionManagementAI — Production Order Schema — Database Design Document (テーブル定義書)

001_DB — requirements REQ-010–REQ-018 (`work-items/WI-002/brief.md`), basic design 001_BD (`docs/en/010_basic-design/001/001_BD_製造指示登録・編集.md`), implements 001_DD and 001_DD-API (`docs/en/020_detailed-design/`).

Extended by 003_DB (`003_DB_ダッシュボード.md`, WI-004): `production_orders` gains `completed_at_utc` and two check constraints. The column is listed below with a pointer; its definition, constraints and migration belong to 003_DB. 002_DB and 003_DB add indexes on `production_orders`, listed in their own documents.

Physical naming follows 000_DB: `snake_case` tables and columns (`EFCore.NamingConventions`, `UseSnakeCaseNamingConvention()` in `DependencyInjection.cs`), `uuid` surrogate keys defaulting to `gen_random_uuid()`, `timestampz` UTC timestamps suffixed `_utc`, and constraint names in the `pk_ / fk_ / ix_ / ck_` style EF Core generates.

Document control (改版履歴)

Field	Value
Document ID	001_DB
System name	ProductionManagementAI
Work item	WI-002
Database	<code>production_management_ai</code> , schema <code>public</code>
DBMS	PostgreSQL 17
Character set	UTF-8
Created by	Claude (for ThanhTN)
Created date	2026-09-18
Last updated by	Claude (for ThanhTN)
Last updated date	2026-09-28

No	Target	Work item	Change	Date	Author
1	All	WI-002	Initial creation (as DB-002): <code>products</code> , <code>production_orders</code> , <code>production_order_number_counters</code> , runtime login <code>pmai_app</code>	2026-09-18	Claude (for ThanhTN)
2	Index definitions	WI-003	<code>order_number</code> search index decision pointed to 002_DB (WI-003 DEC-010)	2026-09-22	Claude (for ThanhTN)
3	<code>production_orders</code>	WI-004	Pointer to 003_DB's <code>completed_at_utc</code> extension	2026-09-22	Claude (for ThanhTN)


No	Target	Work item	Change	Date	Author
4	products	WI-005	Seeded product names made Japanese (migration <code>LocalizeDemoDataToJapanese</code>); renamed to 001_DB (RFC 0010); English and Japanese PDFs added (RFC 0008)	2026-09-23	Claude (for ThanhTN)
5	All	—	File named with the screen's Japanese name (RFC 0011)	2026-09-24	Claude (for ThanhTN)
6	All	—	Restructured to the table-definition template: document control, table list with lifecycle, per-table header and PK/UK/FK/validation/code-value columns, index list with sort order and build method, trigger list, database role section, migration table. <code>completed_at_utc</code> listed with a pointer to 003_DB. <code>order_number</code> expression moved below its table; rollback plan notes the later migrations	2026-09-28	Claude (for ThanhTN)

Table list (テーブル一覧)

No	Schema	Physical name	Logical name	Overview	Indexes beyond PK	Triggers	Created	Schema changed	Dropped	Status
1	public	products	Products	Minimal product reference data, seeded, no catalog UI (DEC-005)	yes	no	2026-09-18	—	—	in use
2	public	production_orders	Production orders	One row per production order created on SCR-001	yes	no	2026-09-18	2026-09-22 (003_DB: <code>completed_at_utc</code> , two checks)	—	in use
3	public	production_order_number_counters	Production order number counters	Last issued order-number sequence per year, used to generate <code>P0-YYYY-NNNN</code> (DEC-012, DEC-013)	no	no	2026-09-18	—	—	in use

"Created" is the date of the migration `AddProductionOrders` (2026-09-18). The indexes 002_DB and 003_DB add are dated in those documents' index lists.

ER diagram and relationships

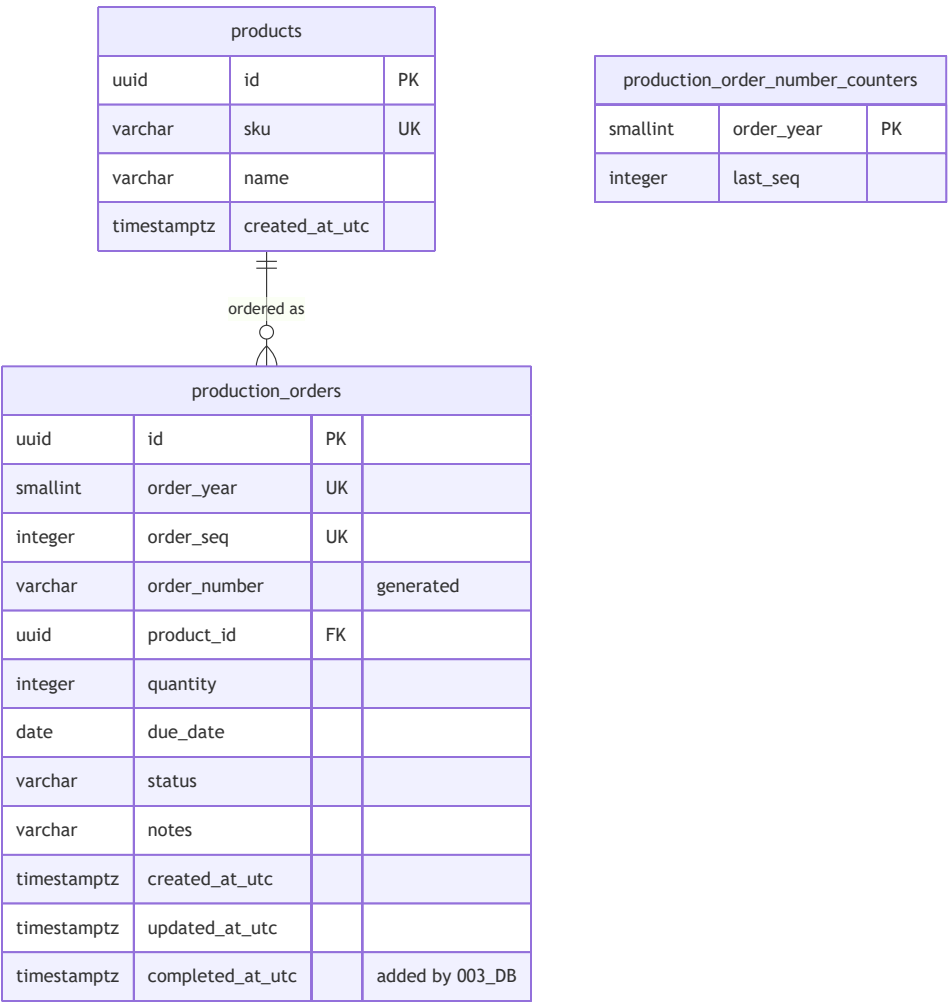

production_order_number_counters has no foreign key: it is a counter keyed by the same year value as production_orders.order_year , not a parent row.

Table	Related table	Relationship (1:1 / 1:N / N:N)	FK column
products	production_orders	1:N (every order references exactly one product; a product may have none)	production_orders.product_id

Table definitions (テーブル定義)

Validation IDs (V-##) are 001_BD's; the API enforces them in the Application and Domain layers (001_DD). `ck_...` names a check constraint from the Constraints section that backs the rule in the database.

Products (products)

Field	Value
Logical name	Products (製品)
Physical name	products
Schema	public
Overview	Minimal product reference data for the product dropdown and labels. Written only by migrations (seed); the application only reads it. No catalog UI (DEC-005)
Estimated volume	small, bounded — 30 seeded rows
Retention / deletion	kept; a product with orders can't be deleted (ON DELETE RESTRICT)

No	Item name	Physical name	Data type	Length	NOT NULL	Default	PK	UK	FK	Validation	Used	Description	Code values	Notes
1	Id	id	uuid	—	yes	gen_random_uuid()	○			—	○	Product key	—	Seed rows use fixed UUIDs so seeding is reproducible
2	SKU	sku	varchar	50	yes	none		○		— (seed only)	○	Unique business code	—	Shown as "{SKU} — {name}" (001_BD M-03), e.g. P-1004 – ドライブシャフト ; the dropdown is ordered by SKU (FN-004)
3	Name	name	varchar	200	yes	none				— (seed only)	○	Product name	—	Japanese since WI-005; 200 characters is ample for Japanese part names
4	CreatedAtUtc	created_at_utc	timestamptz	—	yes	now()				—		When the row was inserted (UTC)	—	

- **Usage patterns (パターン):** Not applicable — one kind of record.
- **CSV import/export (DL対象 / UL更新):** Not applicable — no CSV import/export.
- **Seed data:** 30 sample products for the demo (DEC-019), inserted by the migration via EF Core `HasData` with fixed UUIDs. These are illustrative values, not real master data. Since WI-005 the demo is an automobile-parts manufacturer and the names are Japanese (WI-005 DEC-002); SKUs and UUIDs are unchanged, so every order and figure that refers to a product still does.

sku	name	English gloss	Name before WI-005
P-1001	ブレーキキャリパー	brake caliper	Steel bracket
P-1002	ブレーキディスクローター	brake disc rotor	Aluminium housing
P-1003	ブレーキパッド	brake pad	Control panel assembly
P-1004	ドライブシャフト	drive shaft	Drive shaft

sku	name	English gloss	Name before WI-005
P-1005	等速ジョイント	constant-velocity joint	Hydraulic valve
P-1006	トランスミッションケース	transmission case	Gearbox assembly
P-1007	ハブベアリング	hub bearing	Bearing housing
P-1008	ウォーターポンプ	water pump	Pump impeller
P-1009	エンジンマウント	engine mount	Motor mount plate
P-1010	ラジエーター	radiator	Conveyor roller
P-1011	タイミングギア	timing gear	Spur gear 40T
P-1012	クラッチディスク	clutch disc	Coupling flange
P-1013	ショックアブソーバー	shock absorber	Pneumatic cylinder
P-1014	コイルスプリング	coil spring	Sensor bracket
P-1015	エンジンワイヤーハーネス	engine wire harness	Cable harness A
P-1016	ボディワイヤーハーネス	body wire harness	Cable harness B
P-1017	ヘッドランプユニット	headlamp unit	Terminal block unit
P-1018	リレーボックス	relay box	Relay module
P-1019	オルタネーター	alternator	Power supply unit
P-1020	ECU ケース	ECU case	PLC enclosure
P-1021	インタークーラー	intercooler	Heat sink
P-1022	電動ファン	electric cooling fan	Cooling fan assembly
P-1023	オイルフィルター	oil filter	Filter housing
P-1024	スロットルボディ	throttle body	Valve body
P-1025	ピストン	piston	Piston rod
P-1026	コネクティングロッド	connecting rod	Spring assembly
P-1027	サブフレーム	subframe	Welded frame
P-1028	ドアパネル	door panel	Guard panel
P-1029	ドアヒンジ	door hinge	Hinge set
P-1030	ボルト・ナットキット	bolt and nut kit	Fastener kit

Production orders (production_orders)

Field	Value
Logical name	Production orders (製造指示)
Physical name	production_orders
Schema	public
Overview	One row per production order. Created and updated on SCR-001 (FN-001, FN-002); read by SCR-002 (002_DB) and SCR-003 (003_DB). Demo orders are seeded by 002_DB and 003_DB
Estimated volume	about 15,000 rows a year for one plant (002_DB sizing); the demo database holds 124
Retention / deletion	kept forever; never deleted (no DELETE privilege). Cancelled is a status, not a deletion

No	Item name	Physical name	Data type	Length	NOT NULL	Default	PK	UK	FK	Validation	Used	Description	Code values	Notes
1	Id	id	uuid	—	yes	gen_random_uuid()	○			—	○	Order key	—	Used in the edit route /production-orders/{id}
2	OrderYear	order_year	smallint	—	yes	none		○ (with order_seq)		Set by the application; ck_..._order_year_range	○	Year of creation in the plant timezone, Asia/Tokyo (DEC-011, DEC-017)	—	Never changed. Not exposed by the API
3	OrderSeq	order_seq	integer	—	yes	none		○ (with order_year)		Issued from production_order_number_counters ; ck_..._order_seq_range	○	Sequence within order_year , 1–99999 (DEC-013)	—	Never changed. Not exposed by the API
4	OrderNumber	order_number	varchar	13	yes	generated		(unique through order_year , order_seq)		— (read-only)	○	Display order number, e.g. PO-2026-00001 (DEC-012)	—	Stored generated column; expression below the table. Read-only to the application

No	Item name	Physical name	Data type	Length	NOT NULL	Default	PK	UK	FK	Validation	Used	Description	Code values	Notes
5	ProductId	product_id	uuid	—	yes	none			products.id	V-01, V-07	○	Ordered product	—	Changeable only while status = 'Draft' (REQ-018, application-enforced)
6	Quantity	quantity	integer	—	yes	none				V-02, V-07; ck_quantity_positive	○	Quantity to produce	—	> 0 (REQ-013); changeable only while Draft
7	DueDate	due_date	date	—	yes	none				V-03, V-04	○	Due date (plant-local calendar date)	—	"≥ today" is application-enforced only (see Constraints)
8	Status	status	varchar	20	yes	'Draft'				V-06; ck_production_orders_status	○	Workflow status	Draft : 下書き (draft); InProgress : 進行中 (in progress); Completed : 完了 (completed); Cancelled : 取消 (cancelled)	DEC-015; transitions application-enforced (REQ-017, 001_BD M-02)
9	Notes	notes	varchar	500	no	none				V-05	○	Free-text notes	—	NULL when empty (REQ-016)
10	CreatedAtUtc	created_at_utc	timestamptz	—	yes	now()				—	○	When the order was created (UTC)	—	
11	UpdatedAtUtc	updated_at_utc	timestamptz	—	yes	now()				—	○	When the order was last saved (UTC)	—	Set by the application on every successful update

No	Item name	Physical name	Data type	Length	NOT NULL	Default	PK	UK	FK	Validation	Used	Description	Code values	Notes
12	CompletedAtUtc	completed_at_utc	timestampz	—	no	none				— (set by the application)	○	When the order became Completed	—	Added by 003_DB (WI-004); defined there
—	(row version)	xmin (system column)	xid	—	—	—				V-08	○	Row version	—	Not a declared column. PostgreSQL's row-version system column, mapped by EF Core as the optimistic-concurrency token (DEC-010, DEC-014)

Generation expression of order_number :

```
GENERATED ALWAYS AS ('PO-' || order_year::text || '-' || lpad(order_seq::text, 5, '0')) STORED
```

- **Usage patterns (パターン):** Not applicable — one kind of record.
- **CSV import/export (DL対象 / UL更新):** Not applicable — no CSV import/export.
- **Seed data:** none from this document. 002_DB and 003_DB seed 124 demo orders.

Production order number counters (production_order_number_counters)

Field	Value
Logical name	Production order number counters (製造指示番号採番)
Physical name	production_order_number_counters
Schema	public
Overview	The last order_seq issued per year. Written only by the order-create transaction (FN-001) and by the demo seeds
Estimated volume	small, bounded — one row per year that has orders
Retention / deletion	kept; never deleted, so no order number is reused

No	Item name	Physical name	Data type	Length	NOT NULL	Default	PK	UK	FK	Validation	Used	Description	Code values	Notes
1	OrderYear	order_year	smallint	—	yes	none	○			—	○	Plant-local year	—	Same value as <code>production_orders.order_year</code> ; not a foreign key
2	LastSeq	last_seq	integer	—	yes	none				ck_... _last_seq_range	○	Last <code>order_seq</code> issued for that year	—	1-99999

- **Usage patterns (パターン):** Not applicable — one kind of record.
- **CSV import/export (DL対象 / UL更新):** Not applicable — no CSV import/export.
- **Seed data:** the seed year's row, written by 002_DB's and 003_DB's demo seeds so that Screen A continues after the seeded orders.

Order-number issuance (DEC-013), in the same transaction as the order insert:

```
INSERT INTO production_order_number_counters (order_year, last_seq)
VALUES (@year, 1)
ON CONFLICT (order_year) DO UPDATE SET last_seq = production_order_number_counters.last_seq + 1
RETURNING last_seq;
```

The upsert takes a row lock on that year's counter, so concurrent creates in the same year are serialized for the rest of the transaction and always get distinct numbers. If the insert fails and the transaction rolls back, the counter increment rolls back too, so numbers are not skipped. The statement is issued through the ORM's parameterized raw-SQL API (`ai/rules/database.md`).

Index definitions (インデックス一覧)

Indexes created by `AddProductionOrders` (2026-09-18) on new tables, so none needed `CONCURRENTLY` . 002_DB and 003_DB add four more indexes on `production_orders` , listed in their own documents.

No	Table	Index name	Method	Unique	Column(s) and sort order	Partial predicate / INCLUDE	Built concurrently	Created	Dropped	Rationale (access pattern)
1	products	pk_products	btree	yes	id ASC	—	no — new table	2026-09-18	—	Product lookup by ID when validating <code>product_id</code> (V-01)
2	products	ix_products_sku	btree	yes	sku ASC	—	no — new table	2026-09-18	—	Enforces unique SKU; the product dropdown is ordered by SKU (FN-004)
3	production_orders	pk_production_orders	btree	yes	id ASC	—	no — new table	2026-09-18	—	Load/update by ID (FN-002, FN-003)
4	production_orders	ix_production_orders_order_year_order_seq	btree	yes	order_year ASC, order_seq ASC	—	no — new table	2026-09-18	—	Guarantees order-number uniqueness (DEC-006); <code>order_number</code> is derived from these two columns, so it is unique too

No	Table	Index name	Method	Unique	Column(s) and sort order	Partial predicate / INCLUDE	Built concurrently	Created	Dropped	Rationale (access pattern)
5	production_orders	ix_production_orders_product_id	btree	no	product_id ASC	—	no — new table	2026-09-18	—	Added during implementation (DEC-029); EF Core's foreign-key convention always creates it. Serves the <code>ON DELETE RESTRICT</code> check and Screen B's product filter
6	production_order_number_counters	pk_production_order_number_counters	btree	yes	order_year ASC	—	no — new table	2026-09-18	—	Counter upsert by year

Deliberately not added:

- `production_orders.product_id` (no longer applies): originally left out, but added during implementation (DEC-029). It is No. 5 in the index table.
- `production_orders.order_number`: uniqueness is already covered by the `(order_year, order_seq)` index, and Screen A never looks orders up by number. Screen B's search design decided this: 002_DB adds a `pg_trgm` GIN index for its case-insensitive fragment search (WI-003 DEC-010), not a btree.

Trigger definitions (トリガー一覧)

None — no triggers. The status-transition and locked-field rules could be written as triggers, but the Domain layer is their single source (0001_ADR); see "Rules deliberately not enforced in the database" under Constraints.

Constraints

Constraint	Type (PK/FK/UNIQUE/CHECK/EXCLUDE)	Table.column(s)	References	Rule
pk_products	PK	products.id	—	—
ix_products_sku	UNIQUE (unique index)	products.sku	—	Enforced by the unique index; no separate constraint
pk_production_orders	PK	production_orders.id	—	—
fk_production_orders_products_product_id	FK	production_orders.product_id	products.id	<code>ON DELETE RESTRICT</code> — a product with orders can't be deleted (REQ-015)
ix_production_orders_order_year_order_seq	UNIQUE (unique index)	production_orders.(order_year, order_seq)	—	Enforced by the unique index; no separate constraint
ck_production_orders_quantity_positive	CHECK	production_orders.quantity	—	<code>quantity > 0</code> (REQ-013)
ck_production_orders_status	CHECK	production_orders.status	—	<code>status IN ('Draft', 'InProgress', 'Completed', 'Cancelled')</code> (REQ-017)
ck_production_orders_order_seq_range	CHECK	production_orders.order_seq	—	<code>order_seq BETWEEN 1 AND 99999</code> — keeps NNNNN at five digits (DEC-013)

Constraint	Type (PK/FK/UNIQUE/CHECK/EXCLUDE)	Table.column(s)	References	Rule
ck_production_orders_order_year_range	CHECK	production_orders.order_year	—	order_year BETWEEN 2000 AND 9999 — keeps YYYY at four digits
pk_production_order_number_counters	PK	production_order_number_counters.order_year	—	—
ck_production_order_number_counters_last_seq_range	CHECK	production_order_number_counters.last_seq	—	last_seq BETWEEN 1 AND 99999 . If a year's 100,000th order is attempted, the counter upsert fails, the whole create is rolled back and the API returns a server error (DEC-013)

Rules deliberately **not** enforced in the database, and why:

Rule	Why application-only
Due date ≥ today (REQ-014, DEC-009, DEC-011)	"Today" moves, and depends on the plant timezone. A CHECK would make valid historical rows fail on restore (pg_restore) or re-validation, and it can't express "only when changed"
Allowed status transitions (REQ-017)	Transitions depend on the previous value. A trigger could enforce them, but the Domain layer is the single source of the rule (0001_ADR); the CHECK above still blocks unknown values
Product/quantity locked after Draft (REQ-018, DEC-007)	Also depends on the previous row state; enforced in the Domain/Application layer and covered by tests

Transactions and concurrency

Operation	Transaction scope	Concurrency control
Create (FN-001)	Single transaction: counter upsert → insert production_orders	Counter row lock serializes same-year creates; unique (order_year, order_seq) as a backstop
Update (FN-002)	Single UPDATE ... WHERE id = @id AND xmin = @version (EF Core)	Optimistic: 0 rows affected → the order was changed since it was loaded → rejected (V-08, DEC-010). The client sends back the version it loaded
Read (FN-003, FN-004)	No explicit transaction	—

Database role and privileges

Least privilege this feature needs (ai/rules/database.md). Login split: DEC-016 (decided: split now).

Role	Used by	Privileges on these tables	Reason
pmai_app (runtime login)	The backend at runtime (ConnectionStrings__DefaultConnection)	SELECT on products ; SELECT, INSERT, UPDATE on production_orders and production_order_number_counters . Also CONNECT on the database, USAGE on schema public , and the grants on the 000_DB tables (listed in 000_DB)	Reads products for the dropdown; creates and updates orders; upserts the counter. No DELETE — orders are never deleted. No DDL, no TRUNCATE
Owner (POSTGRES_USER)	dotnet ef database update only	owner — DDL	Owns the schema; runs every migration

Implemented (plan revision 2): the `AddProductionOrders` migration, which runs as the owner, creates `pmai_app` as `NOLGIN` if it's missing and applies these grants. `deploy/db/init/10-app-login.sh` , baked into the database image, gives it `LOGIN PASSWORD` from `PMAI_APP_DB_PASSWORD` on a fresh volume, so no password is in the repository. No `ALTER DEFAULT PRIVILEGES` blanket grant is used: any later migration that adds a table must extend the script with that table's explicit grants. The exact grant list is verified by the integration tests, which run the app as the runtime login, and by `RuntimeLogin_CannotDeleteOrdersOrRunDdl` .

API / DD mapping

DD field names are 001_DD \$3 variable names; API field names are confirmed in 001_DD-API. 001_DD-API adds two computed response-only fields (`allowedNextStatuses` , `isProductQuantityEditable`) that have no column.

Table.column	DD field	API field
<code>production_orders.id</code>	<code>(route id)</code>	<code>id</code>
<code>production_orders.order_number</code>	<code>orderNumber</code>	<code>orderNumber</code> (response only)
<code>production_orders.product_id</code>	<code>productId</code>	<code>productId</code>
<code>production_orders.quantity</code>	<code>quantity</code>	<code>quantity</code>
<code>production_orders.due_date</code>	<code>dueDate</code>	<code>dueDate</code> (ISO YYYY-MM-DD)
<code>production_orders.status</code>	<code>status</code>	<code>status</code> (<code>Draft</code> <code>InProgress</code> <code>Completed</code> <code>Cancelled</code>); request field on update only — create always yields <code>Draft</code>
<code>production_orders.notes</code>	<code>notes</code>	<code>notes</code> (<code>null</code> when empty)
<code>production_orders.created_at_utc</code>	<code>createdAt</code>	<code>createdAt</code> (response only, ISO 8601 UTC)
<code>production_orders.updated_at_utc</code>	<code>updatedAt</code>	<code>updatedAt</code> (response only, ISO 8601 UTC)
<code>production_orders.xmin</code>	(hidden)	<code>version</code> (in the response; required in update requests)
<code>production_orders.order_year</code> , <code>order_seq</code>	—	not exposed (internal to order-number generation)
<code>products.id</code>	<code>productId</code> options	<code>GET /api/products</code> → <code>id</code>
<code>products.sku</code> , <code>products.name</code>	Product option label (M-03)	<code>GET /api/products</code> → <code>sku</code> , <code>name</code>

Migration impact and recovery limits

Migration	Type	Tables touched	Live table?	Sequence
<code>AddProductionOrders</code> (2026-09-18)	additive	<code>products</code> , <code>production_orders</code> , <code>production_order_number_counters</code> (created); product seed; <code>pmai_app</code> grants	no — new tables	single step
<code>LocalizeDemoDataToJapanese</code> (2026-09-23, WI-005)	data-transforming	<code>products</code> , <code>production_orders</code> (data only, no DDL)	yes	single step

- **Data recovery limit:** there are no existing rows to lose when applying it. Rolling it back after use permanently deletes every production order and counter row. Take a `pg_dump` of these tables first if their data matters.

- **Rollback plan:** `dotnet ef database update InitialIdentitySchema --project src/backend/ProductionManagementAI.Infrastructure --startup-project src/backend/ProductionManagementAI.Api` drops the three tables. Later migrations (002_DB, 003_DB) index, alter and seed these tables, so they must be reverted first.
- **WI-005 data migration** `LocalizeDemoDataToJapanese` : data only, no DDL. It renames the 30 seeded products by their fixed UUIDs (EF `UpdateData` , from `ProductSeed`), and rewrites the notes of WI-003's seeded orders from `Demo order N` to `デモ用の製造指示 N` , matched by the seed id prefix `0197e4a0-0000-7000-8001-` and by the exact old text, so orders users created, and seeded notes a user edited, are never touched (WI-005 DEC-008). `Down` restores both. It runs as the owner like every migration and needs no new privilege; an existing Compose volume needs no wipe. A user who renamed a seeded product in the database directly would have that name overwritten, which is acceptable because there is no product UI.
- **Operational note:** the generated `order_number` column is defined with EF Core `HasComputedColumnSql(..., stored: true)` . The expression uses explicit `::text` casts because PostgreSQL requires generation expressions to be immutable.

Open decisions

Decision	Options	Recommendation	Status
How to generate the per-year order sequence	per-year counter table with upsert; <code>MAX(order_seq)+1</code> with retry; one PostgreSQL sequence per year	Counter table	decided — see <code>work-items/WI-002/decisions.md</code> DEC-013
What happens past 99,999 orders in one year	reject the create; widen to 6 digits	Reject (CHECK constraint)	decided — DEC-013
Optimistic-concurrency token	PostgreSQL <code>xmin</code> ; explicit <code>version</code> column	<code>xmin</code>	decided — DEC-014
Status storage	<code>varchar</code> + CHECK; PostgreSQL enum type; smallint code	<code>varchar</code> + CHECK	decided — DEC-015
Split migration-owner and restricted runtime DB roles	split now; keep the single owner role for the local demo	Split before any shared/non-local deployment	decided — split now (DEC-016, user)
Demo product seed size	5; ~15; 30	5	decided — 30 (DEC-019, user)