


```
1 - /*****
2
3 Welcome to GDB Online.
4 GDB online is an online compiler and debugger tool for C, C++, Python, Java, PHP, Ruby, Perl,
5 C#, VB, Swift, Pascal, Fortran, Haskell, Objective-C, Assembly, HTML, CSS, JS, SQLite, Prolog.
6 Code, Compile, Run and Debug online from anywhere in world.
7
8 *****/
9 #include <stdio.h>
10 main()
11 {
12     struct bus
13     {
14         char name[10],dest[10],source[10];
15         int age,fair;
16     }s;
17     printf("Enter the name:");
18     scanf("%s",&s.name);
19     printf("Enter the Destination:");
20     scanf("%s",&s.dest);
21     printf("Enter the source:");
22     scanf("%s",&s.source);
23     printf("Enter the Age:");
24     scanf("%d",&s.age);
25     printf("Enter the fair Amount:");
26     scanf("%d",&s.fair);
27     printf("\n The Name %s",s.name);
28     printf("\n The Destination is %s",s.dest);
29     printf("\n The Source is %s",s.source);
30     printf("\n The fair Amount is %d",s.fair);
31     printf("\n The Age is %d",s.age);
32 }
33
34
35
36
```

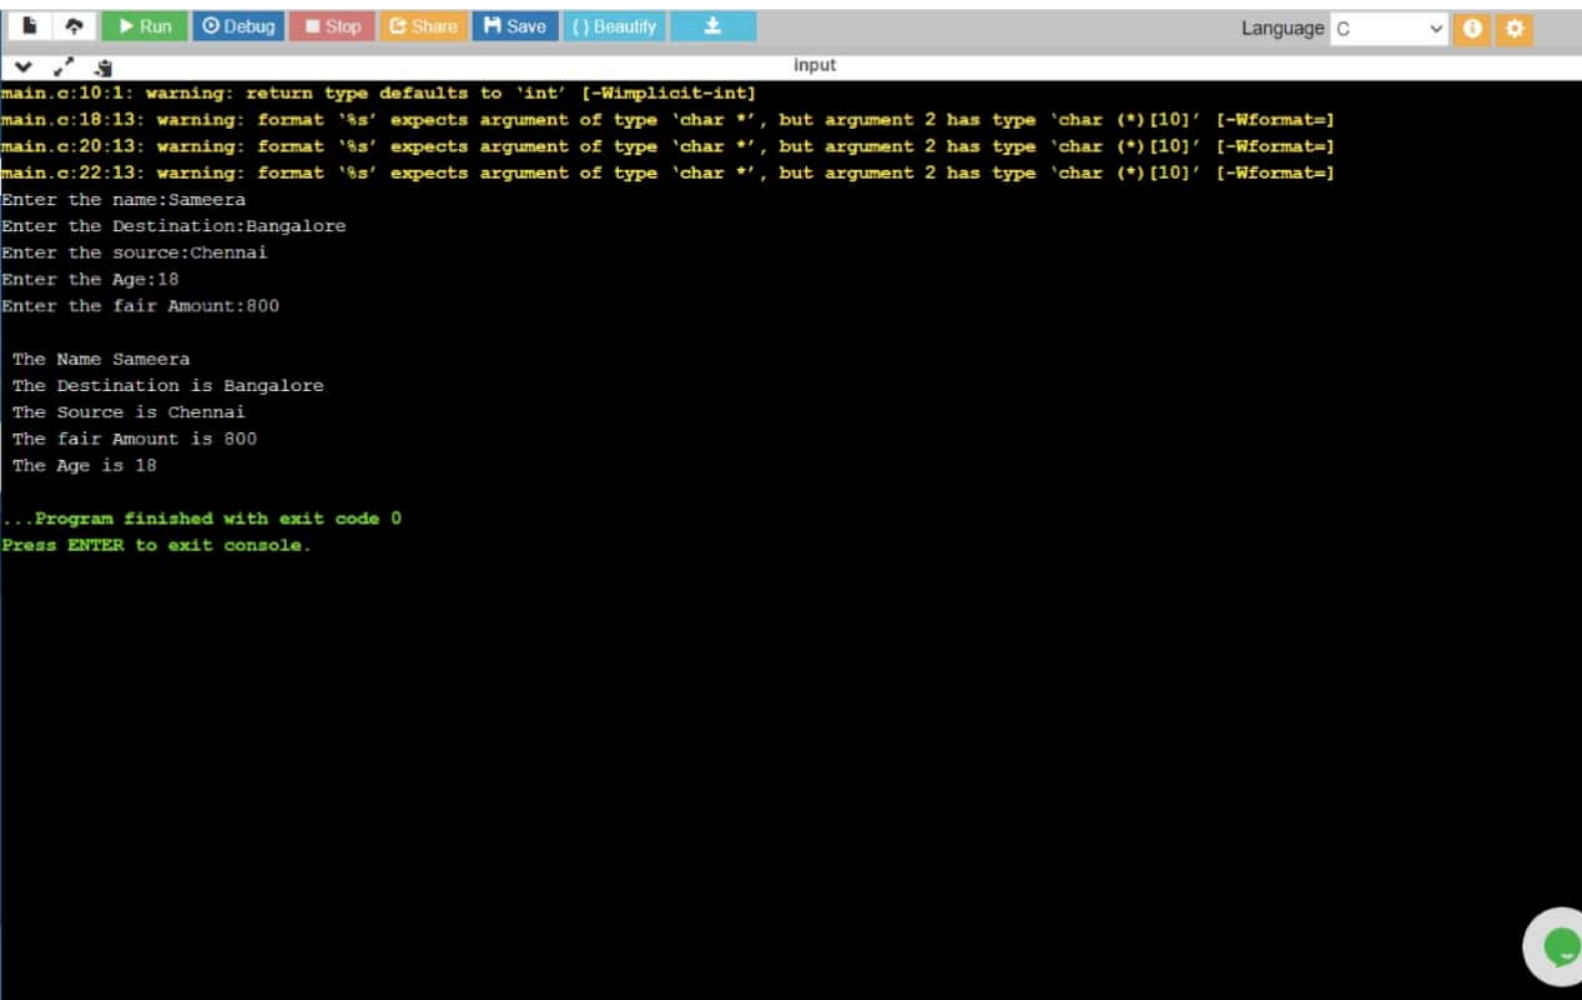

The image shows a screenshot of a C programming IDE. The top toolbar includes buttons for Run, Debug, Stop, Share, Save, Beautify, and a download icon. The Language dropdown is set to 'C'. The main console area displays the following output:

```
main.c:10:1: warning: return type defaults to 'int' [-Wimplicit-int]
main.c:18:13: warning: format '%s' expects argument of type 'char *', but argument 2 has type 'char (*)[10]' [-Wformat=]
main.c:20:13: warning: format '%s' expects argument of type 'char *', but argument 2 has type 'char (*)[10]' [-Wformat=]
main.c:22:13: warning: format '%s' expects argument of type 'char *', but argument 2 has type 'char (*)[10]' [-Wformat=]
Enter the name:Sameera
Enter the Destination:Bangalore
Enter the source:Chennai
Enter the Age:18
Enter the fair Amount:800

The Name Sameera
The Destination is Bangalore
The Source is Chennai
The fair Amount is 800
The Age is 18

...Program finished with exit code 0
Press ENTER to exit console.
```