


week 3


Spring rest using spring boot 3

Spring rest handson


1.Create a Spring Web Project using Maven

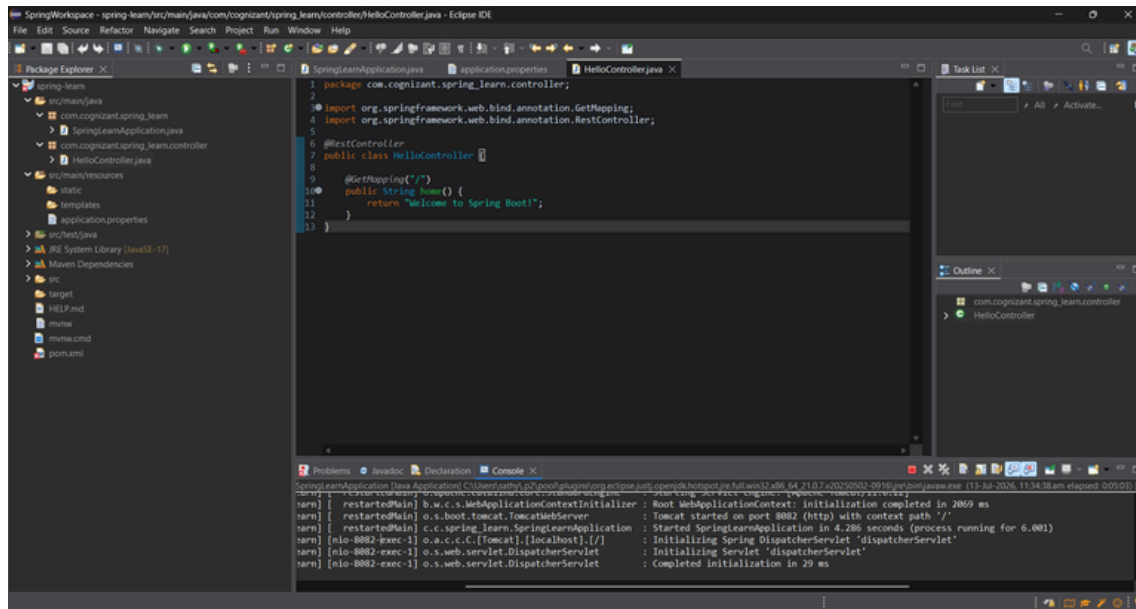

2.Spring Core – Load Country from Spring Configuration XML


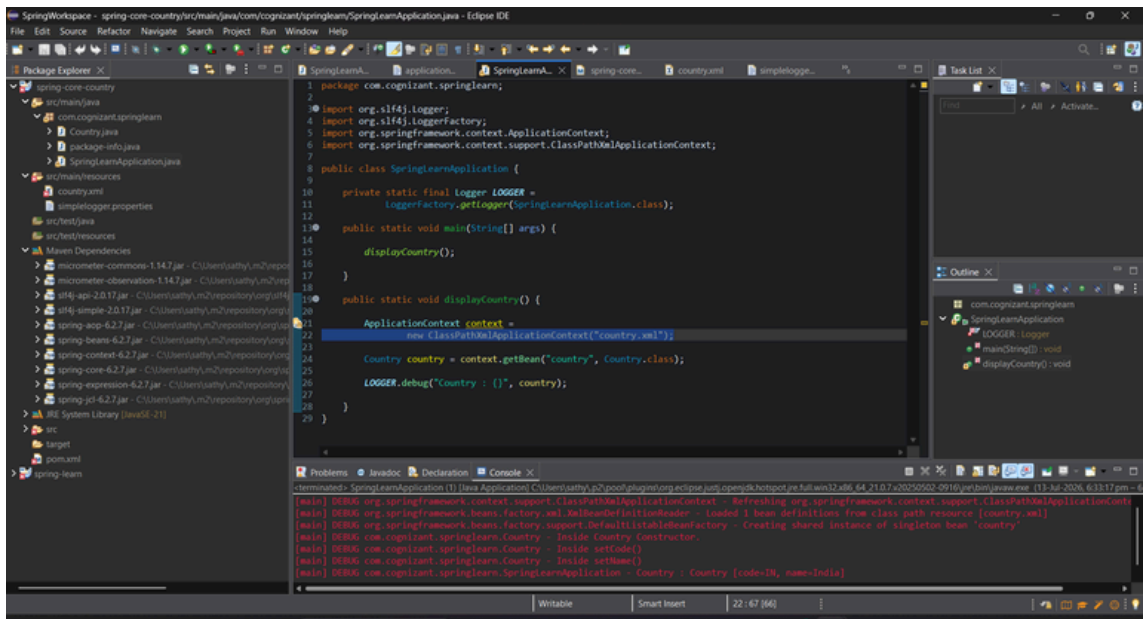


3.Hello World RESTful Web Service

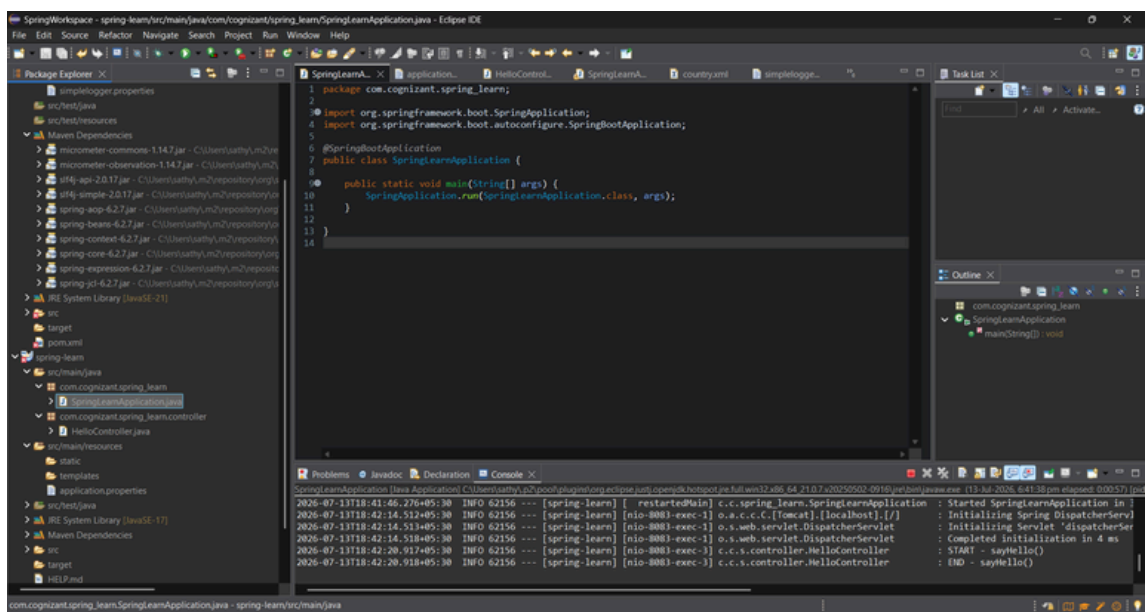




4.REST - Country Web Service

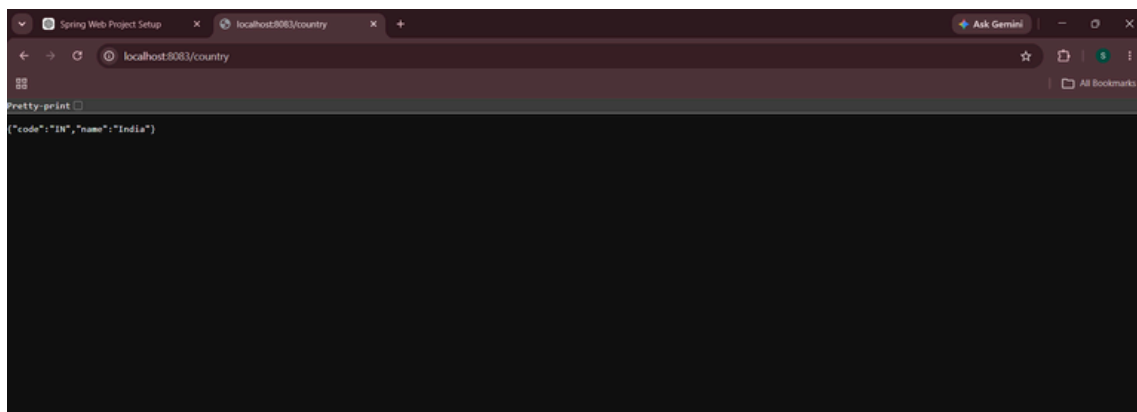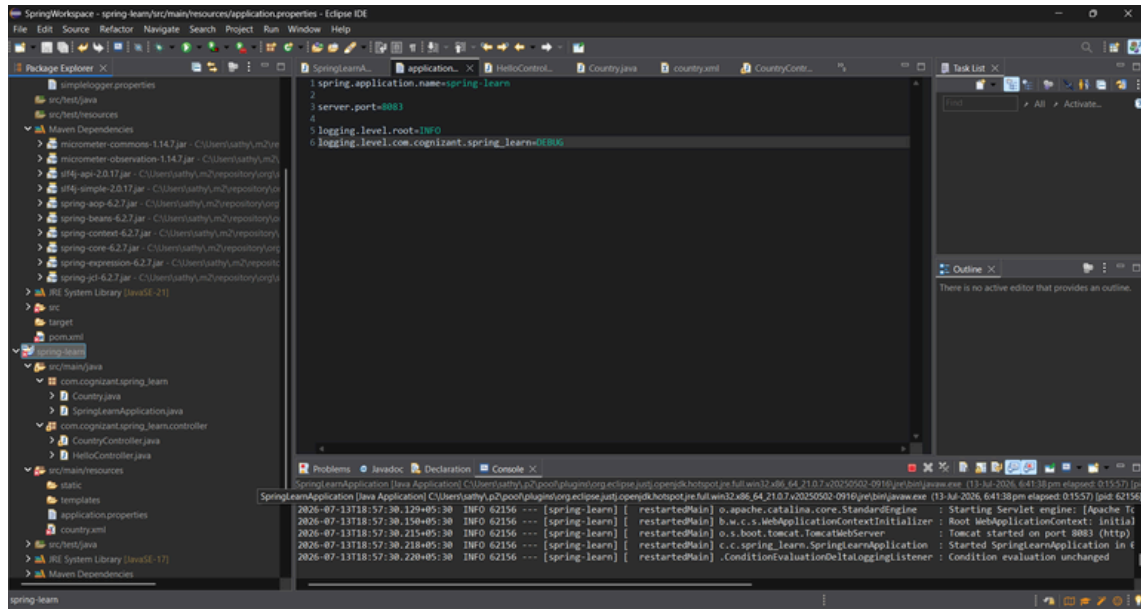

5.REST - Get country based on country code

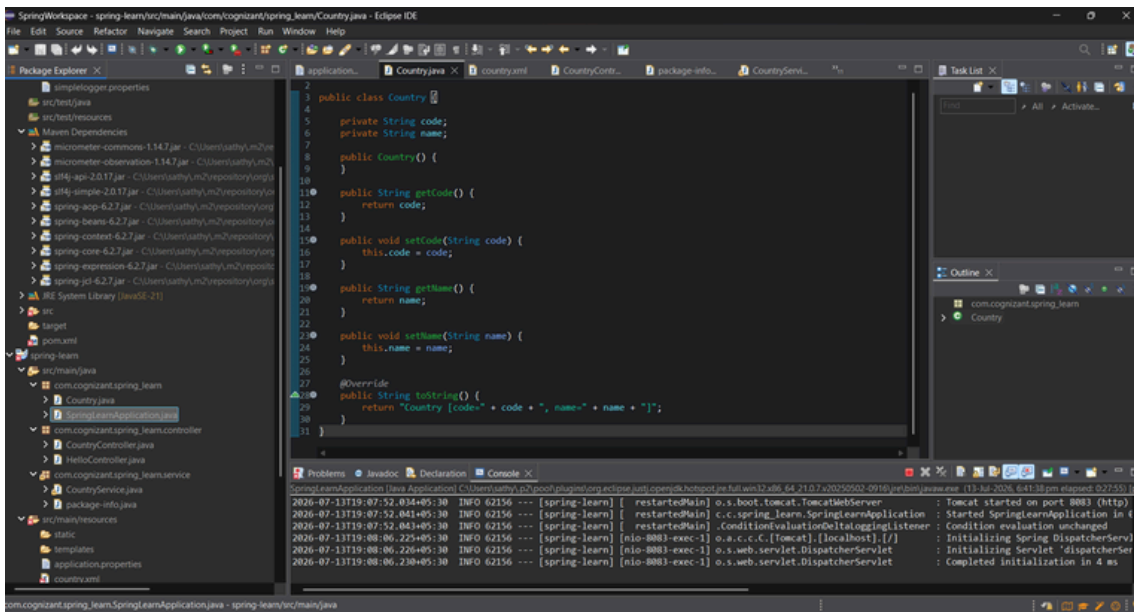


The screenshot shows the Eclipse IDE with the `Country.java` class open. The class has the following code:

```
2 public class Country {
3
4     private String code;
5     private String name;
6
7     public Country() {
8     }
9
10    public String getCode() {
11        return code;
12    }
13
14    public void setCode(String code) {
15        this.code = code;
16    }
17
18    public String getName() {
19        return name;
20    }
21
22    public void setName(String name) {
23        this.name = name;
24    }
25
26    @Override
27    public String toString() {
28        return "Country [code=" + code + ", name=" + name + "]";
29    }
30
31 }
```


The console shows the following output:

```
SpringLearnApplication [java Application] C:\Users\saathy\...
2026-07-13T19:07:52.834+05:30 INFO 62156 --- [spring-learn] [ restartedMain] o.s.boot.tomcat.TomcatWebServer : Tomcat started on port 8083 (http)
2026-07-13T19:07:52.841+05:30 INFO 62156 --- [spring-learn] [ restartedMain] o.c.spring_learn.SpringLearnApplication : Started SpringLearnApplication in 4
2026-07-13T19:08:06.225+05:30 INFO 62156 --- [spring-learn] [ nio-8083-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Condition evaluation unchanged
2026-07-13T19:08:06.226+05:30 INFO 62156 --- [spring-learn] [ nio-8083-exec-1] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring DispatcherServ
2026-07-13T19:08:06.230+05:30 INFO 62156 --- [spring-learn] [ nio-8083-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherSer
2026-07-13T19:08:06.230+05:30 INFO 62156 --- [spring-learn] [ nio-8083-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 4 ms
```

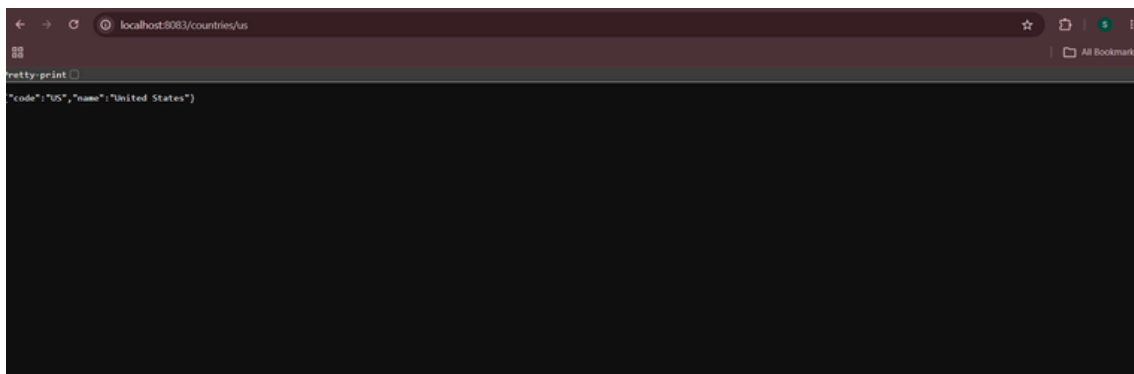

The screenshot shows a web browser with the address bar set to `localhost:8083/countries/us`. The browser's developer tools console shows the following output:

```
netty-print [
  "code": "US", "name": "United States"
]
```

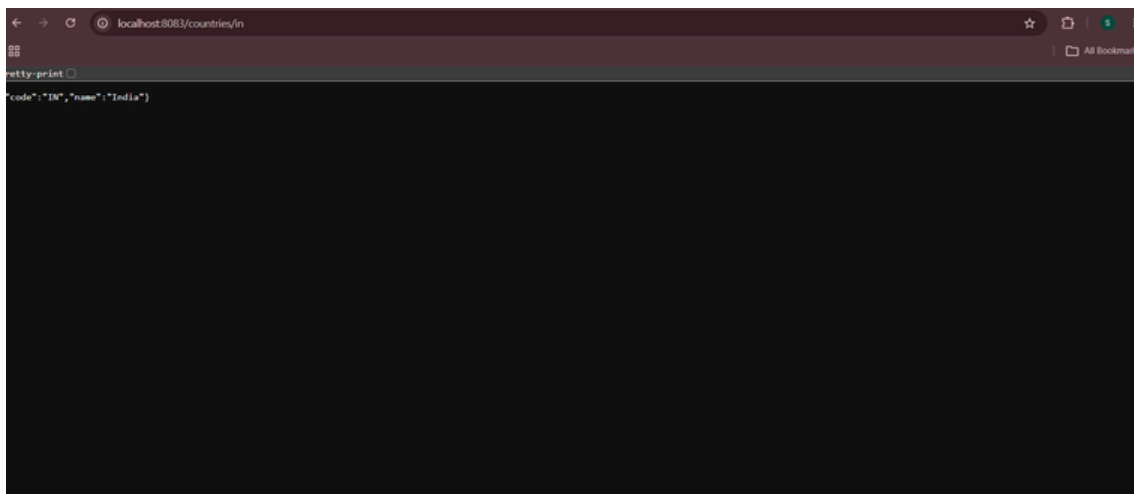

The screenshot shows a web browser with the address bar set to `localhost:8083/countries/in`. The browser's developer tools console shows the following output:

```
netty-print [
  "code": "IN", "name": "India"
]
```