

作业 1

1.

1) GET 请求（进入南开大学官网 <https://www.nankai.edu.cn/>）

▼ General

Request URL: <https://www.nankai.edu.cn/>
Request Method: GET
Status Code: 🟢 200 OK
Remote Address: 222.30.45.190:443
Referrer Policy: strict-origin-when-cross-origin

请求头:

▼ Request Headers

[View source](#)

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.9
Accept-Encoding: gzip, deflate, br
Accept-Language: zh-CN,zh;q=0.9
Cache-Control: max-age=0
Connection: keep-alive
Cookie: JSESSIONID=3F1A72FA84BD469F48EA6A857E9206DA
Host: www.nankai.edu.cn
sec-ch-ua: "Not_A Brand";v="99", "Google Chrome";v="109", "Chromium";v="109"
sec-ch-ua-mobile: ?0
sec-ch-ua-platform: "Windows"
Sec-Fetch-Dest: document
Sec-Fetch-Mode: navigate
Sec-Fetch-Site: none
Sec-Fetch-User: ?1
Upgrade-Insecure-Requests: 1
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/109.0.0.0 Safari/537.36

响应头:

▼ Response Headers

[View source](#)

Connection: keep-alive
Content-Encoding: gzip
Content-Type: text/html
Date: Mon, 30 Jan 2023 09:01:54 GMT
Frame-Options: SAMEORIGIN
Transfer-Encoding: chunked
Vary: Accept-Encoding
X-Content-Type-Options: nosniff
X-Frame-Options: SAMEORIGIN
X-Protected-By: NKSOC
X-XSS-Protection: 1;mode=block

2) POST 请求（登录南开大学电子邮箱系统，提交用户名和密码）

▼ General
Request URL: https://entryhz.qiye.163.com/domain/domainEntLogin
Request Method: POST
Status Code: 🟡 302
Remote Address: 183.136.182.2:443
Referrer Policy: strict-origin-when-cross-origin

请求头:

▼ Request Headers
:authority: entryhz.qiye.163.com
:method: POST
:path: /domain/domainEntLogin
:scheme: https
accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.9
accept-encoding: gzip, deflate, br
accept-language: zh-CN,zh;q=0.9
cache-control: max-age=0
content-length: 161
content-type: application/x-www-form-urlencoded
origin: https://nankai.edu.cn
referer: https://nankai.edu.cn/
sec-ch-ua: "Not_A Brand";v="99", "Google Chrome";v="109", "Chromium";v="109"
sec-ch-ua-mobile: ?0
sec-ch-ua-platform: "Windows"
sec-fetch-dest: document
sec-fetch-mode: navigate
sec-fetch-site: cross-site
sec-fetch-user: ?1
upgrade-insecure-requests: 1
user-agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/109.0.0.0 Safari/537.36

响应头:


▼ Response Headers
access-control-allow-credentials: true
access-control-allow-headers: *
access-control-allow-methods: POST,GET,OPTIONS
access-control-allow-origin: https://open.qiye.163.com
content-length: 0
date: Mon, 30 Jan 2023 09:32:59 GMT
location: https://nankai.edu.cn/?hl=zh_CN&webmailhost=mailh.qiye.163.com&all_secure=1&ch=&msg=ERR.LOGIN.PASSERR&from=hz
server: nginx

2.



操作：点击“百度一下”时，弹出当前搜索框中的内容，并向搜索框中写入“南开大学”

```
语句：$(".s_btn").click(function() {
    alert($(".s_ipst").val());
    $(".s_ipst").val("南开大学");
});
$(".s_btn").trigger("click");
```

响应前截图：

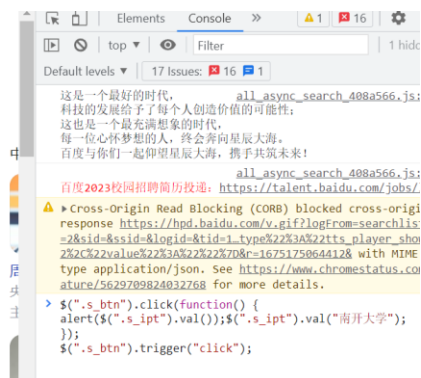

响应后截图：

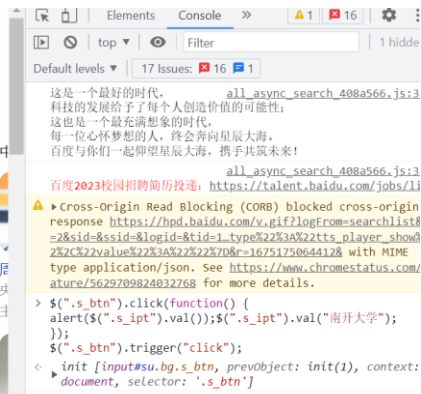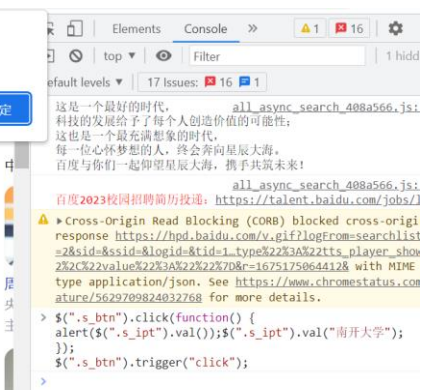

3.

功能：当进行百度搜索时，去除结果前面的广告

代码：

```
文件 编辑 选择 查找 转到 开发者
1 // ==UserScript==
2 // @name 百度搜索去除广告
3 // @namespace http://tampermonkey.net/
4 // @version 0.1
5 // @description 进行百度搜索时去除前面的广告
6 // @author Su Yujia
7 // @match *://www.baidu.com/s*
8 // @icon https://www.google.com/s2/favicons?sz=64&domain=coderschool.cn
9 // @grant none
10 // ==/UserScript==
11
12 (function() {
13     'use strict';
14
15     // Your code here...
16     function removeAd() {
17         var obj = document.getElementById("content_left");//获得左边的文本内容
18         var tag_obj = obj.children;
19         var obj_length = tag_obj.length;
20         for(var i = 0 ; i < obj_length ; i++) { //获取每个搜索结果的id值，搜索结果的id在1-11之间，而广告没有id
21             if(!tag_obj[i])
22                 continue;
23             var idVal = tag_obj[i].getAttribute('id');
24             //如果id存在且在1-11之间则说明不是广告
25             if(idVal && idVal >= 1 && idVal <= 11)
26                 continue;
27             else {
28                 //删除该广告元素
29                 if(tag_obj[i])
30                     obj.removeChild(tag_obj[i]);
31                 //删除完后，所有子元素序号又从0开始重新排列
32                 i = 0;
33             }
34         }
35     }
36     $(".s_btn").trigger("removeAd");//每次点击百度一下重新执行去广告事件
37
38
39 })();
```

执行前：



执行后:

路由器

×

📷

百度一下

🔍 网页 🖼️ 图片 📄 贴吧 📰 资讯 ⓘ 知道 📖 文库 📺 视频 📍 地图 🛒 采购 ⋮ 更多

百度为您找到相关结果约100,000,000个

🔍 搜索工具

路由器 - 商品 - 全网热卖



小米4C
双频千兆
无线速率3000M
支持Mesh组网

¥79

小米 路由器 4C 300M
无线速率 智能...

京东



MERCURY
双频千兆
无线速率3000M
支持Mesh组网

¥59

水星 (MERCURY)
MW325R无线路由器

京东



MERCURY
双频千兆
无线速率3000M
支持Mesh组网

¥159

水星 (MERCURY) D
191G Mesh版 双千...

京东



TP-LINK
AX3000
双频千兆
无线速率3000M
支持Mesh组网

¥249

TP-LINK 大道AX3000
满血WiFi6千兆...

京东



HUAWEI
华为路由
AX2 Pro
双频千兆
无线速率2000M
支持Mesh组网

¥229



Tenda
双频千兆
无线速率3000M
支持Mesh组网

¥119



TP-LINK
双频千兆
无线速率3000M
支持Mesh组网

¥149



TP-LINK
双频千兆
无线速率3000M
支持Mesh组网

¥199