



EPC MODULE

CUSTOMER EPC LOGIC AND TESTING SCRIPTS

R-PAC INTERNATIONAL CORPORATION
Global IT Team

Contents

Centauro	2
Lacoste	4
Inditex	6
State of Art.....	7
Babyshop.....	9
C&A	11
Encuentro Moda	13
Kennedy Space Center	15
Moose Knuckles	17
Lindex	19
Diesel.....	20
MANGO	22
MANGO – Item Code: SSW	24
BlueFields	26
Alvaro Moreno	28
Gerry Weber	30
Stone Island	32

Centauro

Schema Type: SGTIN-96
Schema Info: Standard

Serial number start: 1000000.
Serial number end: 0

Serial Prefix:
Prefix length: 7 digits
Prefix Type:

Kill Password: NA
Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "07891473035025",
  "UserId": 0,
  "CustomerID": "CENT",
  "CustomerName": "Centauro",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3035E1A844036B80000F42E1",
  "EPCEnd": "3035E1A844036B80000F42E1",
  "SerialStart": "1000161",
  "SerialEnd": "1000161",
  "CustomerID": "CENT",
  "GTIN": "07891473035025",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are ‘tblEPCSerila’ and ‘tblEPCLog’

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	07891473035025	1000161	0	NULL	0								

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	07891473035025	1000161	1000161	3035E1A844036B80000F42E1	3035E1A844036B80000F42E1	SGTIN-96	Centauro	CENT	1	Success	999999910	99999910	NULL

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 07891473035025	(21)
	1000161	
		
GS1 Company Prefix Length		
7 digits ▼		
		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:7891473.003502.1000161		
		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
		
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.7891473.003502.1000161		
		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3035E1A844036B80000F42E1		

Lacoste

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 20000000001.

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "03614039991078",
  "UserId": 0,
  "CustomerId": "LACO",
  "CustomerName": "Lacoste",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034DC955C60C8C4A817C8B2",
  "EPCEnd": "3034DC955C60C8C4A817C8B2",
  "SerialStart": "20000000178",
  "SerialEnd": "20000000178",
  "CustomerId": "LACO",
  "GTIN": "03614039991078",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

1	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
	03614039991078	20000000178	0	NULL	0								
1	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
	03614039991078	20000000178	20000000178	3034DC955C60C8C4A817C8B2	3034DC955C60C8C4A817C8B2	SGTIN-96	Lacoste	LACO	1	Success	999999910	999999910	NULL

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes	
GTIN + serial (AI 01 + AI 21) ▼	(01) 03614039991078 (21) 20000000178
GS1 Company Prefix Length 7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS urn:epc:id:sgtin:3614039.099107.20000000178	
RFID Control Information Tag Size 96 bits ▼ Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware urn:epc:tag:sgtin-96:1.3614039.099107.20000000178	
RFID Tag EPC Memory Bank Contents (hexadecimal) — starting at bit 20h 3034DC955C60C8C4A817C8B2	

Inditex

Schema Type: SGTIN-96

Schema Info: We are using GTIN "00123456123456" for serial number increment.

Serial number start: 1500000.

Serial number end: 4294967295

Serial Prefix:

Prefix length:

Prefix Type:

Kill Password: 00000000

Access Password: 07F6D645

User Memory Logic: 00B77543

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00154500104042",
  "UserId": 0,
  "CustomerId": "Inditex",
  "CustomerName": "Tempe Inditex",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "NCDV#4#3#4#15",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "12023107",
  "SerialEnd": "12023107",
  "CustomerId": "Inditex",
  "GTIN": "00154500104042",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCounter'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue							
1	00123456123456	12023107	4294967295	NULL	NULL							

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	00154500104042	12023107	12023107	EPCCounter	EPCCounter	SGTIN-96	Tempe Inditex	Inditex	1	Success	999999910	999999910	NCDV#4#3#4#15

	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varUserMemory	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode
1	999999910	999999910	1	00154500104042	00E00731C8E6490002DD50DCC00178C	12023107	00B77543	1112	07F6D645	00000000	NULL	NULL

Please note that we are using GTIN "00123456123456" for serial number increment.

State of Art

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 100000000000.

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08714596218979",
  "UserId": 0,
  "CustomerId": "SOA",
  "CustomerName": "State of Art",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "303613E5901562574876E802",
  "EPCEnd": "303613E5901562574876E802",
  "SerialStart": "100000000002",
  "SerialEnd": "100000000002",
  "CustomerId": "SOA",
  "GTIN": "08714596218979",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue									
1	08714596218979	100000000002	0	NULL	NULL									

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08714596218979	1000000000002	1000000000002	303613E5901562574876E802	303613E5901562574876E802	SGTIN-96	State of Art	SOA	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08714596218979	(21)
1000000000002		


GS1 Company Prefix Length
7 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS
urn:epc:id:sgtin:8714596.021897.1000000000002

RFID Control Information	
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware
urn:epc:tag:sgtin-96:1.8714596.021897.1000000000002

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h
303613E5901562574876E802

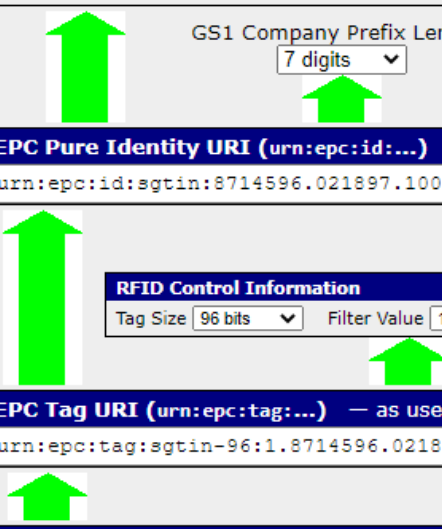

Babyshop

Schema Type: SGTIN-96

Schema Info: Prefix 4 is added to serial number (400000000000).

Serial number start: 0

Serial number end: 0

Serial Prefix: 400000000000

Prefix length: 6 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "06292156658004",
  "UserId": 0,
  "CustomerID": "babyshop",
  "CustomerName": "babyshop",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "303A6677C28A3209502FAE24",
  "EPCEnd": "303A6677C28A3209502FAE24",
  "SerialStart": "40000007716",
  "SerialEnd": "40000007716",
  "CustomerID": "babyshop",
  "GTIN": "06292156658004",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	06292156658004	7716	0	NULL	NULL

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	06292156658004	40000007716	40000007716	303A6677C28A3209502FAE24	303A6677C28A3209502FAE24	SGTIN-96	babyshop	babyshop	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 06292156658004	(21)
40000007716		
GS1 Company Prefix Length		
6 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:629215.0665800.40000007716		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.629215.0665800.40000007716		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303A6677C28A3209502FAE24		

C&A

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 8589934592.

Serial number end: 12884901887

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04063958608953",
  "UserId": 0,
  "CustomerID": "CAInts",
  "CustomerName": "C&A",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response


```
{
  "EPCStart": "3034F80B583B77C200000013",
  "EPCEnd": "3034F80B583B77C200000013",
  "SerialStart": "8589934611",
  "SerialEnd": "8589934611",
  "CustomerID": "CAInts",
  "GTIN": "04063958608953",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	04063958608953	8589934611	12884901887	NULL	0

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	04063958608953	8589934611	8589934611	3034F80B583B77C200000013	3034F80B583B77C200000013	SGTIN-96	C&A	CAInts	1	Success	999999910	999999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 04063958608953	(21) 8589934611
		
GS1 Company Prefix Length 7 digits ▼		
		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:4063958.060895.8589934611		
		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
		
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.4063958.060895.8589934611		
		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3034F80B583B77C200000013		

Encuentro Moda

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: E411F96B

Access Password: 270C3E2F

User Memory Logic: 00000094

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08445149190847",
  "UserId": 0,
  "CustomerID": "EncuentroModa",
  "CustomerName": "Encuentro Moda",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "148",
  "SerialEnd": "148",
  "CustomerID": "EncuentroModa",
  "GTIN": "08445149190847",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCounter'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue							
1	08445149190847	148	0	NULL	0							

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08445149190847	148	148	EPCCounter	EPCCounter	SGTIN-96	Encuentro Moda	EncuentroModa	1	Success	999999910	99999910	

	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varUserMemory	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode
1	999999910	99999910	1	08445149190847	303603737412A30000000094	148	00000094	1111	270C3E2F	E411F96B	NULL	NULL

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08445149190847	(21)
	148	
GS1 Company Prefix Length		
	7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8445149.019084.148		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8445149.019084.148		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303603737412A30000000094		

Kennedy Space Center

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00745358715083",
  "UserId": 0,
  "CustomerID": "KSC",
  "CustomerName": "Kennedy Space Center",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "30342D7E3845D50000000785",
  "EPCEnd": "30342D7E3845D50000000785",
  "SerialStart": "1925",
  "SerialEnd": "1925",
  "CustomerID": "KSC",
  "GTIN": "00745358715083",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	00745358715083	1925	0	NULL	NULL								

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom
1	00745358715083	1925	1925	30342D7E3845D50000000785	30342D7E3845D50000000785	SGTIN-96	Kennedy Space Center	KSC	1	Success	999999910	999999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 00745358715083	(21)
	1925	
GS1 Company Prefix Length		
	7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:0745358.071508.1925		
RFID Control Information		
Tag Size	96 bits ▼	Filter Value
		1 - POS item ▼
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.0745358.071508.1925		
RFID Tag EPC Memory Bank Contents (hexadecimal) — starting at bit 20h		
30342D7E3845D50000000785		

Moose Knuckles

Schema Type: SGTIN-96
Schema Info: Standard

Serial number start: 1000000
Serial number end: 0

Serial Prefix:
Prefix length: 7 digits
Prefix Type:

Kill Password: NA
Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00822185263786",
  "UserId": 0,
  "CustomerID": "MooseKnuckles",
  "CustomerName": "Moose Knuckles",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "3034322EA419C280000F4243",
  "EPCEnd": "3034322EA419C280000F4243",
  "SerialStart": "1000003",
  "SerialEnd": "1000003",
  "CustomerID": "MooseKnuckles",
  "GTIN": "00822185263786",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	00822185263786	1000003	0	NULL	0

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	00822185263786	1000003	1000003	3034322EA419C280000F4243	3034322EA419C280000F4243	SGTIN-96	Moose Knuckles	MooseKnuckles	1	Success	999999910	999999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 00822185263786	(21)
	1000003	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:0822185.026378.1000003		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.0822185.026378.1000003		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3034322EA419C280000F4243		

```
graph TD; A[GS1 Key or other identifier] --> B[EPC Pure Identity URI]; B --> C[EPC Tag URI]; C --> D[RFID Tag EPC Memory Bank Contents];
```

Index

Schema Type: SGTIN-96

Schema Info: We do not make any type of EPC. Only maintain serial number

Serial number start: 0

Serial number end: 9999999

Serial Prefix:

Prefix length:

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "000000000001005",
  "UserId": 0,
  "CustomerID": "Lindex",
  "CustomerName": "Lindex",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "NCDV#Barcode",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "0008003",
  "EPCEnd": "0008003",
  "SerialStart": "8003",
  "SerialEnd": "8003",
  "CustomerID": "Lindex",
  "GTIN": "000000000001005",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	Lindex1005	8003	9999999	NULL	NULL

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	Lindex1005	8003	8003	0008003	0008003	SGTIN-96	Lindex	Lindex	1	Success	999999910	99999910	NCDV#Barcode

Diesel

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: AB161A94

Access Password: EEDF1E78

User Memory Logic: 00000008

Json Request & Response

JSON Request	JSON Response
<pre>{ "Schema": "SGTIN-96", "GTIN": "08057718443997", "UserId": 0, "CustomerId": "Diesel", "CustomerName": "Diesel", "EPC": "", "Serial": 0, "TransactionType": "New", "Event": "", "Quantity": 1, "RPO": 999999910, "DetailLineID": 999999910, "CustomPara1": "", "CustomPara2": "" }</pre>	<pre>{ "EPCStart": "EPCCounter", "EPCEnd": "EPCCounter", "SerialStart": "8", "SerialEnd": "8", "CustomerId": "Diesel", "GTIN": "08057718443997", "Quantity": 1, "Remark": "Success" }</pre>

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCounter'

1	varGTIN 08057718443997	bigIntSerialNoLastUsed 8	bigIntMaximumSerial 0	varGS1Prefix NULL	IntPartitionValue 0								
1	varGTIN 08057718443997	bigIntSerialStart 8	bigIntSerialEnd 8	varEPCStart EPCCounter	varEPCEnd EPCCounter	varSchema SGTIN-96	varCustomerName Diesel	varCustomerId Diesel	bigIntQuantity 1	varRemark Success	bigIntRPO 999999910	bigIntDetailLineNo 99999910	varCustom1
1	bigIntRPO 999999910	bigIntDetailLineID 99999910	bigIntLineNo 1	varGTIN 08057718443997	EPC 3035EBCDD&2B5BC000000008	bigIntSerialNo 8	varUserMemory 00000008	varLockID EEDF1E78	varPassword AB161A94	varKillPassword http://certilogo.com/qr/13ZOH12YBP	varBarcode	varCertilogoCode 158 729 467 716	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08057718443997	(21)
	8	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8057718.044399.8		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8057718.044399.8		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3035EBCDD82B5BC000000008		

MANGO

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 17280532480

Serial number end: 17314086911

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: 88CF63EA

Access Password: C823FF44

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08445306201713",
  "UserId": 0,
  "CustomerId": "MANGO",
  "CustomerName": "MANGO",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1":
  "https://qr.mango.com/v1/p/h/8/87080559/43",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "17280532782",
  "SerialEnd": "17280532782",
  "CustomerId": "MANGO",
  "GTIN": "08445306201713",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog', 'tblEPCCounter' and 'tblGS1CustomerDetail'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	08445306201713	17280532782	17314086911	8445306	5								
	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08445306201713	17280532782	17280532782	EPCCounter	EPCCounter	SGTIN-96	MANGO	MANGO	1	Success	999999910	999999910	https://qr.mango.com/v1/p/h/8/87080559/43
	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode		
1	999999910	999999910	1	08445306201713	30360375E813B2C40600012E	17280532782	1111	C823FF44	88CF63EA	https://qr.mango.com/v1/p/h/8/87080559/43/gtin/0...	NULL		
	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varModifiedDate	varUPCPrefix	varGS1Prefix	Prefi
1	08445306201713	MANGO	GS1 Global Office	8445306000002	PUNTO FA, S.L.	CL Mercaders, 9-11 Pol. Ind. Riera de Caldes	Palau-Solita i Plegamans	8184		2020-09-02		8445306	Acti

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08445306201713	(21)
	17280532782	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8445306.020171.17280532782		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8445306.020171.17280532782		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
30360375E813B2C40600012E		

MANGO – Item Code: SSW

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 51640270849

Serial number end: 51673825279

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08999999999995",
  "UserId": 0,
  "CustomerId": "MANGO",
  "CustomerName": "MANGO",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "SSW",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "30362550FC61A7CC06000003",
  "EPCEnd": "30362550FC61A7CC06000003",
  "SerialStart": "51640270851",
  "SerialEnd": "51640270851",
  "CustomerId": "MANGO",
  "GTIN": "08999999999995",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblGS1CustomerDetail'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	08999999999995	51640270851	51673825279	8999999	5								
	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08999999999995	51640270851	51640270851	30362550FC61A7CC06000003	30362550FC61A7CC06000003	SGTIN-96	MANGO	MANGO	1	Success	999999910	99999910	SSW
	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varModifiedDate	varUPCPrefix	varGS1Prefix	PrefixStat
1	08999999999995	MANGO	GS1 Global Office	NULL	UNILEVER INDONESIA PT.	Graha Unilever, Jl. Jend. Gatot Subroto Kav.15 ...	Jakarta	12903		2016-10-10		8999999	Active

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08999999999995	(21)
51640270851		
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8999999.099999.51640270851		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8999999.099999.51640270851		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
30362550FC61A7CC06000003		

BlueFields

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 100000000000

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08715838972345",
  "UserId": 0,
  "CustomerId": "BlueFields",
  "CustomerName": "BlueFields",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "303613F8F85EF4974876E802",
  "EPCEnd": "303613F8F85EF4974876E802",
  "SerialStart": "100000000002",
  "SerialEnd": "100000000002",
  "CustomerId": "BlueFields",
  "GTIN": "08715838972345",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	08715838972345	1000000000002	0	NULL	0								

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08715838972345	1000000000002	1000000000002	303613F8F85EF4974876E802	303613F8F85EF4974876E802	SGTIN-96	BlueFields	BlueFields	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08715838972345	(21)
	1000000000002	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8715838.097234.1000000000002		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8715838.097234.1000000000002		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303613F8F85EF4974876E802		

```
graph TD; GS1[GS1 Key or other identifier] --> EPCIS[EPC Pure Identity URI]; EPCIS --> EPCTag[EPC Tag URI]; EPCTag --> RFID[RFID Tag EPC Memory Bank Contents];
```

Alvaro Moreno

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: EF83DA4D

Access Password: D8B0A01F

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08434658628828",
  "UserId": 0,
  "CustomerId": "AlvaroMoreno",
  "CustomerName": "Alvaro Moreno",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "511",
  "SerialEnd": "511",
  "CustomerId": "AlvaroMoreno",
  "GTIN": "08434658628828",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog','tblEPCCounter' and 'tblGS1CustomerDetail'

Results											
Messages											
varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue							
1	08434658628828	511	0	8434658	5						
varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo
1	08434658628828	511	511	EPCCounter	EPCCounter	SGTIN-96	Alvaro Moreno	AlvaroMoreno	1	Success	999999910
bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varLockID	varPassword	varKillPassword			
1	999999910	999999910	1	08434658628828	303602CF883D688000001FF	511	1111	D8B0A01F	EF83DA4D		
varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varGS1Prefix	PrefixStatus		
1	08434658628828	AlvaroMoreno	GS1 Global Office	8434658000006	ALVARO MORENO SLU	Pol. Ind. Las Vegas. C/ Aguilucho Cenizo, S/N.	OSUNA	41640	8434658	Active	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes					
GTIN + serial (AI 01 + AI 21) ▼ (01) 08434658628828 (21) 511					
GS1 Company Prefix Length 7 digits ▼					
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS					
urn:epc:id:sgtin:8434658.062882.511					
<table border="1"> <tr> <td colspan="2">RFID Control Information</td> </tr> <tr> <td>Tag Size 96 bits ▼</td> <td>Filter Value 1 - POS item ▼</td> </tr> </table>		RFID Control Information		Tag Size 96 bits ▼	Filter Value 1 - POS item ▼
RFID Control Information					
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼				
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware					
urn:epc:tag:sgtin-96:1.8434658.062882.511					
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h					
303602CF883D6880000001FF					

Gerry Weber

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1255103

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04055915723335",
  "UserId": 0,
  "CustomerId": "GerryWeber",
  "CustomerName": "GerryWeber",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "Catalog",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "3034F78DAC46A340001326D4",
  "EPCEnd": "3034F78DAC46A340001326D4",
  "SerialStart": "1255124",
  "SerialEnd": "1255124",
  "CustomerId": "GerryWeber",
  "GTIN": "04055915723335",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog'

Results		Messages												
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	bigIntRP
1	24186	04055915723335	1255124	1255124	3034F78DAC46A340001326D4	3034F78DAC46A340001326D4	SGTIN-96	GeryWeber	GeryWeber	1	New		Success	999999910
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue				
1	10367	04055915723335	1255124	0	0	2020-12-08 16:59:38.210	0	2020-12-08 17:01:16.580	NULL	0				

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼
(01) 04055915723335 (21)

1255124

GS1 Company Prefix Length

7 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:4055915.072333.1255124

RFID Control Information

Tag Size 96 bits ▼
Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.4055915.072333.1255124

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h
 3034F78DAC46A340001326D4

Stone Island

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "008000232323",
  "Userld": 0,
  "CustomerID": "Stonelsland",
  "CustomerName": "Stone Island",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 5,
  "RPO": 1000014667,
  "DetailLineID": 6000127453,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCCounter",
  "EPCEnd": "EPCCCounter",
  "SerialStart": "72",
  "SerialEnd": "76",
  "CustomerID": "Stonelsland",
  "GTIN": "008000232323",
  "Quantity": 5,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCCounter'

Results		Messages													
1	bigIntId 10390	varGTIN 00800023232323	bigIntSerialNoLastUsed 76	bigIntMaximumSerial 0	bigIntCreatedById 0	dtCreatedOn 2021-02-03 12:31:33.677	bigIntLastUpdatedById 0	dtLastUpdatedOn 2021-02-23 18:25:26.870	varGS1Prefix NULL	IntPartitionValue 0					
1	bigIntId 24607	varGTIN 00800023232323	bigIntSerialStart 72	bigIntSerialEnd 76	varEPCStart EPCCounter	varEPCEnd EPCCounter	varSchema SGTIN-96	varCustomerName Stone Island	varCustomerId StoneIsland	bigIntQuantity 5	varTransaction New	varEvent Success	varRemark 1000014667	bigIntRPO 6000127453	varCustom
1	bigIntId 201380	bigIntRPO 1000014667	bigIntDetailLineId 6000127453	bigIntLineNo 1	varGTIN 00800023232323	EPC 303430D45C16B000000000048	varUserMemory 00000048	varPassword	varLockId	bigIntSerialNo 72	varCustom1	varCustom2	varStatus New	dtCreatedOn 2021-02-23 18:25:27.010	varKill
2	201381	1000014667	6000127453	2	00800023232323	303430D45C16B000000000049	00000049			73			New	2021-02-23 18:25:27.043	
3	201382	1000014667	6000127453	3	00800023232323	303430D45C16B00000000004A	0000004A			74			New	2021-02-23 18:25:27.043	
4	201383	1000014667	6000127453	4	00800023232323	303430D45C16B00000000004B	0000004B			75			New	2021-02-23 18:25:27.043	
5	201384	1000014667	6000127453	5	00800023232323	303430D45C16B00000000004C	0000004C			76			New	2021-02-23 18:25:27.043	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 00800023232323	(21)
	72	

GS1 Company Prefix Length
7 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS
urn:epc:id:sgtin:0800023.023232.72

RFID Control Information
Tag Size 96 bits ▼ Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware
urn:epc:tag:sgtin-96:1.0800023.023232.72

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h
303430D45C16B00000000048

