



EPC MODULE

CUSTOMER EPC LOGIC AND TESTING SCRIPTS

R-PAC INTERNATIONAL CORPORATION
Global IT Team

Contents

Centauro	2
Lacoste	4
Inditex	6
State of Art	7
Babyshop	9
C&A	11
Encuentro Moda	13
Kennedy Space Center	15
Moose Knuckles	17
Lindex	19
Diesel	21
MANGO	23
MANGO – Item Code: SSW	25
BlueFields	27
Alvaro Moreno	29
Gerry Weber	31
Stone Island	33
Desigual	35
Charanga	37
TENDAM	39
HugoBoss	41
Walbusch	43
HamiltonBeach	45
Thinx	51
ByerCalifornia	53
CABOT	55
Kiabi	57
Luxottica	59
ElCorteIngles	61
H&M	64
Liberated Brands	66

Centauro

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1000000.

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "07891473035025",
  "Userid": 0,
  "CustomerID": "CENT",
  "CustomerName": "Centauro",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3035E1A844036B80000F42E1",
  "EPCEnd": "3035E1A844036B80000F42E1",
  "SerialStart": "1000161",
  "SerialEnd": "1000161",
  "CustomerID": "CENT",
  "GTIN": "07891473035025",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

1	varGTIN 07891473035025	bigIntSerialNoLastUsed 1000161	bigIntMaximumSerial 0	varGS1Prefix NULL	IntPartitionValue 0								
---	---------------------------	-----------------------------------	--------------------------	----------------------	------------------------	--	--	--	--	--	--	--	--

1	varGTIN 07891473035025	bigIntSerialStart 1000161	bigIntSerialEnd 1000161	varEPCStart 3035E1A844036B80000F42E1	varEPCEnd 3035E1A844036B80000F42E1	varSchema SGTIN-96	varCustomerName Centauro	varCustomerid CENT	bigIntQuantity 1	varRemark Success	bigIntRPO 999999910	bigIntDetailLineNo 99999910	varCustom 1 NULL
---	---------------------------	------------------------------	----------------------------	---	---------------------------------------	-----------------------	-----------------------------	-----------------------	---------------------	----------------------	------------------------	--------------------------------	---------------------

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 07891473035025	(21)
	1000161	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:7891473.003502.1000161		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.7891473.003502.1000161		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3035E1A844036B80000F42E1		

Lacoste

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 20000000001.

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "03614039991078",
  "UserId": 0,
  "CustomerId": "LACO",
  "CustomerName": "Lacoste",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034DC955C60C8C4A817C8B2",
  "EPCEnd": "3034DC955C60C8C4A817C8B2",
  "SerialStart": "20000000178",
  "SerialEnd": "20000000178",
  "CustomerId": "LACO",
  "GTIN": "03614039991078",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

1	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
	03614039991078	20000000178	0	NULL	0								
1	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
	03614039991078	20000000178	20000000178	3034DC955C60C8C4A817C8B2	3034DC955C60C8C4A817C8B2	SGTIN-96	Lacoste	LACO	1	Success	999999910	999999910	NULL

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes	
GTIN + serial (AI 01 + AI 21) ▼	(01) 03614039991078 (21) 20000000178
GS1 Company Prefix Length 7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS urn:epc:id:sgtin:3614039.099107.20000000178	
RFID Control Information Tag Size 96 bits ▼ Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware urn:epc:tag:sgtin-96:1.3614039.099107.20000000178	
RFID Tag EPC Memory Bank Contents (hexadecimal) — starting at bit 20h 3034DC955C60C8C4A817C8B2	

Inditex

Schema Type: SGTIN-96

Schema Info: We are using GTIN "00123456123456" for serial number increment.

Serial number start: 1500000.

Serial number end: 4294967295

Serial Prefix:

Prefix length:

Prefix Type:

Kill Password: 00000000

Access Password: 07F6D645

User Memory Logic: 00B77543

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00154500104042",
  "UserId": 0,
  "CustomerId": "Inditex",
  "CustomerName": "Tempe Inditex",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "NCDV#4#3#4#15",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "12023107",
  "SerialEnd": "12023107",
  "CustomerId": "Inditex",
  "GTIN": "00154500104042",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCounter'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue							
1	00123456123456	12023107	4294967295	NULL	NULL							

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	00154500104042	12023107	12023107	EPCCounter	EPCCounter	SGTIN-96	Tempe Inditex	Inditex	1	Success	999999910	999999910	NCDV#4#3#4#15

	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varUserMemory	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode
1	999999910	999999910	1	00154500104042	00E00731C8E6490002DD050DCC00178C	12023107	00B77543	1112	07F6D645	00000000	NULL	NULL

Please note that we are using GTIN "00123456123456" for serial number increment.

State of Art

Schema Type: SGTIN-96
Schema Info: Standard

Serial number start: 100000000000.
Serial number end: 0

Serial Prefix:
Prefix length: 7 digits
Prefix Type:

Kill Password: NA
Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08714596218979",
  "UserId": 0,
  "CustomerId": "SOA",
  "CustomerName": "State of Art",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "303613E5901562574876E802",
  "EPCEnd": "303613E5901562574876E802",
  "SerialStart": "100000000002",
  "SerialEnd": "100000000002",
  "CustomerId": "SOA",
  "GTIN": "08714596218979",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are ‘tblEPCSerila’ and ‘tblEPCLog’

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue									
1	08714596218979	100000000002	0	NULL	NULL									

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08714596218979	1000000000002	1000000000002	303613E5901562574876E802	303613E5901562574876E802	SGTIN-96	State of Art	SOA	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08714596218979	(21)
1000000000002		

GS1 Company Prefix Length
7 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8714596.021897.1000000000002		

RFID Control Information	
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8714596.021897.1000000000002		

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303613E5901562574876E802		

```
graph TD; GS1[GS1 Key or other identifier] --> EPCIS[EPC Pure Identity URI]; EPCIS --> EPCTag[EPC Tag URI]; EPCTag --> RFID[RFID Tag EPC Memory Bank Contents];
```

Babyshop

Schema Type: SGTIN-96

Schema Info: Prefix 4 is added to serial number (400000000000).

Serial number start: 0

Serial number end: 0

Serial Prefix: 400000000000

Prefix length: 6 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "06292156658004",
  "UserId": 0,
  "CustomerID": "babyshop",
  "CustomerName": "babyshop",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "303A6677C28A3209502FAE24",
  "EPCEnd": "303A6677C28A3209502FAE24",
  "SerialStart": "40000007716",
  "SerialEnd": "40000007716",
  "CustomerID": "babyshop",
  "GTIN": "06292156658004",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	06292156658004	7716	0	NULL	NULL

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	06292156658004	40000007716	40000007716	303A6677C28A3209502FAE24	303A6677C28A3209502FAE24	SGTIN-96	babyshop	babyshop	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 06292156658004	(21)
40000007716		
GS1 Company Prefix Length 6 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:629215.0665800.40000007716		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.629215.0665800.40000007716		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303A6677C28A3209502FAE24		

C&A

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 8589934592.

Serial number end: 12884901887

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04063958608953",
  "UserId": 0,
  "CustomerId": "CAInts",
  "CustomerName": "C&A",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "3034F80B583B77C200000013",
  "EPCEnd": "3034F80B583B77C200000013",
  "SerialStart": "8589934611",
  "SerialEnd": "8589934611",
  "CustomerId": "CAInts",
  "GTIN": "04063958608953",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	04063958608953	8589934611	12884901887	NULL	0

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	04063958608953	8589934611	8589934611	3034F80B583B77C200000013	3034F80B583B77C200000013	SGTIN-96	C&A	CAInts	1	Success	999999910	999999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 04063958608953	(21) 8589934611
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:4063958.060895.8589934611		
RFID Control Information Tag Size 96 bits ▼ Filter Value 1 - POS item ▼		
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.4063958.060895.8589934611		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3034F80B583B77C200000013		

Encuentro Moda

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: E411F96B

Access Password: 270C3E2F

User Memory Logic: 00000094

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08445149190847",
  "UserId": 0,
  "CustomerID": "EncuentroModa",
  "CustomerName": "Encuentro Moda",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "148",
  "SerialEnd": "148",
  "CustomerID": "EncuentroModa",
  "GTIN": "08445149190847",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCounter'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue							
1	08445149190847	148	0	NULL	0							

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08445149190847	148	148	EPCCounter	EPCCounter	SGTIN-96	Encuentro Moda	EncuentroModa	1	Success	999999910	99999910	

	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varUserMemory	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode
1	999999910	99999910	1	08445149190847	303603737412A30000000094	148	00000094	1111	270C3E2F	E411F96B	NULL	NULL

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08445149190847	(21)
	148	
GS1 Company Prefix Length		
	7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8445149.019084.148		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8445149.019084.148		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303603737412A30000000094		

Kennedy Space Center

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00745358715083",
  "UserId": 0,
  "CustomerId": "KSC",
  "CustomerName": "Kennedy Space Center",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "30342D7E3845D50000000785",
  "EPCEnd": "30342D7E3845D50000000785",
  "SerialStart": "1925",
  "SerialEnd": "1925",
  "CustomerId": "KSC",
  "GTIN": "00745358715083",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	00745358715083	1925	0	NULL	NULL								
	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom
1	00745358715083	1925	1925	30342D7E3845D50000000785	30342D7E3845D50000000785	SGTIN-96	Kennedy Space Center	KSC	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 00745358715083	(21)
	1925	
GS1 Company Prefix Length		
	7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:0745358.071508.1925		
RFID Control Information		
Tag Size	96 bits ▼	Filter Value
		1 - POS item ▼
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.0745358.071508.1925		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
30342D7E3845D50000000785		

Moose Knuckles

Schema Type: SGTIN-96
Schema Info: Standard

Serial number start: 1000000
Serial number end: 0

Serial Prefix:
Prefix length: 7 digits
Prefix Type:

Kill Password: NA
Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00822185263786",
  "UserId": 0,
  "CustomerID": "MooseKnuckles",
  "CustomerName": "Moose Knuckles",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "3034322EA419C280000F4243",
  "EPCEnd": "3034322EA419C280000F4243",
  "SerialStart": "1000003",
  "SerialEnd": "1000003",
  "CustomerID": "MooseKnuckles",
  "GTIN": "00822185263786",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	00822185263786	1000003	0	NULL	0

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	00822185263786	1000003	1000003	3034322EA419C280000F4243	3034322EA419C280000F4243	SGTIN-96	Moose Knuckles	MooseKnuckles	1	Success	999999910	999999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 00822185263786	(21)
	1000003	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:0822185.026378.1000003		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.0822185.026378.1000003		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3034322EA419C280000F4243		

The diagram illustrates the data flow from a GS1 Key to various EPC identifiers. A large green arrow points from the GS1 Key section to the EPC Pure Identity URI section. A smaller green arrow points from the EPC Pure Identity URI section to the EPC Tag URI section. Another green arrow points from the EPC Tag URI section to the RFID Tag EPC Memory Bank Contents section. Additionally, a green arrow points from the RFID Control Information section to the EPC Tag URI section.

Lindex

Schema Type:

Schema Info: We have maintained serial number

Serial number start: 0

Serial number end: 9999999

Serial Prefix:

Prefix length:

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00000000001005",
  "UserId": 0,
  "CustomerId": "Lindex",
  "CustomerName": "Lindex",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "NCDV#Barcode",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "0008003",
  "EPCEnd": "0008003",
  "SerialStart": "8003",
  "SerialEnd": "8003",
  "CustomerId": "Lindex",
  "GTIN": "00000000001005",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	Lindex1005	8003	9999999	NULL	NULL

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	Lindex1005	8003	8003	0008003	0008003	SGTIN-96	Lindex	Lindex	1	Success	999999910	99999910	NCDV#Barcode

Lindex-EPC

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 20000000000

Serial number end: 0

Serial Prefix:

Prefix length:6

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "07314780255530",
  "UserId": 0,
  "CustomerId": "Lindex",
  "CustomerName": "Lindex",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "303ACA558018F444A817CAF8",
  "EPCEnd": "303ACA558018F444A817CAF8",
  "SerialStart": "20000000760",
  "SerialEnd": "20000000760",
  "CustomerId": "Lindex",
  "GTIN": "07314780255530",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedBy	dtCreatedOn	bigIntLastUpdatedBy	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue	
1	37954	07314780255530	20000000760	0	43311	2023-04-25 10:08:40.730	0	2023-12-14 12:57:09.977	NULL	0	

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varCustom1	bigIntId
1	07314780255530	20000000760	20000000760	303ACA558018F444A817CAF8	303ACA558018F444A817CAF8	SGTIN-96	Lindex	Lindex	1	New		641452

Diesel

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: AB161A94

Access Password: EEDF1E78

User Memory Logic: 00000008

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08057718443997",
  "UserId": 0,
  "CustomerId": "Diesel",
  "CustomerName": "Diesel",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "8",
  "SerialEnd": "8",
  "CustomerId": "Diesel",
  "GTIN": "08057718443997",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCounter'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	08057718443997	8	0	NULL	0								

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08057718443997	8	8	EPCCounter	EPCCounter	SGTIN-96	Diesel	Diesel	1	Success	999999910	99999910	

	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varUserMemory	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode
1	999999910	99999910	1	08057718443997	3035EBCDD82B5BC000000008	8	00000008		EEDF1E78	AB161A94	http://certilogo.com/qr/13ZOH12YBP	158 729 467 716

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08057718443997	(21)
	8	
GS1 Company Prefix Length		
	7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8057718.044399.8		
RFID Control Information		
Tag Size	96 bits ▼	Filter Value
		1 - POS item ▼
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8057718.044399.8		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3035EBCDD82B5BC000000008		

MANGO

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 17280532480

Serial number end: 17314086911

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: 88CF63EA

Access Password: C823FF44

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08445306201713",
  "UserId": 0,
  "CustomerId": "MANGO",
  "CustomerName": "MANGO",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1":
  "https://qr.mango.com/v1/p/h/8/87080559/43",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "17280532782",
  "SerialEnd": "17280532782",
  "CustomerId": "MANGO",
  "GTIN": "08445306201713",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog', 'tblEPCCounter' and 'tblGS1CustomerDetail'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	08445306201713	17280532782	17314086911	8445306	5								
	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08445306201713	17280532782	17280532782	EPCCounter	EPCCounter	SGTIN-96	MANGO	MANGO	1	Success	999999910	99999910	https://qr.mango.com/v1/p/h/8/87080559/43
	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varLockID	varPassword	varKillPassword	varBarcode	varCertilogoCode		
1	999999910	99999910	1	08445306201713	30360375E813B2C40600012E	17280532782	1111	C823FF44	88CF63EA	https://qr.mango.com/v1/p/h/8/87080559/43/gtin/0...	NULL		
	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varModifiedDate	varUPCPrefix	varGS1Prefix	Prefi
1	08445306201713	MANGO	GS1 Global Office	8445306000002	PUNTO FA, S.L.	CL Mercaders, 9-11 Pol. Ind. Riera de Caldes	Palau-Solita i Plegamans	8184		2020-09-02		8445306	Actr

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08445306201713	(21) 17280532782
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8445306.020171.17280532782		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8445306.020171.17280532782		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
30360375E813B2C40600012E		

MANGO – Item Code: SSW

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 51640270849

Serial number end: 51673825279

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08999999999995",
  "UserId": 0,
  "CustomerId": "MANGO",
  "CustomerName": "MANGO",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "SSW",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "30362550FC61A7CC06000003",
  "EPCEnd": "30362550FC61A7CC06000003",
  "SerialStart": "51640270851",
  "SerialEnd": "51640270851",
  "CustomerId": "MANGO",
  "GTIN": "08999999999995",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblGS1CustomerDetail'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue								
1	08999999999995	51640270851	51673825279	8999999	5								
	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08999999999995	51640270851	51640270851	30362550FC61A7CC06000003	30362550FC61A7CC06000003	SGTIN-96	MANGO	MANGO	1	Success	999999910	99999910	SSW
	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varModifiedDate	varUPCPrefix	varGS1Prefix	PrefixStat
1	08999999999995	MANGO	GS1 Global Office	NULL	UNILEVER INDONESIA PT.	Graha Unilever, Jl. Jend. Gatot Subroto Kav.15 ...	Jakarta	12903		2016-10-10		8999999	Active

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08999999999995	(21)
51640270851		
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8999999.099999.51640270851		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8999999.099999.51640270851		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
30362550FC61A7CC06000003		

BlueFields

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 100000000000

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08715838972345",
  "UserId": 0,
  "CustomerId": "BlueFields",
  "CustomerName": "BlueFields",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 99999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "303613F8F85EF4974876E802",
  "EPCEnd": "303613F8F85EF4974876E802",
  "SerialStart": "100000000002",
  "SerialEnd": "100000000002",
  "CustomerId": "BlueFields",
  "GTIN": "08715838972345",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue
1	08715838972345	100000000000	0	NULL	0

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom1
1	08715838972345	100000000000	100000000002	303613F8F85EF4974876E802	303613F8F85EF4974876E802	SGTIN-96	BlueFields	BlueFields	1	Success	999999910	99999910	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08715838972345	(21)
	1000000000002	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8715838.097234.1000000000002		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8715838.097234.1000000000002		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303613F8F85EF4974876E802		

Alvaro Moreno

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1

Serial number end: 0

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: EF83DA4D

Access Password: D8B0A01F

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08434658628828",
  "UserId": 0,
  "CustomerId": "AlvaroMoreno",
  "CustomerName": "Alvaro Moreno",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "511",
  "SerialEnd": "511",
  "CustomerId": "AlvaroMoreno",
  "GTIN": "08434658628828",
  "Quantity": 1,
  "Remark": "Success"
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog', 'tblEPCCounter' and 'tblGS1CustomerDetail'

Results											
Messages											
varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue							
1	08434658628828	511	0	8434658	5						
varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varRemark	bigIntRPO	bigIntDetailLineNo
1	08434658628828	511	EPCCounter	EPCCounter	SGTIN-96	Alvaro Moreno	AlvaroMoreno	1	Success	999999910	999999910
bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	bigIntSerialNo	varLockID	varPassword	varKillPassword			
1	999999910	999999910	1	08434658628828	303602CF883D688000001FF	511	1111	D8B0A01F	EF83DA4D		
varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varGS1Prefix	PrefixStatus		
1	08434658628828	AlvaroMoreno	GS1 Global Office	8434658000006	ALVARO MORENO SLU	Pol. Ind. Las Vegas. C/ Aguilucho Cenizo. S/N.	OSUNA	41640	8434658	Active	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes	
GTIN + serial (AI 01 + AI 21) ▼ (01) 08434658628828 (21) 511	
GS1 Company Prefix Length 7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS	
urn:epc:id:sgtin:8434658.062882.511	
RFID Control Information Tag Size 96 bits ▼ Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware	
urn:epc:tag:sgtin-96:1.8434658.062882.511	
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h	
303602CF883D6880000001FF	

Gerry Weber

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1255103

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04055915723335",
  "UserId": 0,
  "CustomerId": "GerryWeber",
  "CustomerName": "GerryWeber",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "Catalog",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "3034F78DAC46A340001326D4",
  "EPCEnd": "3034F78DAC46A340001326D4",
  "SerialStart": "1255124",
  "SerialEnd": "1255124",
  "CustomerId": "GerryWeber",
  "GTIN": "04055915723335",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog'

Results		Messages												
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	bigIntRP
1	24186	04055915723335	1255124	1255124	3034F78DAC46A340001326D4	3034F78DAC46A340001326D4	SGTIN-96	GeryWeber	GeryWeber	1	New		Success	999999910
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue				
1	10367	04055915723335	1255124	0	0	2020-12-08 16:59:38.210	0	2020-12-08 17:01:16.580	NULL	0				

EPC Encoder/Decoder tool

Show an Example

Clear

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) (01) 04055915723335 (21)

1255124



GS1 Company Prefix Length

7 digits



EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:4055915.072333.1255124



RFID Control Information

Tag Size 96 bits

Filter Value 1 - POS item



EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.4055915.072333.1255124



RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

3034F78DAC46A340001326D4

r-pac International - confidential document

32 | Page

Stone Island

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00800023232323",
  "Userld": 0,
  "CustomerID": "Stonelsland",
  "CustomerName": "Stone Island",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 5,
  "RPO": 1000014667,
  "DetailLineID": 6000127453,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "EPCCCounter",
  "EPCEnd": "EPCCCounter",
  "SerialStart": "72",
  "SerialEnd": "76",
  "CustomerID": "Stonelsland",
  "GTIN": "00800023232323",
  "Quantity": 5,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblEPCCCounter'

Results		Messages							
bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedByld	dtCreatedOn	bigIntLastUpdatedByld	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue
1	10390	00800023232323	76	0	2021-02-03 12:31:33.677	0	2021-02-23 18:25:26.870	NULL	0

bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	bigIntRPO	bigIntDetailLineNo	varCustom
1	24607	00800023232323	72	76	EPCCounter	EPCCounter	SGTIN-96	Stone Island	Stonelsland	5	New	Success	1000014667	6000127453	

bigIntId	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	varUserMemory	varPassword	varLockID	bigIntSerialNo	varCustom1	varCustom2	varStatus	dtCreatedOn	varKill
1	201380	1000014667	6000127453	1	00800023232323	303430D45C16B000000000048	000000048		72			New	2021-02-23 18:25:27.010	
2	201381	1000014667	6000127453	2	00800023232323	303430D45C16B000000000049	000000049		73			New	2021-02-23 18:25:27.043	
3	201382	1000014667	6000127453	3	00800023232323	303430D45C16B00000000004A	00000004A		74			New	2021-02-23 18:25:27.043	
4	201383	1000014667	6000127453	4	00800023232323	303430D45C16B00000000004B	00000004B		75			New	2021-02-23 18:25:27.043	
5	201384	1000014667	6000127453	5	00800023232323	303430D45C16B00000000004C	00000004C		76			New	2021-02-23 18:25:27.043	

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 00800023232323	(21)
	72	


GS1 Company Prefix Length
7 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS
urn:epc:id:sgtin:0800023.023232.72

RFID Control Information
Tag Size 96 bits ▼ Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware
urn:epc:tag:sgtin-96:1.0800023.023232.72

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h
303430D45C16B00000000048

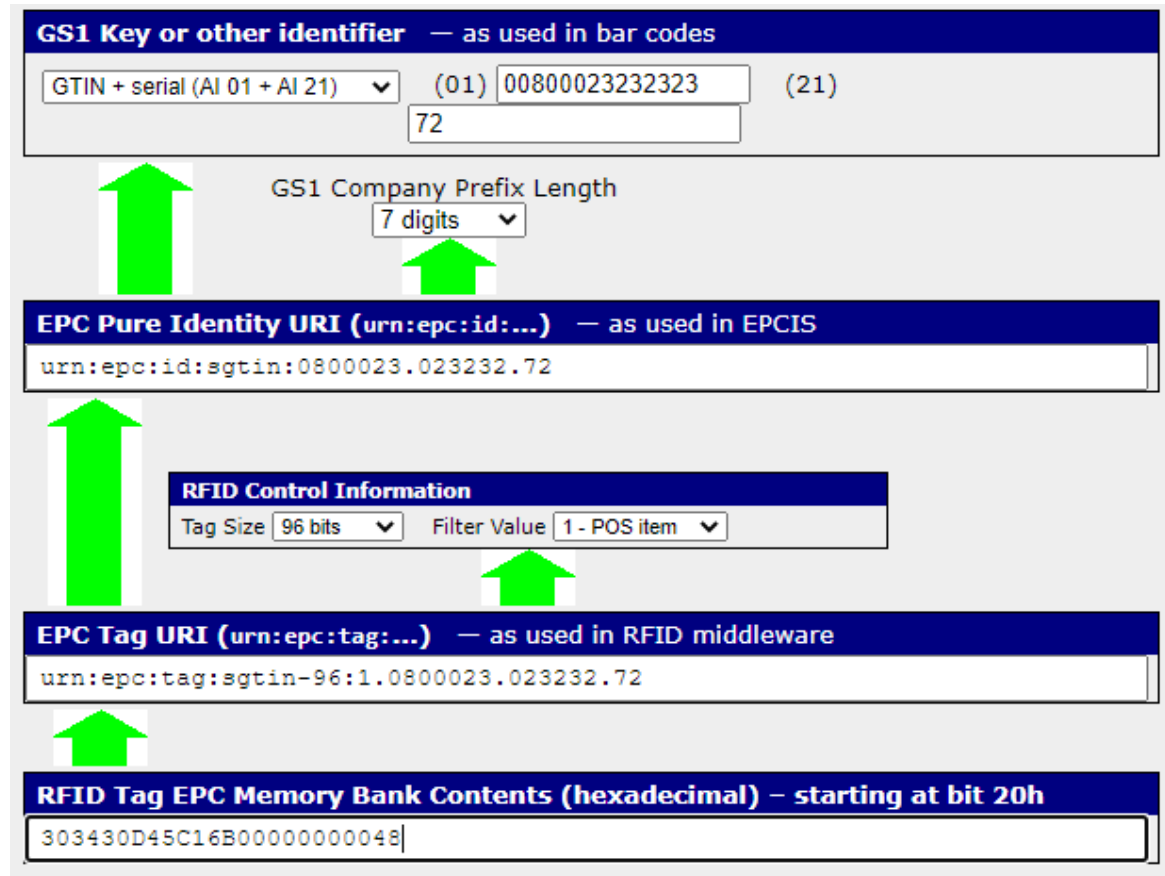

Desigual

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 230000001

Serial number end: 235000000

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08434486868847",
  "UserId": 0,
  "CustomerId": "Desigual",
  "CustomerName": "Desigual",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 10,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "303602CCD854D9000DB5877F",
  "EPCEnd": "303602CCD854D9000DB58788",
  "SerialStart": "230000511",
  "SerialEnd": "230000520",
  "CustomerId": "Desigual",
  "GTIN": "08434486868847",
  "Quantity": 10,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog'

Results		Messages											
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue			
1	10407	08434486868847	230000520	235000000	0	2021-07-21 12:25:35.287	0	2021-07-29 14:52:31.670	NULL	0			
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark
1	24843	08434486868847	230000511	230000520	303602CCD854D9000DB5877F	303602CCD854D9000DB58788	SGTIN-96	Desigual	Desigual	10	New		Success
2	24838	08434486868847	230000311	230000510	303602CCD854D9000DB586B7	303602CCD854D9000DB5877E	SGTIN-96	Desigual	Desigual	200	New		Success
3	24837	08434486868847	230000211	230000310	303602CCD854D9000DB586B3	303602CCD854D9000DB586B6	SGTIN-96	Desigual	Desigual	100	New		Success
4	24836	08434486868847	230000111	230000210	303602CCD854D9000DB585EF	303602CCD854D9000DB58652	SGTIN-96	Desigual	Desigual	100	New		Success
5	24835	08434486868847	230000011	230000110	303602CCD854D9000DB585B8	303602CCD854D9000DB585EE	SGTIN-96	Desigual	Desigual	100	New		Success
6	24834	08434486868847	230000001	230000010	303602CCD854D9000DB585B1	303602CCD854D9000DB585BA	SGTIN-96	Desigual	Desigual	10	New		Success

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 08434486868847	(21)
230000511		
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:8434486.086884.230000511		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.8434486.086884.230000511		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
303602CCD854D9000DB5877F		

Charanga

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1

Serial number end: 0

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: 25193528

Access Password: 25193528

User Memory Logic: NA

Json Request & Response



The affected tables are 'tblEPCSerila', 'tblEPCLog', 'tblEPCCounter' and 'tblGS1CustomerDetail'

tblEPCSerial																
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue						
1	15252	08059010713099	1281	0	0	2022-01-17 13:01:57.277	16	2022-02-07 06:22:22.347	8059010	5						
tblEPCLog																
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	bigIntRPO	bigIntDetailLineNo	var
1	75021	08059010713099	1	1	EPCCounter	EPCCounter	SGTIN-96	Charanga	Charanga	1	New		Success	999999910	999999910	N
tblGS1CustomerDetail																
	bigIntId	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varStreetAddress2	varStreetAddress3	varCity	varStateProvince	varZipCode	varCountry	varGSRN	varModi	
1	1154	08059010713099	Charanga	GS1 Italy	8300646000009	Diesel SpA	Via dell'Industria 4/6			Breganze		36042	IT		2022-01	
tblEPCCounter																
	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	varUserMemory	varPassword	varLockID	bigIntSerialNo	varKillPassword	varBarcode					
1	1000104931	6000720885	621	08059010713099	3035EBE20845A34000000027A		25193528	1111	634	25193528	https://charanga.es/igtn/0843468134677/ser/634					

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) (01) 08059010713099 (21)

1

GS1 Company Prefix Length

7 digits

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:8059010.071309.1

RFID Control Information

Tag Size 96 bits Filter Value 1 - POS item

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.8059010.071309.1

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

3035EBE20845A34000000001

TENDAM

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 60,000,001

Serial number end: 69,999,999

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: 4723396B

Access Password: 4723396B

User Memory Logic: NA

Json Request & Response



The affected tables are 'tblEPCSerila', 'tblEPCLog', 'tblEPCCounter' and 'tblGS1CustomerDetail'

tblEPCSerial															
bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue						
1	15713	08445323393767	60000004	69999999	2022-04-27 06:42:03.893	0	2022-05-10 05:34:39.403	8445323	5						
tblEPCLog															
bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	bigIntRPO	bigIntDetailLineNo	varCu
1	97955	08445323393767	60000001	60000002	EPCCounter	EPCCounter	SGTIN-96	Tendam	2	New		Success	999999910	999999910	NULL
tblGS1CustomerDetail															
bigIntId	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varStreetAddress2	varStreetAddress3	varCity	varStateProvince	varZipCode	varCountry	varGSRN		
1	1279	08445323393767	Tendam	GS1 Global Office	8445323000009	TENDAM RETAIL S.A	AV Llano Castellano, 51		Madrid		28034				
tblEPCCounter_TENDAM															
bigIntRPO	bigIntDetailLineId	bigIntLineNo	varGTIN	EPC	varUserMemory	varPassword	varLockId	bigIntSerialNo	varKillPassword	varBarcode					
1	999999910	999999910	1	08445323393767	303603762C26740003938701	4723396B	1111	60000001	4723396B	https://myspringfield.com/01/08445323393767/21/...					

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21)

(01) 08445323393767

(21) 60000001

GS1 Company Prefix Length

7 digits

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:8445323.039376.60000001

RFID Control Information

Tag Size 96 bits

Filter Value 1 - POS item

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.8445323.039376.60000001

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

303603762C26740003938701

HugoBoss

Schema Type: SGTIN-96

Schema Info: We are using GTIN " 04021407000000" for serial number increment.

Serial number start: 1

Serial number end: 68719476735

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04021405425874",
  "UserId": 0,
  "CustomerId": "HugoBoss",
  "CustomerName": "HugoBoss",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034F572742996C0000000BB",
  "EPCEnd": "3034F572742996C0000000BB",
  "SerialStart": "187",
  "SerialEnd": "187",
  "CustomerId": "HugoBoss",
  "GTIN": "04021405425874",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog'

tblEPCSerial										
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue
1	15734	04021405425874	187	0	0	2022-05-04 13:42:34.540	0	2022-05-23 10:56:19.240	NULL	0

tblEPCLog														
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	bigIntPartitionValue
1	98275	04021405425874	1	1	3034F572742996C000000001	3034F572742996C000000001	SGTIN-96	HugoBoss	HugoBoss	1	New		Success	999

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes		
GTIN + serial (AI 01 + AI 21) ▼	(01) 04021405425874	(21)
	1	
GS1 Company Prefix Length 7 digits ▼		
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS		
urn:epc:id:sgtin:4021405.042587.1		
RFID Control Information		
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼	
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware		
urn:epc:tag:sgtin-96:1.4021405.042587.1		
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h		
3034F572742996C000000001		

Walbusch

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 1

Serial number end: 0

Serial Prefix:

Prefix length: 7 digits

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04099451019279",
  "UserId": 0,
  "CustomerId": "Walbusch",
  "CustomerName": "Walbusch",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": null,
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034FA35EC01E1C00000013C",
  "EPCEnd": "3034FA35EC01E1C00000013C",
  "SerialStart": "316",
  "SerialEnd": "316",
  "CustomerId": "Walbusch",
  "GTIN": "04099451019279",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerial', 'tblEPCLog'

tblEPCSerial

	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedBy	dtCreatedOn	bigIntLastUpdatedBy	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue
1	15741	04099451019279	315	0	0	2022-05-09 12:55:14.070	0	2022-05-09 12:55:39.570	NULL	0

tblEPCLog

	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark	b
1	98581	04099451019279	1	5	3034FA35EC01E1C000000001	3034FA35EC01E1C000000005	SGTIN-96	Walbusch	Walbusch	5	New		Success	9

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes	
GTIN + serial (AI 01 + AI 21) ▼	(01) 04099451019279 (21)
1	
GS1 Company Prefix Length 7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS	
urn:epc:id:sgtin:4099451.001927.1	
RFID Control Information	
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware	
urn:epc:tag:sgtin-96:1.4099451.001927.1	
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h	
3034FA35EC01E1C000000001	

Hamilton Beach

Schema Type: SGTIN-96

Schema Info: Standard

We have 3 types of serial numbers. Please see below for details.

12 digits decimal serial number

- 3 digits for retailer prefix o Retailer is determined by the brand table under master
- 2 digits for model identifier o This is determined from the data feed o Append "0" if only one digit is received
- 7 digits for serial number Walmart National Brand Schema

1. Walmart National Brand Schema

# of digits	Value	Comment
3 digits	Retailer prefix	000
2 digits	Model Identifier	Received in the data feed under "Model Identifier" column, append "0" if only one digit is received
7 digits	Serial Number (max serial number per GTIN will be 9999999)	Serial numbers are generated by us starting from 0700000

Example: 000040700001

Retailer Prefix → 000

Model Identifier → 04

Serial Number → 0700001

2. Walmart Private Brand Schema

# of digits	Value	Comment
3 digits	Retailer prefix	098
2 digits	Model Identifier	Received in the data feed under "Model Identifier" column, append "0" if only one digit is received
7 digits	Serial Number (max serial number per GTIN will be 9999999)	Serial numbers are generated by us starting from 0700000

Example: 098040700001
Retailer Prefix → 098
Model Identifier → 04
Serial Number → 0700001

3. Belk National Brand Schema

# of digits	Value	Comment
3 digits	Retailer prefix	000
2 digits	Model Identifier	Received in the data feed under “Model Identifier” column, append “0” if only one digit is received
7 digits	Serial Number (max serial number per GTIN will be 9999999)	Serial numbers are generated by us starting from 0000001

Example: 000040000001
Retailer Prefix → 000
Model Identifier → 04
Serial Number → 0000001

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response (Walmart National Brand Schema)

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00040094334773",
  "UserId": 0,
  "CustomerID": "HamiltonBeach",
  "CustomerName": "HamiltonBeach",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "WALMART NATIONAL BRAND#000#01",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "303402727820B14000A346D9",
  "EPCEnd": "303402727820B14000A346D9",
  "SerialStart": "700505",
  "SerialEnd": "700505",
  "CustomerID": "HamiltonBeach",
  "GTIN": "00040094334773",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

EPC Encoder/Decoder tool (Walmart National Brand Schema)

The interface shows a top-down flow of EPC generation. At the top, the 'GS1 Key or other identifier' section contains a dropdown for 'GTIN + serial (AI 01 + AI 21)', a text input for '(01) 00040094334773', and another text input for '(21) 10700505'. A green arrow points down to the 'EPC Pure Identity URI' section, which displays 'urn:epc:id:sgtin:0040094.033477.10700505'. To the right, a 'GS1 Company Prefix Length' dropdown is set to '7 digits'. Another green arrow points down to the 'EPC Tag URI' section, which displays 'urn:epc:tag:sgtin-96:1.0040094.033477.10700505'. Above this section is an 'RFID Control Information' box with 'Tag Size' set to '96 bits' and 'Filter Value' set to '1 - POS item'. A final green arrow points down to the 'RFID Tag EPC Memory Bank Contents' section, which displays the hexadecimal value '303402727820B14000A346D9'.

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) (01) 00040094334773 (21) 10700505

GS1 Company Prefix Length 7 digits

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:0040094.033477.10700505

RFID Control Information

Tag Size 96 bits Filter Value 1 - POS item

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.0040094.033477.10700505

RFID Tag EPC Memory Bank Contents (hexadecimal) — starting at bit 20h

303402727820B14000A346D9

Json Request & Response (Walmart Private Brand Schema)

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00040094131044",
  "UserId": 0,
  "CustomerID": "HamiltonBeach",
  "CustomerName": "HamiltonBeach",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "WALMART PRIVATE BRAND#098#00",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "30340272780CCC16D14C02C5",
  "EPCEnd": "30340272780CCC16D14C02C5",
  "SerialStart": "700101",
  "SerialEnd": "700101",
  "CustomerID": "HamiltonBeach",
  "GTIN": "00040094131044",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

EPC Encoder/Decoder tool (Walmart Private Brand Schema)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) (01) 00040094131044 (21) 98000700101

GS1 Company Prefix Length: 7 digits

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:0040094.013104.98000700101

RFID Control Information

Tag Size: 96 bits Filter Value: 1 - POS item

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.0040094.013104.98000700101

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

30340272780CCC16D14C02C5

Json Request & Response (Belk National Brand Schema)

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00040094553501",
  "UserId": 0,
  "CustomerID": "HamiltonBeach",
  "CustomerName": "HamiltonBeach",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "BELK NATIONAL BRAND#000#00",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034027278360D80000000CB",
  "EPCEnd": "3034027278360D80000000CB",
  "SerialStart": "203",
  "SerialEnd": "203",
  "CustomerID": "HamiltonBeach",
  "GTIN": "00040094553501",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

EPC Encoder/Decoder tool (Belk National Brand Schema)

GS1 Key or other identifier — as used in bar codes	
GTIN + serial (AI 01 + AI 21) ▼	(01) 00040094553501 (21) 203
GS1 Company Prefix Length 7 digits ▼	
EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS	
urn:epc:id:sgtin:0040094.055350.203	
RFID Control Information	
Tag Size 96 bits ▼	Filter Value 1 - POS item ▼
EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware	
urn:epc:tag:sgtin-96:1.0040094.055350.203	
RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h	
3034027278360D80000000CB	

The affected tables are ‘tblGS1CustomerDetail’ ‘tblEPCSerila’, ‘tblEPCLog’

tblGS1CustomerDetail													
	bigIntId	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varStreetAddress2	varStreetAddress3	varCity	varStateProvince	varZipCode	varCount
1	1447	00040094131044	HamiltonBeach	GS1 US, INC.	0040094110308	Hamilton Beach Brands Inc.	4421 WATERFRONT DR			GLEN ALLEN	VA	23060-3375	USA
2	1434	00040094334773	HamiltonBeach	GS1 US, INC.	0040094110308	Hamilton Beach Brands Inc.	4421 WATERFRONT DR			GLEN ALLEN	VA	23060-3375	USA
3	1443	00040094553501	HamiltonBeach	GS1 US, INC.	0040094110308	Hamilton Beach Brands Inc.	4421 WATERFRONT DR			GLEN ALLEN	VA	23060-3375	USA

tblEPCSerial											>	
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue		
1	37358	BN00040094553501	203	99999999	47	2022-11-18 11:14:52.550	0	2022-11-30 06:53:31.680	0040094	5		
2	37258	N00040094334773	700505	99999999	16	2022-11-07 11:53:38.517	0	2022-11-30 06:35:47.363	NULL	5		
3	37362	P00040094131044	700101	99999999	16	2022-11-18 16:06:58.337	0	2022-11-30 06:46:26.847	0040094	5		

tblEPCLog													
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark
1	511396	00040094553501	203	203	3034027278360D80000000CB	3034027278360D80000000CB	SGTIN-96	HamiltonBeach	HamiltonBeach	1	New		Success
2	511395	00040094131044	700101	700101	30340272780CCC16D14C02C5	30340272780CCC16D14C02C5	SGTIN-96	HamiltonBeach	HamiltonBeach	1	New		Success
3	511394	00040094334773	700505	700505	303402727820B14000A346D9	303402727820B14000A346D9	SGTIN-96	HamiltonBeach	HamiltonBeach	1	New		Success

THINX

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 015001000000

Serial number end: 015999999999

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00191900669098",
  "UserId": 0,
  "CustomerId": "Thinx",
  "CustomerName": "Thinx",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "30340BB6704157437E211877",
  "EPCEnd": "30340BB6704157437E211877",
  "SerialStart": "15001000055",
  "SerialEnd": "15001000055",
  "CustomerId": "Thinx",
  "GTIN": "00191900669098",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblGS1CustomerDetail', 'tblEPCSerial' and 'tblEPCLog'

tblGS1CustomerDetail													
	bigIntId	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varStreetAddress2	varStreetAddress3	varCity	varStateProvince	varZipCode	varCountry
1	1377	00191900669098	Thinx	GS1 US, INC.	0787329000002	G-III Apparel Group Ltd.	512 FASHION AVE FL 35			NEW YORK	NY	10018-0832	USA
tblEPCSerial													
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue			
1	16121	00191900669098	15001000055	15999999999	16	2022-07-19 06:36:42 423	0	2022-11-30 07:25:00 247	0191900	5			
tblEPCLog													
	bigIntId	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varEvent	varRemark
1	511398	00191900669098	15001000055	15001000055	30340BB6704157437E211877	30340BB6704157437E211877	SGTIN-96	Thinx	Thinx	1	New		Success

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21)

(01) 00191900669098

(21) 15001000055

GS1 Company Prefix Length

7 digits

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:0191900.066909.15001000055

RFID Control Information

Tag Size 96 bits

Filter Value 1 - POS item

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.0191900.066909.15001000055

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

30340BB6704157437E211877

ByerCalifornia

Schema Type: SGTIN-96

Schema Info: Standard

Serial number start: 0

Serial number end: NA

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00826422879150",
  "UserId": 0,
  "CustomerID": "ByerCalifornia",
  "CustomerName": "ByerCalifornia",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": ""
}
```

JSON Response

```
{
  "EPCStart": "30343270D855DAC0000000066",
  "EPCEnd": "30343270D855DAC0000000066",
  "SerialStart": "102",
  "SerialEnd": "102",
  "CustomerID": "ByerCalifornia",
  "GTIN": "00826422879150",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblGS1CustomerDetail', 'tblEPCSerial' and 'tblEPCLog'

tblGS1CustomerDetail														
	bigIntId	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varStreetAddress2	varStreetAddress3	varCity	varStateProvince	varZipCode	varCountry	varGSRN
1	1490	00826422879150	ByerCalifornia	GS1 US, INC.	0043849000008	Byer California	66 POTRERO AVE			SAN FRANCISCO	CA	94103-4800	USA	101234500

tblEPCSerial

<

EPC Encoder/Decoder tool

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) (01) 00826422879150 (21)
 102

GS1 Company Prefix Length
 7 digits

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS
 urn:epc:id:sgtin:0826422.087915.102

RFID Control Information
 Tag Size 96 bits Filter Value 1 - POS item

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware
 urn:epc:tag:sgtin-96:1.0826422.087915.102

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h
 30343270D855DAC0000000066

CABOT

Schema Type: SGTIN-96

Schema Info: Prefix added to serial number (10000000000) according to binary (0001/0110, etc.), which has been received from request.

Serial number start: 0

Serial number end: 0

Serial Prefix: Adding 1000000000

Prefix length: 5.

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00888830060032",
  "UserId": 0,
  "CustomerId": "CABOT",
  "CustomerName": "CABOT CAPE BRETON",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "0001",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034363FF805DCC2540BE4A7",
  "EPCEnd": "3034363FF805DCC2540BE4A7",
  "SerialStart": "10000000167",
  "SerialEnd": "10000000167",
  "CustomerId": "CABOT",
  "GTIN": "00888830060032",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblGS1CustomerDetail'

	varGTIN	bigIntSerialNotLastUsed	bigIntMaximumSerial	varGS1Prefix	IntPartitionValue										
1	00888830060032	167	999999999	088830	5										

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varCustom1				
1	00888830060032	10000000167	10000000167	3034363FF805DCC2540BE4A7	3034363FF805DCC2540BE4A7	SGTIN-96	CABOT CAPE BRETON	CABOT	1	New	0001				

	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varGSRN	varModifiedDate	varUPCPrefix	varGS1Prefix	PrefixStat		
1	00888830060032	CABOT	GS1 US, INC.	0888830000007	YETI Coolers, LLC	7601 SOUTHWEST PKWY	AUSTIN	78735-8989	USA	101234500158135238	2014-10-18	888830	0888830	Active		

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▾

(01) 00888830060032 (21)

10000000167



GS1 Company Prefix Length
7 digits ▾



EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:0888830.006003.10000000167



RFID Control Information
Tag Size 96 bits ▾ Filter Value 1 - POS item ▾



EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.0888830.006003.10000000167



RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

3034363FF805DCC2540BE4A7

Kiabi

Schema Type: SGTIN-96

Schema Info: Serial number (start & end) we will receive from Kiabi.

Serial number start: We have received from kiabi

Serial number end: We have received from kiabi

Serial Prefix:

Prefix length: 6

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "03492219133407",
  "UserId": 0,
  "CustomerId": "Kiabi",
  "CustomerName": "Kiabi",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "0#0#61193200#913340",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "30395509437BEF00000001B1",
  "EPCEnd": "30395509437BEF00000001B1",
  "SerialStart": "433",
  "SerialEnd": "433",
  "CustomerId": "Kiabi",
  "GTIN": "03492219133407",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue	varKey	
1	10883	03492219133407	803	812	10645	2023-11-24 12:03:46.397	NULL	NULL	NULL	0	803#812	
	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varCustom1	bigIntId
1	03492219133407	433	433	30395509437BEF00000001B1	30395509437BEF00000001B1	SGTIN-96	Kiabi	Kiabi	1	New	0#0#61193200#913340	64144

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼

(01) 03492219133407 (21)

433




GS1 Company Prefix Length

6 digits ▼



EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:349221.0913340.433



RFID Control Information

Tag Size 96 bits ▼ Filter Value 1 - POS item ▼



EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.349221.0913340.433



RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

30395509437BEF00000001B1

Luxottica

Schema Type: SGTIN-96

Schema Info: Standard.

Serial number start: 10000000000

Serial number end: 0

Serial Prefix:

Prefix length: 7.

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08056153280310",
  "UserId": 0,
  "CustomerID": "Luxottica",
  "CustomerName": "Luxottica",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3035EBB5641B5FC2540BE40B",
  "EPCEnd": "3035EBB5641B5FC2540BE40B",
  "SerialStart": "10000000011",
  "SerialEnd": "10000000011",
  "CustomerID": "Luxottica",
  "GTIN": "08056153280310",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila' and 'tblEPCLog'

Results Messages											
	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue	
1	79128	08056153280310	10000000011	0	16	2023-12-07 13:52:31.433	0	2023-12-14 10:57:08.640	NULL	0	

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varCustom1	bigIntId
1	08056153280310	10000000011	10000000011	3035EBB5641B5FC2540BE40B	3035EBB5641B5FC2540BE40B	SGTIN-96	Luxottica	Luxottica	1	New		641448

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼

(01) 08056153280310 (21)

10000000011




GS1 Company Prefix Length
7 digits ▼



EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:8056153.028031.10000000011



RFID Control Information

Tag Size 96 bits ▼

Filter Value 1 - POS item ▼



EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.8056153.028031.10000000011



RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

3035EBB5641B5FC2540BE40B

ElCorteIngles

Schema Type: SGTIN-96
Schema Info: Standard.

Serial number start: 0
Serial number end: NA

Serial Prefix:
Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length.
Prefix Type:

Kill Password: NA
Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "08445525411740",
  "UserId": 0,
  "CustomerId": "ElCorteIngles",
  "CustomerName": "ElCorteIngles",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "EPCCounter",
  "EPCEnd": "EPCCounter",
  "SerialStart": "10",
  "SerialEnd": "10",
  "CustomerId": "ElCorteIngles",
  "GTIN": "08445525411740",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are ‘tblGS1CustomerDetail’, ‘tblEPCSerila’ and ‘tblEPCLog’

Results Messages														
1	bigIntId	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varStreetAddress2	varStreetAddress3	varCity	varStateProvince	varZipCode	varCountry	varModifiedC
	42609	08445525411740	ElCorteIngles	GS1 Spain	8456789000014	EL CORTE INGLES, S.A	C/ Hermosilla 112			Madrid	MADRID	28009	ES	2024-03-07

<														>
1	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedBy	dtCreatedOn	bigIntLastUpdatedBy	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue				
	111611	08445525411740	10	0	47	2024-09-05 12:49:16.350	0	2024-10-15 11:42:56.360	8445525	5				

1	bigIntId	bigIntRPO	bigIntDetailLineID	bigIntLineNo	varGTIN	EPC	varUserMemory	varPassword	varLockID	bigIntSerialNo	varCustom1	varCustom2	varStatus	dtCreatedOn	varKillP
	1703	999999910	999999910	1	08445525411740	30360379542835800000000A		NULL	1111	10		NULL	New	2024-10-15 11:42:56.360	NULL

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼

(01) 08445525411740 (21)

10

GS1 Company Prefix Length 7 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:8445525.041174.10

RFID Control Information

Tag Size 96 bits ▼ Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.8445525.041174.10

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

30360379542835800000000A



Schema Type: SGTIN-96

Schema Info: Standard.

Serial number start: 135000000000

Serial number end: 139999999999

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "07321733169066",
  "UserId": 0,
  "CustomerId": "H&M",
  "CustomerName": "H&M",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "303ACB0341357A9F6EA0975E",
  "EPCEnd": "303ACB0341357A9F6EA0975E",
  "SerialStart": "135000004446",
  "SerialEnd": "135000004446",
  "CustomerId": "H&M",
  "GTIN": "07321733169066",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblGS1CustomerDetail'

1	bigIntId	varGTIN	bigIntSerialNoLastUsed		bigIntMaximumSerial	bigIntCreatedById	dtCreatedOn	bigIntLastUpdatedById	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue			
	69072	07321733169066	135000004446		139999999999	10635	2023-11-23 05:50:46.813	0	2023-12-14 11:30:55.920	732173	6			
1	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varCustom1	bigIntId		
	07321733169066	135000004446	135000004446	303ACB0341357A9F6EA0975E	303ACB0341357A9F6EA0975E	SGTIN-96	H&M	H&M	1	New		641450		
1	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varGSRN	varModifiedDate	varUPCPrefix	varGS1Prefix	PrefixS
	07321733169066	H&M	GS1 Sweden	7321730000003	H & M Hennes & Mauritz GBC AB	Master Samuelsgatan 46 A	Stockholm	106 38	SE		2023-11-22		732173	Active

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼

(01) 07321733169066 (21)

135000004446

GS1 Company Prefix Length

6 digits ▼

EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:732173.0316906.135000004446

RFID Control Information

Tag Size 96 bits ▼ Filter Value 1 - POS item ▼

EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.732173.0316906.135000004446

RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

303ACB0341357A9F6EA0975E

Liberated Brands

Schema Type: SGTIN-96

Schema Info: Standard.

Serial number start: 0

Serial number end: 0

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "00192636468986",
  "UserId": 0,
  "CustomerId": "LiberatedBrands",
  "CustomerName": "Liberated Brands",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "30340BC1F02DCC8000000BB9",
  "EPCEnd": "30340BC1F02DCC8000000BB9",
  "SerialStart": "3001",
  "SerialEnd": "3001",
  "CustomerId": "LiberatedBrands",
  "GTIN": "00192636468986",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblEPCSerila', 'tblEPCLog' and 'tblGS1CustomerDetail'

	bigIntId	varGTIN	bigIntSerialNoLastUsed	bigIntMaximumSerial	bigIntCreatedBy	dtCreatedOn	bigIntLastUpdatedBy	dtLastUpdatedOn	varGS1Prefix	IntPartitionValue
1	69074	00192636468986	3001	0	16	2023-11-24 07:07:25.880	0	2023-12-14 12:36:58.380	0192636	5

	varGTIN	bigIntSerialStart	bigIntSerialEnd	varEPCStart	varEPCEnd	varSchema	varCustomerName	varCustomerId	bigIntQuantity	varTransaction	varCustom1	bigIntId
1	00192636468986	3001	3001	30340BC1F02DCC8000000BB9	30340BC1F02DCC8000000BB9	SGTIN-96	Liberated Brands	LiberatedBrands	1	New		641451

	varGTIN	varCustomerId	varSource	varEntityGLN	varCompanyName	varStreetAddress1	varCity	varZipCode	varCountry	varGSRN	varModifiedDate	varUPCPrefix	varGS1Prefix	PrefixStatus
1	00192636468986	LiberatedBrands	GS1 US, INC.	0192636000001	Liberated-Spyder LLC	1700 Coal Creek Dr Ste 2	Lafayette	80026	USA		2021-12-28	192636	0192636	Active

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼

(01) 00192636468986 (21)

3001




GS1 Company Prefix Length
7 digits ▼



EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:0192636.046898.3001



RFID Control Information
Tag Size 96 bits ▼ Filter Value 1 - POS item ▼



EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.0192636.046898.3001



RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

30340BC1F02DCC8000000BB9

Deichmann

Schema Type: SGTIN-96

Schema Info: Standard.

Serial number start: 100000000000

Serial number end: 0

Serial Prefix:

Prefix length: Partition value is determined by making a call to the GS1 database to determine the company prefix length

Prefix Type:

Kill Password: NA

Access Password: NA

User Memory Logic: NA

Json Request & Response

JSON Request

```
{
  "Schema": "SGTIN-96",
  "GTIN": "04068197530508",
  "UserId": 0,
  "CustomerId": "Deichmann",
  "CustomerName": "Deichmann",
  "EPC": "",
  "Serial": 0,
  "TransactionType": "New",
  "Event": "",
  "Quantity": 1,
  "RPO": 999999910,
  "DetailLineID": 999999910,
  "CustomPara1": "",
  "CustomPara2": null
}
```

JSON Response

```
{
  "EPCStart": "3034F84D9433CE974876E806",
  "EPCEnd": "3034F84D9433CE974876E806",
  "SerialStart": "100000000000",
  "SerialEnd": "100000000000",
  "CustomerId": "Deichmann",
  "GTIN": "04068197530508",
  "Quantity": 1,
  "Remark": "Success",
  "AccessPWD": "",
  "KillPWD": ""
}
```

The affected tables are 'tblGS1CustomerDetail', 'tblEPCSerila' and 'tblEPCLog'

Results Messages															
1	bigIntId 42607	varGTIN 04068197530508	varCustomerId Deichmann	varSource GS1 Germany	varEntityGLN 4000001000005	varCompanyName SNIPES SE	varStreetAddress1 Schanzenstr. 41	varStreetAddress2	varStreetAddress3	varCity Köln	varStateProvince	varZipCode 51063	varCountry DE	varGSRN	varModifiedDate 2023-11-26T22:00:00
< >															
1	bigIntId 111610	varGTIN 04068197530508	bigIntSerialNoLastUsed 1000000000006	bigIntMaximumSerial 0	bigIntCreatedById 16	dtCreatedOn 2024-09-05 11:52:46.020	bigIntLastUpdatedById 0	dtLastUpdatedOn 2024-10-15 13:01:22.447	varGS1Prefix 4068197	IntPartitionValue 5					
1	bigIntId 779283	varGTIN 04068197530508	bigIntSerialStart 1000000000006	bigIntSerialEnd 1000000000006	varEPCStart 3034F84D9433CE974876E806	varEPCEnd 3034F84D9433CE974876E806	varSchema SGTIN-96	varCustomerName Deichmann	varCustomerId Deichmann	bigIntQuantity 1	varTransaction New	varEvent	varRemark Success	bigInt 99999	

EPC Encoder/Decoder tool

[Show an Example](#) [Clear](#)

GS1 Key or other identifier — as used in bar codes

GTIN + serial (AI 01 + AI 21) ▼

(01) 04068197530508 (21)

1000000000006




GS1 Company Prefix Length 7 digits ▼



EPC Pure Identity URI (urn:epc:id:...) — as used in EPCIS

urn:epc:id:sgtin:4068197.053050.1000000000006



RFID Control Information

Tag Size 96 bits ▼ Filter Value 1 - POS item ▼



EPC Tag URI (urn:epc:tag:...) — as used in RFID middleware

urn:epc:tag:sgtin-96:1.4068197.053050.1000000000006



RFID Tag EPC Memory Bank Contents (hexadecimal) – starting at bit 20h

3034F84D9433CE974876E806

