


DataBase Test Log

- Test Image:




[illegible]

Test Image:

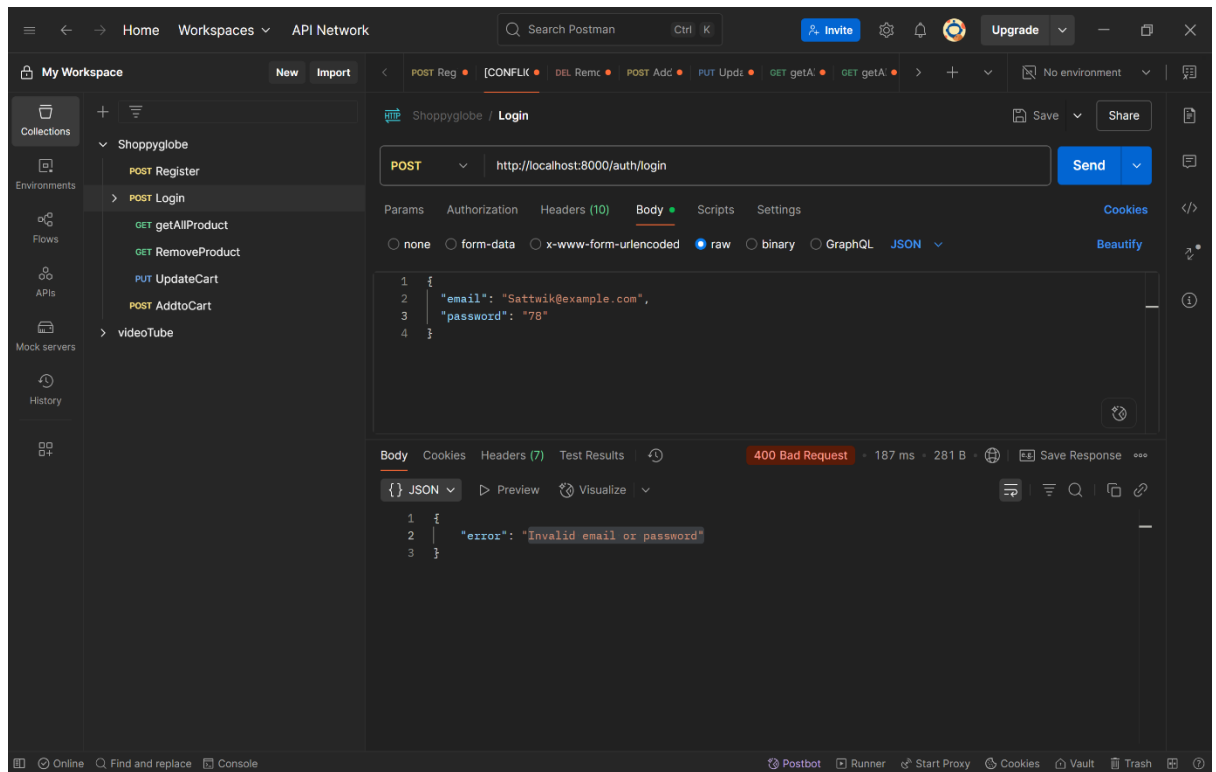


3. Get All Products URL: <http://localhost:8000/products>

Test Image:

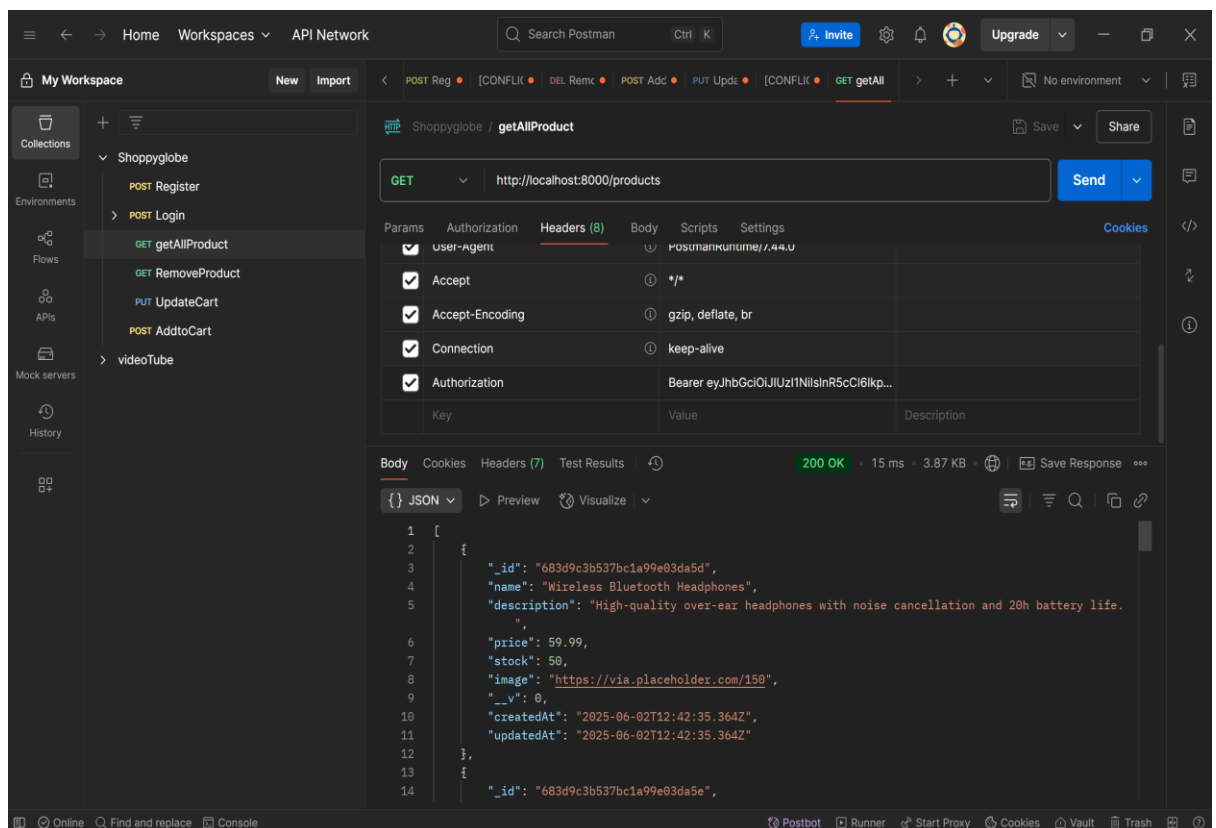


DataBase's Products Image:

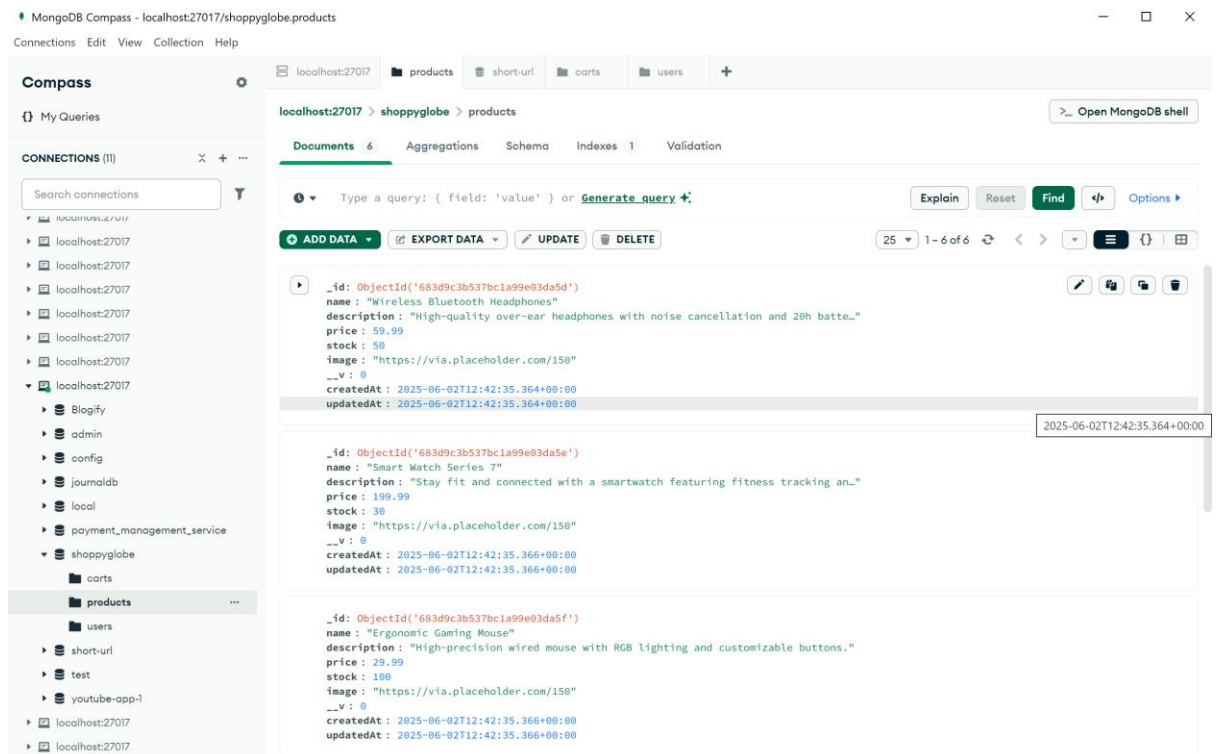


4. Get Specific Product URL: <http://localhost:8000/products/683d9c3b537bc1a99e03da5d>

Test Image:

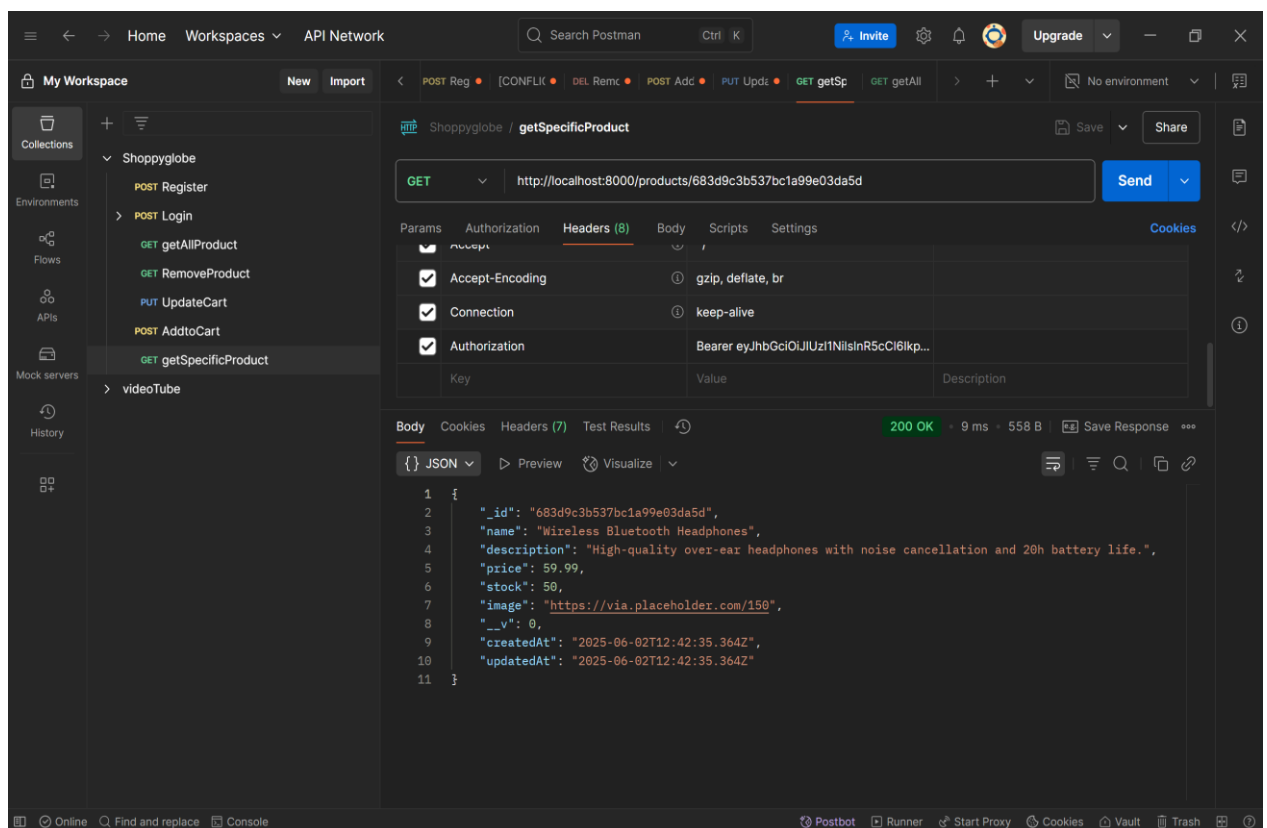


Database Test Image:

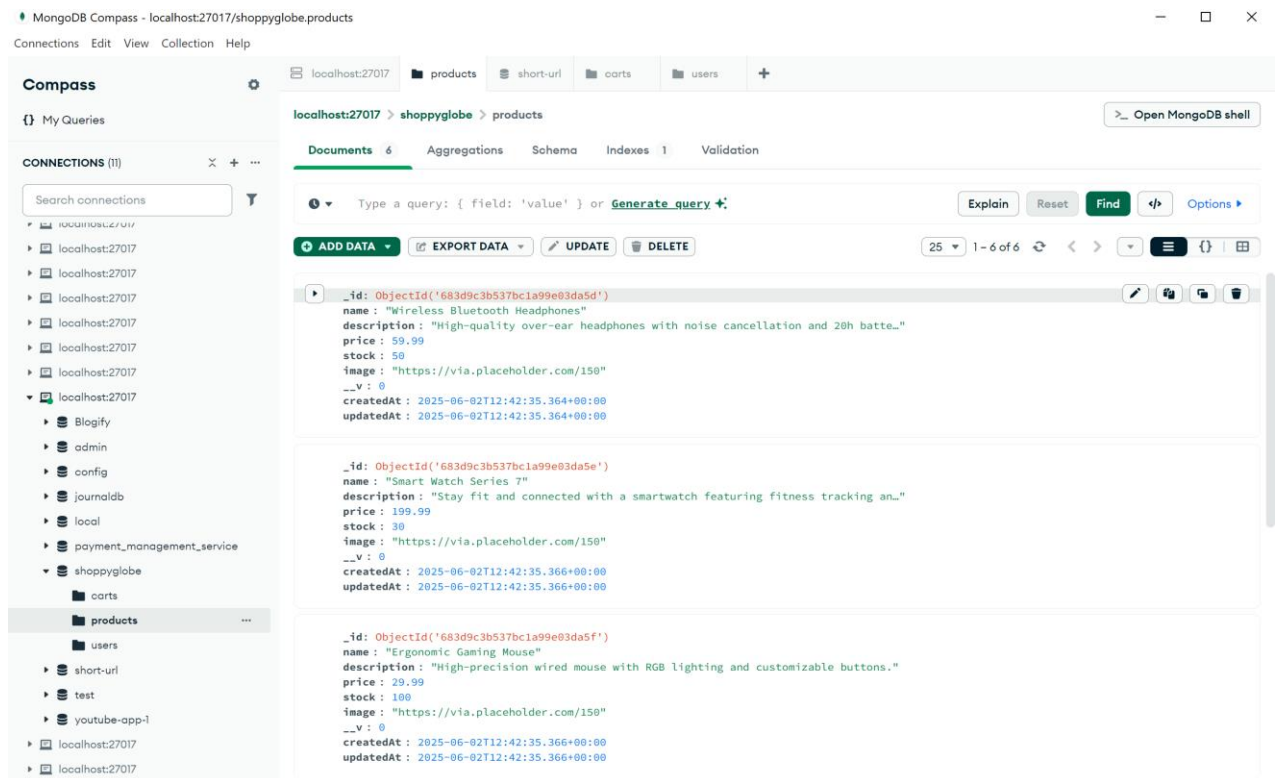


5. Add Product in cart URL: <http://localhost:8000/cart/add>

Test Image:

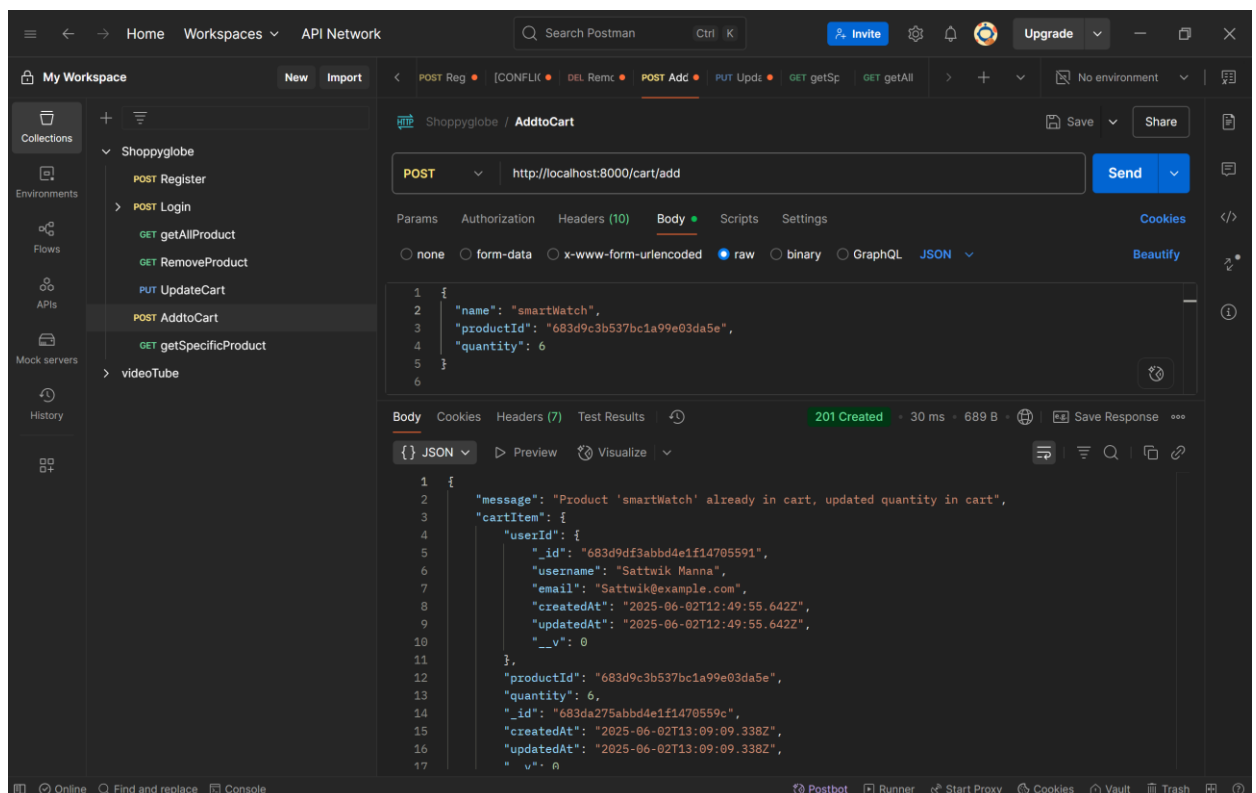


DataBase Test Image:

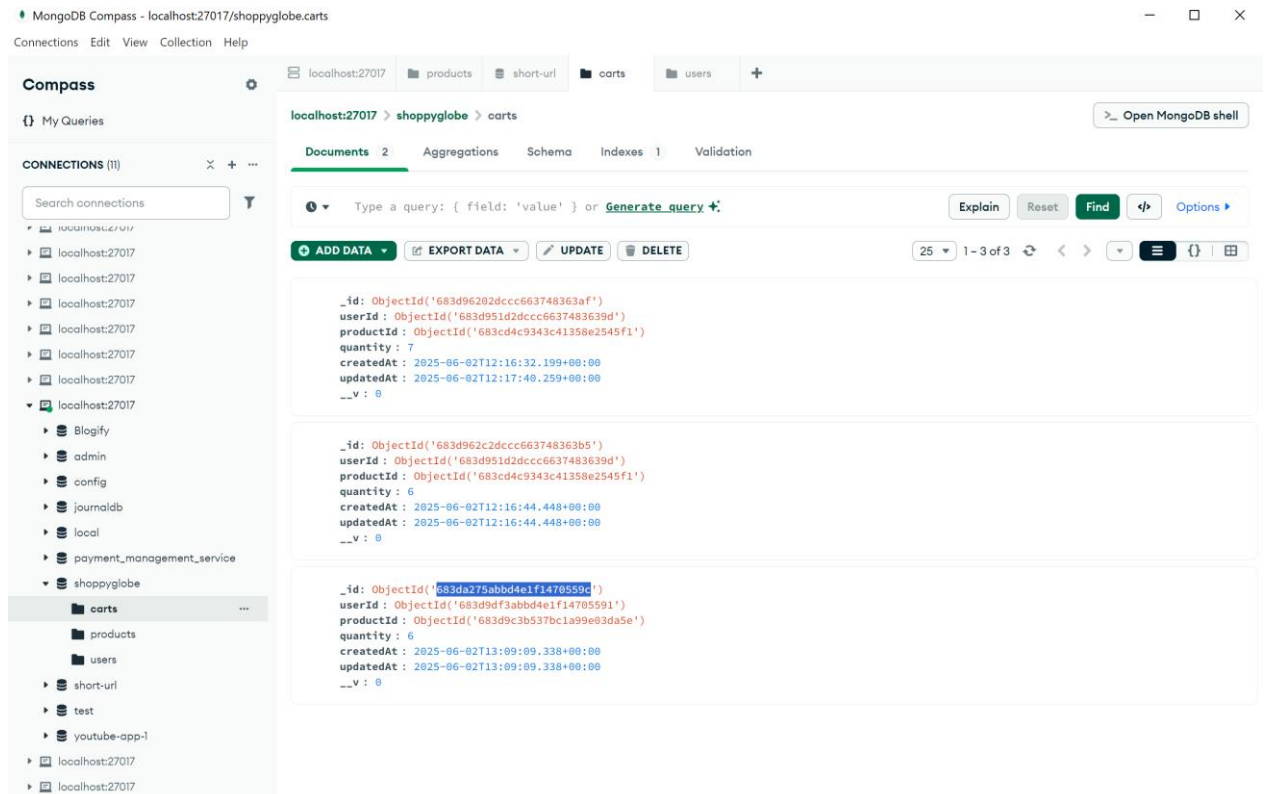

6. Update Quantity of Specific Cart's product URL:

<http://localhost:8000/cart/683da275abbd4e1f1470559c>

Test Image:

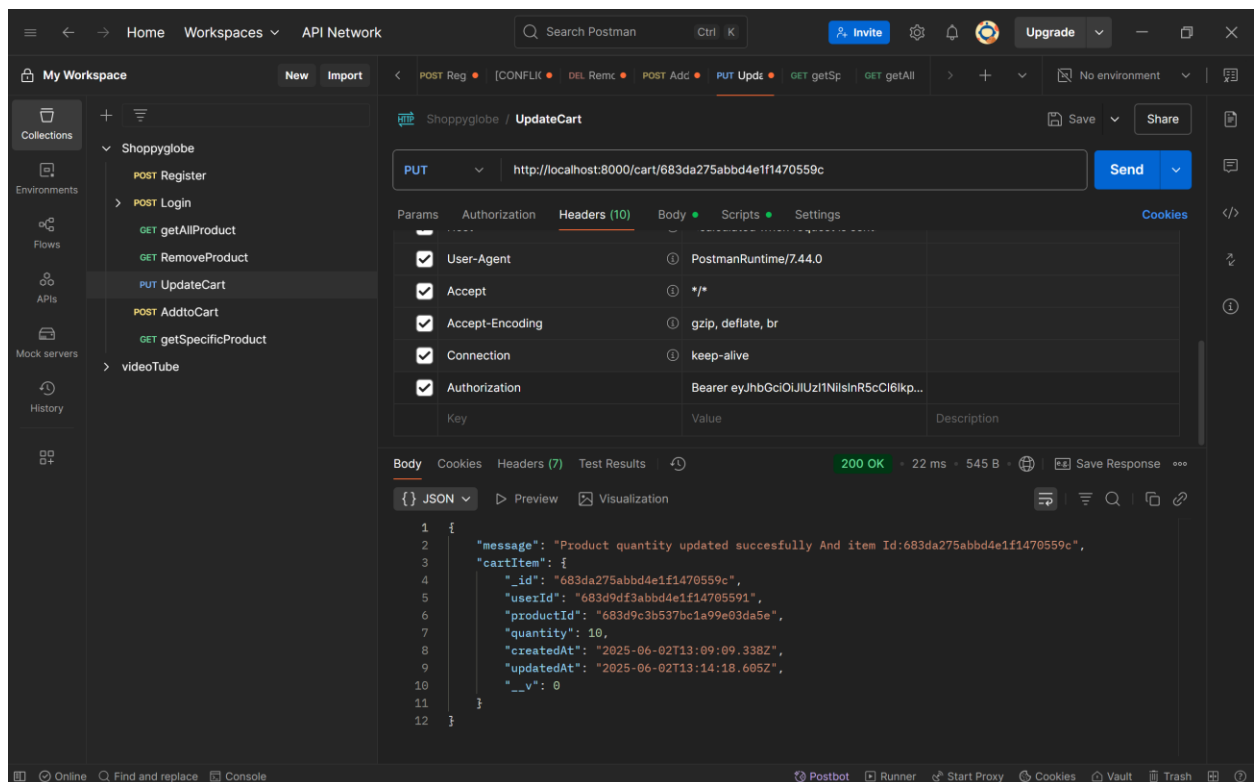

DataBase Test Image:



The screenshot displays the Postman application interface. On the left sidebar, the 'My Workspace' section is active, showing a collection named 'Shopyglobe' with several API endpoints. The main panel shows a DELETE request to 'http://localhost:8000/cart/683da275abb4e1f1470559c'. The request headers include 'User-Agent', 'Accept', 'Accept-Encoding', 'Connection', and 'Authorization'. The response is a 200 OK status with a response time of 16 ms and a body containing a JSON message: 'Product removed from cart successfully'.

DataBase Test Image Before Deletion:

