



Chapter 4 – Software Requirements

Topics covered



- ✧ Functional and non-functional requirements
- ✧ Requirements engineering processes
- ✧ Requirements elicitation
- ✧ Requirements specification
- ✧ Requirements validation
- ✧ Requirements change

Functional vs Non-Functional Requirements

- **Requirements**, which are related to functional/Working aspect of software fall into this category.
- **Non-Functional Requirements** are expected characteristics of target software. (Security, Storage, Configuration, Performance, Cost, Interoperability, Flexibility, Disaster recovery, Accessibility)



Software Requirements

- It is the description of features and functionalities of the target system.
- It is the description of what the system should do.
- Requirements engineering (RE) refers to the process of defining, documenting, and maintaining requirements in the engineering design process.
- It is a four step process, which includes –
 1. Feasibility Study
 2. Requirement Gathering/Elicitation
 3. Software Requirement Specification
 4. Software Requirement Validation



Tool support for Requirements Engineering

- Observation reports (user observation)
- Questionnaires (interviews, surveys and polls),
- Use cases
- User stories
- Requirement workshops
- Mind mapping
- Role-playing
- Prototyping

SRS Structure

1. Introduction

1.1 Purpose

1.2 Intended Audience

1.3 Scope

1.4 Definitions

1.5 References

2. Overall Description

2.1 User Interfaces

2.2 System Interfaces

2.3 Constraints, assumptions and dependencies

2.4 User Characteristics

3. System Features and Requirements

3.1 Functional Requirements

3.2 Use Cases

3.3 External Interface Requirements

3.4 Logical database requirement

3.5 Nonfunctional Requirements

4. Deliver for Approval



Requirements engineering processes

Requirements Engineering Process



Requirements Engineering is the process of identifying, eliciting, analyzing, specifying, validating, and managing the needs and expectations of stakeholders for a software system.

- A systematic and strict approach to the definition, creation, and verification of requirements for a software system is known as requirements engineering.
- To guarantee the effective creation of a software product, the requirements engineering process entails several tasks that help in understanding, recording, and managing the demands of stakeholders.

Requirements Engineering Process



The picture can't be displayed.

Requirements Engineering Process cont...



1. Feasibility Study

The feasibility study mainly concentrates on below five mentioned areas below

Technical Feasibility: In Technical Feasibility current resources both hardware software along required technology are analyzed/assessed to develop the project.

Operational Feasibility: In Operational Feasibility degree of providing service to requirements is analyzed along with **how easy the product will be to operate and maintain** after deployment.

Economic Feasibility: In the Economic Feasibility study cost and benefit of the project are analyzed.

Requirements Engineering Process cont...



Legal Feasibility: In legal feasibility, the project is ensured to comply with all relevant laws, regulations, and standards. ~~It identifies any legal constraints that could impact the project and reviews existing contracts and agreements to assess their effect on the project's execution.~~

Schedule Feasibility: In schedule feasibility, the project timeline is evaluated to determine if it is realistic and achievable. Significant milestones are identified, and deadlines are established to track progress effectively.

Requirements Engineering Process cont...



2. Requirements Elicitation

It is related to the various ways used to gain knowledge about the project domain and requirements. ~~The various sources of domain knowledge include customers, business manuals, the existing software of the same type, standards, and other stakeholders of the project.~~

Interviews: These are one-on-one conversations with stakeholders to gather information about their needs and expectations.

Surveys: These are questionnaires that are distributed to stakeholders to gather information about their needs and expectations.



Focus Groups: These are small groups of stakeholders who are brought together to discuss their needs and expectations for the software system.

Observation: This technique involves observing the stakeholders in their work environment to gather information about their needs and expectations.

Prototyping: This technique involves creating a working model of the software system, which can be used to gather feedback from stakeholders and to validate requirements.

Requirements Engineering Process cont...



3. Requirements Specification

This activity is used to produce formal software requirement models. All the requirements including the functional as well as the non-functional requirements and the constraints are specified

Several types of requirements are commonly specified in this step, including

Functional Requirements: These describe what the software system should do. They specify the functionality that the system must provide, such as input validation, data storage, and user interface.

Non-Functional Requirements: These describe how well the software system should do it. They specify the quality attributes of the system, such as performance, reliability, usability, and security.

Constraints: These describe any limitations or restrictions that must be considered when developing the software system.

Acceptance Criteria: These describe the conditions that must be met for the software system to be considered complete and ready for release.

Requirements Engineering Process cont...



4. Requirements Verification and Validation

Verification: It refers to the set of tasks that ensures that the software correctly implements a specific function.

Validation: It refers to a different set of tasks that ensures that the software that has been built is traceable to customer requirements.

The main steps for this process include:

The requirements should be consistent with all the other requirements i.e. no two requirements should conflict with each other.

The requirements should be complete in every sense.

The requirements should be practically achievable.

Requirements Engineering Process cont...



5. Requirements Management

Requirement management is the process of analyzing, documenting, tracking, prioritizing, and agreeing on the requirement and controlling the communication with relevant stakeholders.

Several key activities are involved in requirements management, including:

Tracking and controlling changes: This involves monitoring and controlling changes to the requirements throughout the development process, including identifying the source of the change, assessing the impact of the change, and approving or rejecting the change.

Version control: This involves keeping track of different versions of the requirements document and other related artifacts.

Traceability: This involves linking the requirements to other elements of the development process, such as design, testing, and validation.

Communication: This involves ensuring that the requirements are communicated effectively to all stakeholders and that any changes or issues are addressed promptly.

Monitoring and reporting: This involves monitoring the progress of the development process and reporting on the status of the requirements.



Requirements Elicitation

Requirements Elicitation



Methods of requirement elicitation

Is the most difficult, most critical, most error-prone and communication intensive aspect of the s/w development. It can only succeed only through an effective customer developer partnership.

Requirements Elicitation



• Interview

- Both parties would like to understand each other
- Interview can be of two types open-ended or structured
- In open ended, there is no present agenda, context free questions can be asked to understand the problem, to have an over view over the situation
- In structured interview, agenda is pre-set.



Requirements Elicitation



- **Brain Storming**

- A kind of group discussion, which lead to ideas very quickly and help to promote creative thinking
- Very popular now a days and is being used in most of the organizations
- All participants are encouraged to say whatever idea come to their mind and no one will be criticized for any idea no matter how goofy it seems



Requirements Elicitation



- Delphi technique

- Here participants are made to write the requirement on a piece of paper, then these requirements are exchanged among participants who gave their comments to get a revised set of requirements. This process is repeated till the final consensus is reached



Requirements Elicitation



- **FAST (facilitated application specification technique)**
 - This approach encourages the creation of joint team of customer and developer who works together to understand correct set of requirements
 - Everyone is asked to prepare a list of
 - What surrounds the system
 - Produced by the system
 - Used by the system
 - List of service, constraints, and performance criterion
 - Then we divide these lists into smaller list to work in smaller teams

Requirements Elicitation



QFD (quality functional deployment)

- Its emphasizes to incorporate the voice of the customer with importance
- Then according to customer, a value indicating a degree of importance, is assigned to each requirement. Thus, the customer, determine the importance of each requirement on a scale of 1 to 5 as:
 - **5 points:** very important
 - **4 points:** important
 - **3 points:** not important but nice to have
 - **2 point:** not important
 - **1 point:** unrealistic, requires further explanation



Documents Specification

Requirement Documentation

- After have final set of requirements it is also necessary to document them properly in a standard format, so that can be understood easily even by non-technical person.

Preparation of Papers for IEEE TRANSACTIONS and JOURNALS (December 2013)

First A. Author, *Fellow, IEEE*; Second B. Author, and Third C. Author, Jr., *Member, IEEE*

Abstract—These instructions give you guidelines for preparing papers for IEEE Transactions and Journals. Use this document as a template if you are using Microsoft Word 6.0 or later. Otherwise, use this document as an instruction set. The electronic file of your paper will be formatted further at IEEE. Paper titles should be written in uppercase and lowercase letters, not all uppercase. Avoid writing long formulas with subscripts in the title; short formulas that identify the elements are fine (e.g., "N₀-Fe-B"). Do not write "(Invited)" in the title. Full names of authors are preferred in the author field, but are not required. Put a space between authors' initials. Define all symbols used in the abstract. Do not cite references in the abstract. Do not delete the blank line immediately above the abstract; it sets the footnote at the bottom of this column.

Index Terms—Enter key words or phrases in alphabetical order, separated by commas. For a list of suggested keywords, send a blank e-mail to keywords@ieee.org or visit <http://www.ieee.org/organizations/pubs/authors/prod/keywords.html>

I. INTRODUCTION

THIS document is a template for Microsoft Word versions 6.0 or later. If you are reading a paper or PDF version of this document, please download the electronic file, TRANS-JOUR.DOC, from the IEEE Web site at <http://www.ieee.org/web/publications/authors/transjnl/index.html> so you can use it to prepare your manuscript. If you would prefer to use LATEX, download IEEE's LATEX style and sample files from the same Web page. Use these LATEX files for formatting, but please follow the instructions in TRANS-JOUR.DOC or TRANS-JOUR.PDF.

If your paper is intended for a conference, please contact your conference editor concerning acceptable word processor formats for your particular conference.

This paragraph of the first footnote will contain the date on which you submitted your paper for review. It will also contain support information, including sponsor and financial support acknowledgment. For example, "This work was supported in part by the U.S. Department of Commerce under Grant BS123456."

The next few paragraphs should contain the authors' current affiliations, including current address and e-mail. For example, F. A. Author is with the National Institute of Standards and Technology, Boulder, CO 80505 USA (e-mail: author@boulder.nist.gov).

S. B. Author, Jr., was with Rice University, Houston, TX 77005 USA. He is now with the Department of Physics, Colorado State University, Fort Collins, CO 80523 USA (e-mail: author@lamar.colostate.edu).

T. C. Author is with the Electrical Engineering Department, University of Colorado, Boulder, CO 80309 USA, on leave from the National Research Institute for Metals, Tsukuba, Japan (e-mail: author@nrim.go.jp).

II. GUIDELINES FOR MANUSCRIPT PREPARATION

When you open TRANS-JOUR.DOC, select "Page Layout" from the "View" menu in the menu bar (View | Page Layout), (these instructions assume MS 6.0. Some versions may have alternate ways to access the same functionalities noted here). Then, type over sections of TRANS-JOUR.DOC or cut and paste from another document and use markup styles. The pull-down style menu is at the left of the Formatting Toolbar at the top of your Word window (for example, the style at this point in the document is "Text"). Highlight a section that you want to designate with a certain style, then select the appropriate name on the style menu. The style will adjust your fonts and line spacing. Do not change the font sizes or line spacing to squeeze more text into a limited number of pages. Use italics for emphasis; do not underline.

To insert images in Word, position the cursor at the insertion point and either use Insert | Picture | From File or copy the image to the Windows clipboard and then Edit | Paste Special | Picture (with "float over text" unchecked).

IEEE will do the final formatting of your paper. If your paper is intended for a conference, please observe the conference page limits.

A. Abbreviations and Acronyms

Define abbreviations and acronyms the first time they are used in the text, even after they have already been defined in the abstract. Abbreviations such as IEEE, SI, ac, and dc do not have to be defined. Abbreviations that incorporate periods should not have spaces: write "C.N.R.S.," not "C. N. R. S." Do not use abbreviations in the title unless they are unavoidable (for example, "IEEE" in the title of this article).

B. Other Recommendations

Use one space after periods and colons. Hyphenate complex modifiers: "zero-field-cooled magnetization." Avoid dangling participles, such as, "Using (1), the potential was calculated." [It is not clear who or what used (1).] Write instead, "The potential was calculated by using (1)," or "Using (1), we calculated the potential."

Use a zero before decimal points: "0.25," not ".25." Use "cm²," not "cc." Indicate sample dimensions as "0.1 cm × 0.2 cm," not "0.1 × 0.2 cm²." The abbreviation for "seconds" is "s," not "sec." Use "Wb/m²" or "webers per square meter," not "webers/m²." When expressing a range of values, write "7 to 9" or "7-9," not "7-9."



- Here IEEE provides standard for SRS documents in IEEE830, using which we can make SRS document more readable, modifiable, and a format which can be followed through the world.



IEEE Standard for SRS

1-Introduction

1.1-Purpose

1.2-Scope/Intended Audience

1.3-Definition, Acronyms and Abbreviation

1.4-References / Contact Information / SRS team member

1.5-Overview



2-Overall Description

2.1-Product Perspective

2.2-Product Functions

2.3-User Characteristics

2.4-General Constraints

2.5-Assumptions and dependencies

3-Specific Requirement

- 3.1-External interface requirements(user/hardware/software interface)
- 3.2-Functional requirements
- 3.3-Performance requirements
- 3.4-Design constraints(Standards compliance/hardware limitations)
- 3.5-Logical database requirements
- 3.6-Software system attributes(Reliability, availability, Security, Maintainab

4-Change Management process

5-Document approval

5.1-Tables, diagrams, and flowcharts

5.2-Appendices

5.3-Index



User Requirements

- **Easy & Simple to Operate**
- **Quick Response**
- **effectively handling operational errors**
- **Customer support**

User Requirement Specification

- The user requirement(s) document (URD) or user requirement specification (URS) is a document usually used in software engineering that specifies what the user expects the software to be able to do.
- It is a contractual agreement.

Requirements elicitation



Requirements elicitation is the process of gathering and defining the requirements for a software system. The goal of requirements elicitation is to ensure that the software development process is based on a clear and comprehensive understanding of the customer's needs and requirements.

What is Requirement Elicitation?

The process of investigating and learning about a system's requirements from users, clients, and other stakeholders is known as requirements elicitation.

Requirements elicitation



1. Requirement Elicitation can be successful only through an effective customer-developer partnership. It is needed to know what the users require.
2. Requirements elicitation involves the identification, collection, analysis, and refinement of the requirements for a software system.
3. Requirement Elicitation is a critical part of the [software development life cycle](#) and is typically performed at the beginning of the project.
4. Requirements elicitation involves stakeholders from different areas of the organization, including business owners, end-users, and technical experts.
5. The output of the requirements elicitation process is a set of clear, concise, and well-defined requirements that serve as the basis for the design and development of the software system.
6. Requirements elicitation is difficult because just questioning users and customers about system needs may not collect all relevant requirements, particularly for safety and dependability.
7. Interviews, surveys, user observation, workshops, brainstorming, use cases, role-playing, and prototyping are all methods for eliciting requirements.

Importance of Requirements Elicitation




1. **Compliance with Business Objectives:** The process of elicitation guarantees that the software development endeavors are in harmony with the wider company aims and objectives. Comprehending the business context facilitates the development of a solution that adds value for the company.
2. **User Satisfaction:** It is easier to create software that fulfills end users' needs and expectations when they are involved in the requirements elicitation process. Higher user pleasure and acceptance of the finished product are the results of this.
3. **Time and Money Savings:** Having precise and well-defined specifications aids in preventing miscommunication and rework during the development phase. As a result, there will be cost savings and the project will be completed on time.
4. **Compliance and Regulation Requirements:** Requirements elicitation is crucial for projects in regulated industries to guarantee that the software conforms with applicable laws and norms. In industries like healthcare, finance, and aerospace, this is crucial.
5. **Traceability and Documentation:** Throughout the [software development process](#), traceability is based on well-documented requirements. Traceability

Requirements Elicitation Activities



1. Requirements elicitation includes the subsequent activities. A few of them are listed below:
2. Knowledge of the overall area where the systems are applied.
3. The details of the precise customer problem where the system is going to be applied must be understood.
4. Interaction of system with external requirements.
5. Detailed investigation of user needs.
6. Define the constraints for system development.

Requirements Elicitation Techniques

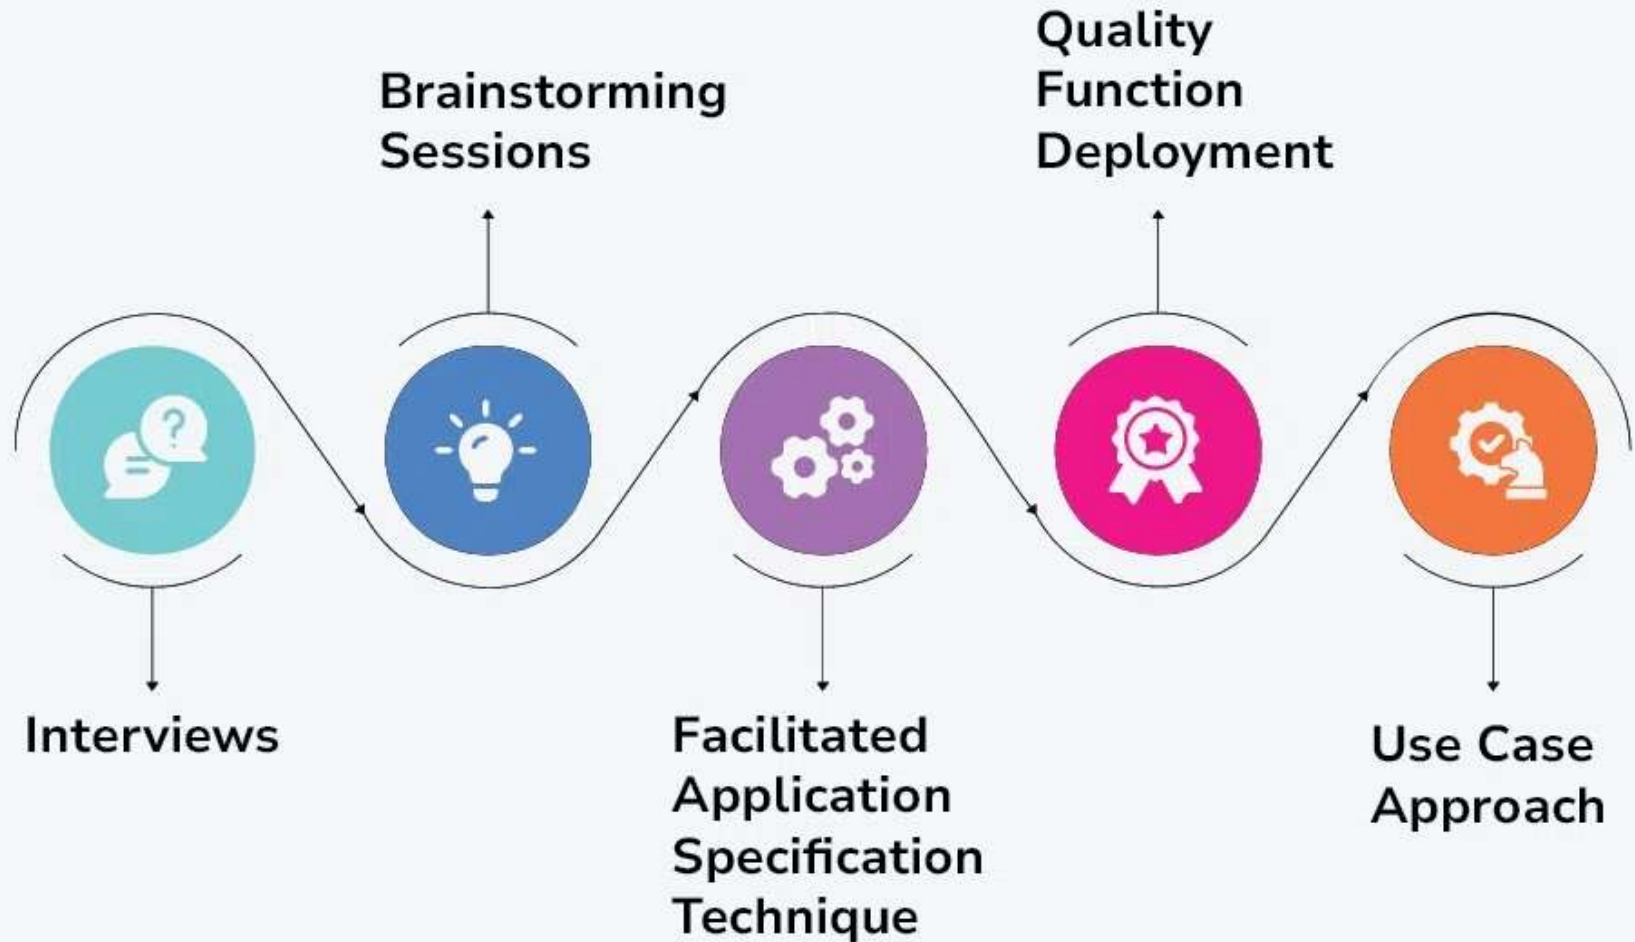

Steps of Requirements Elicitation



Requirements elicitation



1. Requirement Elicitation can be successful only through an effective customer-developer partnership. It is needed to know what the users require.
2. Requirements elicitation involves the identification, collection, analysis, and refinement of the requirements for a software system.
3. Requirement Elicitation is a critical part of the [software development life cycle](#) and is typically performed at the beginning of the project.
4. Requirements elicitation involves stakeholders from different areas of the organization, including business owners, end-users, and technical experts.
5. The output of the requirements elicitation process is a set of clear, concise, and well-defined requirements that serve as the basis for the design and development of the software system.
6. Requirements elicitation is difficult because just questioning users and customers about system needs may not collect all relevant requirements, particularly for safety and dependability.
7. Interviews, surveys, user observation, workshops, brainstorming, use cases, role-playing, and prototyping are all methods for eliciting requirements.

Requirements engineering



- ✧ The process of establishing the services that a customer requires from a system and the constraints under which it operates and is developed.
- ✧ The system requirements are the descriptions of the system services and constraints that are generated during the requirements engineering process.

What is a requirement?



- ✧ It may range from a high-level abstract statement of a service or of a system constraint to a detailed mathematical functional specification.
- ✧ This is inevitable as requirements may serve a dual function
 - May be the basis for a bid for a contract - therefore must be open to interpretation;
 - May be the basis for the contract itself - therefore must be defined in detail;
 - Both these statements may be called requirements.

Requirements abstraction (Davis)



“If a company wishes to let a contract for a large software development project, it must define its needs in a sufficiently abstract way that a solution is not pre-defined. The requirements must be written so that several contractors can bid for the contract, offering, perhaps, different ways of meeting the client organization’s needs. Once a contract has been awarded, the contractor must write a system definition for the client in more detail so that the client understands and can validate what the software will do. Both of these documents may be called the requirements document for the system.”

Types of requirement



✧ User requirements

- Statements in natural language plus diagrams of the services the system provides and its operational constraints. Written for customers.

✧ System requirements

- A structured document setting out detailed descriptions of the system's functions, services and operational constraints. Defines what should be implemented so may be part of a contract between client and contractor.

User and system requirements




User requirements definition

- 1.** The Mentcare system shall generate monthly management reports showing the cost of drugs prescribed by each clinic during that month.

System requirements specification

- 1.1** On the last working day of each month, a summary of the drugs prescribed, their cost and the prescribing clinics shall be generated.
- 1.2** The system shall generate the report for printing after 17.30 on the last working day of the month.
- 1.3** A report shall be created for each clinic and shall list the individual drug names, the total number of prescriptions, the number of doses prescribed and the total cost of the prescribed drugs.
- 1.4** If drugs are available in different dose units (e.g. 10mg, 20mg, etc) separate reports shall be created for each dose unit.
- 1.5** Access to drug cost reports shall be restricted to authorized users as listed on a management access control list.

Readers of different types of requirements specification

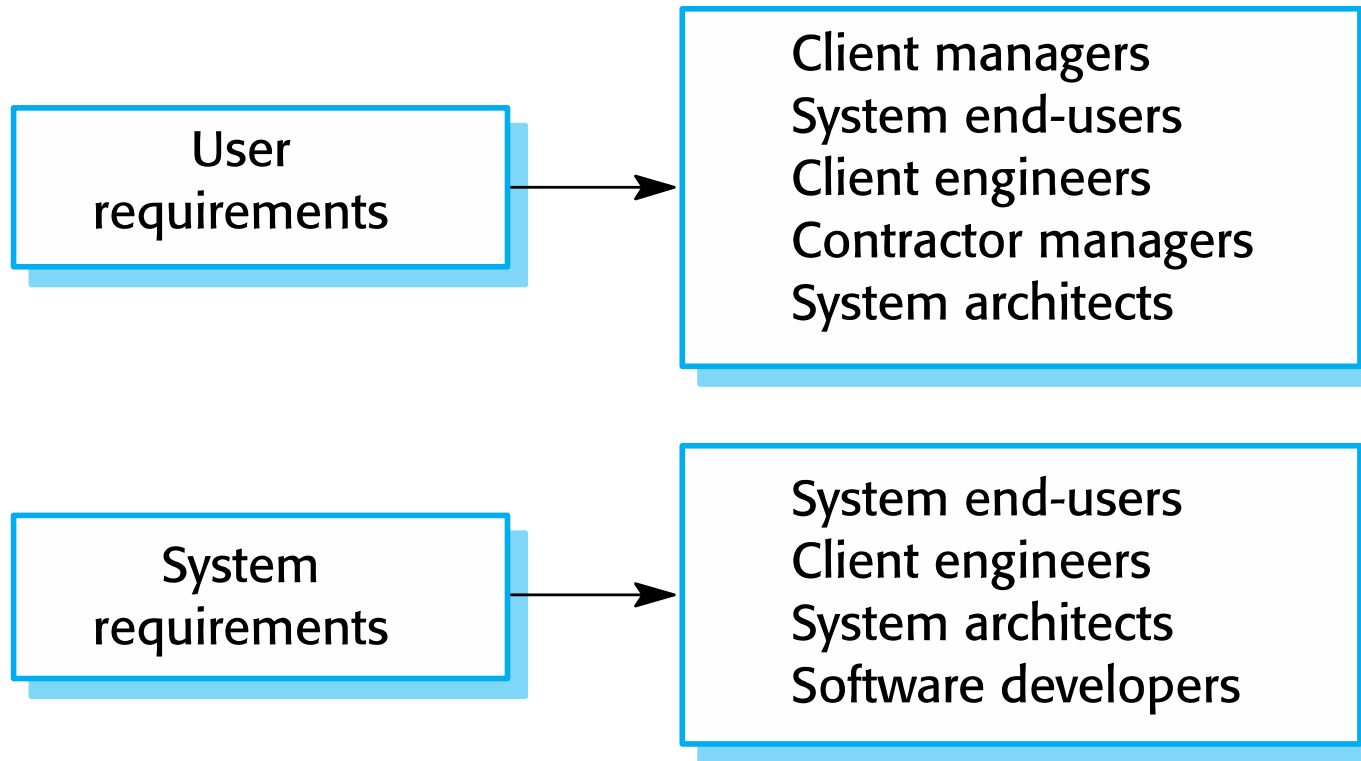

System stakeholders



- ✧ Any person or organization who is affected by the system in some way and so who has a legitimate interest
- ✧ Stakeholder types
 - End users
 - System managers
 - System owners
 - External stakeholders

Stakeholders in the Mentcare system



- ✧ Patients whose information is recorded in the system.
- ✧ Doctors who are responsible for assessing and treating patients.
- ✧ Nurses who coordinate the consultations with doctors and administer some treatments.
- ✧ Medical receptionists who manage patients' appointments.
- ✧ IT staff who are responsible for installing and maintaining the system.

Stakeholders in the Mentcare system



- ✧ A medical ethics manager who must ensure that the system meets current ethical guidelines for patient care.
- ✧ Health care managers who obtain management information from the system.
- ✧ Medical records staff who are responsible for ensuring that system information can be maintained and preserved, and that record keeping procedures have been properly implemented.

Agile methods and requirements



- ✧ Many agile methods argue that producing detailed system requirements is a waste of time as requirements change so quickly.
- ✧ The requirements document is therefore always out of date.
- ✧ Agile methods usually use incremental requirements engineering and may express requirements as 'user stories' (discussed in Chapter 3).
- ✧ This is practical for business systems but problematic for systems that require pre-delivery analysis (e.g. critical systems) or systems developed by several teams.



Functional and non-functional requirements

Functional and non-functional requirements



✧ Functional requirements

- Statements of services the system should provide, how the system should react to particular inputs and how the system should behave in particular situations.
- May state what the system should not do.

✧ Non-functional requirements

- Constraints on the services or functions offered by the system such as timing constraints, constraints on the development process, standards, etc.
- Often apply to the system as a whole rather than individual features or services.

✧ Domain requirements

- Constraints on the system from the domain of operation

Functional requirements



- ✧ Describe functionality or system services.
- ✧ Depend on the type of software, expected users and the type of system where the software is used.
- ✧ Functional user requirements may be high-level statements of what the system should do.
- ✧ Functional system requirements should describe the system services in detail.

Mentcare system: functional requirements



- ✧ A user shall be able to search the appointments lists for all clinics.
- ✧ The system shall generate each day, for each clinic, a list of patients who are expected to attend appointments that day.
- ✧ Each staff member using the system shall be uniquely identified by his or her 8-digit employee number.

Requirements imprecision



- ✧ Problems arise when functional requirements are not precisely stated.
- ✧ Ambiguous requirements may be interpreted in different ways by developers and users.
- ✧ Consider the term 'search' in requirement 1
 - User intention – search for a patient name across all appointments in all clinics;
 - Developer interpretation – search for a patient name in an individual clinic. User chooses clinic then search.

Requirements completeness and consistency




- ✧ In principle, requirements should be both complete and consistent.
- ✧ Complete
 - They should include descriptions of all facilities required.
- ✧ Consistent
 - There should be no conflicts or contradictions in the descriptions of the system facilities.
- ✧ In practice, because of system and environmental complexity, it is impossible to produce a complete and consistent requirements document.

Non-functional requirements



- ✧ These define system properties and constraints e.g. reliability, response time and storage requirements. Constraints are I/O device capability, system representations, etc.
- ✧ Process requirements may also be specified mandating a particular IDE, programming language or development method.
- ✧ Non-functional requirements may be more critical than functional requirements. If these are not met, the system may be useless.

Types of nonfunctional requirement

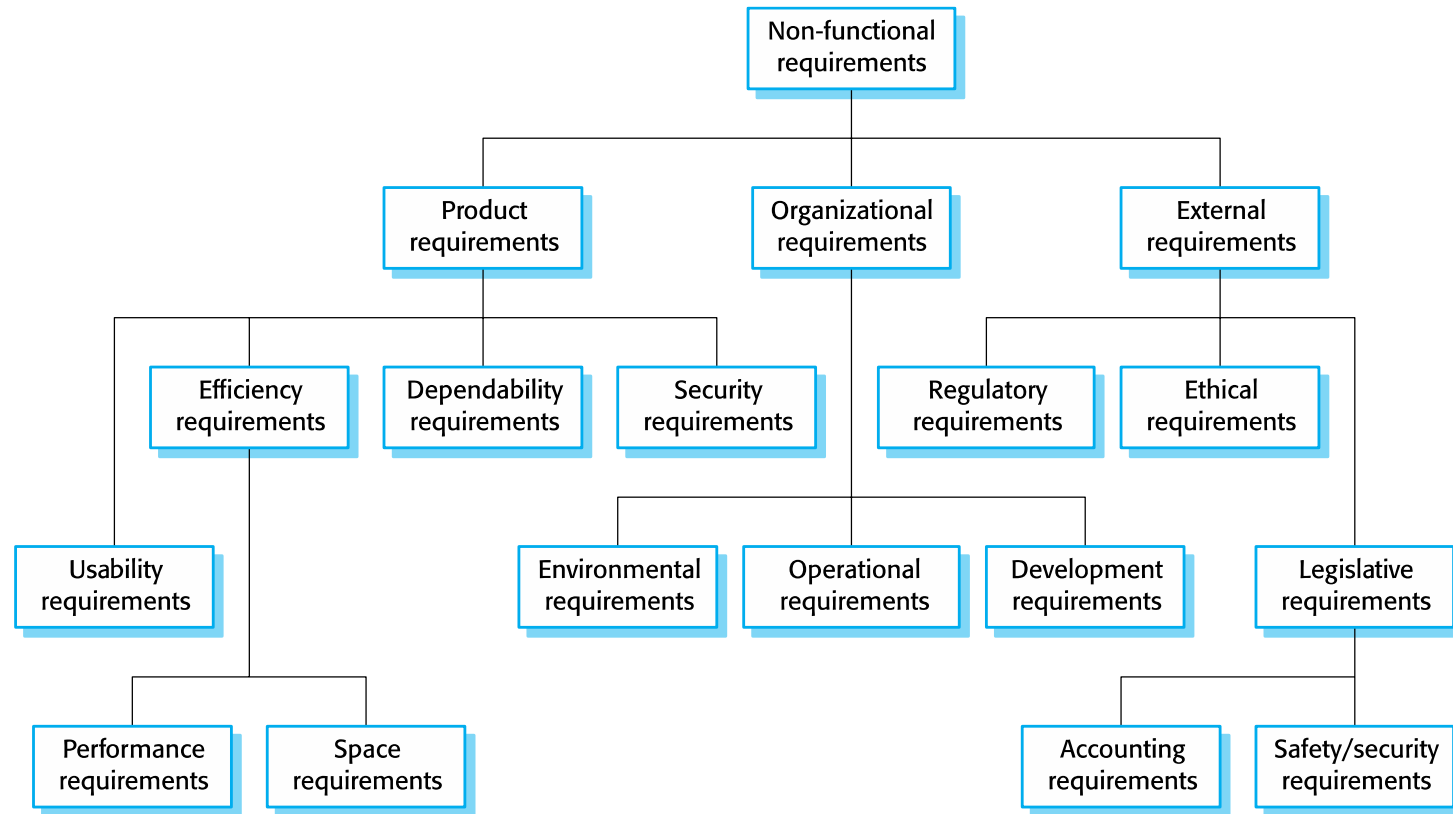

Non-functional requirements implementation



- ✧ Non-functional requirements may affect the overall architecture of a system rather than the individual components.
 - For example, to ensure that performance requirements are met, you may have to organize the system to minimize communications between components.
- ✧ A single non-functional requirement, such as a security requirement, may generate a number of related functional requirements that define system services that are required.
 - It may also generate requirements that restrict existing requirements.

Non-functional classifications



✧ Product requirements

- Requirements which specify that the delivered product must behave in a particular way e.g. execution speed, reliability, etc.

✧ Organisational requirements

- Requirements which are a consequence of organisational policies and procedures e.g. process standards used, implementation requirements, etc.

✧ External requirements

- Requirements which arise from factors which are external to the system and its development process e.g. interoperability requirements, legislative requirements, etc.

Examples of nonfunctional requirements in the Mentcare system



Product requirement

The Mentcare system shall be available to all clinics during normal working hours (Mon–Fri, 0830–17.30). Downtime within normal working hours shall not exceed five seconds in any one day.

Organizational requirement

Users of the Mentcare system shall authenticate themselves using their health authority identity card.

External requirement

The system shall implement patient privacy provisions as set out in HStan-03-2006-priv.

Goals and requirements



- ✧ Non-functional requirements may be very difficult to state precisely and imprecise requirements may be difficult to verify.
- ✧ Goal
 - A general intention of the user such as ease of use.
- ✧ Verifiable non-functional requirement
 - A statement using some measure that can be objectively tested.
- ✧ Goals are helpful to developers as they convey the intentions of the system users.

Usability requirements



- ✧ The system should be easy to use by medical staff and should be organized in such a way that user errors are minimized. (Goal)
- ✧ Medical staff shall be able to use all the system functions after four hours of training. After this training, the average number of errors made by experienced users shall not exceed two per hour of system use. (Testable non-functional requirement)

Metrics for specifying nonfunctional requirements



Property	Measure
Speed	Processed transactions/second User/event response time Screen refresh time
Size	Mbytes Number of ROM chips
Ease of use	Training time Number of help frames
Reliability	Mean time to failure Probability of unavailability Rate of failure occurrence Availability
Robustness	Time to restart after failure Percentage of events causing failure Probability of data corruption on failure
Portability	Percentage of target dependent statements Number of target systems




Requirements engineering processes

Requirements engineering processes



- ✧ The processes used for RE vary widely depending on the application domain, the people involved and the organisation developing the requirements.
- ✧ However, there are a number of generic activities common to all processes
 - Requirements elicitation;
 - Requirements analysis;
 - Requirements validation;
 - Requirements management.
- ✧ In practice, RE is an iterative activity in which these processes are interleaved.

A spiral view of the requirements engineering process

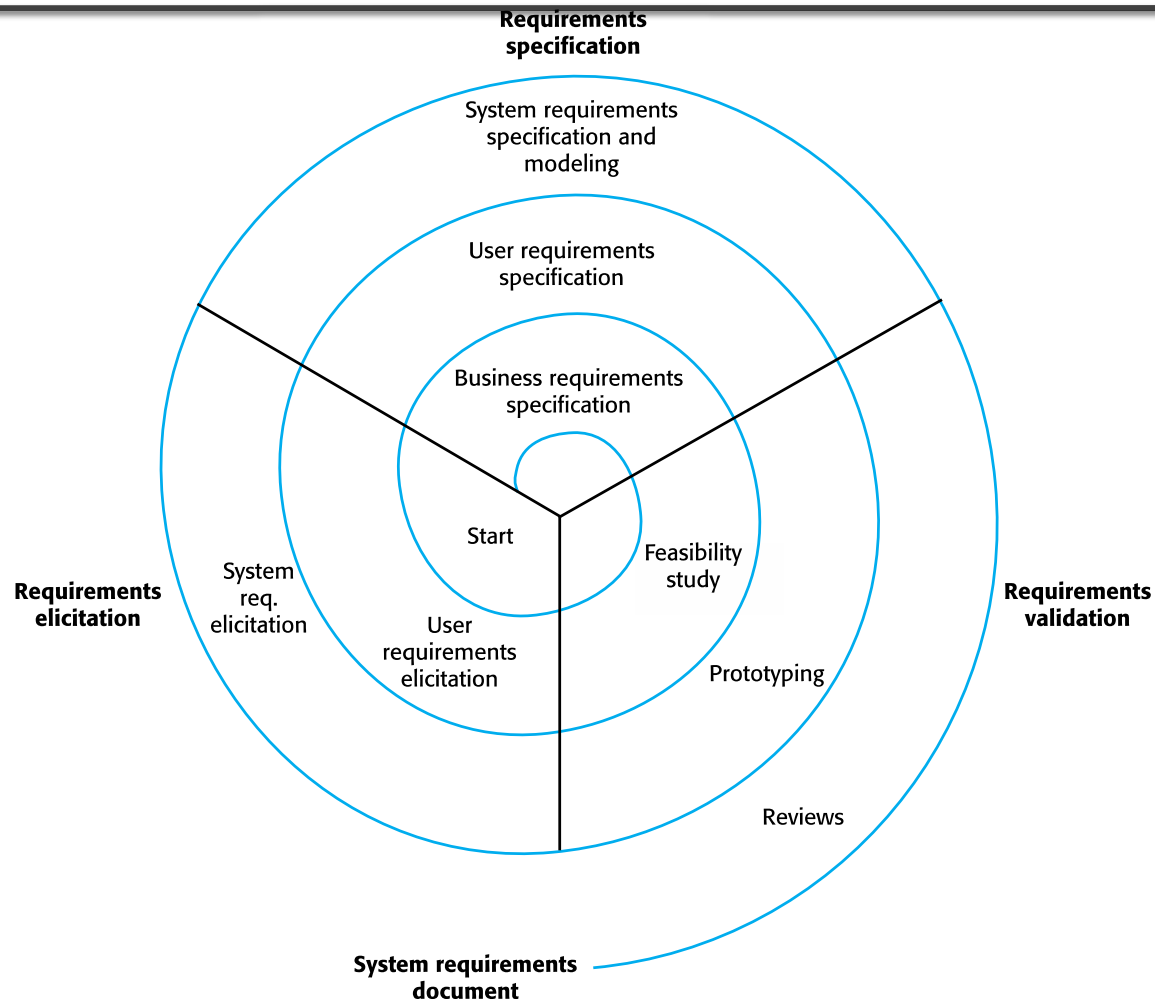



Requirements elicitation

Requirements elicitation and analysis



- ✧ Sometimes called requirements elicitation or requirements discovery.
- ✧ Involves technical staff working with customers to find out about the application domain, the services that the system should provide and the system's operational constraints.
- ✧ May involve end-users, managers, engineers involved in maintenance, domain experts, trade unions, etc. These are called *stakeholders*.



Requirements elicitation

Requirements elicitation




- ✧ Software engineers work with a range of system stakeholders to find out about the application domain, the services that the system should provide, the required system performance, hardware constraints, other systems, etc.
- ✧ Stages include:
 - Requirements discovery,
 - Requirements classification and organization,
 - Requirements prioritization and negotiation,
 - Requirements specification.

Problems of requirements elicitation



- ✧ Stakeholders don't know what they really want.
- ✧ Stakeholders express requirements in their own terms.
- ✧ Different stakeholders may have conflicting requirements.
- ✧ Organisational and political factors may influence the system requirements.
- ✧ The requirements change during the analysis process. New stakeholders may emerge and the business environment may change.

The requirements elicitation and analysis process

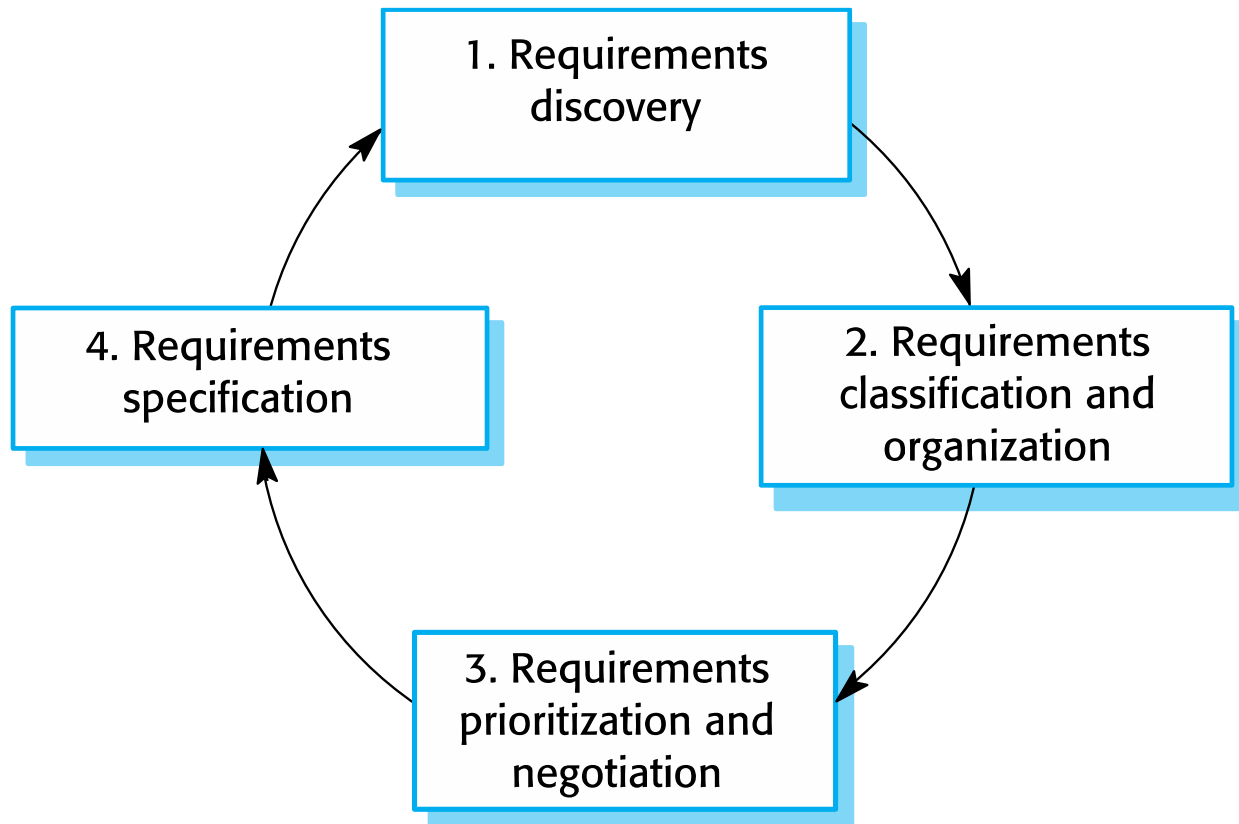

Process activities



✧ Requirements discovery

- Interacting with stakeholders to discover their requirements. Domain requirements are also discovered at this stage.

✧ Requirements classification and organisation

- Groups related requirements and organises them into coherent clusters.

✧ Prioritisation and negotiation

- Prioritising requirements and resolving requirements conflicts.

✧ Requirements specification

- Requirements are documented and input into the next round of the spiral.

Requirements discovery



- ✧ The process of gathering information about the required and existing systems and distilling the user and system requirements from this information.
- ✧ Interaction is with system stakeholders from managers to external regulators.
- ✧ Systems normally have a range of stakeholders.

Interviewing



- ✧ Formal or informal interviews with stakeholders are part of most RE processes.
- ✧ Types of interview
 - Closed interviews based on pre-determined list of questions
 - Open interviews where various issues are explored with stakeholders.
- ✧ Effective interviewing
 - Be open-minded, avoid pre-conceived ideas about the requirements and are willing to listen to stakeholders.
 - Prompt the interviewee to get discussions going using a springboard question, a requirements proposal, or by working together on a prototype system.

Interviews in practice



- ✧ Normally a mix of closed and open-ended interviewing.
- ✧ Interviews are good for getting an overall understanding of what stakeholders do and how they might interact with the system.
- ✧ Interviewers need to be open-minded without pre-conceived ideas of what the system should do
- ✧ You need to prompt the use to talk about the system by suggesting requirements rather than simply asking them what they want.

Problems with interviews



- ✧ Application specialists may use language to describe their work that isn't easy for the requirements engineer to understand.
- ✧ Interviews are not good for understanding domain requirements
 - Requirements engineers cannot understand specific domain terminology;
 - Some domain knowledge is so familiar that people find it hard to articulate or think that it isn't worth articulating.

Ethnography



- ✧ A social scientist spends a considerable time observing and analysing how people actually work.
- ✧ People do not have to explain or articulate their work.
- ✧ Social and organisational factors of importance may be observed.
- ✧ Ethnographic studies have shown that work is usually richer and more complex than suggested by simple system models.

Scope of ethnography




- ✧ Requirements that are derived from the way that people actually work rather than the way in which process definitions suggest that they ought to work.
- ✧ Requirements that are derived from cooperation and awareness of other people's activities.
 - Awareness of what other people are doing leads to changes in the ways in which we do things.
- ✧ Ethnography is effective for understanding existing processes but cannot identify new features that should be added to a system.

Focused ethnography



- ✧ Developed in a project studying the air traffic control process
- ✧ Combines ethnography with prototyping
- ✧ Prototype development results in unanswered questions which focus the ethnographic analysis.
- ✧ The problem with ethnography is that it studies existing practices which may have some historical basis which is no longer relevant.

Ethnography and prototyping for requirements analysis

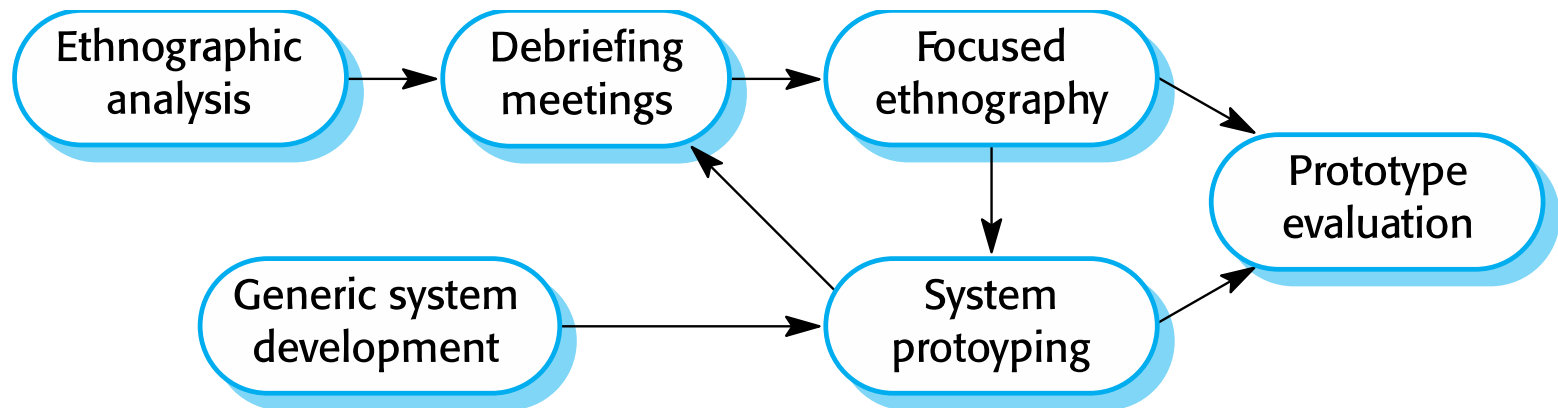

Stories and scenarios



- ✧ Scenarios and user stories are real-life examples of how a system can be used.
- ✧ Stories and scenarios are a description of how a system may be used for a particular task.
- ✧ Because they are based on a practical situation, stakeholders can relate to them and can comment on their situation with respect to the story.

Photo sharing in the classroom (iLearn)



- ✧ Jack is a primary school teacher in Ullapool (a village in northern Scotland). He has decided that a class project should be focused around the fishing industry in the area, looking at the history, development and economic impact of fishing. As part of this, pupils are asked to gather and share reminiscences from relatives, use newspaper archives and collect old photographs related to fishing and fishing communities in the area. Pupils use an iLearn wiki to gather together fishing stories and SCRAN (a history resources site) to access newspaper archives and photographs. However, Jack also needs a photo sharing site as he wants pupils to take and comment on each others' photos and to upload scans of old photographs that they may have in their families.

Jack sends an email to a primary school teachers group, which he is a member of to see if anyone can recommend an appropriate system. Two teachers reply and both suggest that he uses KidsTakePics, a photo sharing site that allows teachers to check and moderate content. As KidsTakePics is not integrated with the iLearn authentication service, he sets up a teacher and a class account. He uses the iLearn setup service to add KidsTakePics to the services seen by the pupils in his class so that when they log in, they can immediately use the system to upload photos from their mobile devices and class computers.

Scenarios



- ✧ A structured form of user story
- ✧ Scenarios should include
 - A description of the starting situation;
 - A description of the normal flow of events;
 - A description of what can go wrong;
 - Information about other concurrent activities;
 - A description of the state when the scenario finishes.

Uploading photos iLearn)



- ✧ **Initial assumption:** A user or a group of users have one or more digital photographs to be uploaded to the picture sharing site. These are saved on either a tablet or laptop computer. They have successfully logged on to KidsTakePics.
- ✧ **Normal:** The user chooses upload photos and they are prompted to select the photos to be uploaded on their computer and to select the project name under which the photos will be stored. They should also be given the option of inputting keywords that should be associated with each uploaded photo. Uploaded photos are named by creating a conjunction of the user name with the filename of the photo on the local computer.
- ✧ On completion of the upload, the system automatically sends an email to the project moderator asking them to check new content and generates an on-screen message to the user that this has been done.

Uploading photos



- ✧ **What can go wrong:**
- ✧ No moderator is associated with the selected project. An email is automatically generated to the school administrator asking them to nominate a project moderator. Users should be informed that there could be a delay in making their photos visible.
- ✧ Photos with the same name have already been uploaded by the same user. The user should be asked if they wish to re-upload the photos with the same name, rename the photos or cancel the upload. If they chose to re-upload the photos, the originals are overwritten. If they chose to rename the photos, a new name is automatically generated by adding a number to the existing file name.
- ✧ **Other activities:** The moderator may be logged on to the system and may approve photos as they are uploaded.
- ✧ **System state on completion:** User is logged on. The selected photos have been uploaded and assigned a status 'awaiting moderation'. Photos are visible to the moderator and to the user who uploaded them.



Requirements specification

Requirements specification



- ✧ The process of writing down the user and system requirements in a requirements document.
- ✧ User requirements have to be understandable by end-users and customers who do not have a technical background.
- ✧ System requirements are more detailed requirements and may include more technical information.
- ✧ The requirements may be part of a contract for the system development
 - It is therefore important that these are as complete as possible.

Ways of writing a system requirements specification



Notation	Description
Natural language	The requirements are written using numbered sentences in natural language. Each sentence should express one requirement.
Structured natural language	The requirements are written in natural language on a standard form or template. Each field provides information about an aspect of the requirement.
Design description languages	This approach uses a language like a programming language, but with more abstract features to specify the requirements by defining an operational model of the system. This approach is now rarely used although it can be useful for interface specifications.
Graphical notations	Graphical models, supplemented by text annotations, are used to define the functional requirements for the system; UML use case and sequence diagrams are commonly used.
Mathematical specifications	These notations are based on mathematical concepts such as finite-state machines or sets. Although these unambiguous specifications can reduce the ambiguity in a requirements document, most customers don't understand a formal specification. They cannot check that it represents what they want and are reluctant to accept it as a system contract

Requirements and design



- ✧ In principle, requirements should state what the system should do and the design should describe how it does this.
- ✧ In practice, requirements and design are inseparable
 - A system architecture may be designed to structure the requirements;
 - The system may inter-operate with other systems that generate design requirements;
 - The use of a specific architecture to satisfy non-functional requirements may be a domain requirement.
 - This may be the consequence of a regulatory requirement.

Natural language specification



- ✧ Requirements are written as natural language sentences supplemented by diagrams and tables.
- ✧ Used for writing requirements because it is expressive, intuitive and universal. This means that the requirements can be understood by users and customers.

Guidelines for writing requirements



- ✧ Invent a standard format and use it for all requirements.
- ✧ Use language in a consistent way. Use shall for mandatory requirements, should for desirable requirements.
- ✧ Use text highlighting to identify key parts of the requirement.
- ✧ Avoid the use of computer jargon.
- ✧ Include an explanation (rationale) of why a requirement is necessary.

Problems with natural language



✧ Lack of clarity

- Precision is difficult without making the document difficult to read.

✧ Requirements confusion

- Functional and non-functional requirements tend to be mixed-up.

✧ Requirements amalgamation

- Several different requirements may be expressed together.

Example requirements for the insulin pump software system



3.2 The system shall measure the blood sugar and deliver insulin, if required, every 10 minutes. *(Changes in blood sugar are relatively slow so more frequent measurement is unnecessary; less frequent measurement could lead to unnecessarily high sugar levels.)*

3.6 The system shall run a self-test routine every minute with the conditions to be tested and the associated actions defined in Table 1. *(A self-test routine can discover hardware and software problems and alert the user to the fact the normal operation may be impossible.)*

Structured specifications



- ✧ An approach to writing requirements where the freedom of the requirements writer is limited and requirements are written in a standard way.
- ✧ This works well for some types of requirements e.g. requirements for embedded control system but is sometimes too rigid for writing business system requirements.

Form-based specifications



- ✧ Definition of the function or entity.
- ✧ Description of inputs and where they come from.
- ✧ Description of outputs and where they go to.
- ✧ Information about the information needed for the computation and other entities used.
- ✧ Description of the action to be taken.
- ✧ Pre and post conditions (if appropriate).
- ✧ The side effects (if any) of the function.

A structured specification of a requirement for an insulin pump



Insulin Pump/Control Software/SRS/3.3.2

Function Compute insulin dose: safe sugar level.

Description

Computes the dose of insulin to be delivered when the current measured sugar level is in the safe zone between 3 and 7 units.

Inputs Current sugar reading (r2); the previous two readings (r0 and r1).

Source Current sugar reading from sensor. Other readings from memory.

Outputs CompDose—the dose in insulin to be delivered.

Destination Main control loop.

A structured specification of a requirement for an insulin pump



Action

CompDose is zero if the sugar level is stable or falling or if the level is increasing but the rate of increase is decreasing. If the level is increasing and the rate of increase is increasing, then CompDose is computed by dividing the difference between the current sugar level and the previous level by 4 and rounding the result. If the result, is rounded to zero then CompDose is set to the minimum dose that can be delivered.

Requirements

Two previous readings so that the rate of change of sugar level can be computed.

Pre-condition

The insulin reservoir contains at least the maximum allowed single dose of insulin.

Post-condition r0 is replaced by r1 then r1 is replaced by r2.

Side effects None.

Tabular specification



- ✧ Used to supplement natural language.
- ✧ Particularly useful when you have to define a number of possible alternative courses of action.
- ✧ For example, the insulin pump systems bases its computations on the rate of change of blood sugar level and the tabular specification explains how to calculate the insulin requirement for different scenarios.

Tabular specification of computation for an insulin pump




Condition	Action
Sugar level falling ($r2 < r1$)	CompDose = 0
Sugar level stable ($r2 = r1$)	CompDose = 0
Sugar level increasing and rate of increase decreasing ($(r2 - r1) < (r1 - r0)$)	CompDose = 0
Sugar level increasing and rate of increase stable or increasing ($(r2 - r1) \geq (r1 - r0)$)	CompDose = round $((r2 - r1)/4)$ If rounded result = 0 then CompDose = MinimumDose

Use cases



- ✧ Use-cases are a kind of scenario that are included in the UML.
- ✧ Use cases identify the actors in an interaction and which describe the interaction itself.
- ✧ A set of use cases should describe all possible interactions with the system.
- ✧ High-level graphical model supplemented by more detailed tabular description (see Chapter 5).
- ✧ UML sequence diagrams may be used to add detail to use-cases by showing the sequence of event processing in the system.

Use cases for the Mentcare system

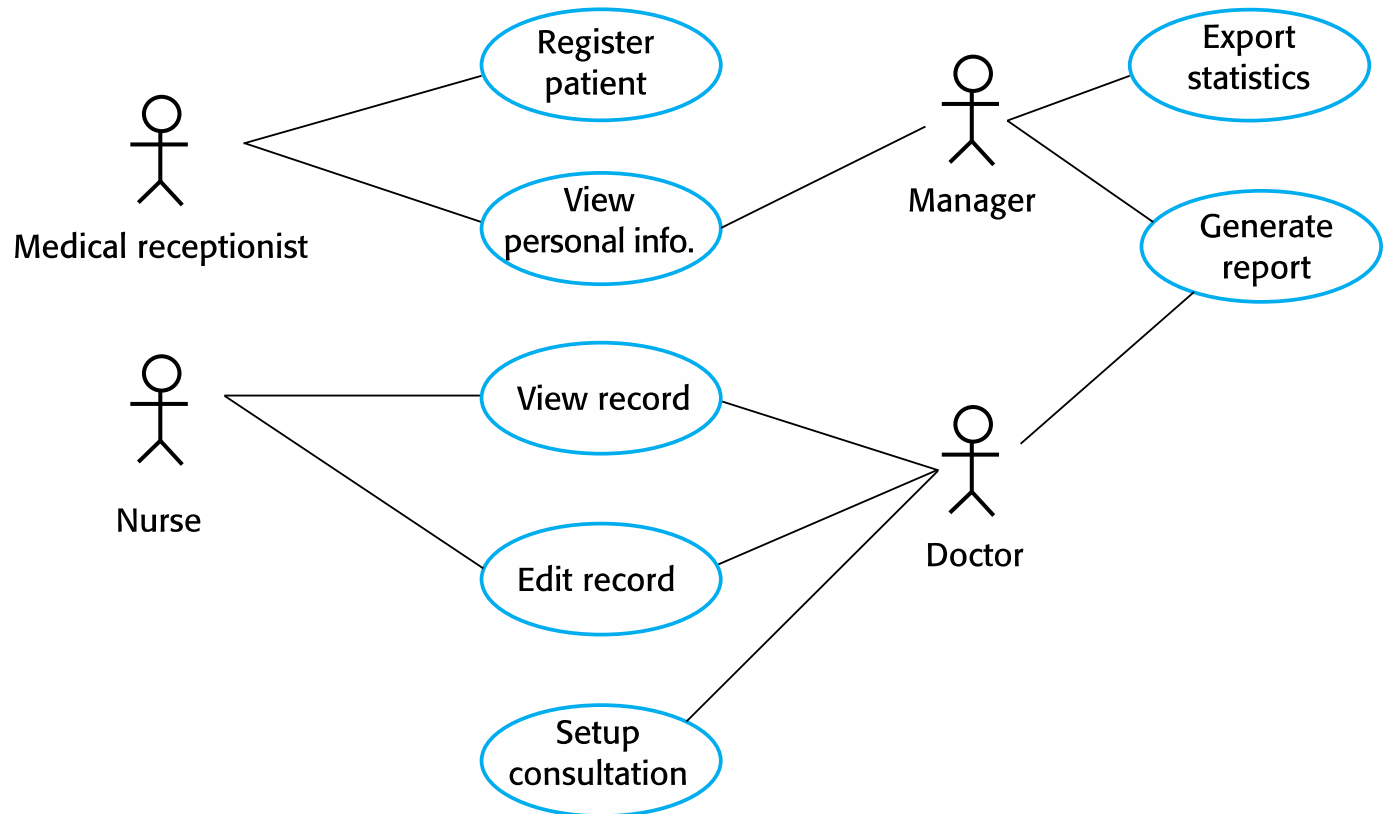


The software requirements document



- ✧ The software requirements document is the official statement of what is required of the system developers.
- ✧ Should include both a definition of user requirements and a specification of the system requirements.
- ✧ It is NOT a design document. As far as possible, it should set of WHAT the system should do rather than HOW it should do it.

Users of a requirements document

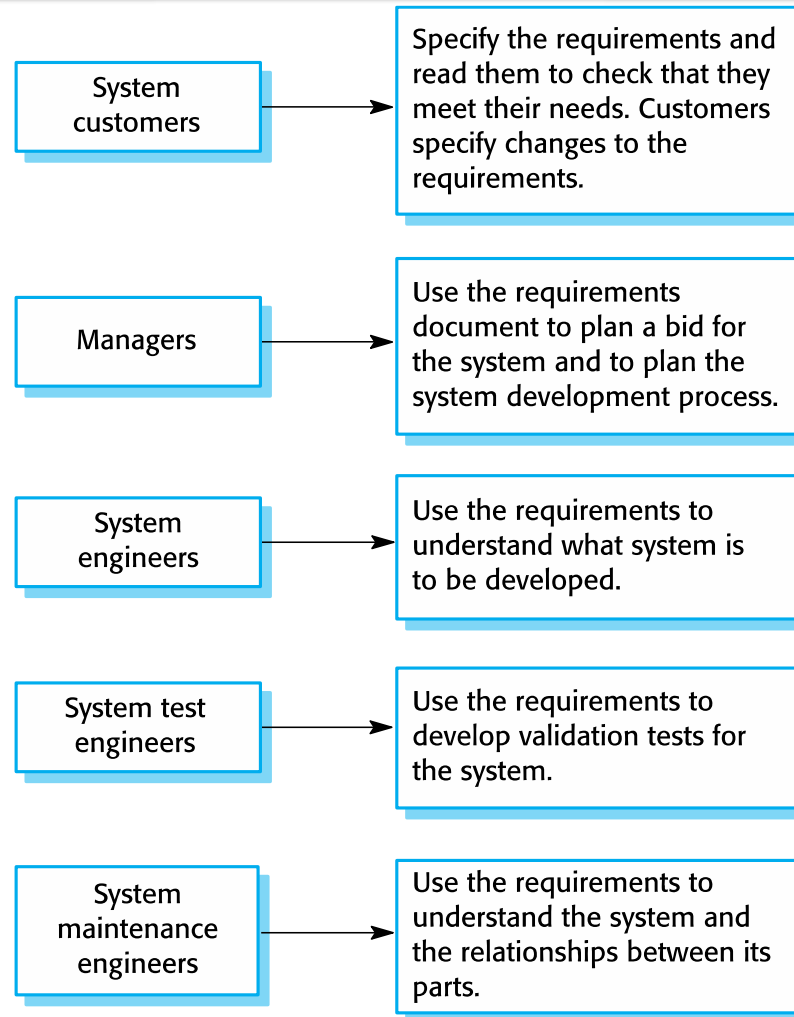

Requirements document variability



- ✧ Information in requirements document depends on type of system and the approach to development used.
- ✧ Systems developed incrementally will, typically, have less detail in the requirements document.
- ✧ Requirements documents standards have been designed e.g. IEEE standard. These are mostly applicable to the requirements for large systems engineering projects.

The structure of a requirements document



Chapter	Description
Preface	This should define the expected readership of the document and describe its version history, including a rationale for the creation of a new version and a summary of the changes made in each version.
Introduction	This should describe the need for the system. It should briefly describe the system's functions and explain how it will work with other systems. It should also describe how the system fits into the overall business or strategic objectives of the organization commissioning the software.
Glossary	This should define the technical terms used in the document. You should not make assumptions about the experience or expertise of the reader.
User requirements definition	Here, you describe the services provided for the user. The nonfunctional system requirements should also be described in this section. This description may use natural language, diagrams, or other notations that are understandable to customers. Product and process standards that must be followed should be specified.
System architecture	This chapter should present a high-level overview of the anticipated system architecture, showing the distribution of functions across system modules. Architectural components that are reused should be highlighted.

The structure of a requirements document



Chapter	Description
System requirements specification	This should describe the functional and nonfunctional requirements in more detail. If necessary, further detail may also be added to the nonfunctional requirements. Interfaces to other systems may be defined.
System models	This might include graphical system models showing the relationships between the system components and the system and its environment. Examples of possible models are object models, data-flow models, or semantic data models.
System evolution	This should describe the fundamental assumptions on which the system is based, and any anticipated changes due to hardware evolution, changing user needs, and so on. This section is useful for system designers as it may help them avoid design decisions that would constrain likely future changes to the system.
Appendices	These should provide detailed, specific information that is related to the application being developed; for example, hardware and database descriptions. Hardware requirements define the minimal and optimal configurations for the system. Database requirements define the logical organization of the data used by the system and the relationships between data.
Index	Several indexes to the document may be included. As well as a normal alphabetic index, there may be an index of diagrams, an index of functions, and so on.



Requirements validation

Requirements validation



- ✧ Concerned with demonstrating that the requirements define the system that the customer really wants.
- ✧ Requirements error costs are high so validation is very important
 - Fixing a requirements error after delivery may cost up to 100 times the cost of fixing an implementation error.

Requirements checking



- ✧ Validity. Does the system provide the functions which best support the customer's needs?
- ✧ Consistency. Are there any requirements conflicts?
- ✧ Completeness. Are all functions required by the customer included?
- ✧ Realism. Can the requirements be implemented given available budget and technology
- ✧ Verifiability. Can the requirements be checked?

Requirements validation techniques



✧ Requirements reviews

- Systematic manual analysis of the requirements.

✧ Prototyping

- Using an executable model of the system to check requirements.
Covered in Chapter 2.

✧ Test-case generation

- Developing tests for requirements to check testability.

Requirements reviews



- ✧ Regular reviews should be held while the requirements definition is being formulated.
- ✧ Both client and contractor staff should be involved in reviews.
- ✧ Reviews may be formal (with completed documents) or informal. Good communications between developers, customers and users can resolve problems at an early stage.

Review checks



✧ Verifiability

- Is the requirement realistically testable?

✧ Comprehensibility

- Is the requirement properly understood?

✧ Traceability

- Is the origin of the requirement clearly stated?

✧ Adaptability

- Can the requirement be changed without a large impact on other requirements?



Requirements change

Changing requirements




- ✧ The business and technical environment of the system always changes after installation.
 - New hardware may be introduced, it may be necessary to interface the system with other systems, business priorities may change (with consequent changes in the system support required), and new legislation and regulations may be introduced that the system must necessarily abide by.
- ✧ The people who pay for a system and the users of that system are rarely the same people.
 - System customers impose requirements because of organizational and budgetary constraints. These may conflict with end-user requirements and, after delivery, new features may have to be added for user support if the system is to meet its goals.

Changing requirements



- ✧ Large systems usually have a diverse user community, with many users having different requirements and priorities that may be conflicting or contradictory.
 - The final system requirements are inevitably a compromise between them and, with experience, it is often discovered that the balance of support given to different users has to be changed.

Requirements evolution

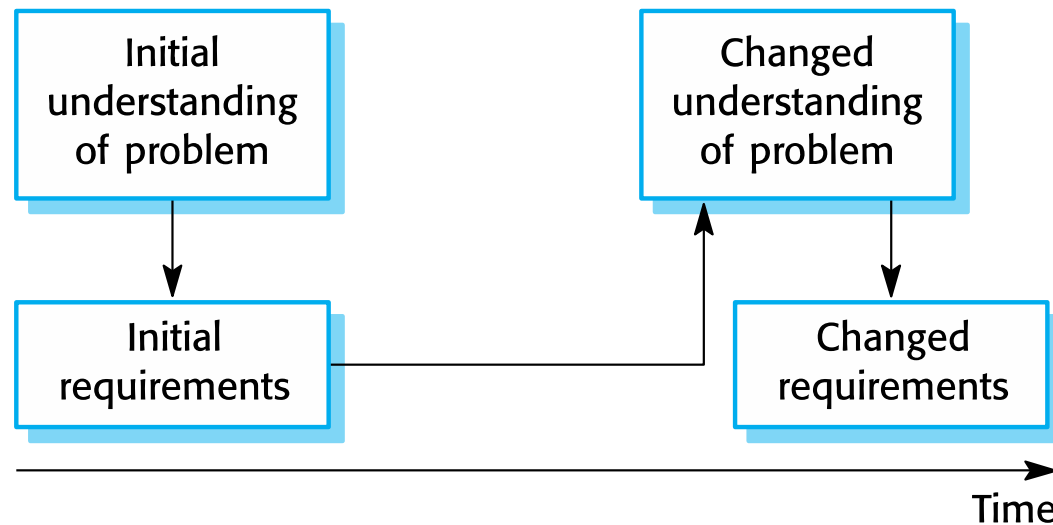

Requirements management



- ✧ Requirements management is the process of managing changing requirements during the requirements engineering process and system development.
- ✧ New requirements emerge as a system is being developed and after it has gone into use.
- ✧ You need to keep track of individual requirements and maintain links between dependent requirements so that you can assess the impact of requirements changes. You need to establish a formal process for making change proposals and linking these to system requirements.

Requirements management planning



- ✧ Establishes the level of requirements management detail that is required.
- ✧ Requirements management decisions:
 - *Requirements identification* Each requirement must be uniquely identified so that it can be cross-referenced with other requirements.
 - *A change management process* This is the set of activities that assess the impact and cost of changes. I discuss this process in more detail in the following section.
 - *Traceability policies* These policies define the relationships between each requirement and between the requirements and the system design that should be recorded.
 - *Tool support* Tools that may be used range from specialist requirements management systems to spreadsheets and simple database systems.


Requirements change management



✧ Deciding if a requirements change should be accepted

- *Problem analysis and change specification*
 - During this stage, the problem or the change proposal is analyzed to check that it is valid. This analysis is fed back to the change requestor who may respond with a more specific requirements change proposal, or decide to withdraw the request.
- *Change analysis and costing*
 - The effect of the proposed change is assessed using traceability information and general knowledge of the system requirements. Once this analysis is completed, a decision is made whether or not to proceed with the requirements change.
- *Change implementation*
 - The requirements document and, where necessary, the system design and implementation, are modified. Ideally, the document should be organized so that changes can be easily implemented.

Requirements change management

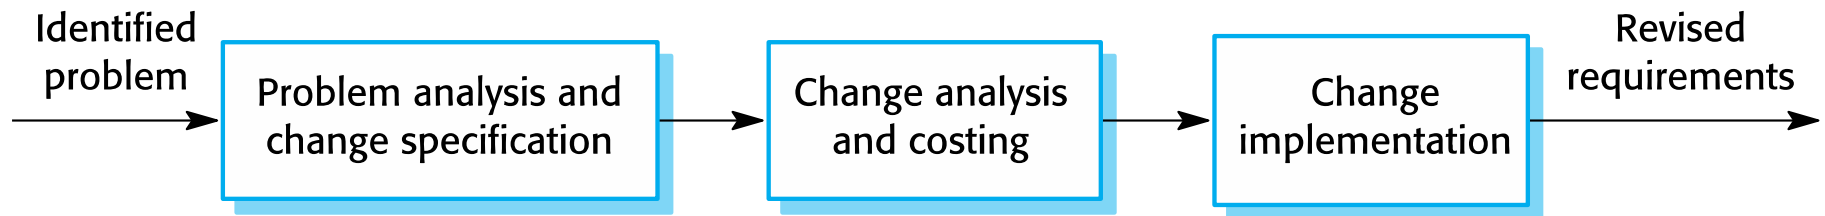

Key points



- ✧ Requirements for a software system set out what the system should do and define constraints on its operation and implementation.
- ✧ Functional requirements are statements of the services that the system must provide or are descriptions of how some computations must be carried out.
- ✧ Non-functional requirements often constrain the system being developed and the development process being used.
- ✧ They often relate to the emergent properties of the system and therefore apply to the system as a whole.

Key points



- ✧ The requirements engineering process is an iterative process that includes requirements elicitation, specification and validation.
- ✧ Requirements elicitation is an iterative process that can be represented as a spiral of activities – requirements discovery, requirements classification and organization, requirements negotiation and requirements documentation.
- ✧ You can use a range of techniques for requirements elicitation including interviews and ethnography. User stories and scenarios may be used to facilitate discussions.

Key points



- ✧ Requirements specification is the process of formally documenting the user and system requirements and creating a software requirements document.
- ✧ The software requirements document is an agreed statement of the system requirements. It should be organized so that both system customers and software developers can use it.

Key points



- ✧ Requirements validation is the process of checking the requirements for validity, consistency, completeness, realism and verifiability.
- ✧ Business, organizational and technical changes inevitably lead to changes to the requirements for a software system. Requirements management is the process of managing and controlling these changes.