

```
In [1]: import pandas as pd
import warnings
warnings.filterwarnings('ignore')
data=pd.read_csv("/home/placement/Downloads/fiat500.csv")
```

```
In [2]: data.describe()
```

Out[2]:

	ID	engine_power	age_in_days	km	previous_owners	lat	lon	price
<b>count</b>	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000	1538.000000
<b>mean</b>	769.500000	51.904421	1650.980494	53396.011704	1.123537	43.541361	11.563428	8576.003901
<b>std</b>	444.126671	3.988023	1289.522278	40046.830723	0.416423	2.133518	2.328190	1939.958641
<b>min</b>	1.000000	51.000000	366.000000	1232.000000	1.000000	36.855839	7.245400	2500.000000
<b>25%</b>	385.250000	51.000000	670.000000	20006.250000	1.000000	41.802990	9.505090	7122.500000
<b>50%</b>	769.500000	51.000000	1035.000000	39031.000000	1.000000	44.394096	11.869260	9000.000000
<b>75%</b>	1153.750000	51.000000	2616.000000	79667.750000	1.000000	45.467960	12.769040	10000.000000
<b>max</b>	1538.000000	77.000000	4658.000000	235000.000000	4.000000	46.795612	18.365520	11100.000000

```
In [3]: data1=data.loc[(data.previous_owners==1)]
```

In [4]: data1

Out[4]:

	ID	model	engine_power	age_in_days	km	previous_owners	lat	lon	price
0	1	lounge	51	882	25000	1	44.907242	8.611560	8900
1	2	pop	51	1186	32500	1	45.666359	12.241890	8800
2	3	sport	74	4658	142228	1	45.503300	11.417840	4200
3	4	lounge	51	2739	160000	1	40.633171	17.634609	6000
4	5	pop	73	3074	106880	1	41.903221	12.495650	5700
...	...	...	...	...	...	...	...	...	...
1533	1534	sport	51	3712	115280	1	45.069679	7.704920	5200
1534	1535	lounge	74	3835	112000	1	45.845692	8.666870	4600
1535	1536	pop	51	2223	60457	1	45.481541	9.413480	7500
1536	1537	lounge	51	2557	80750	1	45.000702	7.682270	5990
1537	1538	pop	51	1766	54276	1	40.323410	17.568270	7900

1389 rows × 9 columns

```
In [5]: data2=data.drop(['lat','lon','ID'],axis=1)
data2
```

Out[5]:

	model	engine_power	age_in_days	km	previous_owners	price
0	lounge	51	882	25000	1	8900
1	pop	51	1186	32500	1	8800
2	sport	74	4658	142228	1	4200
3	lounge	51	2739	160000	1	6000
4	pop	73	3074	106880	1	5700
...	...	...	...	...	...	...
1533	sport	51	3712	115280	1	5200
1534	lounge	74	3835	112000	1	4600
1535	pop	51	2223	60457	1	7500
1536	lounge	51	2557	80750	1	5990
1537	pop	51	1766	54276	1	7900

1538 rows × 6 columns

```
In [6]: data2=pd.get_dummies(data2)
data2
```

Out[6]:

	engine_power	age_in_days	km	previous_owners	price	model_lounge	model_pop	model_sport
0	51	882	25000	1	8900	1	0	0
1	51	1186	32500	1	8800	0	1	0
2	74	4658	142228	1	4200	0	0	1
3	51	2739	160000	1	6000	1	0	0
4	73	3074	106880	1	5700	0	1	0
...	...	...	...	...	...	...	...	...
1533	51	3712	115280	1	5200	0	0	1
1534	74	3835	112000	1	4600	1	0	0
1535	51	2223	60457	1	7500	0	1	0
1536	51	2557	80750	1	5990	1	0	0
1537	51	1766	54276	1	7900	0	1	0

1538 rows × 8 columns

```
In [7]: #adding to seperate dataframe the value,we want to predict
y=data2['price']
#removing the value we want to predict from orginal dataframe
x=data2.drop('price',axis=1)
```

In [8]:

y

Out[8]:

0	8900
1	8800
2	4200
3	6000
4	5700
	...
1533	5200
1534	4600
1535	7500
1536	5990
1537	7900

Name: price, Length: 1538, dtype: int64

In [9]:

```
from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.33,random_state=42)
```

```
In [10]: x_train
```

```
Out[10]:
```

	engine_power	age_in_days	km	previous_owners	model_lounge	model_pop	model_sport
527	51	425	13111	1	1	0	0
129	51	1127	21400	1	1	0	0
602	51	2039	57039	1	0	1	0
331	51	1155	40700	1	1	0	0
323	51	425	16783	1	1	0	0
...	...	...	...	...	...	...	...
1130	51	1127	24000	1	1	0	0
1294	51	852	30000	1	1	0	0
860	51	3409	118000	1	0	1	0
1459	51	762	16700	1	1	0	0
1126	51	701	39207	1	1	0	0

1030 rows × 7 columns

```
In [11]: x_test
```

```
Out[11]:
```

	engine_power	age_in_days	km	previous_owners	model_lounge	model_pop	model_sport
481	51	3197	120000	2	0	1	0
76	62	2101	103000	1	0	1	0
1502	51	670	32473	1	1	0	0
669	51	913	29000	1	1	0	0
1409	51	762	18800	1	1	0	0
...	...	...	...	...	...	...	...
291	51	701	22000	1	1	0	0
596	51	3347	85500	1	0	1	0
1489	51	366	22148	1	0	1	0
1436	51	1797	61000	1	1	0	0
575	51	366	19112	1	1	0	0

508 rows × 7 columns

```
In [12]: y_train
```

```
Out[12]: 527      9990
          129      9500
          602      7590
          331      8750
          323      9100
          ...
          1130     10990
          1294      9800
          860      5500
          1459      9990
          1126      8900
          Name: price, Length: 1030, dtype: int64
```

```
In [13]: y_test
```

```
Out[13]: 481      7900
          76      7900
          1502     9400
          669      8500
          1409     9700
          ...
          291     10900
          596      5699
          1489      9500
          1436      6990
          575     10900
          Name: price, Length: 508, dtype: int64
```



```
In [14]: from sklearn.model_selection import GridSearchCV
from sklearn.linear_model import ElasticNet


elastic = ElasticNet()

parameters = {'alpha': [1e-15, 1e-10, 1e-8, 1e-4, 1e-3, 1e-2, 1, 5, 10, 20]}

elastic_regressor = GridSearchCV(elastic, parameters)

elastic_regressor.fit(x_train, y_train)
```

```
Out[14]:
```

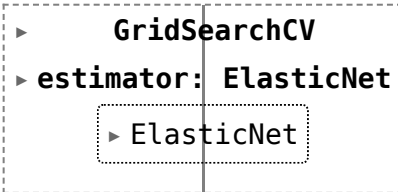

```
  ▶ GridSearchCV
  ▶ estimator: ElasticNet
    ▶ ElasticNet
```

```
In [19]: elastic_regressor.best_params_
```

```
Out[19]: {'alpha': 0.01}
```

```
In [20]: elastic=ElasticNet(alpha=0.01)
elastic.fit(x_train,y_train)
y_pred_elastic=elastic.predict(x_test)
```

```
In [21]: from sklearn.metrics import mean_squared_error#calculating MSE
elastic_Error=mean_squared_error(y_pred_elastic,y_test)
elastic_Error
```

```
Out[21]: 581390.7642825295
```

```
In [18]: from sklearn.metrics import r2_score
r2_score(y_test,y_pred_elastic)
```

```
Out[18]: 0.841688021120299
```

```
In [22]: Results=pd.DataFrame(columns=['actual','predicted'])
Results['actual']=y_test
Results['predicted']=y_pred_elastic
Results=Results.reset_index()
Results['Id']=Results.index
Results.head(15)
```

Out[22]:

	index	actual	predicted	Id
0	481	7900	5867.742075	0
1	76	7900	7136.527402	1
2	1502	9400	9865.726723	2
3	669	8500	9722.573593	3
4	1409	9700	10038.936496	4
5	1414	9900	9653.407122	5
6	1089	9900	9672.438692	6
7	1507	9950	10118.075470	7
8	970	10700	9903.219809	8
9	1198	8999	9350.750929	9
10	1088	9890	10433.808937	10
11	576	7990	7731.059127	11
12	965	7380	7697.260395	12
13	1488	6800	6569.177338	13
14	1432	8900	9662.252449	14

```
In [23]: import seaborn as sns
import matplotlib.pyplot as plt
sns.lineplot(x='Id',y='actual',data=Results.head(50))
sns.lineplot(x='Id',y='predicted',data=Results.head(50))
plt.plot()
```

Out[23]: []

