

**PROJECT
DOCUMENTATION:
AWS STATIC
WEBSITE
HOSTING WITH
AWS AMPLIFY &
S3**



GETTING STARTED WITH STATIC WEBSITE HOSTING ON AWS AMPLIFY AND S3

This comprehensive guide will walk you through the seamless process of setting up a static website using AWS Amplify and S3. Follow these simple steps to quickly deploy your website on AWS and bring your online presence to life! 🌐 🚀

Why Choose AWS Amplify for Web Hosting?


AWS Amplify simplifies web development and hosting by providing tools to create scalable and secure applications. Whether you're building a static site or a dynamic app, Amplify offers:

- 🌐 **Seamless Deployment:** Automated deployments with ease.
- 📈 **Scalability:** Effortlessly handles traffic spikes.
- 🔒 **Security:** Built-in features to keep your website safe.
- 🔗 **Integration:** Seamless connectivity with AWS services like S3, Lambda, and CloudFront.

Amplify empowers you to scale and secure your website, unlocking fast and reliable hosting solutions. 🌍 ⚡

STEP I: CREATE AN S3 BUCKET

1. Open the AWS Management Console.

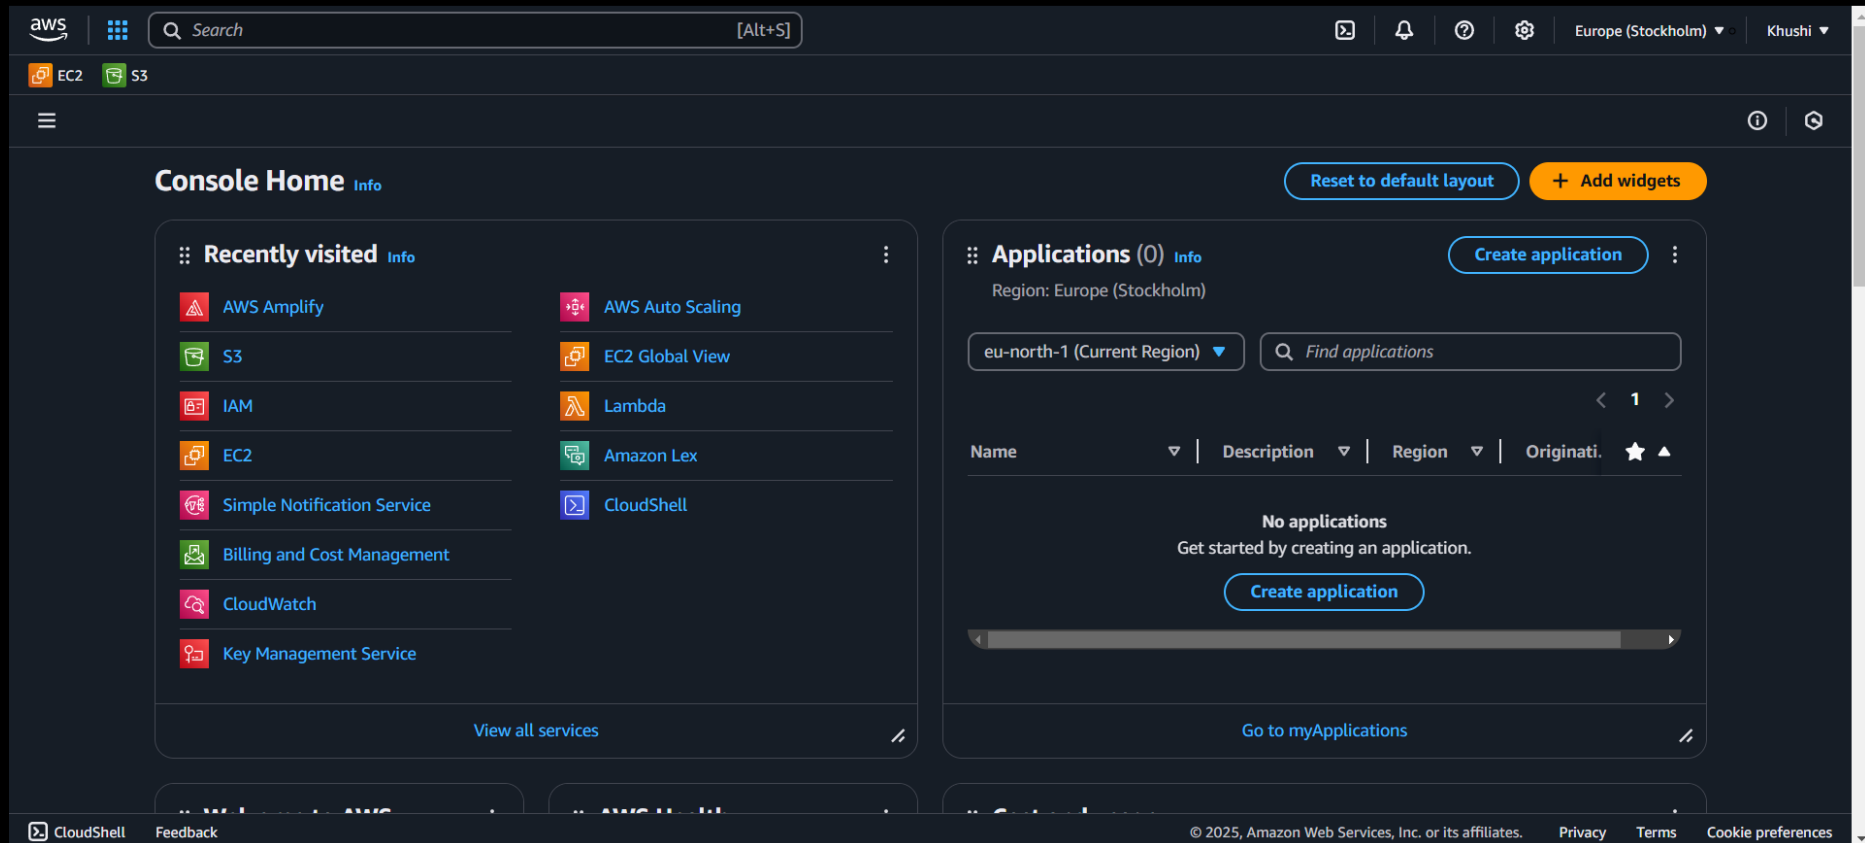

2. Search for S3 and navigate to the Dashboard.

The screenshot displays the AWS Management Console for the Amazon S3 service. The top navigation bar includes the AWS logo, a search bar, and the current region (Europe (Stockholm)) and user (Khushi). The left sidebar shows the 'Amazon S3' section with various options like General purpose buckets, Directory buckets, and Storage Lens. The main content area features an 'Account snapshot' section, a 'General purpose buckets' section with a table of buckets, and a 'Create bucket' button.

Account snapshot - updated every 24 hours All AWS Regions [View Storage Lens dashboard](#)

Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#)

General purpose buckets All AWS Regions

Buckets are containers for data stored in S3.

Name	AWS Region	IAM Access Analyzer	Creation date
mock-interview-audio-recordings			January 21, 2025, 13:03:56 (UTC+05:30)

[Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

[Block Public Access settings for this account](#)

Storage Lens


- Dashboards
- Storage Lens groups
- AWS Organizations settings

[Feedback](#)


<https://eu-north-1.console.aws.amazon.com/console/home?region=eu-north-1>

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

3. Click on Create Bucket.

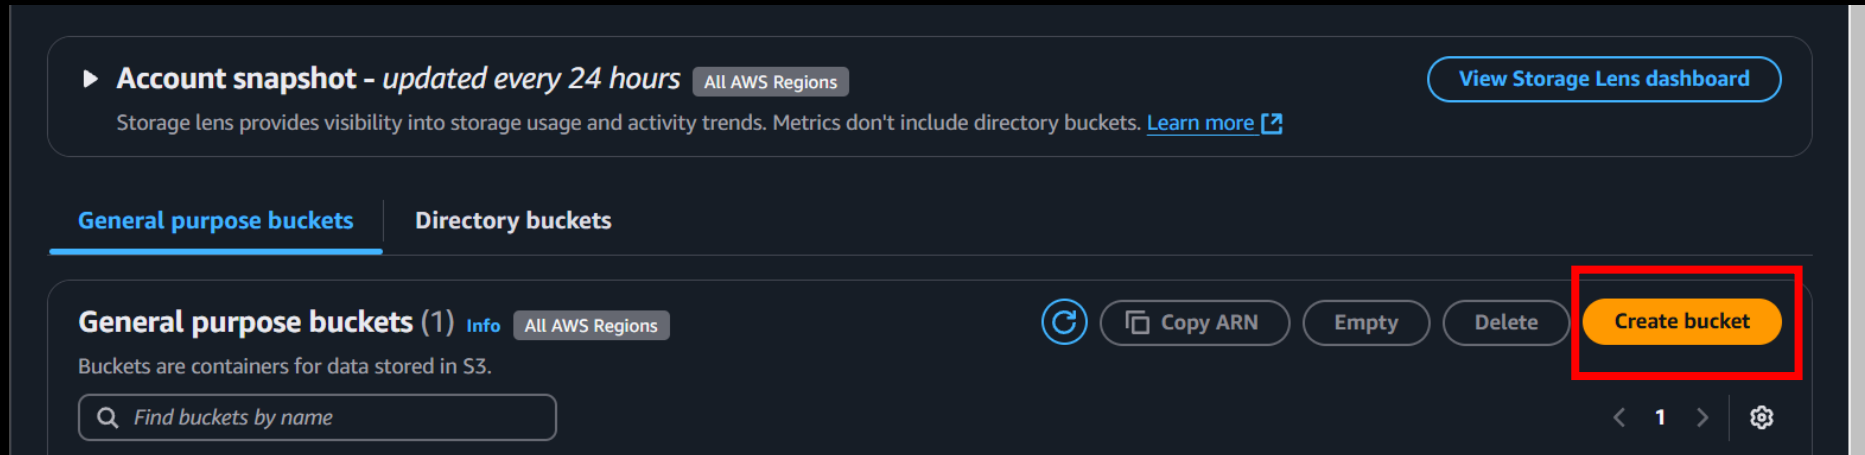

4. Name your bucket (e.g., static-website-hosting-using-aws-amplify).

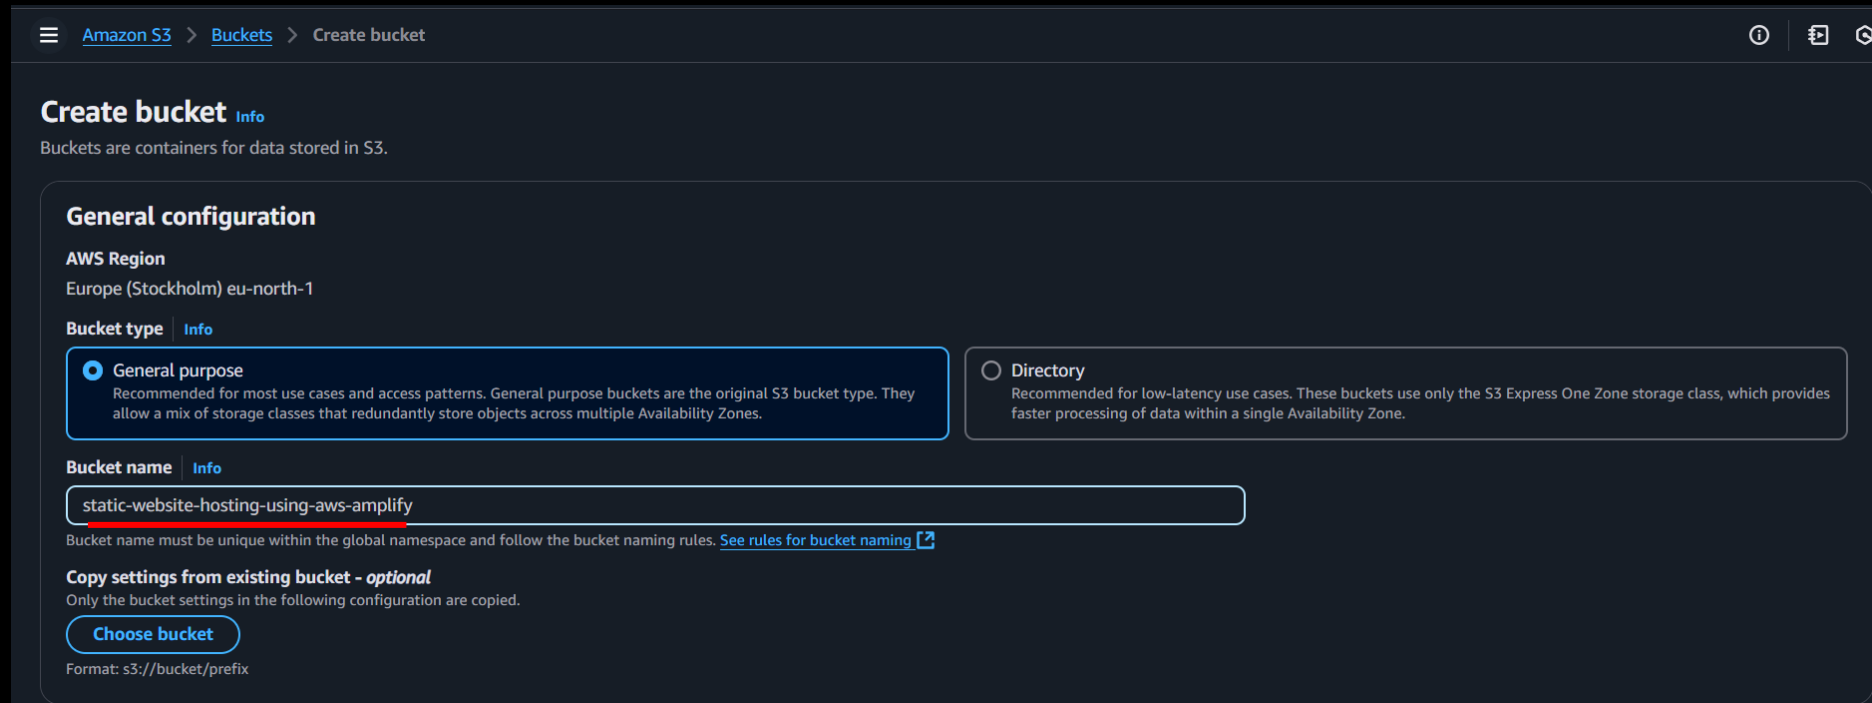

Amazon S3 > Buckets > Create bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Europe (Stockholm) eu-north-1

Bucket type [Info](#)

- ☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
- ☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)

static-website-hosting-using-aws-amplify

Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

5. Keep the other default settings as is.

Amazon S3 > Buckets > Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ **Block all public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☒ **Block public access to buckets and objects granted through new access control lists (ACLs)**

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☒ **Block public access to buckets and objects granted through any access control lists (ACLs)**

S3 will ignore all ACLs that grant public access to buckets and objects.

☒ **Block public access to buckets and objects granted through new public bucket or access point policies**

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☒ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable

☐ Enable

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

6. Scroll down and click on Create Bucket.

EC2 S3

Amazon S3 > Buckets > Create bucket

Create encryption

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

- ☐ Disable
- ☒ Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.


[Cancel](#) [Create bucket](#)

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

STEP II: UPLOAD YOUR WEBSITE FILES

1. Once the bucket is created, click on the bucket name.

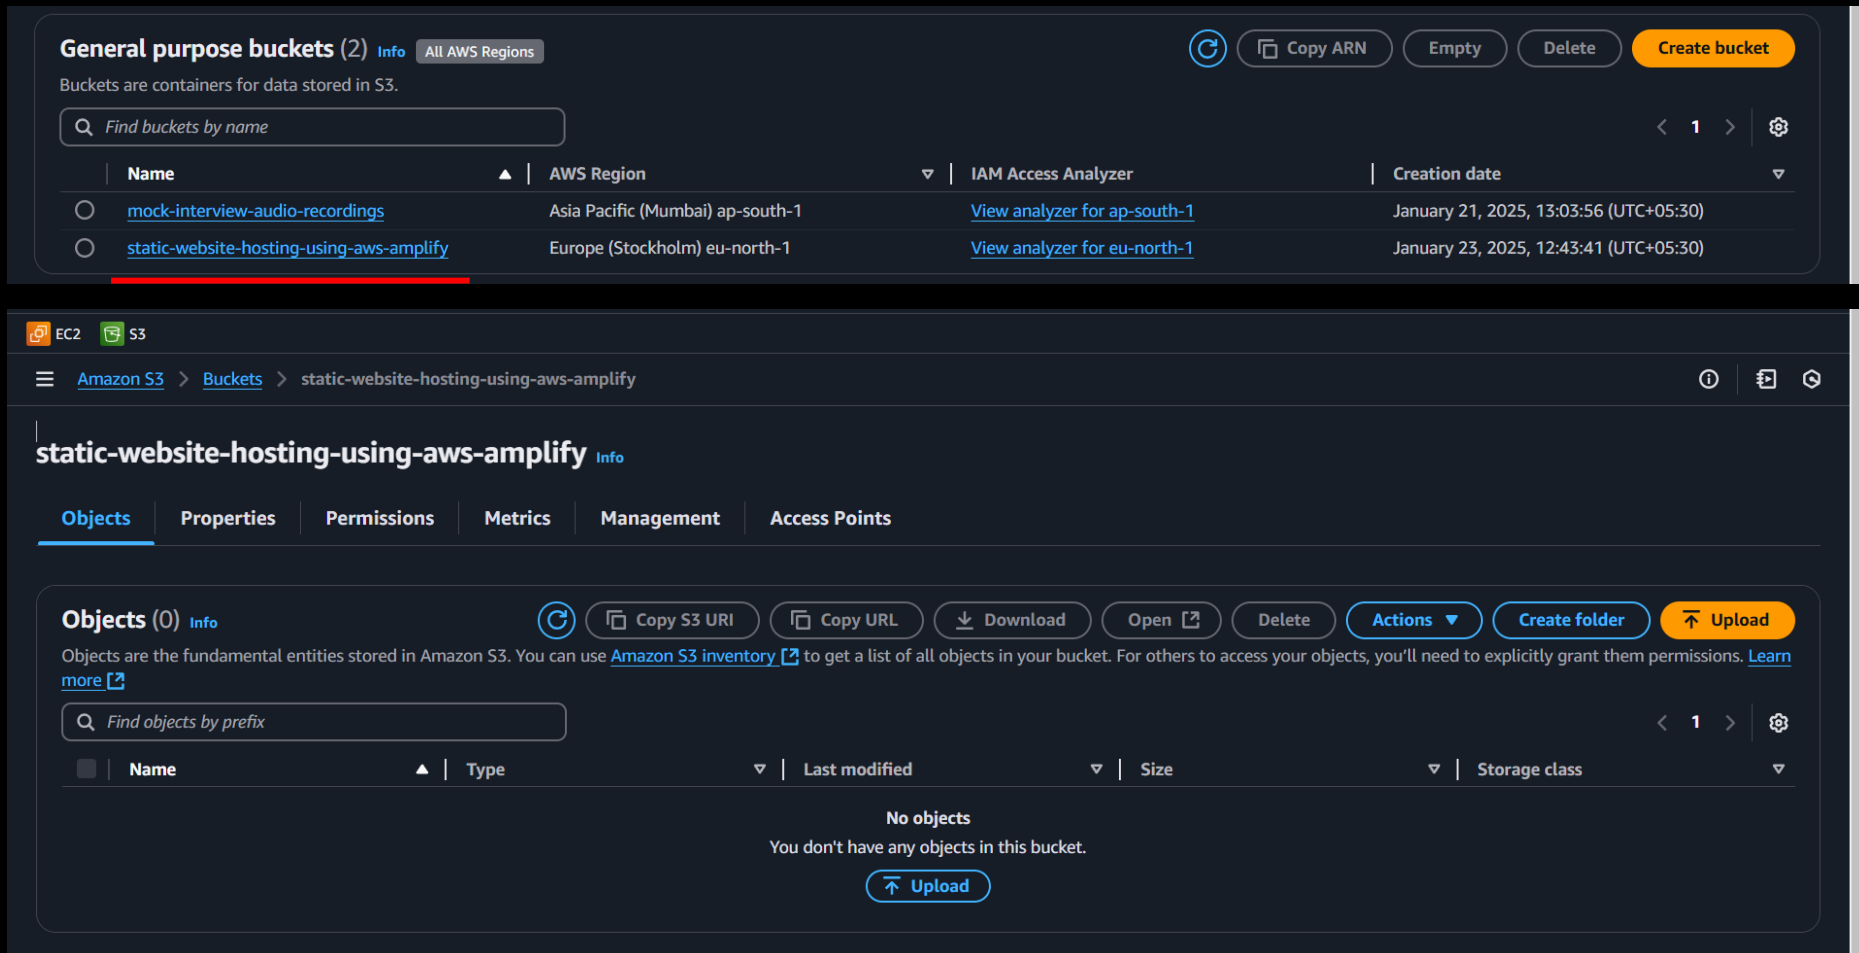

The screenshot shows the AWS S3 console. The top section, 'General purpose buckets (2)', lists two buckets. The second bucket, 'static-website-hosting-using-aws-amplify', is highlighted with a red underline. Below this, the console shows the details for this bucket. The 'Objects' tab is selected, showing an empty bucket with a 'No objects' message and an 'Upload' button.

General purpose buckets (2) [Info](#) [All AWS Regions](#)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
mock-interview-audio-recordings	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	January 21, 2025, 13:03:56 (UTC+05:30)
static-website-hosting-using-aws-amplify	Europe (Stockholm) eu-north-1	View analyzer for eu-north-1	January 23, 2025, 12:43:41 (UTC+05:30)

static-website-hosting-using-aws-amplify [Info](#)

[Objects](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [Access Points](#)

Objects (0) [Info](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Name	Type	Last modified	Size	Storage class
No objects				


You don't have any objects in this bucket.


[Upload](#)

2. Go to the Objects tab and click on Upload.

The screenshot shows the Amazon S3 console interface. At the top, there's a breadcrumb trail: [Amazon S3](#) > [Buckets](#) > static-website-hosting-using-aws-amplify. Below this, the bucket name 'static-website-hosting-using-aws-amplify' is displayed with an 'Info' link. A tab bar shows 'Objects' as the active tab, with other tabs like 'Properties', 'Permissions', 'Metrics', 'Management', and 'Access Points'. The 'Objects' section has a header 'Objects (0)' with an 'Info' link. Below the header, there's a description of objects and a link to 'Amazon S3 inventory'. A search bar is present with the placeholder 'Find objects by prefix'. A table header shows columns: 'Name', 'Type', 'Last modified', 'Size', and 'Storage class'. In the center of the table, a message states 'No objects' and 'You don't have any objects in this bucket.' with an 'Upload' button. Above the table, there are several action buttons: 'Copy S3 URI', 'Copy URL', 'Download', 'Open', 'Delete', 'Actions', 'Create folder', and 'Upload'.

3. Add your website files and folders to the bucket.

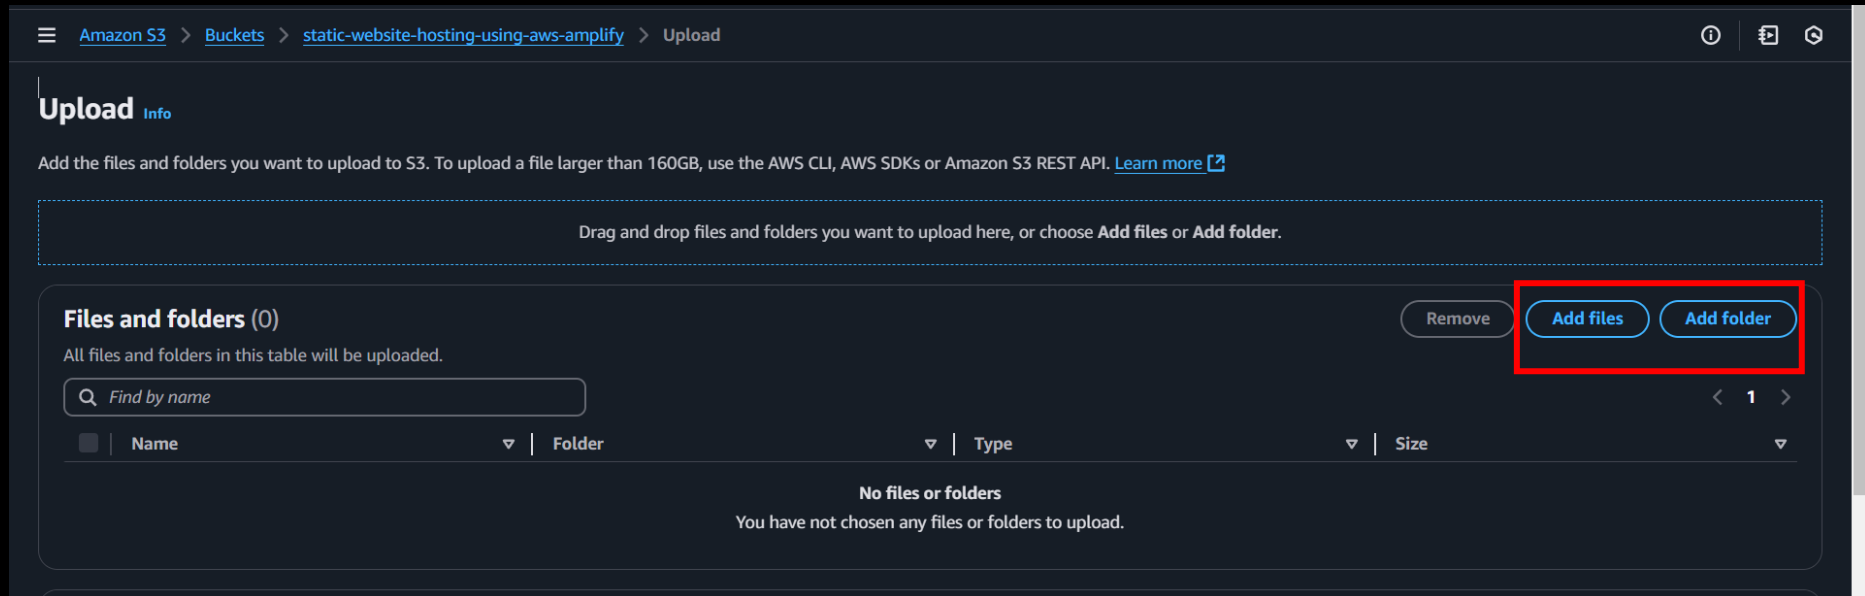

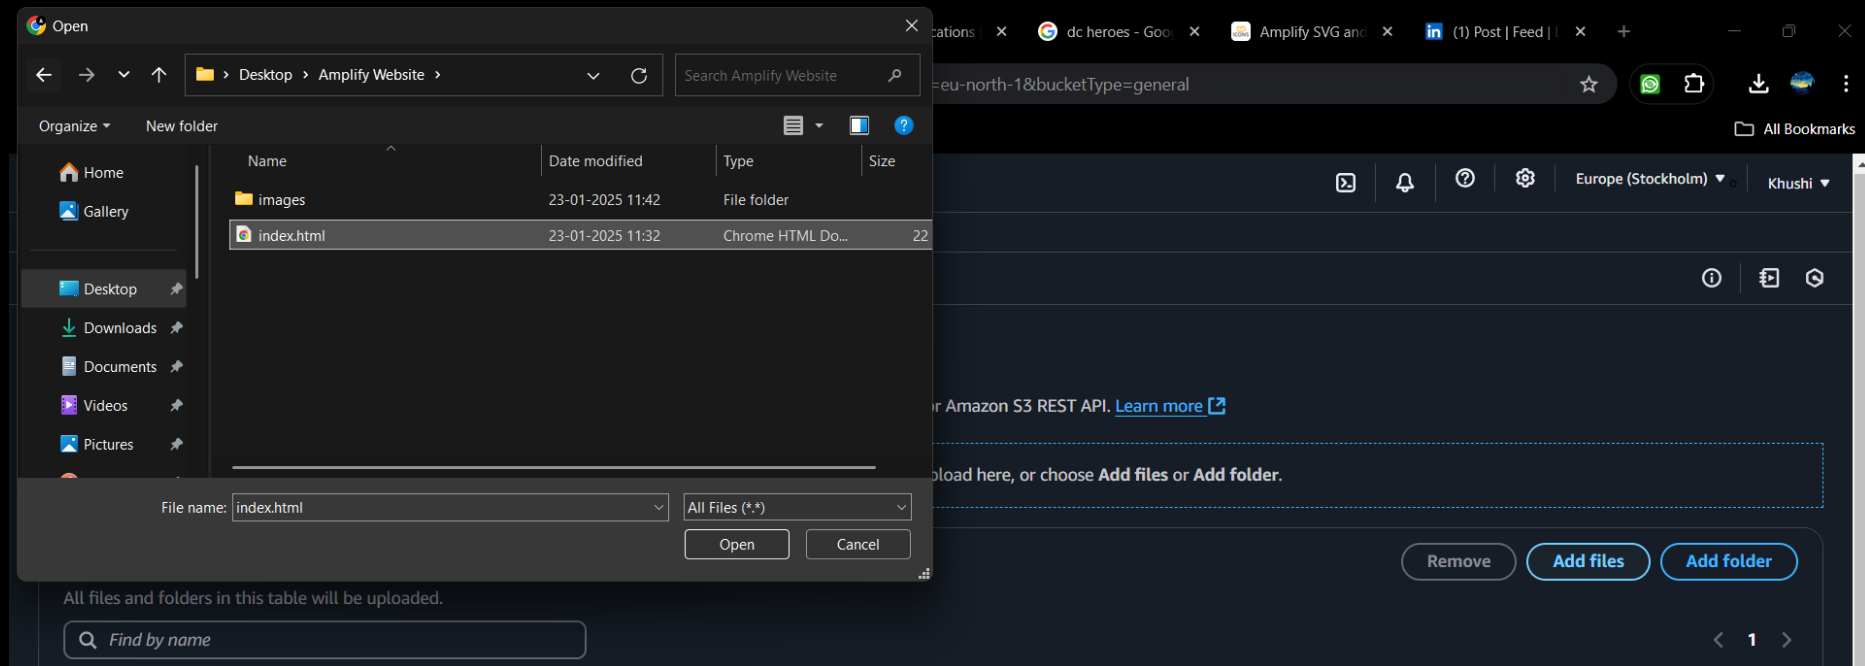

Amazon S3 > Buckets > static-website-hosting-using-aws-amplify > Upload

Upload

Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (1 total, 21.2 KB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

Find by name


< 1 >

☐	Name	Folder	Type	Size
☐	index.html	-	text/html	21.2 KB


Destination

PROJECT DOCUMENTATION: AWS HOSTING WITH AMPLIFY & S3

BY KHUSHI NANDWANI

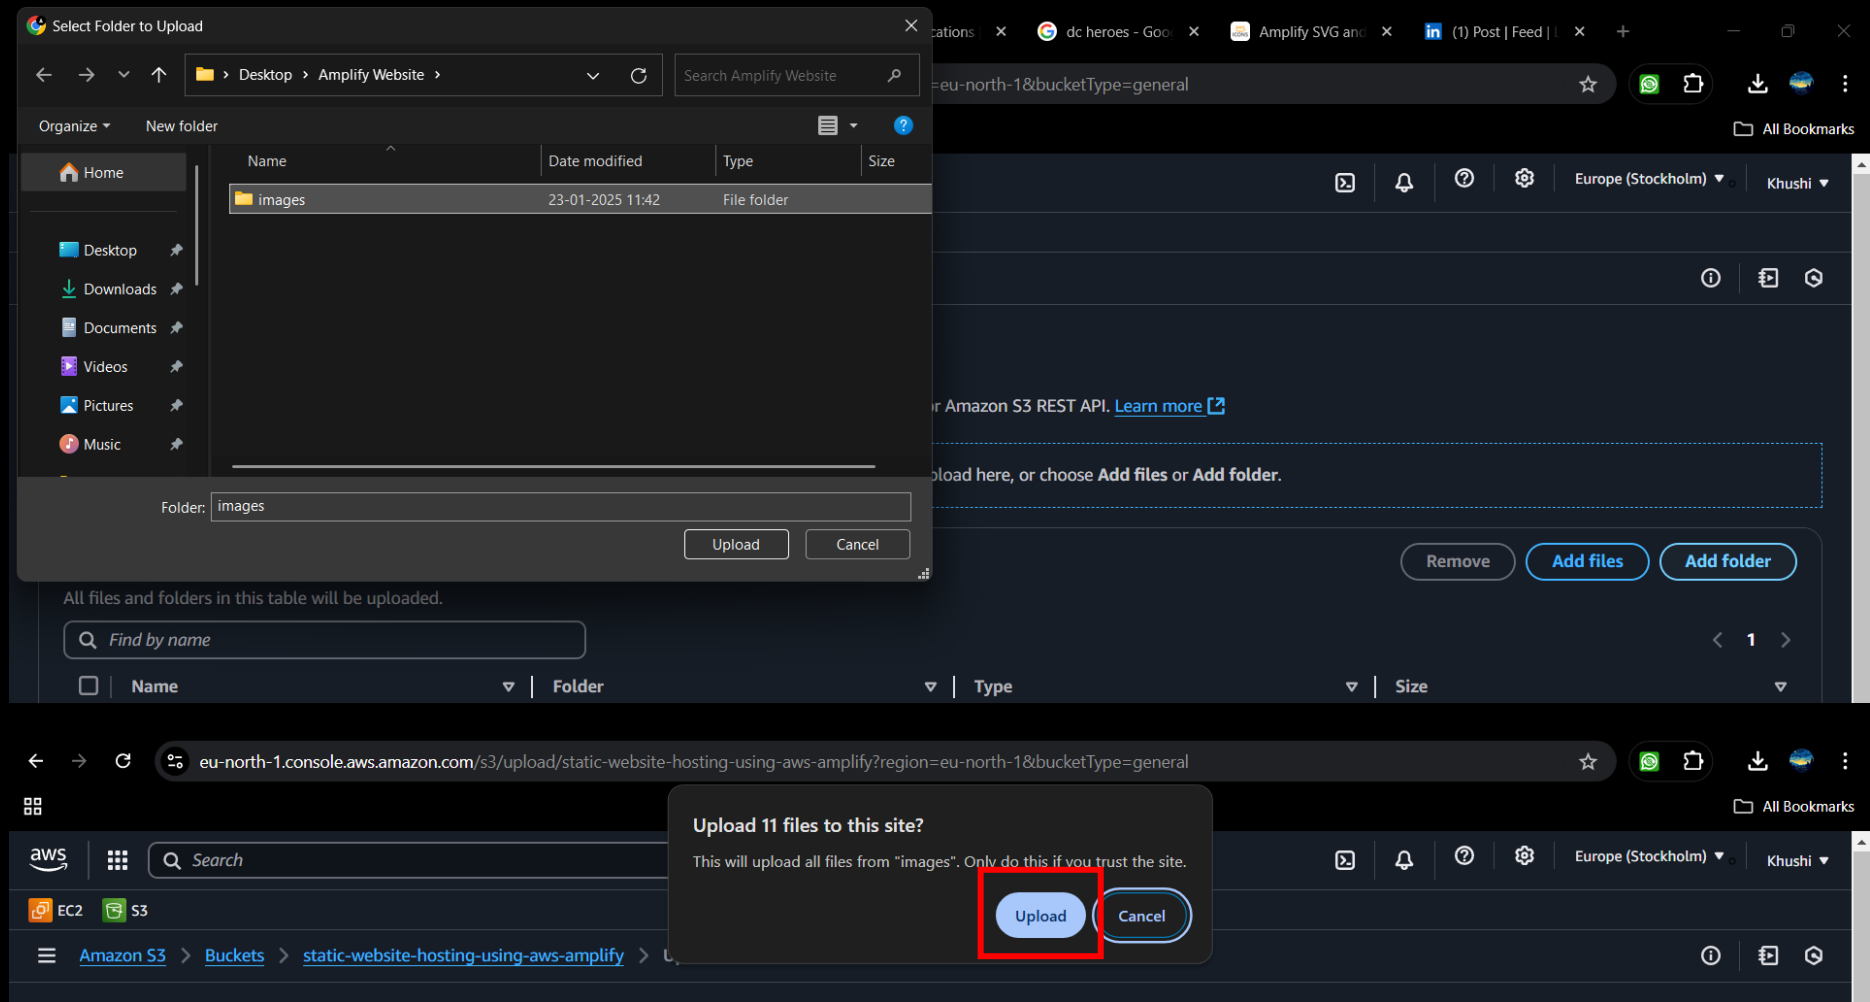

4. Click on Upload to complete the process.

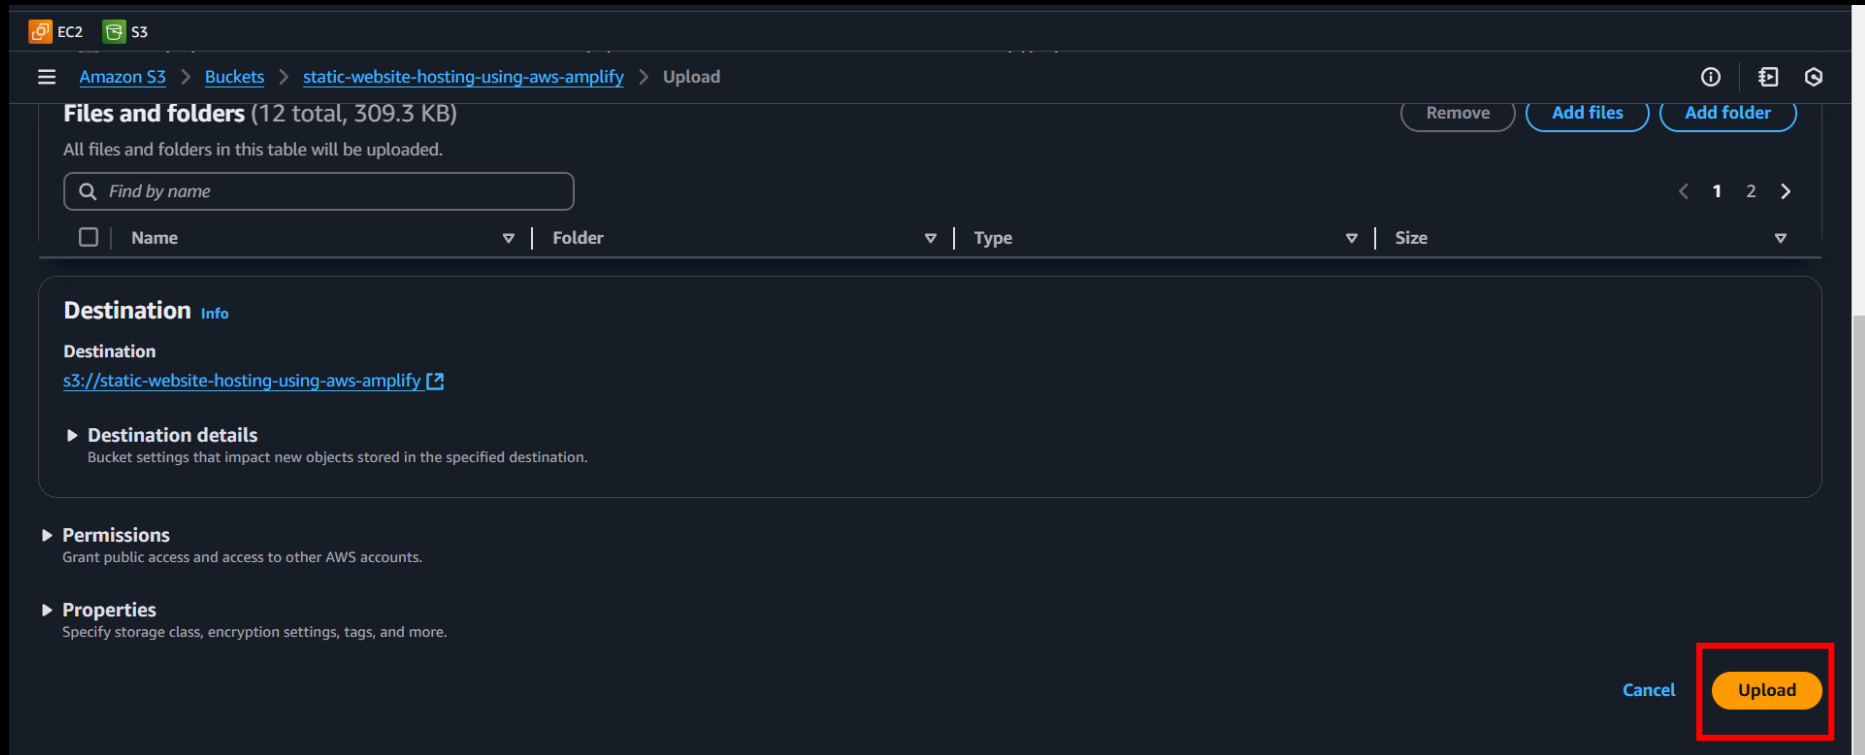

Amazon S3 > Buckets > static-website-hosting-using-aws-amplify

static-website-hosting-using-aws-amplify [Info](#)

[Objects](#) | [Properties](#) | [Permissions](#) | [Metrics](#) | [Management](#) | [Access Points](#)

Objects (2) [Info](#)


Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

☐	Name	Type	Last modified	Size	Storage class
☐	images/	Folder	-	-	-
☐	index.html	html	January 23, 2025, 12:48:52 (UTC+05:30)	21.2 KB	Standard

STEP III: ENABLE STATIC WEBSITE HOSTING

1. Go to the Properties tab of the S3 bucket.

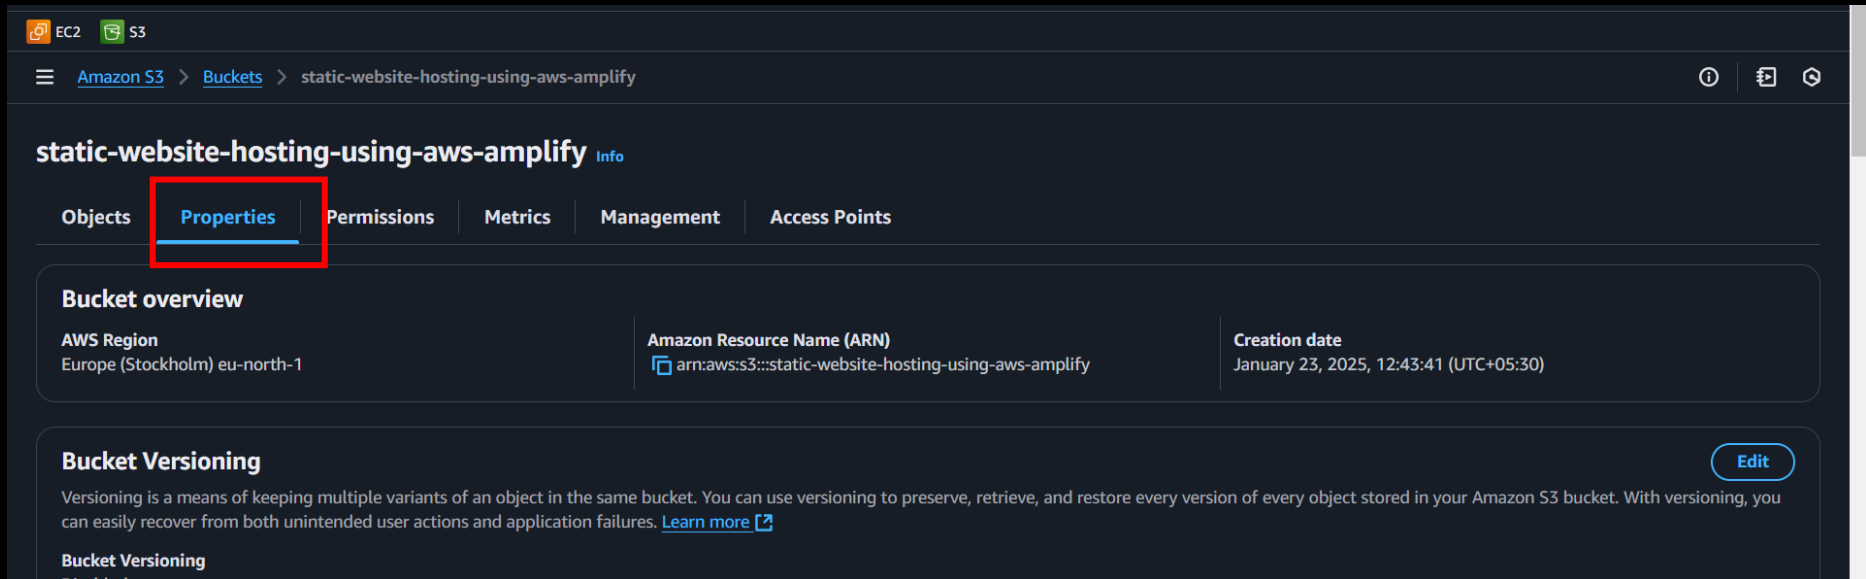

The screenshot shows the AWS Management Console interface for an S3 bucket named "static-website-hosting-using-aws-amplify". The breadcrumb navigation at the top indicates the path: Amazon S3 > Buckets > static-website-hosting-using-aws-amplify. The bucket's name is displayed with an "Info" link. Below the name, there are several tabs: Objects, Properties (which is selected and highlighted with a red box), Permissions, Metrics, Management, and Access Points. The main content area is divided into two sections. The "Bucket overview" section contains three key-value pairs: "AWS Region" is "Europe (Stockholm) eu-north-1", "Amazon Resource Name (ARN)" is "arn:aws:s3:::static-website-hosting-using-aws-amplify", and "Creation date" is "January 23, 2025, 12:43:41 (UTC+05:30)". The "Bucket Versioning" section provides a description of versioning and includes an "Edit" button in the top right corner.

static-website-hosting-using-aws-amplify [Info](#)

Objects **Properties** Permissions Metrics Management Access Points

Bucket overview


AWS Region Europe (Stockholm) eu-north-1	Amazon Resource Name (ARN)  arn:aws:s3:::static-website-hosting-using-aws-amplify	Creation date January 23, 2025, 12:43:41 (UTC+05:30)
--	--	--

Bucket Versioning [Edit](#)


Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#) 

Bucket Versioning


2. Scroll down to find the **Static Website Hosting** section.

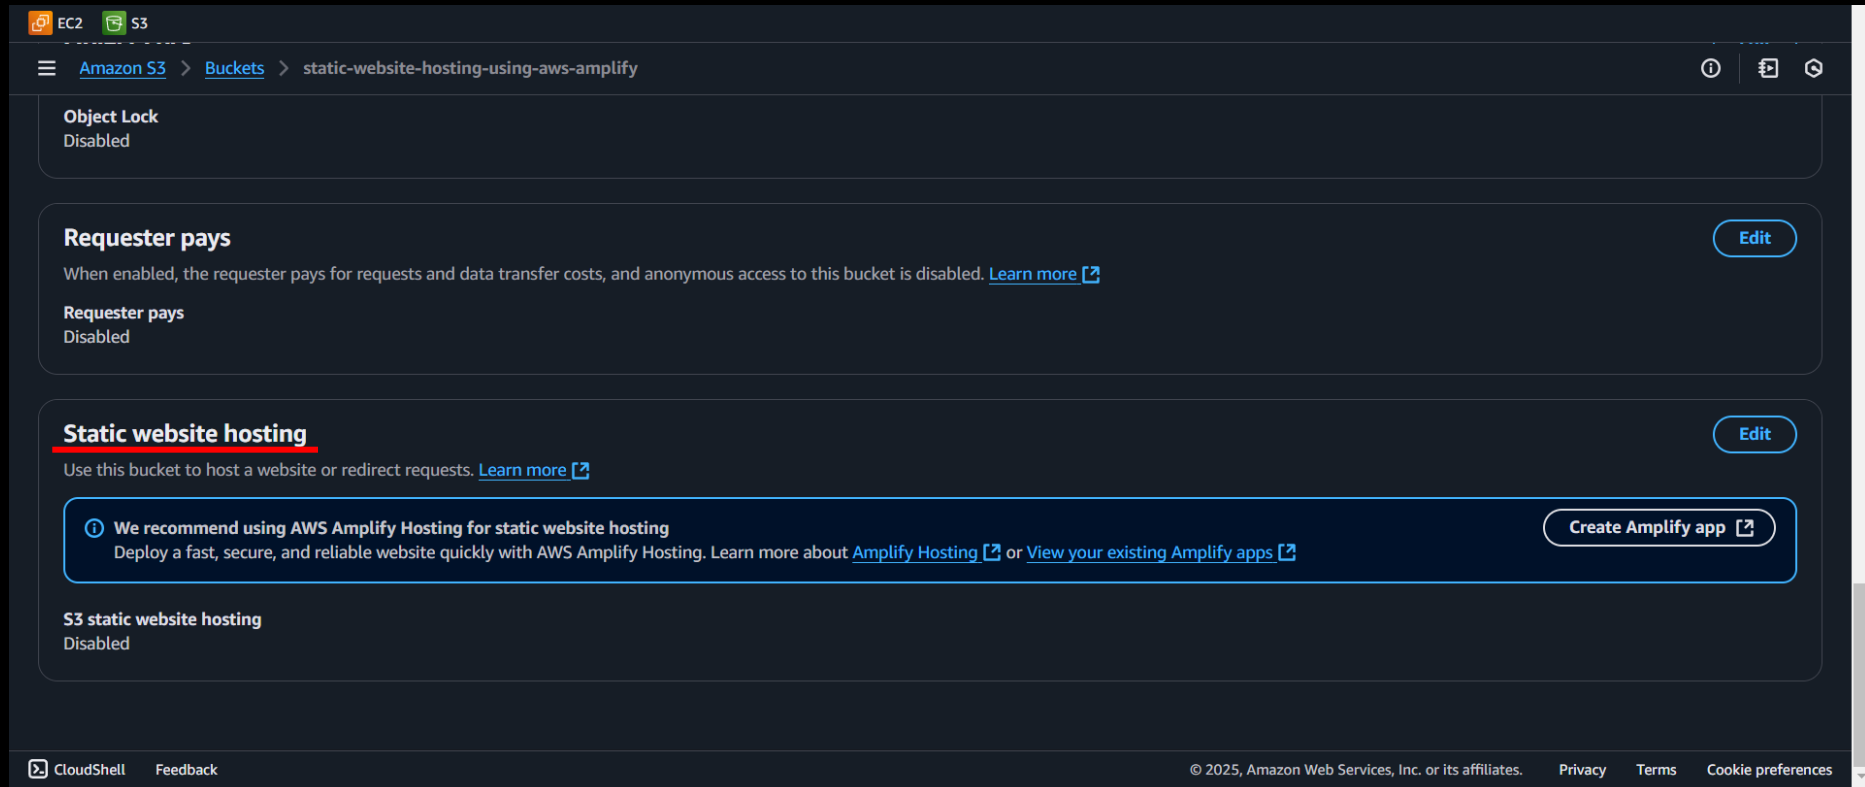

3. You will see a pop-up saying **We recommend using AWS Amplify for Static Website Hosting.**

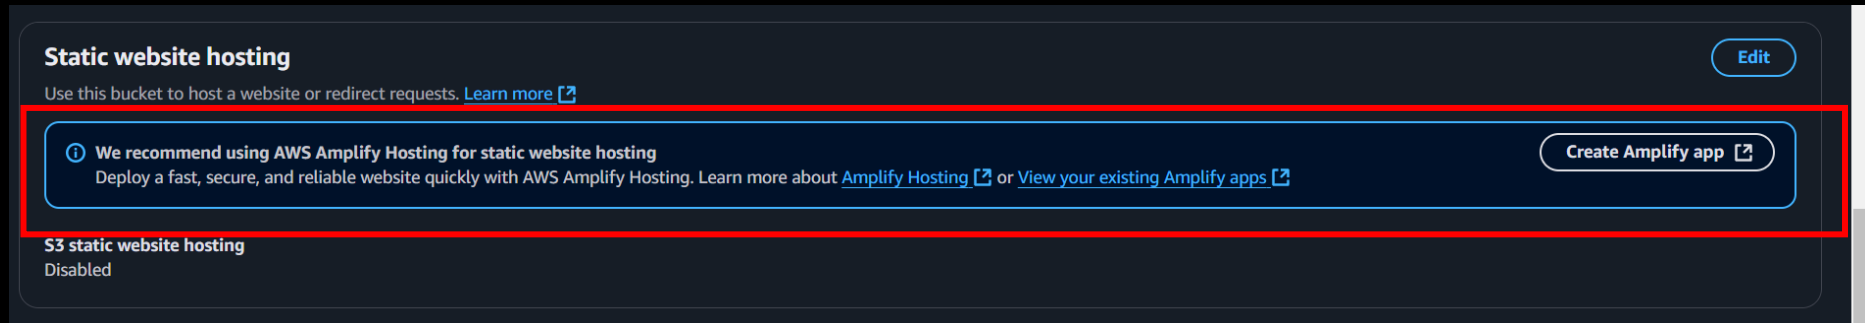

4. Click on **Create Amplify App**.

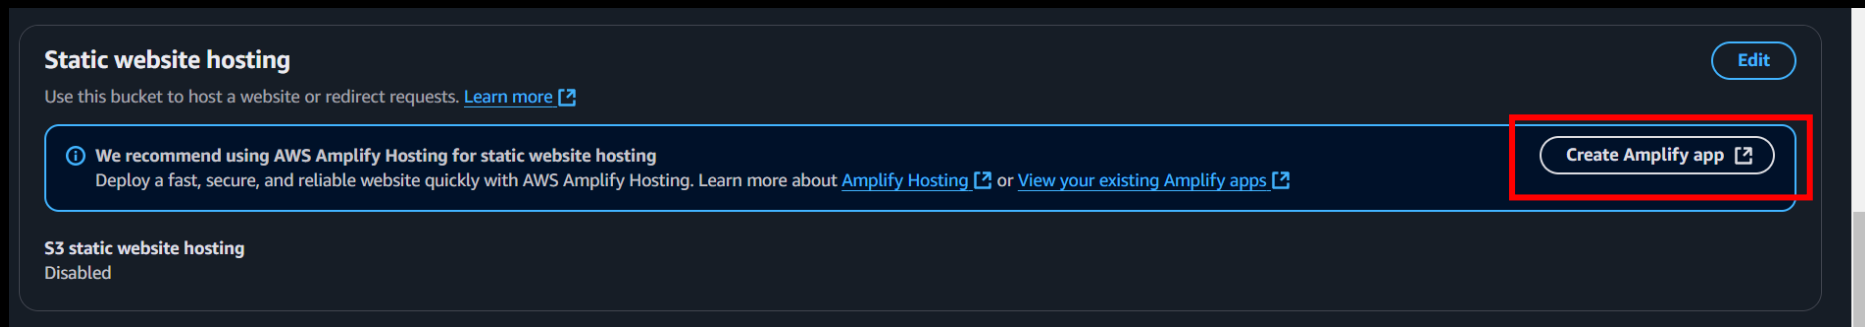

5. You will be redirected to the AWS Amplify Dashboard.

The screenshot shows the AWS Amplify console in the 'eu-north-1' region. The breadcrumb trail is 'All apps > Create new app'. The left sidebar contains a progress indicator with four steps: 1. Choose source code provider (selected), 2. Add repository and branch, 3. App settings, and 4. Review. The main content area is titled 'Start a manual deployment' and includes a description: 'Manually upload objects to deploy your app. You can choose to drag and drop the artifacts directly, pull a zip from an existing S3 bucket or any other URL.' The form fields are as follows: 'App name' is 'app5556', 'Branch name' is 'staging', and 'Method' is 'Amazon S3' (selected). The 'S3 location of objects to host' field contains 's3://static-website-hosting-using-aws-amplify/'. At the bottom right are 'Cancel', 'Previous', and 'Save and deploy' buttons. The footer includes 'CloudShell', 'Feedback', and copyright information for Amazon Web Services, Inc. or its affiliates.

eu-north-1.console.aws.amazon.com/amplify/create/manual-deploy/configure?region=eu-north-1&bucket=static-website-hosting-using-aws-amplify

aws Services Search [Alt+S]

EC2 S3

All apps > Create new app Support Docs

Choose source code provider

- 1 Choose source code provider
- 2 Add repository and branch
- 3 App settings
- 4 Review

Start a manual deployment

Manually upload objects to deploy your app. You can choose to drag and drop the artifacts directly, pull a zip from an existing S3 bucket or any other URL.

App name Branch name

app5556 staging

Method

☐ Drag and drop ☒ Amazon S3 ☐ Any URL

S3 location of objects to host

s3://static-website-hosting-using-aws-amplify/ Browse S3

Cancel Previous Save and deploy

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

STEP IV: CONFIGURE YOUR AMPLIFY APP

1. In the AWS Amplify Dashboard, you will see the App Name (you can change this if desired), Branch Name, and Location of Your S3 Bucket.

Start a manual deployment

Manually upload objects to deploy your app. You can choose to drag and drop the artifacts directly, pull a zip from an existing S3 bucket or any other URL.

App name

app5556

Branch name

staging

Method

☐  Drag and drop

☒  Amazon S3

☐  Any URL

S3 location of objects to host

s3://static-website-hosting-using-aws-amplify/

Browse S3

Cancel

Previous

Save and deploy

2. Click on Save and Deploy.

Start a manual deployment

Manually upload objects to deploy your app. You can choose to drag and drop the artifacts directly, pull a zip from an existing S3 bucket or any other URL.

App name

app5556

Branch name

staging

Method

☐  Drag and drop

☒  Amazon S3

☐  Any URL

S3 location of objects to host

s3://static-website-hosting-using-aws-amplify/


Browse S3

Cancel

Previous

Save and deploy

3. Wait a few seconds, and once deployment is complete, you will see the **Domain URL** of your app.

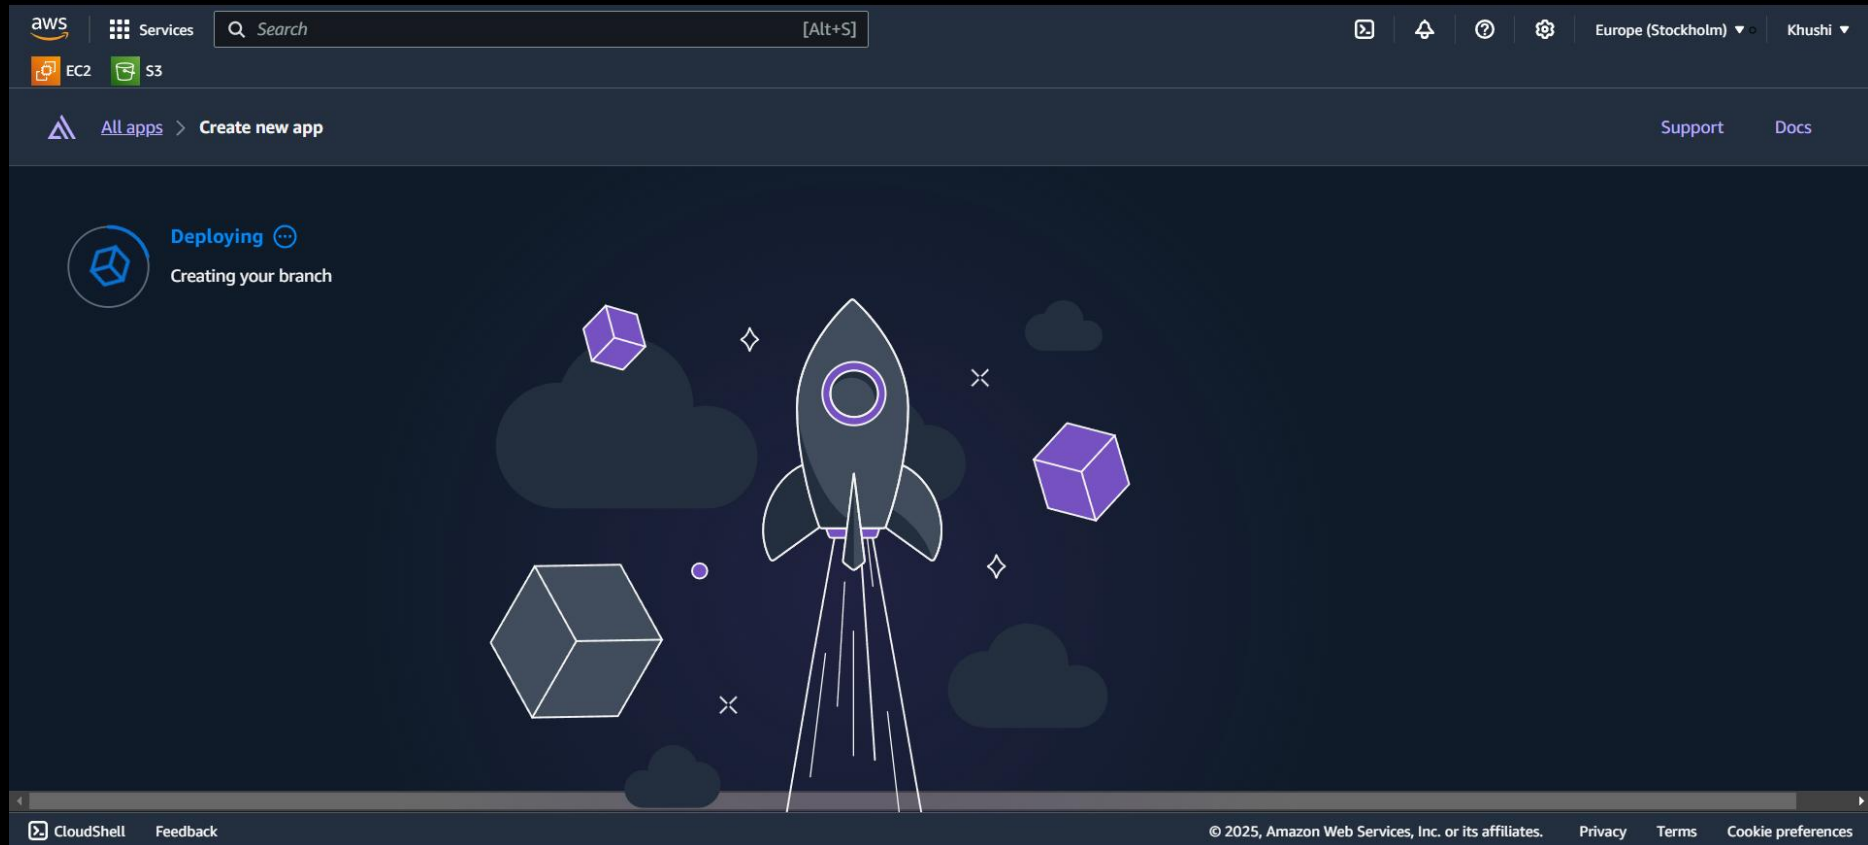

The screenshot displays the AWS Amplify console interface for an application named 'app5556'. The top navigation bar includes the AWS logo, a breadcrumb trail 'All apps > app5556: Overview', and links for 'Support' and 'Docs'. A left-hand sidebar contains a menu with 'app5556' (selected), 'Overview', 'Hosting', and 'App settings'. The main content area shows the 'app5556' overview, including the 'App ID: d328milhofke91' with a copy icon, a 'Visit deployed URL' button, and a 'Branches' section with a search bar and an 'Add branch' button. A single 'staging' branch is listed as 'Deployed' with a green checkmark. It includes a 'Domain' of 'https://staging.d328milhofke9l.amplifyapp.com' and a 'Last deployment' of '0 minutes ago'. A 'Deploy updates' button and a 'Production branch' star icon are also visible. The footer contains 'CloudShell', 'Feedback', copyright information '© 2025, Amazon Web Services, Inc. or its affiliates.', and links for 'Privacy', 'Terms', and 'Cookie preferences'.

app5556 Overview

App ID: d328milhofke91

Visit deployed URL

Branches 1

Search...

+ Add branch

staging
Deployed ✓

Domain: https://staging.d328milhofke9l.amplifyapp.com

Last deployment: 0 minutes ago

Deploy updates


★ Production branch

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


STEP V: ACCESS YOUR WEBSITE

1. Click on the **Domain URL** below the deployed app in the Amplify Dashboard.

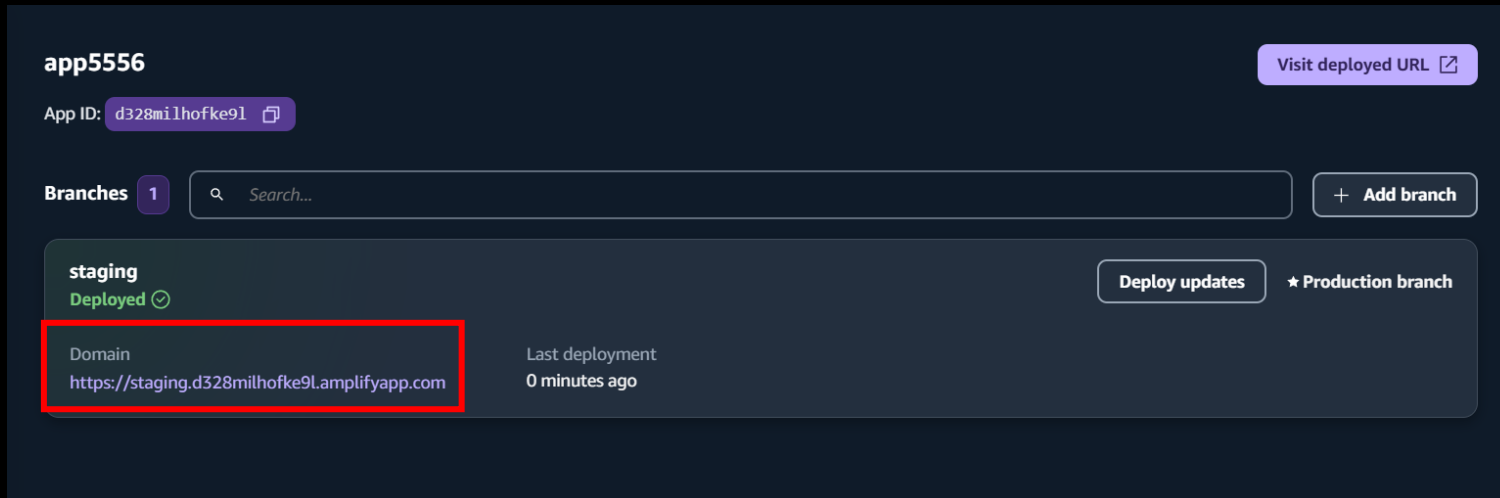


The screenshot shows the AWS Amplify Dashboard for an application named **app5556**. The App ID is **d328milhofke9l**. A button labeled **Visit deployed URL** is in the top right. Below, the **Branches** section shows one branch, **staging**, which is **Deployed** (indicated by a green checkmark). To the right of the branch name are buttons for **Deploy updates** and **★ Production branch**. The domain **https://staging.d328milhofke9l.amplifyapp.com** is listed under the **Domain** label and is highlighted with a red rectangular box. To the right of the domain, it shows **Last deployment: 0 minutes ago**.

2. You will be redirected to your website!

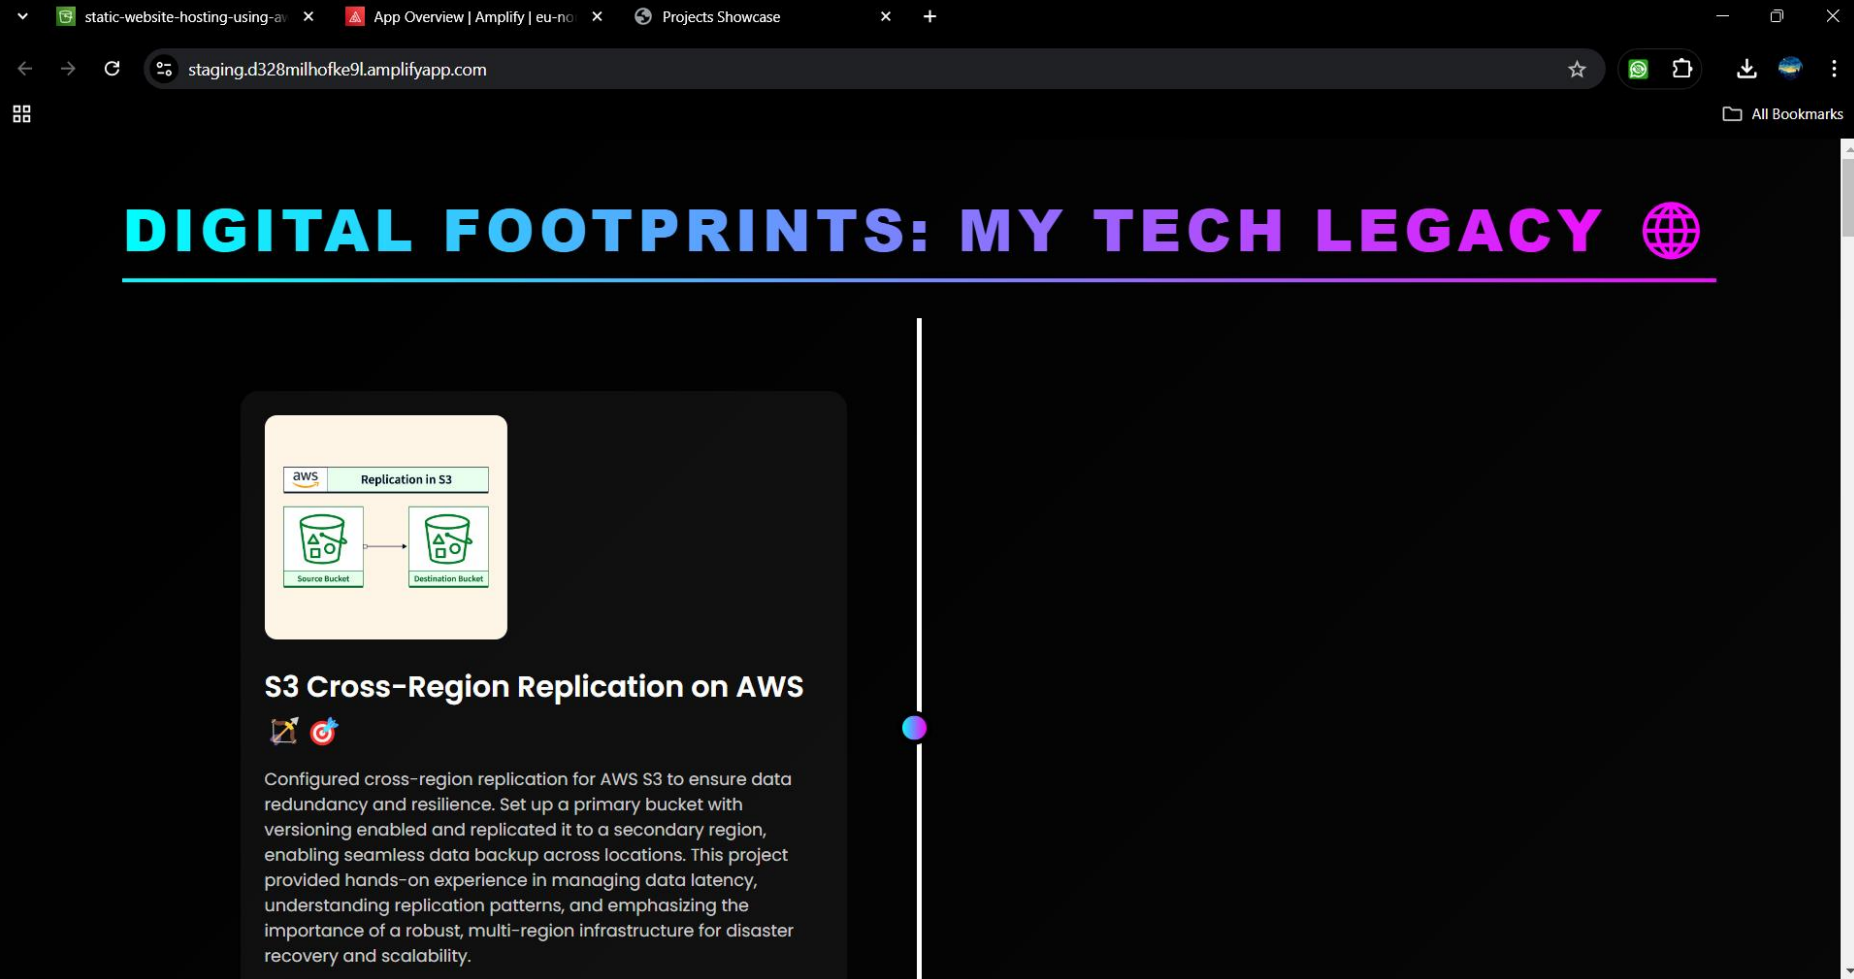

STEP VI: MANAGE YOUR S3 BUCKET PERMISSIONS

1. Go to the **Permissions** tab in your S3 bucket.

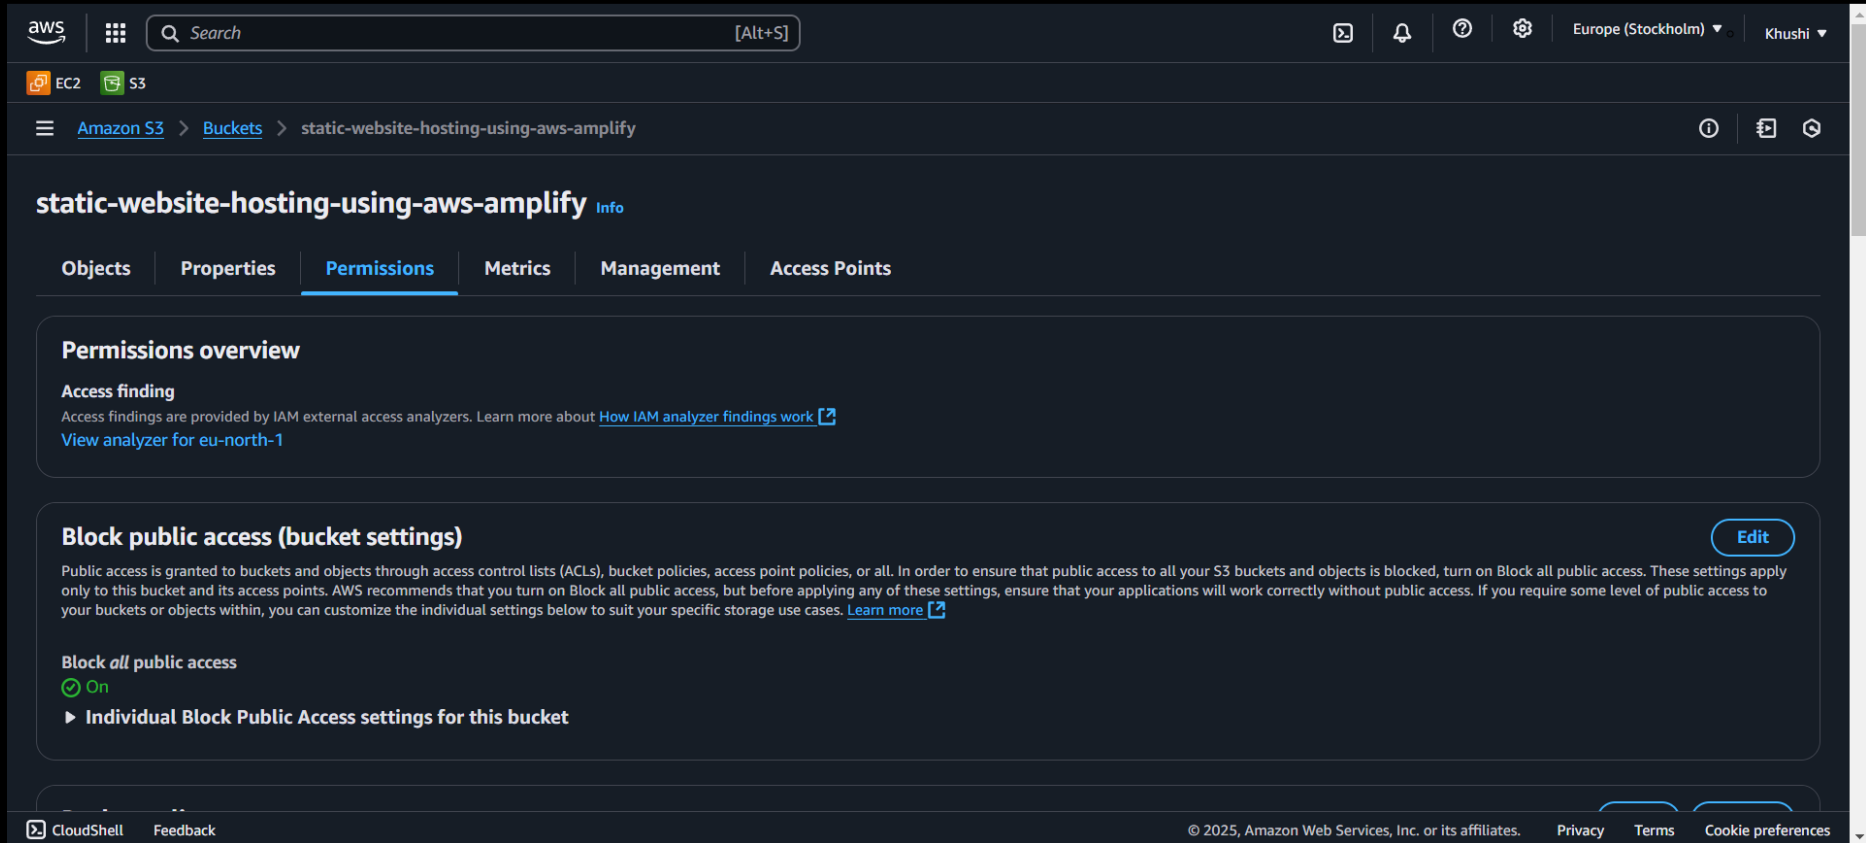

The screenshot displays the AWS Management Console interface for an S3 bucket named "static-website-hosting-using-aws-amplify". The "Permissions" tab is selected, showing the "Permissions overview" section. Under "Access finding", it states that access findings are provided by IAM external access analyzers and includes a link to "How IAM analyzer findings work". Below this, the "Block public access (bucket settings)" section is visible, indicating that "Block all public access" is currently "On". A link to "Individual Block Public Access settings for this bucket" is provided. The console header shows the AWS logo, a search bar, and navigation links for EC2 and S3. The footer includes "CloudShell", "Feedback", and copyright information for Amazon Web Services, Inc. or its affiliates, along with links for "Privacy", "Terms", and "Cookie preferences".

2. You will see a **Bucket Policy**, even though it wasn't manually configured earlier.

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Public access is blocked because Block Public Access settings are turned on for this bucket
To determine which settings are turned on, check your Block Public Access settings for this bucket. [Learn more about using Amazon S3 Block Public Access](#)


```
{
  "Version": "2008-10-17",
  "Statement": [
    {
      "Sid": "AllowAmplifyToListPrefix_d328milhofke9l_staging_",
      "Effect": "Allow",
      "Principal": {
        "Service": "amplify.amazonaws.com"
      },
      "Action": "s3:ListBucket",
      "Resource": "arn:aws:s3:::static-website-hosting-using-aws-amplify",
      "Condition": {
        "StringEquals": {
          "aws:SourceAccount": "971422709086",
          "aws:SourceArn": "arn:aws:s3:::static-website-hosting-using-aws-amplify",
          "s3:prefix": ""
        }
      }
    }
  ]
}
```

Copy


CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

STEP VII: DELETING THE APP & S3 BUCKET

1. To delete the app, return to the AWS Amplify Dashboard.

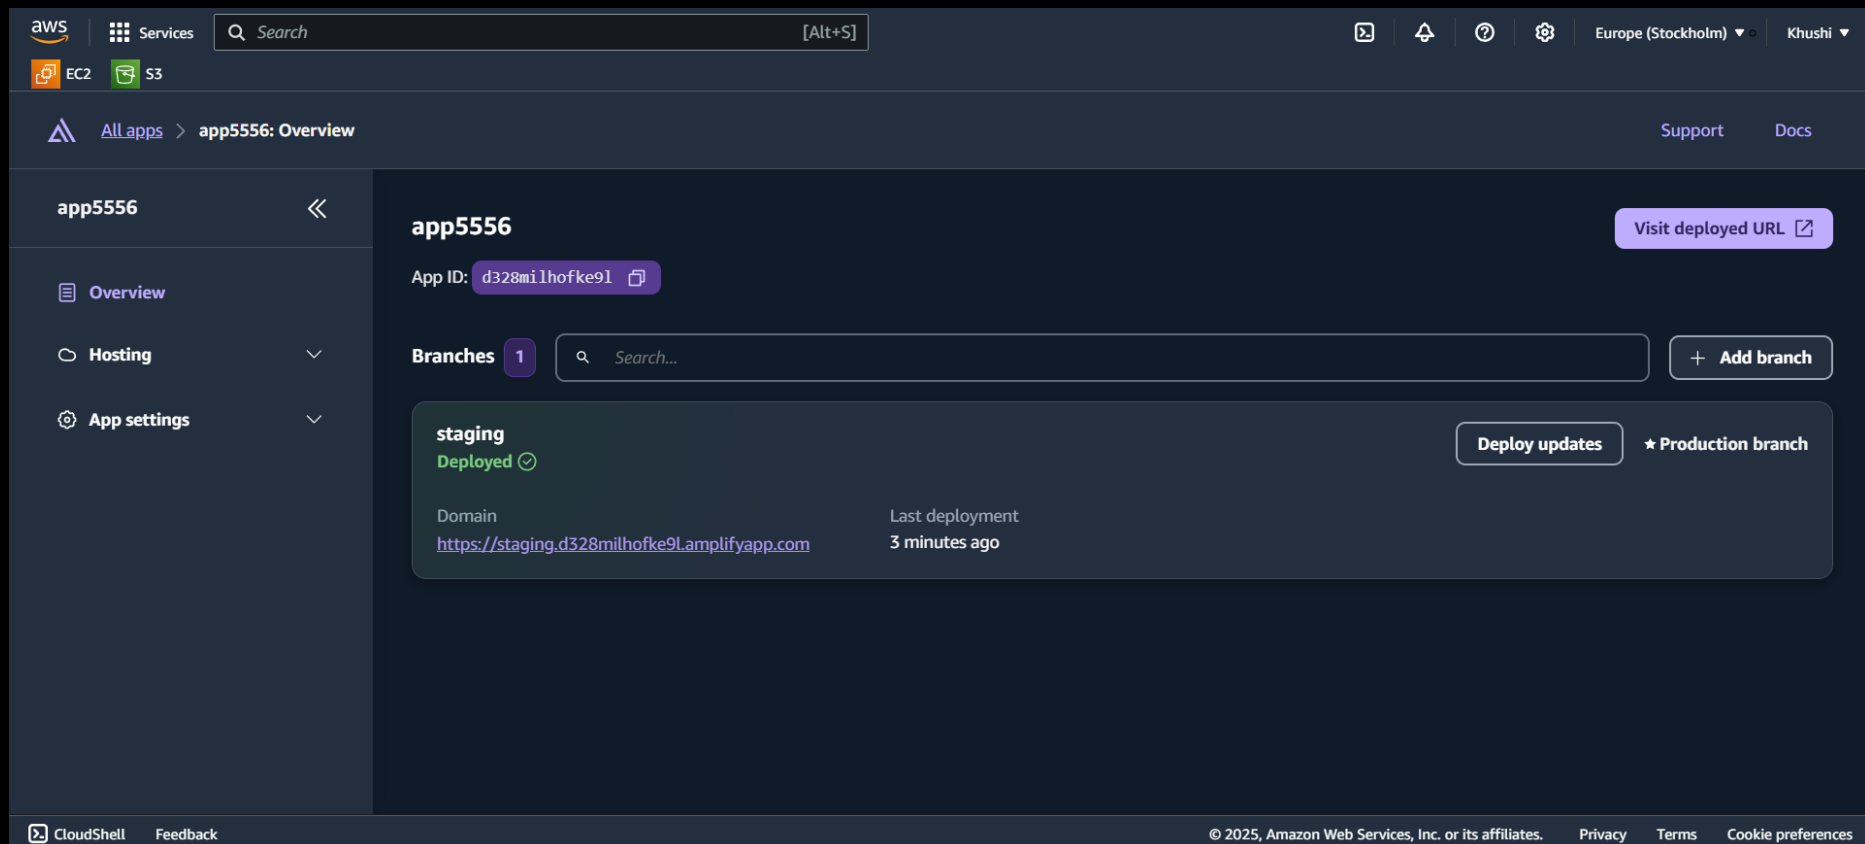

2. In the left panel, click on **App Settings**.

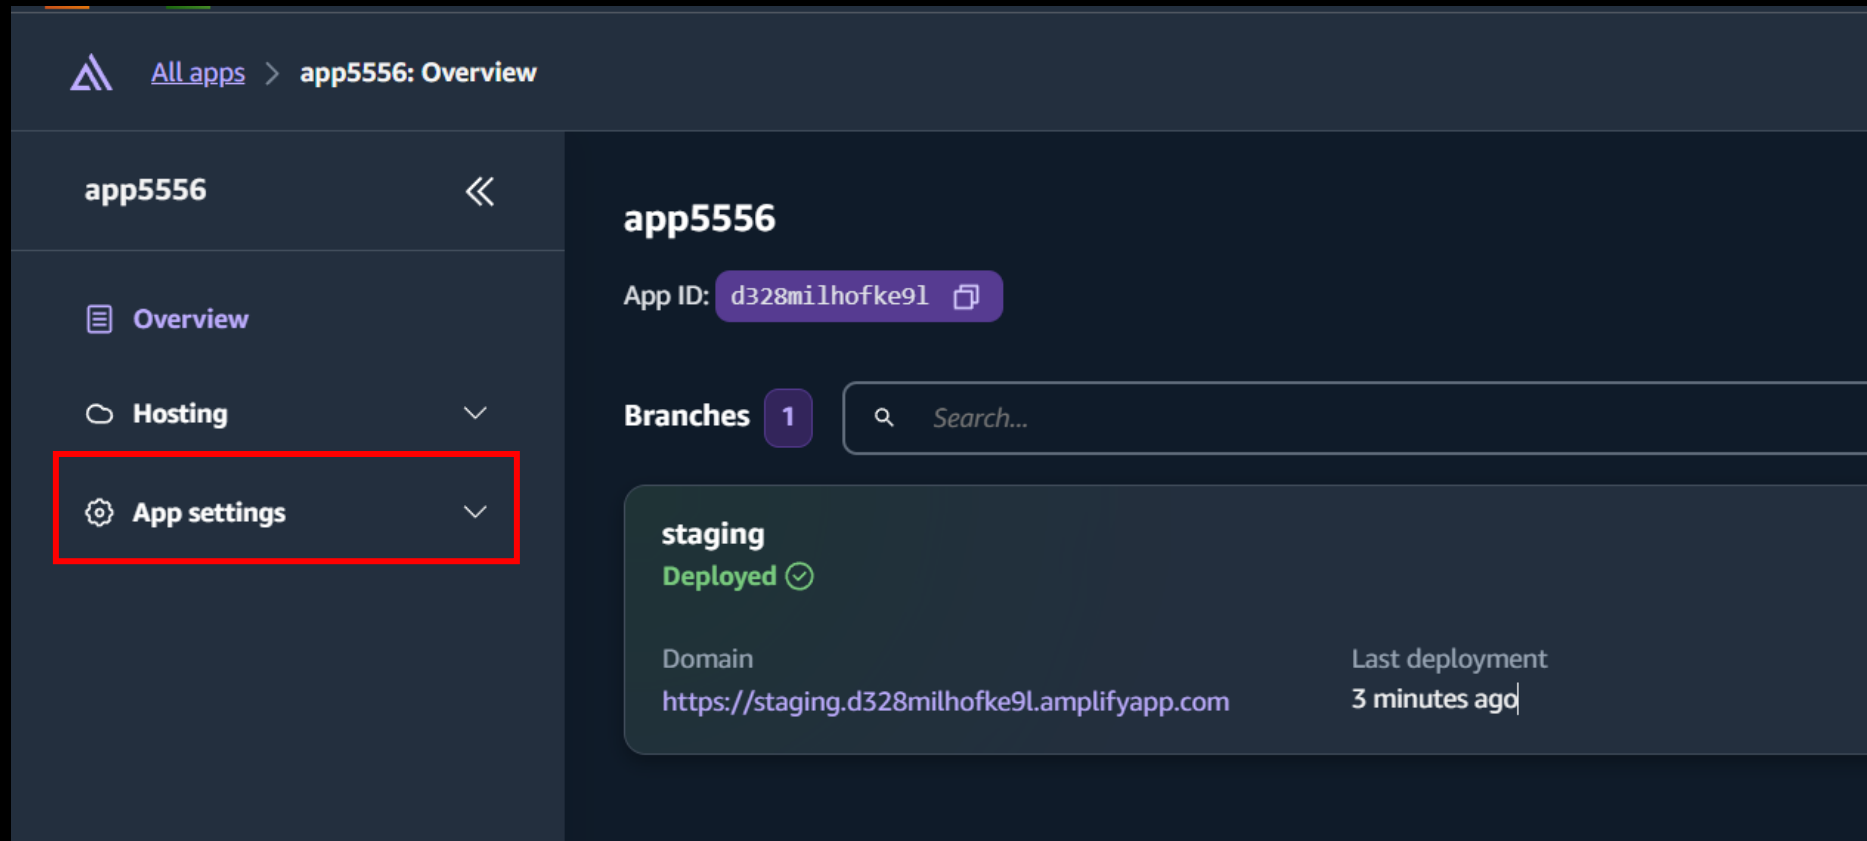

3. Go to General Settings and click on Delete App.

The screenshot displays the AWS Amplify console interface for an application named 'app5556'. The left sidebar contains a navigation menu with the following items: 'app5556' (selected), 'Overview', 'Hosting', 'App settings' (highlighted with a red box), 'General settings' (underlined with a red line), and 'Branch settings'. The main content area shows the 'General settings' for 'app5556'. At the top right of this section is a 'Visit deployed URL' button. Below this, the 'App ID' is 'd328milhofke9l'. A 'Branches' section shows one branch named 'staging', which is 'Deployed' (indicated by a green checkmark). The 'Domain' is 'https://staging.d328milhofke9l.amplifyapp.com' and the 'Last deployment' was '4 minutes ago'. There are buttons for 'Deploy updates' and 'Add branch'. The footer of the console includes 'CloudShell', 'Feedback', and copyright information for Amazon Web Services, Inc. or its affiliates, along with links for 'Privacy', 'Terms', and 'Cookie preferences'.

General settings

app5556

Edit

App name	app5556	Platform	WEB
Production branch URL	https://staging.d328milhofke9l.amplifyapp.com	App ARN	arn:aws:amplify:eu-north-1:971422709086:apps/d328milhofke9l
Service role		Created at	1/23/2025, 12:54:04 PM
Framework	-	Updated at	1/23/2025, 12:54:04 PM


Delete app

Once an app is deleted it cannot be recovered.

Delete app

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

4. **Warning:** Once the app is deleted, it cannot be recovered.

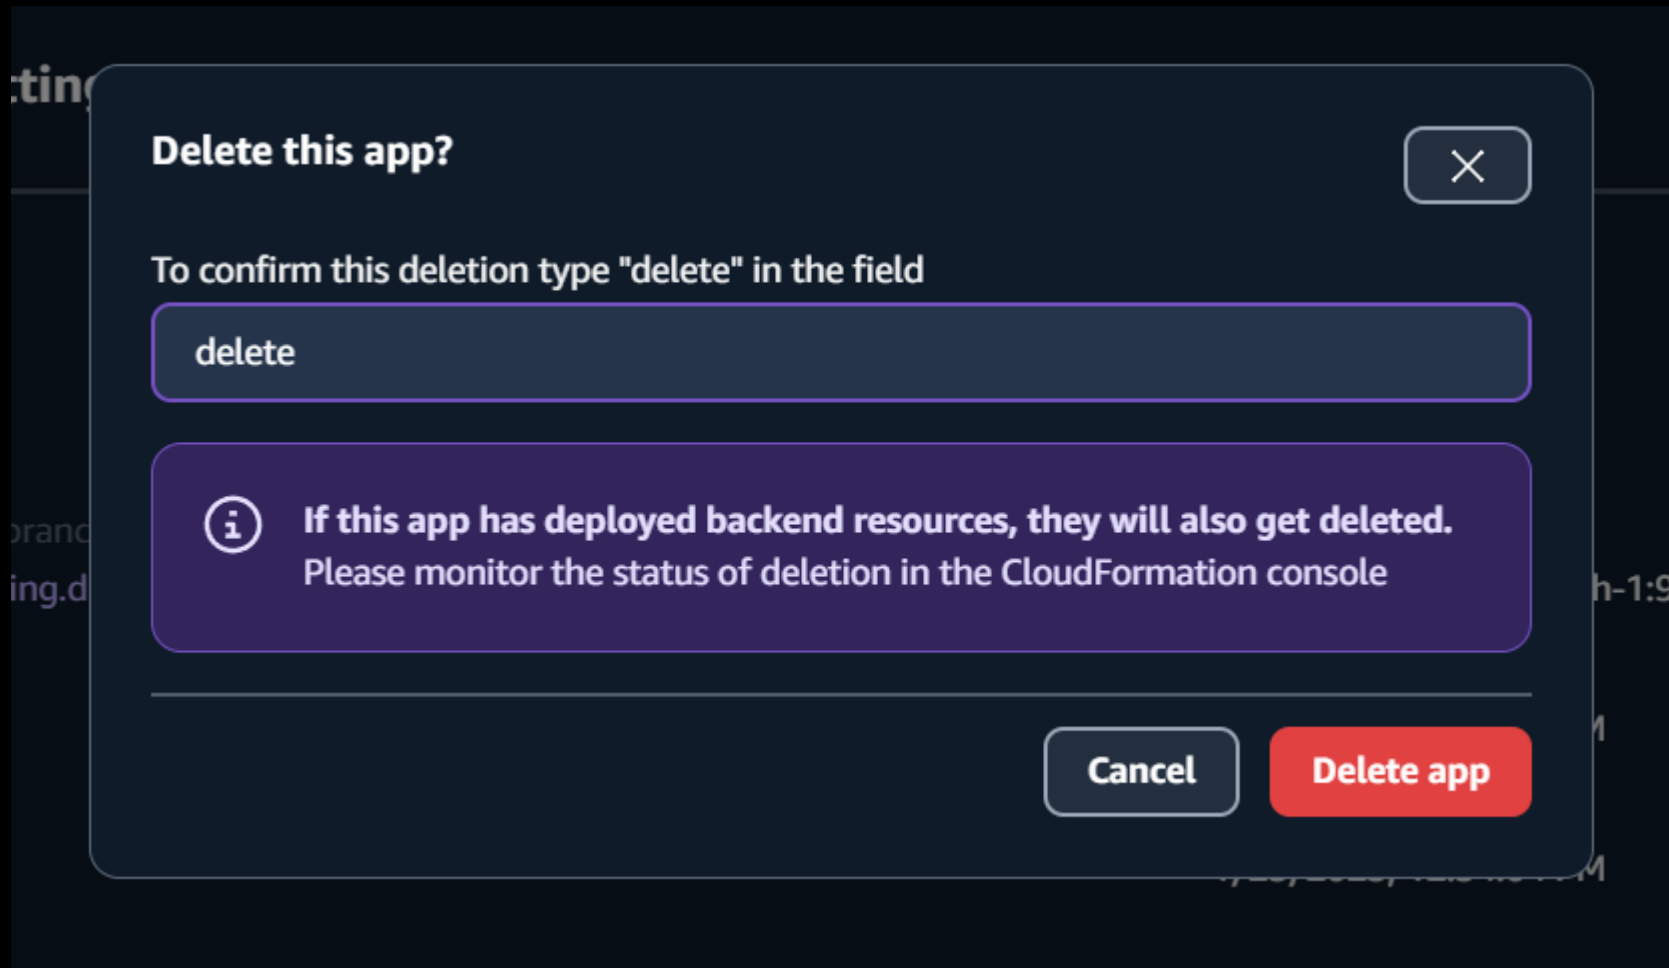

The screenshot displays the AWS Amplify console interface. At the top, the AWS logo and 'Services' menu are visible, along with a search bar and navigation icons. The 'AWS Amplify' link in the top navigation bar is highlighted with a red rectangle. Below the navigation bar, the main content area features the AWS Amplify logo and the heading 'Ship fullstack apps fast'. A subheading states: 'AWS Amplify is everything you need to build and deploy web and mobile apps. Easy to start, easy to scale.' Two buttons, 'Deploy an app' and 'Start with a template', are present. Below these, a section titled 'See how it works' includes a video player with the title 'Intro to AWS Amplify | Amazon Web Services'. In the bottom right corner, a green success message is displayed, indicating that app5556 was successfully deleted and its backend resources are queued for deletion. This message is also highlighted with a red rectangle. The footer contains links for 'CloudShell', 'Feedback', and copyright information for 2025.

aws Services Search [Alt+S]

EC2 S3

AWS Amplify Support Docs

Ship fullstack apps fast

AWS Amplify is everything you need to build and deploy web and mobile apps. Easy to start, easy to scale.

Deploy an app Start with a template

See how it works


aws Intro to AWS Amplify | Amazon Web Services

Successfully deleted app5556. Backend resources for all branches successfully queued for deletion.

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

For the S3 bucket:

1. First, empty the bucket by deleting all objects inside.

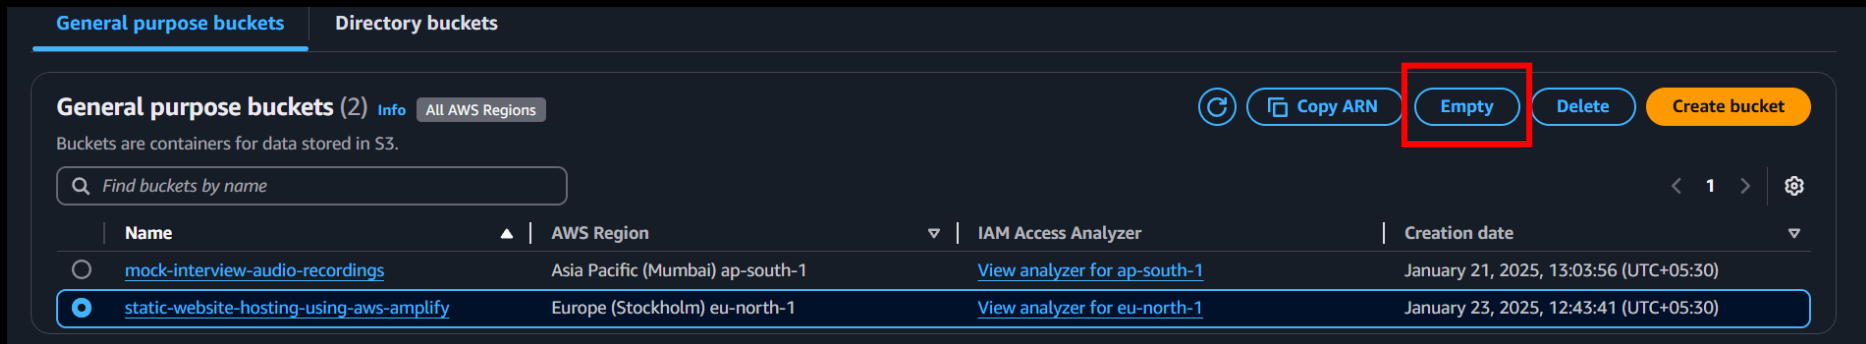

The screenshot shows the AWS S3 console interface. At the top, there are two tabs: 'General purpose buckets' (selected) and 'Directory buckets'. Below the tabs, the header for 'General purpose buckets (2)' is displayed, along with an 'Info' link and a button for 'All AWS Regions'. To the right of the header are several action buttons: a refresh icon, 'Copy ARN', 'Empty' (highlighted with a red box), 'Delete', and 'Create bucket'. Below the header, there is a search bar with the placeholder text 'Find buckets by name'. A table lists the buckets with columns for 'Name', 'AWS Region', 'IAM Access Analyzer', and 'Creation date'. The table contains two rows: one for 'mock-interview-audio-recordings' in the 'Asia Pacific (Mumbai) ap-south-1' region, and another for 'static-website-hosting-using-aws-amplify' in the 'Europe (Stockholm) eu-north-1' region. The second row is selected, indicated by a blue highlight.

Name	AWS Region	IAM Access Analyzer	Creation date
mock-interview-audio-recordings	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	January 21, 2025, 13:03:56 (UTC+05:30)
static-website-hosting-using-aws-amplify	Europe (Stockholm) eu-north-1	View analyzer for eu-north-1	January 23, 2025, 12:43:41 (UTC+05:30)

The screenshot shows the AWS Management Console interface for the 'Empty bucket' action. The breadcrumb trail at the top reads: Amazon S3 > Buckets > static-website-hosting-using-aws-amplify > Empty bucket. The main heading is 'Empty bucket' with an 'Info' link. A yellow warning box contains the following text: 'Emptying the bucket deletes all objects in the bucket and cannot be undone. Objects added to the bucket while the empty bucket action is in progress might be deleted. To prevent new objects from being added to this bucket while the empty bucket action is in progress, you might need to update your bucket policy to stop objects from being added to the bucket. Learn more [?]'. Below this, a blue box contains the text: 'If your bucket contains a large number of objects, creating a lifecycle rule to delete all objects in the bucket might be a more efficient way of emptying your bucket. Learn more [?]'. A button labeled 'Go to lifecycle rule configuration' is to the right. The main section is titled 'Permanently delete all objects in bucket "static-website-hosting-using-aws-amplify"?'. It includes the instruction: 'To confirm deletion, type *permanently delete* in the text input field.' Below this is a text input field containing 'permanently delete'. At the bottom right, there are two buttons: 'Cancel' and 'Empty'. The 'Empty' button is highlighted with a red rectangle. Below this section, a green success message box is highlighted with a red rectangle. It contains a checkmark icon and the text: 'Successfully emptied bucket "static-website-hosting-using-aws-amplify"'. Below this, it says: 'View details below. If you want to delete this bucket, use the [delete bucket configuration](#).' At the bottom right of this box is a close icon (X). Below the success message, the heading 'Empty bucket: status' is shown. Below this, a blue box contains the text: 'The details below are no longer available after you navigate away from this page.' At the bottom right of this box are two buttons: 'Cancel' and 'Exit'.

Amazon S3 > Buckets > static-website-hosting-using-aws-amplify > Empty bucket

Empty bucket Info

Warning

- Emptying the bucket deletes all objects in the bucket and cannot be undone.
- Objects added to the bucket while the empty bucket action is in progress might be deleted.
- To prevent new objects from being added to this bucket while the empty bucket action is in progress, you might need to update your bucket policy to stop objects from being added to the bucket.

[Learn more \[?\]](#)

If your bucket contains a large number of objects, creating a lifecycle rule to delete all objects in the bucket might be a more efficient way of emptying your bucket. [Learn more \[?\]](#) [Go to lifecycle rule configuration](#)

Permanently delete all objects in bucket "static-website-hosting-using-aws-amplify"?

To confirm deletion, type *permanently delete* in the text input field.

[Cancel](#) [Empty](#)

Success

Successfully emptied bucket "static-website-hosting-using-aws-amplify"


View details below. If you want to delete this bucket, use the [delete bucket configuration](#).

[Cancel](#) [Exit](#)

Empty bucket: status

The details below are no longer available after you navigate away from this page.

2. Then, you can delete the bucket from the S3 Dashboard.

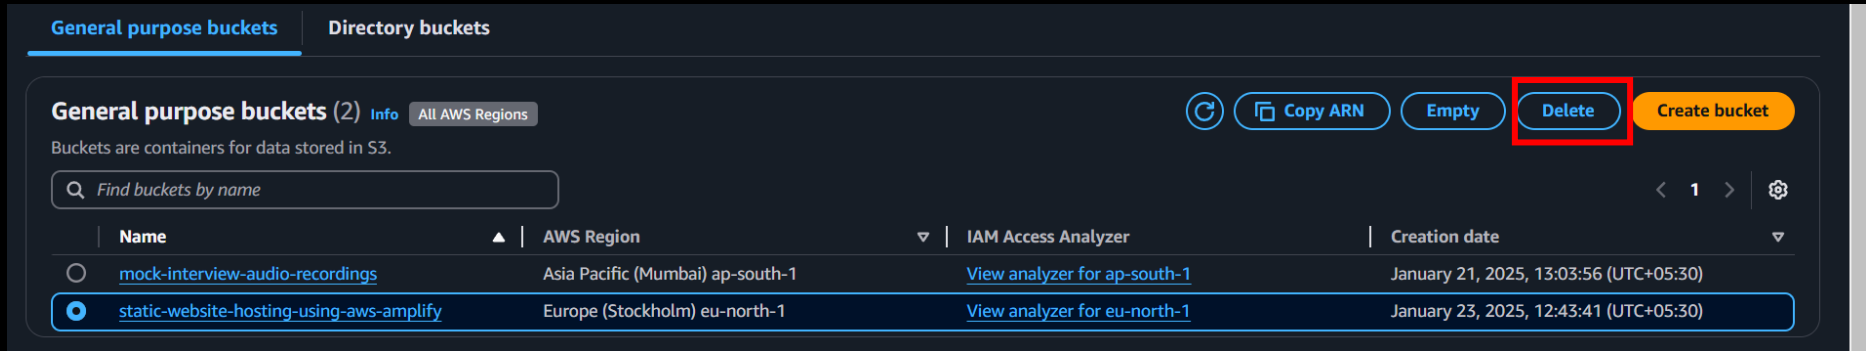

The screenshot shows the AWS S3 console interface. At the top, there are two tabs: 'General purpose buckets' (selected) and 'Directory buckets'. Below the tabs, there's a header section for 'General purpose buckets (2)' with an 'Info' link and a button for 'All AWS Regions'. To the right of this header are several action buttons: a refresh icon, 'Copy ARN', 'Empty', 'Delete' (highlighted with a red box), and 'Create bucket'. Below the header, there's a search bar with the placeholder text 'Find buckets by name'. Underneath the search bar is a table listing the buckets. The table has four columns: 'Name', 'AWS Region', 'IAM Access Analyzer', and 'Creation date'. There are two buckets listed: 'mock-interview-audio-recordings' in the 'Asia Pacific (Mumbai) ap-south-1' region, and 'static-website-hosting-using-aws-amplify' in the 'Europe (Stockholm) eu-north-1' region. The second bucket is selected, indicated by a blue circle next to its name.

Name	AWS Region	IAM Access Analyzer	Creation date
mock-interview-audio-recordings	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	January 21, 2025, 13:03:56 (UTC+05:30)
static-website-hosting-using-aws-amplify	Europe (Stockholm) eu-north-1	View analyzer for eu-north-1	January 23, 2025, 12:43:41 (UTC+05:30)

Amazon S3 > Buckets > static-website-hosting-using-aws-amplify > Delete bucket

Delete bucket Info

Warning:

- Deleting a bucket cannot be undone.
- Bucket names are unique. If you delete a bucket, another AWS user can use the name.
- If this bucket is used with a Multi-Region Access Point in an external account, initiate failover before deleting the bucket.
- If this bucket is used with an access point in an external account, the requests made through those access points will fail after you delete this bucket.

[Learn more](#)

Delete bucket "static-website-hosting-using-aws-amplify"?

To confirm deletion, enter the name of the bucket in the text input field.

static-website-hosting-using-aws-amplify

[Cancel](#) [Delete bucket](#)

EC2 S3

Amazon S3

✓ Successfully deleted bucket "static-website-hosting-using-aws-amplify" ✕

CONCLUSION 🎉

Congratulations! You've successfully set up static website hosting with **AWS Amplify** and **S3**! Your website is now live and ready to welcome visitors from all around the world!



AWS Amplify and S3 take the hassle out of web hosting by offering a robust and scalable solution that ensures your website performs flawlessly. From effortless deployment to automatic scaling and enhanced security, you're equipped with everything needed to support your growing digital presence. Whether it's a personal blog 📝, portfolio 📷, or an e-commerce store 🛒, AWS provides a seamless experience for both developers and users alike.

**WITH AWS AMPLIFY AND S3, YOUR WEBSITE IS NOT JUST HOSTED,
IT'S POWERED TO SCALE, ENSURING FAST AND RELIABLE
EXPERIENCES FOR USERS WORLDWIDE. 🌍 🚀**