



Testing a shared query update

Hypothesis: query after 'now' $\approx$ previous query + one learned vector per head


Routing prediction
All 448 heads

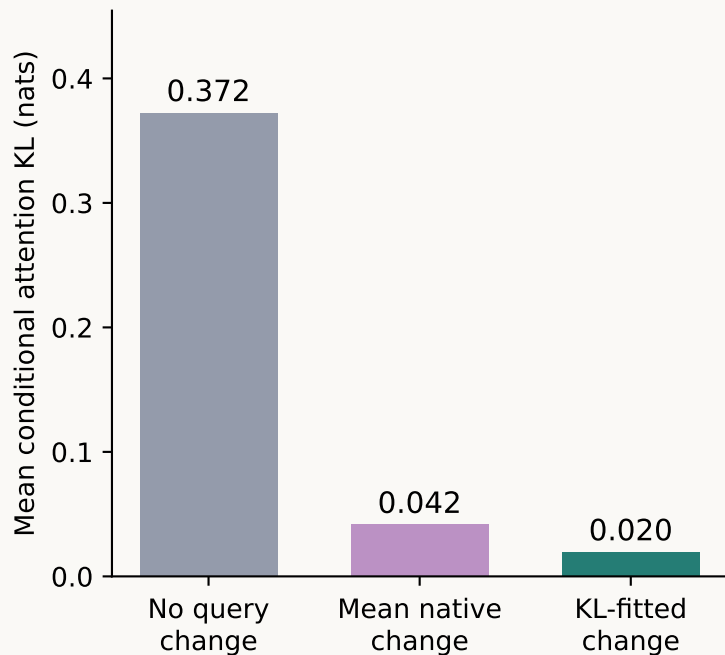

Downstream prediction
Four selected heads, changed together

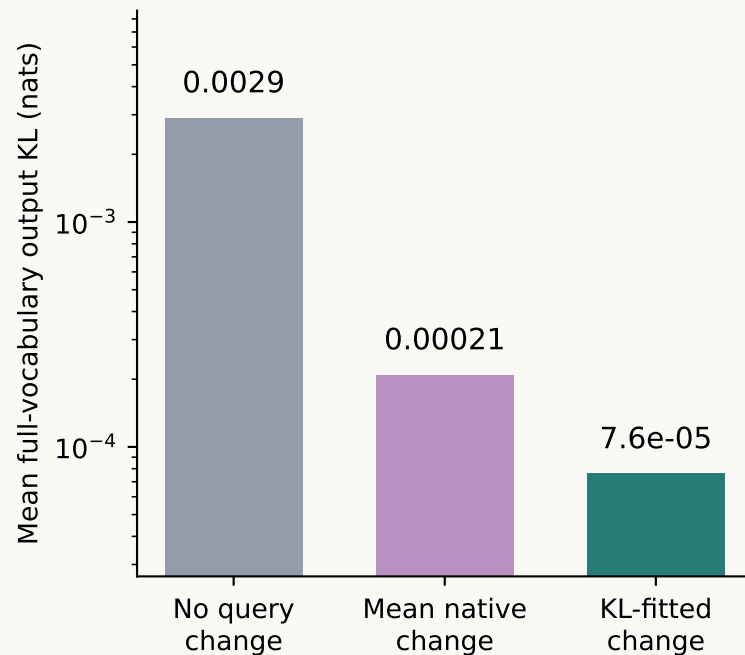

Effect on the answer preference
Updated value versus original value

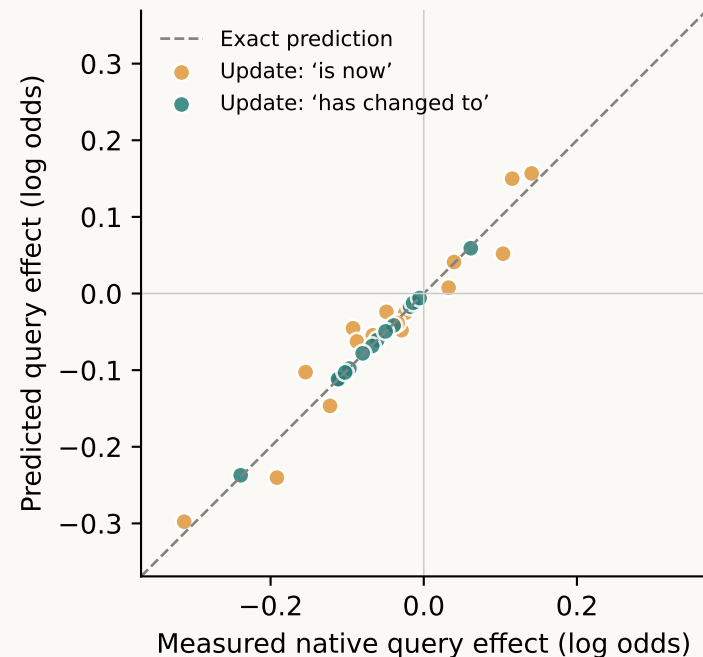

32 paired discovery contexts; predictions use the opposite training fold. Head selection used discovery results.

Left: new-token attention excluded. Middle/right: new token included; native computation outside query changes retained.

A supplied additive rule, not recovered retrieval logic. All fits reached the iteration limit; lexical heldout remains unevaluated.

These selected heads rarely attend directly to the color values; a retrieval mechanism is not established.