


Copy the probe run's activations entering layer 34 into a no-probe run, at





Swap one head's output at the answer between the two runs

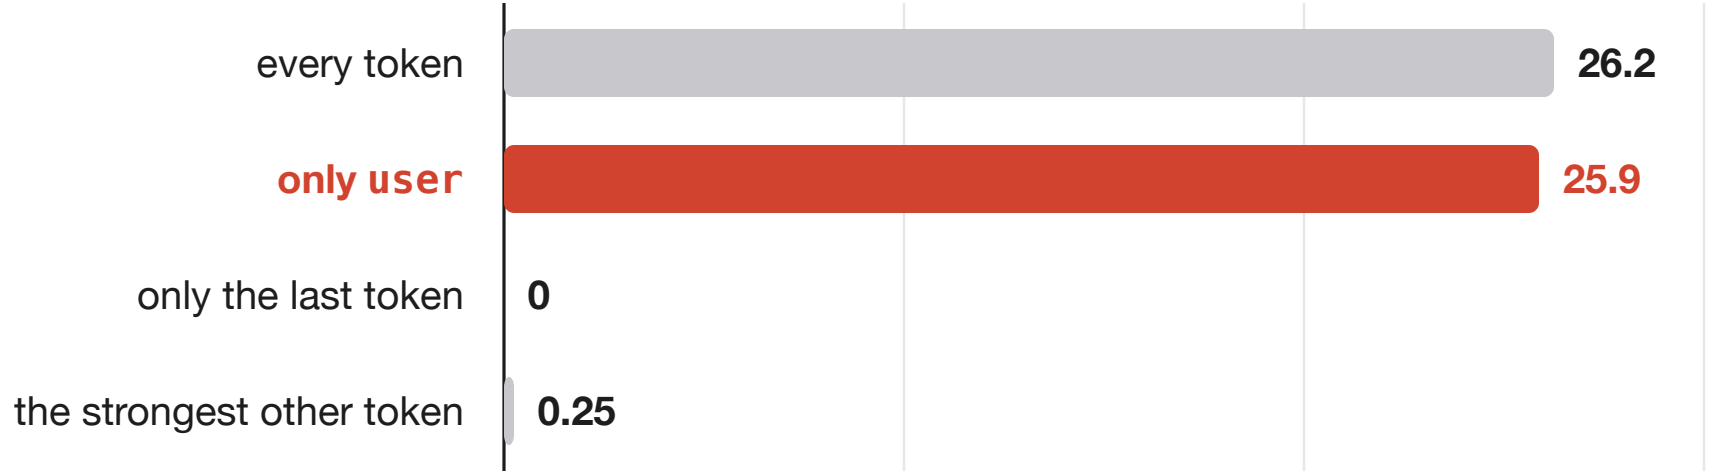